



The bridge to possible

[Data sheet](#)
Cisco public

Cisco CWDM SFP 10 Gigabit Ethernet Solution

Contents

Overview	3
Key features and benefits	3
Technical specifications	4
Warranty	6
Ordering information	6
Product sustainability	6
Service and support	7
Cisco Capital	7
For more information	7
Document history	8

Overview

The Cisco® CWDM SFP 10 Gigabit Ethernet solution allows enterprise companies and service providers to provide scalable and easy-to-deploy 10 Gigabit Ethernet. The product set enables the flexible design of highly available, multiservice networks.

The Cisco Coarse Wavelength-Division Multiplexing Small Form-Factor Pluggable Plus (Cisco CWDM SFP+) solution is a convenient and cost-effective solution for the adoption of 10 Gigabit Ethernet in campus, data-center, and metropolitan-area access networks (Figure 1).

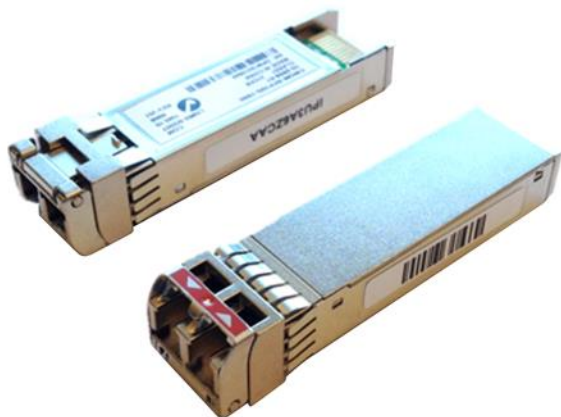


Figure 1.
Cisco CWDM 10 Gigabit Ethernet SFP Solution

Key features and benefits

Scalability

The Cisco CWDM SFP+ solution enables the transport of up to eight channels of 10 Gigabit Ethernet over Single Mode Fiber (SMF) strands.

High availability

The Cisco CWDM SFP 10 Gigabit Ethernet solution takes advantage of a multichannel architecture and the inherent protection of ring architectures. The solution enables:

- Use of Layer 2 and Layer 3 redundancy and failover mechanisms at the channel endpoints (Cisco CWDM SFP+) to build highly available links
- Use of two-path link configurations in a ring architecture to provide protection from fiber cuts

Investment protection

The Cisco CWDM SFP+ solution enables enterprises and service providers to increase the bandwidth of an existing 10 Gigabit Ethernet optical infrastructure without adding new fiber strands. The solution can be used in parallel with other Cisco SFP+ devices on the same platform.

Technical specifications

Cisco CWDM 10 Gigabit Ethernet SFPs

A Cisco CWDM SFP 10 Gigabit Ethernet SFP is a hot-swappable input/output device that plugs into an SFP+ port or slot of a Cisco switch or router, linking the port with the fiber-optic network.

Performance

The CWDM 10 Gigabit Ethernet SFP module supports the following bit rates:

Datarate	FEC
• OC-192 9.95328 Gbps ± 20 ppm	No Forward-Error-Correction (FEC) application (target Bit Error Rate [BER] = 1E-12)
• 10 Gigabit Ethernet WAN 9.95328 Gbps ± 20 ppm	No FEC application (target) BER = 1E-12)
• 10 Gigabit Ethernet LAN 10.3125 Gbps ± 100 ppm	No FEC application (target) BER = 1E-12)
• OTU-2 10.709 Gbps ± 20 ppm	FEC application (pre-FEC target BER = 1E-6)
• OTU-1e with stuffed bits 11.0491 Gbps ± 100 ppm	FEC application (pre-FEC target BER = 1E-6)
• OTU-2e without stuffed bits 11.0957 Gbps ± 100 ppm	FEC application (pre-FEC target BER = 1E-6)

Platform support

The Cisco CWDM 10 Gigabit Ethernet SFPs are supported across a variety of Cisco switches, routers, and optical transport devices. For more details, refer to the document “TMG Compatibility Matrix”.

Connectors and cabling

- Equipment: Standard SFP+ interface
- Network: Dual LC/PC connector

Note: Only connections with patch cords with PC or UPC connectors are supported. Patch cords with APC connectors are not supported.

Environmental conditions and power requirements

- Operating temperature range: 32 to 158°F (0 to 70°C)
- Storage temperature range: -40 to 185°F (-40 to 85°C)

Table 1 describes details about the electrical power interface, and Table 2 describes optical parameters.

Table 1. Electrical power interface data

Parameter	Symbol	Minimum	Typical	Maximum	Units
Supply current	I _s		220	300	mA
Surge current	I _{Surge}			+30	mA

Parameter	Symbol	Minimum	Typical	Maximum	Units
Input voltage	V _{max}	3.1	3.3	3.46	V

Table 2. Optical parameters

Parameter	Symbol	Minimum	Typical	Maximum	Units	Notes and Conditions
Transmitter center wavelength	wavelength _c	(x - 6.5)		(x + 6.5)	nm	Available center wavelengths: 1471, 1491, 1511, 1531, 1551, 1571, 1591, and 1611 nm
Side-mode suppression ratio	SMSR	30			dB	Average power coupled into SMF
Transmitter optical output power	P _{out}	0		5.0	dBm	
Receiver optical input power (BER <10 ⁻¹² with Pseudo-Random Bit Sequence (PRBS) 2 ³¹ - 1 or OC-192, 10 GE LAN, or 10 GE WAN frame)	P _{in}	-16.0		-1.0	dBm	Back to back, No FEC applications (10 GE LAN and WAN, OC-192 rates)
Receiver optical input power (Pre-FEC BER <10 ⁻⁶ with PRBS 2 ³¹ - 1 or OTU-2, OTU-1e, or OTU-2e frame)	P _{in}	-16.0		-1.0	dBm	Back to back, FEC applications (OTU-2, OTU-1e, and OTU-2e rates)
Receiver optical input power (BER <10 ⁻¹² with PRBS 2 ³¹ - 1 or OC-192, 10 GE LAN, or 10 GE WAN frame)	P _{in}	-14.0		-1.0	dBm	With ITU-T G.652 maximum dispersion over 40-km SMF No FEC applications (10 GE LAN and WAN, OC-192 rates)
Receiver optical input power (Pre-FEC BER <10 ⁻⁶ with PRBS 2 ³¹ - 1 or OTU-2, OTU-1e, or OTU-2e frame)	P _{in}	-14.0		-1.0	dBm	With ITU-T G.652 maximum dispersion over 40-km SMF FEC applications (OTU-2, OTU-1e, and OTU-2e rates)
Receiver optical input wavelength	wavelength _{in}	1450		1620	nm	
Transmitter extinction ratio	OMI	8.2			dB	
DGD penalty				1	dB	@ 30 ps DGD

Note: Parameters are specified over temperature and at end of life unless otherwise noted.

Note: When shorter distances of SMF are used, it may be necessary to insert an inline optical attenuator in the link to avoid overloading the receiver.

Warranty

- Standard warranty: 1 year
- Expedited replacement available via a Cisco SMARTnet® Service support contract

Ordering information

To place an order, visit the [Cisco Ordering Home Page](#) and refer to Table 3.

Table 3. Cisco CWDM SFP Product Information

Product Number	Description	Color
CWDM-SFP10G-1470=	Cisco CWDM 1470-nm SFP+; 10 Gigabit Ethernet	Red
CWDM-SFP10G-1490=	Cisco CWDM 1490-nm SFP+; 10 Gigabit Ethernet	Red
CWDM-SFP10G-1510=	Cisco CWDM 1510-nm SFP+; 10 Gigabit Ethernet	Red
CWDM-SFP10G-1530=	Cisco CWDM 1530-nm SFP+; 10 Gigabit Ethernet	Red
CWDM-SFP10G-1550=	Cisco CWDM 1550-nm SFP+; 10 Gigabit Ethernet	Red
CWDM-SFP10G-1570=	Cisco CWDM 1570-nm SFP+; 10 Gigabit Ethernet	Red
CWDM-SFP10G-1590=	Cisco CWDM 1590-nm SFP+; 10 Gigabit Ethernet	Red
CWDM-SFP10G-1610=	Cisco CWDM 1610-nm SFP+; 10 Gigabit Ethernet	Red

Regulatory and standards compliance

- Compliant with the ITU-T G.694.2 CWDM grid
- Safety: Laser Class I 21CFR1040

Product sustainability

Information about Cisco's Environmental, Social and Governance (ESG) initiatives and performance is provided in Cisco's CSR and sustainability [reporting](#)

Table 4. Cisco environmental sustainability information

Sustainability Topic	Reference	
General	Information on product-material-content laws and regulations	Materials
	Information on electronic waste laws and regulations, including our products, batteries and packaging	WEEE Compliance
	Information on product takeback and reuse program	Cisco Takeback and Reuse Program
	Sustainability Inquiries	Contact: csr_inquiries@cisco.com
	Countries and Regions Supported	Regulatory Compliance Page 6

Sustainability Topic		Reference
Power	Power (Including Pluggable)	Table 6: Power Consumption
Material	Product packaging weight and materials	Contact: environment@cisco.com

Service and support

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco Services help you protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business. For more information about Cisco Services, refer to [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

Cisco Capital

Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments. [Learn more.](#)

For more information

For more information about the Cisco CWDM products, please visit: https://www.cisco.com/en/US/products/hw/modules/ps4999/products_data_sheet09186a00801a557c.html or contact your local Cisco account representative.

Document history

Table 5. Document history

New or Revised Topic	Described In	Date
Removed reference to CWDM compatibility matrix	Platform Support	Mar. 18, 2021

Americas Headquarters
Cisco Systems, Inc.
San Jose, CA

Asia Pacific Headquarters
Cisco Systems (USA) Pte. Ltd.
Singapore

Europe Headquarters
Cisco Systems International BV Amsterdam,
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)