



The bridge to possible

[Data sheet](#)  
Cisco public

# Cisco GPON SFP

---

# Contents

Overview	3
Primary Features and Benefits	3
Technical Specifications	4
Warranty	6
Cisco environmental sustainability	6
Ordering Information	6
Regulatory and Standards Compliance	7
Service and Support	7
Cisco Capital	7

## Overview

Over the years, fiber-based access has proven to be a cost-effective way to reach customer premises to deliver managed business and residential services. Ethernet or Passive Optical Network (PON) technologies such as Gigabit PON (GPON) are supported by the Cisco® ME Series Switches. Cisco ME Series products support any fiber-based (FTTx) access scenarios, including Fiber To The Home (FTTH), Fiber To The Building (FTTB), Fiber To The Curb (FTTC), Fiber To The cell (FTTc), and Fiber To The business (FTTb). Figure 1 illustrates the Cisco GPON solution.

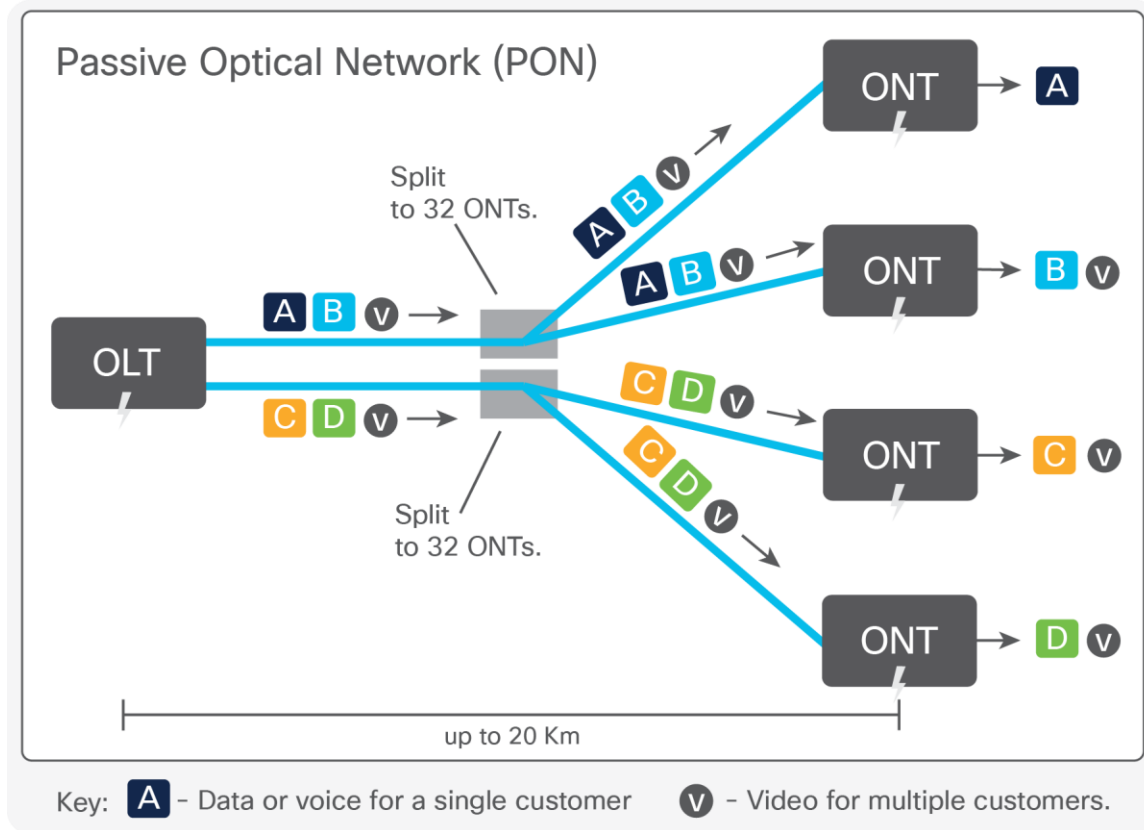


Figure 1.  
Cisco GPON Solution

## Primary Features and Benefits

- Single fiber transceiver with single-mode SC receptacle
- Complies with ITU-T G.984.2 class B+ and C+
- Digital Optical Monitoring (DOM) support
- Complies with RoHS6 directive
- Point-to-multipoint
- Broadcast protocol uses TDMA
- High port density OLT at headend
- Low-cost ONT/ONU at home
- Primary market: FTTH for voice/data/video

- Low-cost passive optical splitter enables sharing of fiber, headend equipment

## Technical Specifications

### Platform Support

The Cisco GPON SFPs are supported by the ME 4600 Series OLT devices. For more details, refer to the document "[Cisco Gigabit Ethernet Compatibility Matrix](#)" and [ME 4600 Series datasheet](#).

### Connectors and Cabling

- Equipment: standard SFP+ interface
- Network: dual LC/PC connector

Table 1 describes the optical parameters for the GPON class B+ SFP OLT transceiver module.

**Table 1.** Optical Parameters for GPON Class B+ SFP OLT Transceiver Module

Parameter	Symbol	Minimum	Typical	Maximum	Units
<b>Transmitter</b>					
Data rate	-	-	2.488	-	Gb/s
Optical transmit power	P <sub>o</sub>	1.5	-	5	dBm
Output center wavelength	-	1480	-	1500	nm
Side mode suppression ratio	SMSR	30	-	-	dB
Extinction ratio	ER	10	-	-	dB
Output power at transmit off	-	-	-	-39	dBm
<b>Receiver</b>					
Wavelength of operation	-	1260	-	1360	nm
Data rate	-	-	1.244	-	Gb/s
Sensitivity	Sen	-	-	-28	dBm
Saturation optical power	Sat	-8	-	-	dBm
Burst packet detect sensitivity	-	-	-	-30	dBm

Table 2 describes the optical parameters for the GPON class C+ SFP OLT transceiver module.

**Table 2.** Optical Parameters for GPON Class C+ SFP OLT Transceiver Module

Parameter	Symbol	Minimum	Typical	Maximum	Units
<b>Transmitter</b>					
Data rate	-	-	2.488	-	Gb/s
Optical transmit power	P <sub>o</sub>	3	-	7	dBm
Output center wavelength	-	1480	-	1500	nm
Side mode suppression ratio	SMSR	30	-	-	dB
Extinction ratio	E <sub>r</sub>	8.2	-	-	dB
Output power at transmit off	-	-	-	-39	dBm
<b>Receiver</b>					
Wavelength of operation	-	1290	-	1330	nm
Data rate	-	-	1.244	-	Gb/s
Sensitivity	Sen	-	-	-31	dBm
Saturation optical power	Sat	-12	-	-	dBm
Burst packet detect sensitivity	-	-	-	-30	dBm

### Environmental Conditions and Power Requirements

Operating temperature range (see Table 3):

- Commercial temperature range (COM): 0 to 70°C (32 to 158°F)
- Industrial temperature range (IND): -40 to 85°C (-40 to 185°F)
- Storage temperature range: -40 to 85°C (-40 to 185°F)

Cisco SFP modules typically consume up to 1.9W per SFP port.

Table 3. Temperature Range and DOM Support

Product Number	Temperature Range
SFP-GPON-B	COM
SFP-GPON-B-I	IND
SFP-GPON-C	COM
SFP-GPON-C-I	IND

## Warranty

- Standard warranty: 1 year

## Cisco environmental sustainability

Information about Cisco’s environmental sustainability policies and initiatives for our products, solutions, operations, and extended operations or supply chain is provided in the “Environment Sustainability” section of Cisco’s [Corporate Social Responsibility](#)(CSR) Report.

Reference links to information about key environmental sustainability topics (mentioned in the “Environment Sustainability” section of the CSR Report) are provided in the following table:

Sustainability topic	Reference
Information on product material content laws and regulations	<a href="#">Materials</a>
Information on electronic waste laws and regulations, including products, batteries, and packaging	<a href="#">WEEE compliance</a>

Cisco makes the packaging data available for informational purposes only. It may not reflect the most current legal developments, and Cisco does not represent, warrant, or guarantee that it is complete, accurate, or up to date. This information is subject to change without notice.

## Ordering Information

To place an order, visit the [Cisco Ordering page](#) and refer to Table 4.

Table 4. Cisco GPON SFP Ordering Information

Product Number	Description	Color
SFP-GPON-B	Cisco GPON Class B+ SFP OLT Trcvr Module, 1490Tx, 1310Rx	Blue
SFP-GPON-B-I	Cisco GPON Class B+ SFP OLT Trcvr Module, 1490Tx, 1310Rx, I-Temp	Blue
SFP-GPON-C	Cisco GPON Class C+ SFP OLT Trcvr Module, 1490Tx, 1310Rx	Blue
SFP-GPON-C-I	Cisco GPON Class C+ SFP OLT Trcvr Module, 1490Tx, 1310Rx, I-Temp	Blue

Product Number	Description	Color
SFP-GPON-B-8=	8 units of SFP-GPON-B for ME4600-AMX-16GPON	-
SFP-GPON-B-I-8=	8 units of SFP-GPON-B-I for ME4600-AMX-16GPON	-
SFP-GPON-C-8=	8 units of SFP-GPON-C for ME4600-AMX-16GPON	-
SFP-GPON-C-I-8=	8 units of SFP-GPON-C-I for ME4600-AMX-16GPON	-
SFP-GPON-B-16=	16 units of SFP-GPON-B for ME4600-AMX-16GPON	-
SFP-GPON-B-I-16=	16 units of SFP-GPON-B-I for ME4600-AMX-16GPON	-
SFP-GPON-C-16=	16 units of SFP-GPON-C for ME4600-AMX-16GPON	-
SFP-GPON-C-I-16=	16 units of SFP-GPON-C-I for ME4600-AMX-16GPON	-

## Regulatory and Standards Compliance

- Compliant with ITU-T G.984.2 Class C+
- Compliant with ITU-T G.984.2 Class B+
- Safety: Laser Class I 21CFR1040

## Service and Support

Cisco offers a wide range of services programs to accelerate customer success. These innovative services programs are delivered through a unique combination of people, processes, tools, and partners, resulting in high levels of customer satisfaction. Cisco Services help you protect your network investment, optimize network operations, and prepare your network for new applications to extend network intelligence and the power of your business. For more information about Cisco Services, refer to [Cisco Technical Support Services](#) or [Cisco Advanced Services](#).

## Cisco Capital

### Flexible payment solutions to help you achieve your objectives

Cisco Capital makes it easier to get the right technology to achieve your objectives, enable business transformation and help you stay competitive. We can help you reduce the total cost of ownership, conserve capital, and accelerate growth. In more than 100 countries, our flexible payment solutions can help you acquire hardware, software, services and complementary third-party equipment in easy, predictable payments.

[Learn more.](#)

#### Americas Headquarters

Cisco Systems, Inc.  
San Jose, CA

#### Asia Pacific Headquarters

Cisco Systems (USA) Pte. Ltd.  
Singapore

#### Europe Headquarters

Cisco Systems International BV Amsterdam,  
The Netherlands

Cisco has more than 200 offices worldwide. Addresses, phone numbers, and fax numbers are listed on the Cisco Website at <https://www.cisco.com/go/offices>.

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/go/trademarks>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1110R)