

# EMCC(Extension Mobility Cross Cluster) 문제 해결

## 목차

[소개](#)

[사전 요구 사항](#)

[요구 사항](#)

[사용되는 구성 요소](#)

[배경 정보](#)

[네트워크 다이어그램](#)

[구성](#)

[문제 해결](#)

[수집할 데이터](#)

[로그인용 분석 예](#)

[Cisco Lab의 장비 정보](#)

[방문 클러스터 CUCM에 대한 로그 검토](#)

[홈 클러스터 CUCM에 대한 로그 검토](#)

[전화 구성 파일에 표시된 서비스](#)

[전화기에 대한 로그 검토](#)

[전화기에 대한 PCAP 검토](#)

[관련 정보](#)

## 소개

이 문서에서는 Cisco CUCM(Unified Communications Manager)용 EMCC(Extension Mobility Cross Cluster) 기능에 대해 설명합니다. 이 문서에서는 기능의 목적, 기능의 구성, 중요한 진단 데이터, 데이터 분석 예제 및 추가 연구를 위한 관련 리소스를 다룹니다.

## 사전 요구 사항

### 요구 사항

다음 주제에 대한 지식을 보유하고 있으면 유용합니다.

- 전화 등록
- 내선 이동
- 다중 클러스터 환경

### 사용되는 구성 요소


이 문서는 현재 지원되는 소프트웨어 및 하드웨어에 이 기능이 포함되어 있으므로 특정 소프트웨어 및 하드웨어 버전으로 제한되지 않습니다.

이 문서의 정보는 특정 랩 환경의 디바이스를 토대로 작성되었습니다. 이 문서에 사용된 모든 디바이스는 초기화된(기본) 컨피그레이션으로 시작되었습니다. 네트워크가 작동 중인 경우 모든 명령의 잠재적인 영향을 이해해야 합니다.

## 배경 정보

이 기능의 목적은 최종 사용자가 홈 클러스터 전화 걸기 방식을 유지하면서 한 클러스터에서 다른 클러스터로 이동할 수 있도록 하는 것입니다. 사용자는 전화기를 가져올 필요가 없지만, 대신 디바이스 프로필을 사용하여 원격 사이트의 전화기에 로그인하면 됩니다.

## 네트워크 다이어그램

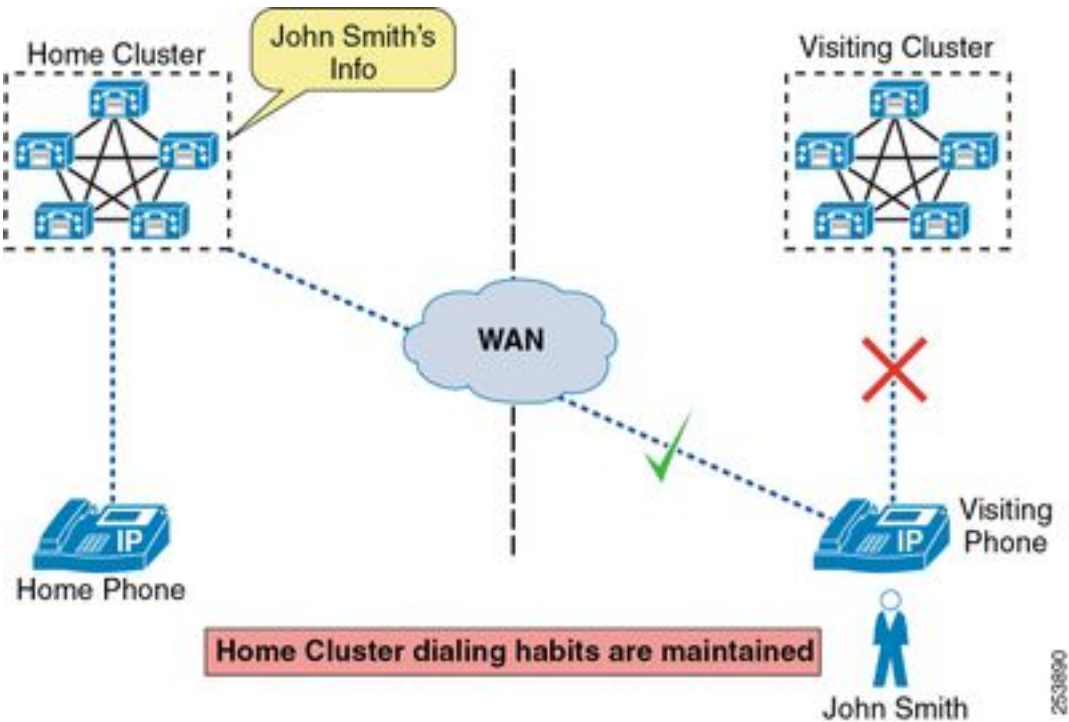

## 구성

EMCC 구성은 Enable UC servers for [Extension Mobility Cross Cluster\(EMCC\)](#) 문서에서 다룹니다.

## 문제 해결

### 수집할 데이터

EMCC 문제를 해결할 때 각 CUCM 클러스터에서 다음 정보를 수집해야 합니다.

- 두 클러스터의 CUCM 게시자 CLI에서 활성화된 버전 표시
- 두 클러스터 모두에서 CUCM 게시자의 CLI에서 네트워크 클러스터를 표시합니다.
- Cisco CallManager는 두 클러스터의 모든 노드에서 로그를 기록합니다.
- Cisco Extension Mobility는 두 클러스터의 모든 노드에서 로그를 기록합니다.
- Cisco Extension Mobility Application은 두 클러스터의 모든 노드에서 로그를 기록합니다.
- Cisco Tftp는 두 클러스터의 모든 노드에서 로그를 기록합니다.
- Cisco Trust Verification Service는 두 클러스터의 모든 노드에서 로그를 확인합니다.

- 두 클러스터의 모든 노드에서 이벤트 뷰어-애플리케이션 로그
- 두 클러스터의 모든 노드에서 이벤트 뷰어-시스템 로그
- 두 클러스터의 모든 노드에서 패킷 캡처 로그를 가져오는 것이 유용할 수 있습니다.그러나 대부분의 시나리오에서는 이러한 기능이 필요하지 않습니다.
- 로그인/로그아웃 오류가 발생한 경우 로그인 시도에 대한 세부 정보를 검토해야 합니다.

사용자 ID:

전화 MAC 주소:

전화 IP 주소:

타임스탬프:

EMCC 서비스 URL:

- 통화 오류가 발생한 경우 다음 문제를 검토해야 합니다.

발신 번호:

전화 번호:

타임스탬프:

사용자 경험(빠른 사용 중, 기타 소음, 전화기가 유휴 상태로 돌아감 등)

전화기에서 다음 데이터도 수집해야 합니다.

- 어떤 사용자 경험(화면의 정확한 오류, 전화기 화면의 이벤트 순서 등)
- 사용자가 로그인한 전화기의 PRT입니다.
- 전화기에서 캡을 받는 것은 유익할 수 있습니다.그러나 대부분의 시나리오에서는 필요하지 않습니다.

## 로그인용 분석 예

### Cisco Lab의 장비 정보

전화:

모델:7821

펌웨어 버전:sip78xx.12-1-1-12

IP 주소:192.168.7.104

eth.addr==c8:00:84:aa:87:43

홈 클러스터:

버전:11.5.1.15900-18

IP 주소:192.168.7.200

방문 클러스터:

버전:11.5.1.15900-18

IP 주소:192.168.7.100, 192.168.7.101, 192.168.7.102, 192.168.7.103

EMCC

URL:<http://192.168.7.100:8080/emapp/EMAppServlet?device=#DEVICENAME#&EMCC=#EMCC#>

사용자 정보:

사용자 ID:adgjm

로그인 시간: 11:15

## 방문 클러스터 CUCM에 대한 로그 검토

**참고:**로그의 순차적 순서는 emapp과 emservice 간의 메시지를 표시합니다.이 로그 조각을 읽는 동안 이 점에 유의하십시오.

### emapp

```
##### 13:32:15,947 EMApp on the visiting cluster prints that it received a request pertaining
to EMCC for Device Name SEPC80084AA8743
2019-03-09 13:32:15,947 INFO [http-bio-80-exec-8 ] EMAppServlet - EMApp Request#
----->2
2019-03-09 13:32:15,948 INFO [http-bio-80-exec-8 ] EMAppServlet - EMAppServlet:
Request protocol is :http
```

```
##### 13:32:15,948 we can see the request isn't for logout, the device name, the ip address,
and that EMCC is set to true
2019-03-09 13:32:15,948 INFO [http-bio-80-exec-8 ] EMAppServlet - EMApp Request
parameters: Logout=null Device Name=SEPC80084AA8743 User Id=null Device Profile=null
Refresh=null Remote Host IP Address = 192.168.7.104 Via Header Set = false getClusterInfo = null
Lang = en_US Charset=utf-8,;q=0.8 Emcc = true
```

### emservice

```
##### 13:32:16,109 The device is being queried for a user
2019-03-09 13:32:16,109 INFO [http-bio-443-exec-6 ] DBRequestor - 1:Querying
device user for device SEPC80084AA8743
2019-03-09 13:32:16,110 INFO [http-bio-443-exec-6 ] DBRequestor - 1:Getting
device object - three params
2019-03-09 13:32:16,110 INFO [http-bio-443-exec-6 ] DBRequestor - 1:
DBRequestor.queryDeviceUser: Dev: 'SEPC80084AA8743' - Getting device object
```

```
##### 13:32:16,115 The result of the query is returned and we can see there isn't anyone logged
in at the moment: currentuserid=,
2019-03-09 13:32:16,115 INFO [http-bio-443-exec-6 ] CMDatabase -
getDeviceInfo:Result of the query: {tkproduct=508, loginduration=, lastuserid=adgjm,
tkdeviceprotocol=11, pkid=b5a73ec1-a04d-5ad3-fa7f-e38c501800f7, tkmodel=621, logintime=,
currentuserid=, allowhotelingflag=t, fkdevicepool=1b1b9eb6-7803-11d3-bdf0-00108302ead1,
tkuserlocale=}
2019-03-09 13:32:16,115 INFO [http-bio-443-exec-6 ] DBRequestor - 1:
DBRequestor.queryDeviceUser: Dev: 'SEPC80084AA8743' - Device object returned
2019-03-09 13:32:16,115 INFO [http-bio-443-exec-6 ] DBRequestor - 1:
```

QueryDeviceUser: Device Logged out  
2019-03-09 13:32:16,115 INFO [http-bio-443-exec-6 ] DBRequestor - 1:Device query  
info contains userid=  
2019-03-09 13:32:16,116 INFO [http-bio-443-exec-6 ] DBRequestor - 1:Device query  
info contains last login userid= adgjm  
2019-03-09 13:32:16,116 INFO [http-bio-443-exec-6 ] EMServiceServlet - 1:Query  
Processing Time: 68

## emapp

##### 13:32:16,124 We can see the device doesn't have anyone logged in and that the profile is  
not already in use elsewhere  
2019-03-09 13:32:16,124 INFO [http-bio-80-exec-8 ] EMAppServlet - The login  
status result for :SEPC80084AA8743:null:adgjm:null:no  
2019-03-09 13:32:16,124 INFO [http-bio-80-exec-8 ] CMDatabase -  
CMDatabase:checkDeviceAllowsAlternateScript  
2019-03-09 13:32:16,126 INFO [http-bio-80-exec-8 ] CMDatabase - SEPC80084AA8743  
with model 621 and locale 1 does not support alternate script  
2019-03-09 13:32:16,126 INFO [http-bio-80-exec-8 ] EMAppServlet - Sent login page  
for device SEPC80084AA8743  
2019-03-09 13:32:16,126 INFO [http-bio-80-exec-8 ] EMAppServlet - Context:/emapp  
::URI:/jsp/form1.jsp  
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet -  
findPreferredCharSet on utf-8,;q=0.8  
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - token1 = utf-8  
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - token2 = utf-8  
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - charset with q  
value is 1 utf-8  
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - returning  
charset as q value is 1 utf-8  
2019-03-09 13:32:16,127 INFO [http-bio-80-exec-8 ] EMAppServlet - my charset  
=utf-8

##### 13:32:27,814 another request comes in via HTTP  
2019-03-09 13:32:27,814 INFO [http-bio-80-exec-7 ] EMAppServlet - EMApp Request#  
----->3  
2019-03-09 13:32:27,815 INFO [http-bio-80-exec-7 ] EMAppServlet - EMAppServlet:  
Request protocol is :http

##### 13:32:27,815 we can see the same info from before, but this time there is a user id  
specified  
2019-03-09 13:32:27,815 INFO [http-bio-80-exec-7 ] EMAppServlet - EMApp Request  
parameters: Logout=null Device Name=SEPC80084AA8743 User Id=adgjm Device Profile=null  
Refresh=null Remote Host IP Address = 192.168.7.104 Via Header Set = false getClusterInfo = null  
Lang = en\_US Charset=utf-8,;q=0.8 Emcc = true  
2019-03-09 13:32:27,816 INFO [http-bio-80-exec-7 ] EMServiceCommunicator - Posting to EM  
Query Service:https://localhost:8443/emservice/EMServiceServlet  
2019-03-09 13:32:27,835 INFO [http-bio-80-exec-7 ] EMAppServlet - EMCC Request  
for adgjm  
2019-03-09 13:32:27,836 INFO [http-bio-80-exec-7 ] EMAppServlet - EMURI =  
http%3A%2F%2F192.168.7.100%3A8080%2Femapp%2FEMAppServlet%3Fdevice%3DSEPC80084AA8743%26doLogout%3  
Dtrue  
2019-03-09 13:32:27,836 INFO [http-bio-80-exec-7 ] EMServiceCommunicator -  
postMsgToLoginService: Service URL :https://localhost:8443/emservice/EMServiceServlet

## emservice

##### 13:32:27,826 There is an authenticate request

2019-03-09 13:32:27,826 INFO [http-bio-443-exec-10] EMServiceServlet - 2:  
authenticate2: Authenticate request.  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] Authenticator -  
2:Authenticator.authenticateTransaction: AppID: CCMSysUser- Checking values in credential cache  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] Authenticator -  
2:Authenticator.authenticateTransaction: AppID: CCMSysUser- Approved through credential cache,  
108234 ms remaining

##### 13:32:27,827 The authentication succeeds and there is a check for the user  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] EMServiceServlet - 2:EMService  
Authentication succeeded  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] EMServiceServlet - 2:EMService  
Check User Status  
2019-03-09 13:32:27,827 INFO [http-bio-443-exec-10] Authenticator -  
2:Authenticator.userExists: UserID: adgjm- Calling cmdb.isLocalUser(osUserID)...

##### 13:32:27,831 we see no user exists with id: adgjm  
2019-03-09 13:32:27,831 ERROR [http-bio-443-exec-10] CMDatabase -  
CMDatabase.isLocalUser: no user exists with id: adgjm  
2019-03-09 13:32:27,831 ERROR [http-bio-443-exec-10] CMDatabase -  
CMDatabase.isLocalUser: com.cisco.ccm.database.CMDBLException: Unknown user: adgjm  
2019-03-09 13:32:27,832 ERROR [http-bio-443-exec-10] Authenticator - Exception :  
Unknown user: adgjm  
2019-03-09 13:32:27,832 WARN [http-bio-443-exec-10] EMServiceServlet - 2: executeQuery  
MyException.  
2019-03-09 13:32:27,832 INFO [http-bio-443-exec-10] EMServiceServlet - 2:Query  
Processing Time: 11  
2019-03-09 13:32:27,839 INFO [http-bio-443-exec-2 ] EMServiceServlet - EMService  
Request# ----> : 3

##### 13:32:27,839 The request type is noted as EMCC  
2019-03-09 13:32:27,839 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:EMService:  
Request Type=EMCC  
2019-03-09 13:32:27,843 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:  
processEmccRequest: Received EMCC Login Request for :adgjm  
2019-03-09 13:32:27,843 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3: Executing  
authenticate2...  
2019-03-09 13:32:27,844 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:  
authenticate2: Authenticate request.  
2019-03-09 13:32:27,844 INFO [http-bio-443-exec-2 ] Authenticator -  
3:Authenticator.authenticateTransaction: AppID: CCMSysUser- Checking values in credential cache  
2019-03-09 13:32:27,844 INFO [http-bio-443-exec-2 ] Authenticator -  
3:Authenticator.authenticateTransaction: AppID: CCMSysUser- Approved through credential cache,  
108216 ms remaining  
2019-03-09 13:32:27,844 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:EMService  
Authentication succeeded  
2019-03-09 13:32:27,846 INFO [http-bio-443-exec-2 ] PolicyValidator -  
3:PolicyValidator.checkDeviceAllowsLogin: Dev: SEPC80084AA8743- Calling dbr.getDeviceObject  
2019-03-09 13:32:27,847 INFO [http-bio-443-exec-2 ] DBRequestor - 3:Getting  
device object - loginInfo, caller  
2019-03-09 13:32:27,847 INFO [http-bio-443-exec-2 ] DBRequestor - 3:  
PolicyValidator.checkDeviceAllowsLogin: Dev: SEPC80084AA8743- Getting device object  
2019-03-09 13:32:27,850 INFO [http-bio-443-exec-2 ] CMDatabase -  
getDeviceInfo:Result of the query: {tkproduct=508, loginduration=, lastuserid=adgjm,  
tkdeviceprotocol=11, pkid=b5a73ec1-a04d-5ad3-fa7f-e38c501800f7, tkmodel=621, logintime=,  
currentuserid=, allowhotelingflag=t, fkdevicepool=1b1b9eb6-7803-11d3-bdf0-00108302ead1,  
tkuserlocale=}  
2019-03-09 13:32:27,851 INFO [http-bio-443-exec-2 ] DBRequestor - 3:  
PolicyValidator.checkDeviceAllowsLogin: Dev: SEPC80084AA8743- Device object returned  
2019-03-09 13:32:27,851 INFO [http-bio-443-exec-2 ] PolicyValidator -  
3:PolicyValidator.checkDeviceAllowsLogin: Dev: SEPC80084AA8743- dbr.getDeviceObject returned

```
2019-03-09 13:32:27,851 INFO [http-bio-443-exec-2 ] EmccData - osQuery =
SELECT COUNT(*) as value FROM ProductSupportsFeature p INNER JOIN Device d on (p.tkProduct =
d.tkProduct AND p.tkDeviceProtocol IN (99, d.tkDeviceProtocol )) INNER JOIN TypeSupportsFeature
t ON p.tkSupportsFeature = t.Enum WHERE LOWER(d.name) = LOWER('SEPC80084AA8743') AND t.Moniker =
'SUPPORTS_FEATURE_EMCC'
2019-03-09 13:32:27,853 INFO [http-bio-443-exec-2 ] PolicyValidator -
3:PolicyValidator.checkCurrentLogin: getCurrentLoginTime return value- 0
```

```
##### 13:32:27,854 No user is logged into the phone and we are going to look for the user's
home cluster (only 1 cluster is listed in cluster view for this lab setup)
```

```
2019-03-09 13:32:27,854 INFO [http-bio-443-exec-2 ] PolicyValidator -
3:PolicyValidator.checkCurrentLogin: no user currently logged in
2019-03-09 13:32:27,854 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3
findHomeCluster: Finding Home Cluster for User: adgjm
```

```
##### 13:32:27,928 The home cluster is determined to be 192.168.7.200 which is "ClusterTwo"
with a pkid of b986ff55-4374-43d2-8d99-ad6db704e672
```

```
2019-03-09 13:32:27,928 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:
EmccLoginRequest: Home Cluster URL for User:adgjm is :
https://192.168.7.200:8443/emservice/EMServiceServlet
2019-03-09 13:32:27,929 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:
EmccLoginRequest: Device Profile for this user is: test_emcc_udp
2019-03-09 13:32:27,969 INFO [http-bio-443-exec-2 ] EmccData - 3:
getRemoteClusterInfo: Pkid for cluster ClusterTwo is b986ff55-4374-43d2-8d99-ad6db704e672
```

```
##### 13:32:27,970 The login request is sent to the home cluster
```

```
2019-03-09 13:32:27,970 INFO [http-bio-443-exec-2 ] EmccCommunicator - 3:
performDoLogin : Sending home login XML to
:https://192.168.7.200:8443/emservice/EMServiceServlet and Parsing the response
2019-03-09 13:32:28,052 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3:
EmccLoginRequest: Performing Visiting Device Login for :adgjm
2019-03-09 13:32:28,052 INFO [http-bio-443-exec-2 ] EMServiceServlet -
3:performVisitingDeviceLogin - SEPC80084AA8743
2019-03-09 13:32:28,072 INFO [http-bio-443-exec-2 ] EMServiceServlet - 3: EmccRequest
Processing Time: 233
```

## emapp

```
##### 13:32:28,075 The login is successful
```

```
2019-03-09 13:32:28,075 INFO [http-bio-80-exec-7 ] EMAppServlet - Successfully
performed Login for user adgjm at SEPC80084AA8743
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - Context:/emapp
::URI:/jsp/phone_refresh.jsp
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet -
findPreferredCharSet on utf-8,;q=0.8
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - token1 = utf-8
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - token2 = utf-8
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - charset with q
value is 1 utf-8
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - returning
charset as q value is 1 utf-8
2019-03-09 13:32:28,076 INFO [http-bio-80-exec-7 ] EMAppServlet - my charset
=utf-8
```

## 홈 클러스터 CUCM에 대한 로그 검토

emservice logs:

##### 13:32:27,863 EMService on the home cluster receives an EMCC Check User Request 2019-03-09 13:32:27,863 INFO [http-bio-443-exec-17] EMServiceServlet - EMService Request# ----> : 1 2019-03-09 13:32:27,863 INFO [http-bio-443-exec-17] EMServiceServlet - 1:EMService: Request Type=EMCC 2019-03-09 13:32:27,872 INFO [http-bio-443-exec-17] EMServiceServlet - 1: Setting remoteIPAddr to connection IP=192.168.7.100 2019-03-09 13:32:27,873 INFO [http-bio-443-exec-17] EMServiceServlet - 1 : 3 : ClusterOne: processEmccRequest: Received Check User Request for :adgjm ##### 13:32:27,873 The EMService on the home cluster checks if the user exists in the local database 2019-03-09 13:32:27,873 INFO [http-bio-443-exec-17] EMServiceServlet - 1 : 3 : ClusterOne: EmccCheckUser : Checking if User adgjm exists in local database 2019-03-09 13:32:27,873 INFO [http-bio-443-exec-17] Authenticator - 1:Authenticator.userExists: UserID: adgjm- Calling cmdb.isLocalUser(osUserID)... ##### 13:32:27,889 EMService on the home cluster finds the user then looks up the information for the remote cluster and responds with the user id and associated device profiles 2019-03-09 13:32:27,889 INFO [http-bio-443-exec-17] Authenticator - 1:Authenticator.userExists: UserID: adgjm- cmdb.isLocalUser(osUserID) returned 2019-03-09 13:32:27,889 INFO [http-bio-443-exec-17] DBRequestor - 1: queryUDP2: User Exists 2019-03-09 13:32:27,892 INFO [http-bio-443-exec-17] DBRequestor - UserInfo: UserID: adgjm Password: Locale: 0 Authentication proxy rights: falseDevice Profiles: test\_emcc\_udp 2019-03-09 13:32:27,892 INFO [http-bio-443-exec-17] EMServiceServlet - 1: authenticate pin for adgjm 2019-03-09 13:32:27,923 INFO [http-bio-443-exec-17] EmccData - 1: getRemoteClusterInfo: Pkid for cluster ClusterOne is f672bb12-5e1b-4795-81fa-d06d5ce07e84 2019-03-09 13:32:27,925 INFO [http-bio-443-exec-17] EMServiceServlet - 1 : 3 : ClusterOne: EmccCheckUser <emccResponse><checkUser><user id="adgjm"><numProfiles>1</numProfiles><exists/><deviceProfile1>test\_emcc\_udp</deviceProfile1></user></checkUser></emccResponse> 2019-03-09 13:32:27,925 INFO [http-bio-443-exec-17] EMServiceServlet - 1: EmccRequest Processing Time: 61 ##### 13:32:27,975 EMService on the home cluster receives an EMCC Login Request 2019-03-09 13:32:27,975 INFO [http-bio-443-exec-19] EMServiceServlet - EMService Request# ----> : 2 2019-03-09 13:32:27,975 INFO [http-bio-443-exec-19] EMServiceServlet - 2:EMService: Request Type=EMCC 2019-03-09 13:32:27,978 INFO [http-bio-443-exec-19] EMServiceServlet - 2: Setting remoteIPAddr to connection IP=192.168.7.100 2019-03-09 13:32:27,978 INFO [http-bio-443-exec-19] EMServiceServlet - 2 : 3 : ClusterOne: processEmccRequest: Received EMCC Home Cluster Login Request for :adgjm 2019-03-09 13:32:27,978 INFO [http-bio-443-exec-19] EMServiceServlet - 2 : 3 : DeviceSecurityMode: 1 HomeCluster SecurityMode: 0 2019-03-09 13:32:27,978 INFO [http-bio-443-exec-19] EMServiceServlet - 2: authenticate pin for adgjm 2019-03-09 13:32:27,980 INFO [http-bio-443-exec-19] EMServiceServlet - 2 : 3 : ClusterOne: EmccHomeLogin : Performing Home Device Login for :adgjm 2019-03-09 13:32:27,981 INFO [http-bio-443-exec-19] EmccData - 2: getRemoteClusterInfo: Pkid for cluster ClusterOne is f672bb12-5e1b-4795-81fa-d06d5ce07e84 2019-03-09 13:32:27,981 INFO [http-bio-443-exec-19] EMServiceServlet - 2: computeLoginDuration: Device: SEPC80084AA8743 - Checking autologout settings... 2019-03-09 13:32:28,048 INFO [http-bio-443-exec-19] EMServiceServlet - 2: scheduleLogout: Device: SEPC80084AA8743-Setting autologout request with logout scheduler for : 36000 secs 2019-03-09 13:32:28,049 INFO [http-bio-443-exec-19] LogoutScheduler - 2:LogoutScheduler.setLogout(): Dev: SEPC80084AA8743- Set logout for 36000 seconds 2019-03-09 13:32:28,049 INFO [http-bio-443-exec-19] EMServiceServlet - 2: EmccRequest Processing Time: 74 ##### 13:32:28,154 EMService on the home cluster then updates the extensionmobilitydynamic database table 2019-03-09 13:32:28,154 INFO [Thread-35 ] CMDatabase - [CMDatabase] process(<msg><type>DBL</type><table>extensionmobilitydynamic</table><tableid>170</tableid><action>U</action><user>dbemweb</user><time>1552156348</time><old><cdrserver>2</cdrserver><cdrtime>1550846224</cdrtime><pkid>180363d9-ed4b-4d5c-b299-751aa3e06cfd</pkid><logintime>NULL</logintime><loginduration>NULL</loginduration><fkdevice\_currentloginprofile>NULL</fkdevice\_currentloginprofile><fkenduser\_lastlogin>97f2a05c-f973-6fd4-fd5e-2048b7f70530</fkenduser\_lastlogin><fkdevice>180363d9-ed4b-4d5c-b299-751aa3e06cfd</fkdevice><allowcticontrolflag>t</allowcticontrolflag><ctiidbase>3</ctiidbase><date timestamp>1550846224</date timestamp><fkcallingsearchspace\_restrict>NULL</fkcallingsearchspace\_restrict><fkenduser>NULL</fkenduser><fkmatrix\_presence>NULL</fkmatrix\_presence><fkmlppdomain>NULL</fkmlppdomain><fkphonetemplate>NULL</fkphonetemplate><fksoftkeytemplate>NULL</fksoftkeytemplate><ignorepi>f</ignorepi><lastnumplanindex>0</lastnumplanindex><mismatchedlogin>f</mismatchedlogin><tkpreemption>2</tkpreemption><tkstatus\_mlppindicationstatus>2</tkstatus\_mlppindicationstatus><tkuserlocale>1</tkuserlocale><userholdmohaudiosourceid>NULL</userholdmohaudiosourceid><versionstamp>1550846224-ca3abf91-97c3-4ce7-9a3d-4373eb132289</versionstamp><tkringsetting\_dnd>NULL</tkringsetting\_dnd><tkdndoption>2</tkdndoption><tkstatus\_joinacrosslines>0</tkstatus\_joinacrosslines><tkbarga>0</tkbarga><tkstatus\_alwaysuseprimeline>2</tkstatus\_alwaysuseprimeline><tkstatus\_alwaysuseprimelineforvm>2</tkstatus\_alwaysuseprimelineforvm><fkcallingsearchspace\_emcc>NULL</fkcallingsearchspace\_emcc><fkfeaturecontrolpolicy



```
>NULL</fkfeaturecontrolpolicy><ifx_replcheck>6660833813205221397</ifx_replcheck></old><new><tkstatus_alwaysuseprimelineforvm>2</tkstatus_alwaysuseprimelineforvm><tkstatus_alwaysuseprimeline>2</tkstatus_alwaysuseprimeline><ignoreepi>f</ignoreepi><tkringsetting_dnd>NULL</tkringsetting_dnd><fkcallingsearchspace_restrict>NULL</fkcallingsearchspace_restrict><fkmlppdomain>NULL</fkmlppdomain><fkmatrix_presence>ad243d17-98b4-4118-8feb-5ff2e1b781ac</fkmatrix_presence><fkphonetemplate>16f15a8c-63f6-44ba-b240-82c24714ec12</fkphonetemplate><allowcticontrolflag>t</allowcticontrolflag><tkuserlocale>1</tkuserlocale><fksoftkeytemplate>NULL</fksoftkeytemplate><userholdmohaudiosourceid>NULL</userholdmohaudiosourceid><tkstatus_mlppindicationstatus>2</tkstatus_mlppindicationstatus><tkpreemption>2</tkpreemption><tkdndoption>2</tkdndoption><ctiidbase>1</ctiidbase><mismatchedlogin>f</mismatchedlogin><lastnumplanindex>0</lastnumplanindex><fkenduser>97f2a05c-f973-6fd4-fd5e-2048b7f70530</fkenduser><logintime>1552156348</logintime><loginduration>36000</loginduration><fkdevice_currentloginprofile>91ac8680-48d3-48c1-956e-f6e10d046ce4</fkdevice_currentloginprofile><datetimestamp>1552156347</datetimestamp><versionstamp>1552156347-145cec2d-3b45-430f-acaf-d79657a15c58</versionstamp></new></msg> ) started 2019-03-09 13:32:28,154 INFO [Thread-35 ] CMDatabase - [CMDatabase] process() - table=extensionmobilitydynamic
```

#### CCM logs:

```
##### 13:32:28.155 The database on the home cluster receives the update and processes it
00009522.001 |13:32:28.155 |AppInfo |ProcessCnf N: extensionmobilitydynamic U 180363d9-ed4b-4d5c-b299-751aa3e06cfd, size(2864) fkmatrix_presence(NULL/ad243d17-98b4-4118-8feb-5ff2e1b781ac)
fkphonetemplate(NULL/16f15a8c-63f6-44ba-b240-82c24714ec12) ctiidbase(3/1)
fkenduser(NULL/97f2a05c-f973-6fd4-fd5e-2048b7f70530) logintime(NULL/1552156348)
loginduration(NULL/36000) fkdevice_currentloginprofile(NULL/91ac8680-48d3-48c1-956e-f6e10d046ce4)
datetimestamp(1550846224/1552156347) versionstamp(1550846224-ca3abf91-97c3-4ce7-9a3d-4373eb132289/1552156347-145cec2d-3b45-430f-acaf-d79657a15c58)
```

#### 전화 구성 파일에 표시된 서비스

```
<phoneService type="0" category="0">
<name>EMCC_Service</name>
<url>http://192.168.7.100:8080/emapp/EMAppServlet?device=#DEVICENAME#&EMCC=#EMCC#</url>
<vendor></vendor>
<version></version>
</phoneService>
```

#### 전화기에 대한 로그 검토

참고:이러한 로그를 수집할 때 활성화된 디버그가 없습니다.

```
##### 18:32:35.240378 || The EMCC mode is changed to true
4743 WRN Mar 09 18:32:35.240378 (618:910) JAVA-configmgr MQThread|DisplayTask:? - EMCC mode
changed to true
4744 WRN Mar 09 18:32:35.241080 (618:910) JAVA-configmgr MQThread|DisplayTask:? -
resetCurrentPowerState(): Energywise is disabled
4745 WRN Mar 09 18:32:35.241873 (618:910) JAVA-configmgr MQThread|DisplayTask:? -
resetCurrentPowerState(): Energywise null domain
4746 WRN Mar 09 18:32:35.242606 (618:910) JAVA-configmgr MQThread|DisplayTask:? -
resetCurrentPowerState(): Energywise null secret
4747 WRN Mar 09 18:32:35.243643 (618:910) JAVA-configmgr MQThread|DisplayTask:? -
resetCurrentPowerState(): Energywise disabled for EMCC mode
4748 ERR Mar 09 18:32:35.244254 (618:910) JAVA-IO_JNI| NIOLightLamp: led Data passed to
cprLedSet(): 0x01000000
4749 ERR Mar 09 18:32:35.244712 (618:910) JAVA-[API]LED ID error
4750 ERR Mar 09 18:32:35.245170 (618:910) JAVA-IO_JNI| !!! cprLedSet() return failed!
4751 WRN Mar 09 18:32:35.245933 (618:910) JAVA-configmgr MQThread|DisplayTask:? -
resetCurrentPowerState(): energywise is not available now
```

```
##### 18:32:35.273065 || sipcc is notified that EMCC is enabled
4752 NOT Mar 09 18:32:35.273065 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: -
[commitEMCCProperties] to notify sipcc of EMCC:enabled
4753 NOT Mar 09 18:32:35.275751 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: -
[commitEMCCProperties] notify sipcc of [vEM-IP,vEM-Port]:[192.168.7.100,8080]
```

```
##### 18:32:35.313016 || We identify the TFTP servers for the home cluster
4754 NOT Mar 09 18:32:35.313016 (339:1813) downd-SETTFTP [339] emcc_mode=1, override=0,
tempTftp1= 192.168.7.200, tempTftp2 = , tempTftp3 = , tempTftp4 =
```

```
##### 18:32:36.726445 || The EMCC mini config files is received
4797 WRN Mar 09 18:32:36.726445 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? -
EMCC|Received Mini-config file.
4798 WRN Mar 09 18:32:36.727636 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? - ==>no
need set capf,EMCC=true and encrConfig=false
4799 INF Mar 09 18:32:36.728643 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? -
processConfigNoError: result=1
4800 NOT Mar 09 18:32:36.731786 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: - Sending
update notice to Metmand
4801 NOT Mar 09 18:32:36.732794 (624:624) metmand-config_parser_main parsing
/usr/local/flash0/sip-SEPC80084AA8743.cnf.xml
4802 NOT Mar 09 18:32:36.741400 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: - Sending
update notice to Metmand - COMPLETE
4803 NOT Mar 09 18:32:36.748115 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? - Config
processConfigNoError() result code=CONFIG_FILE_CHANGED
```

```
##### 18:32:37.594689 || The phone requests the CTL file from the Home Cluster
4849 NOT Mar 09 18:32:37.594689 (339:1850) downd-GETXXTP
[GT339][src=CTLSEPC80084AA8743.tlv][dest=/tmp/CTLFile.tlv][serv=][serv6=][sec=0]
4850 NOT Mar 09 18:32:37.597405 (339:1850) downd-In normal mode, call - > makeXXTPrequest
(V6...)
4851 NOT Mar 09 18:32:37.643125 (618:755) JAVA-Thread-12|cip.setg.IpStacksStateProperty:? -
IpStacksStateProperty changed from "IPv4-stack-state:1 (DHCP BOUND), IPv6-stack-state:199 (IPV6
STACK TURNED OFF)" to "IPv4-stack-state:1 (DHCP BOUND), IPv6-stack-state:199 (IPV6 STACK TURNED
OFF)"
4852 NOT Mar 09 18:32:37.641843 (339:1850) downd-EMCC reading:
4853 NOT Mar 09 18:32:37.643735 (339:1850) downd- EMCC Mode - 1
4854 NOT Mar 09 18:32:37.643827 (339:1850) downd- EMCC Override - 0
4855 NOT Mar 09 18:32:37.643888 (339:1850) downd- Home Tftp 1 - [14] 192.168.7.200
4856 NOT Mar 09 18:32:37.643949 (339:1850) downd- Home Tftp 2 - [1]
4857 NOT Mar 09 18:32:37.644010 (339:1850) downd- Home Tftp 3 - [1]
4858 NOT Mar 09 18:32:37.644071 (339:1850) downd- Home Tftp 4 - [1]
4859 NOT Mar 09 18:32:37.644132 (339:1850) downd-unable to convert the tempTftpSvr2: retVal=0
4860 NOT Mar 09 18:32:37.644193 (339:1850) downd-unable to convert the tempTftpSvr4: retVal=0
```

```
##### 18:32:37.644345 || look up server - 0 - 192.168.7.200
4861 NOT Mar 09 18:32:37.644345 (339:1850) downd-AUTH.SRVR [GT339] look up server - 0 -
192.168.7.200
4862 NOT Mar 09 18:32:37.646787 (618:755) JAVA-Calling handleNetSDEvent
4863 NOT Mar 09 18:32:37.699343 (339:1850) downd-AUTH.SRVR [GT339] look up server - 1 - 0.0.0.0
4864 NOT Mar 09 18:32:37.750465 (339:1850) downd-AUTH.SRVR [GT339] authentication retval = 9
4865 NOT Mar 09 18:32:37.750648 (339:1850) downd-XXTP Non secure file requested
4866 NOT Mar 09 18:32:37.750923 (339:1850) downd-XXTP start request, server 1 - 192.168.7.200
4867 NOT Mar 09 18:32:37.751441 (339:1850) downd-XXTP actualserver [192.168.7.200]
```

```
4868 NOT Mar 09 18:32:37.763222 (339:1858) downnd-XXX arg[0] /usr/sbin/gethttp
4869 NOT Mar 09 18:32:37.768655 (339:1858) downnd-XXX arg[1] -t
4870 NOT Mar 09 18:32:37.769296 (339:1858) downnd-XXX arg[2] 192.168.7.200
4871 NOT Mar 09 18:32:37.769784 (339:1858) downnd-XXX arg[3] -i0
4872 NOT Mar 09 18:32:37.774088 (339:1858) downnd-XXX arg[4] CTLSEPC80084AA8743.tlv
4873 NOT Mar 09 18:32:37.774606 (339:1858) downnd-XXX arg[5] /tmp/CTLFile.tlv
4874 NOT Mar 09 18:32:37.775095 (339:1858) downnd-XXX arg[6] (null)
4875 NOT Mar 09 18:32:37.818739 (1858:1858) GHTTP-LIMIT download will be limited to 2048 KB
4876 DEB Mar 09 18:32:37.974088 (618:755) JAVA-getassetid(): pid: 618
4877 DEB Mar 09 18:32:37.974454 (618:755) JAVA-getassetid(): msgsnd() rc: 0, size: 44 bytes
4878 DEB Mar 09 18:32:37.975980 (618:755) JAVA-getassetid(): msgrcv() 44 bytes
4879 NOT Mar 09 18:32:37.978177 (322:366) NETSD-siginfThr(): tempvvlan: 4095 vvlan: 4095
linkState: 1 cdpState: 1
4880 NOT Mar 09 18:32:37.979032 (322:366) NETSD-siginfThr(): activechange: 0
4881 NOT Mar 09 18:32:37.979123 (322:366) NETSD-siginfThr(): force_dhcp: 0

##### 18:32:37.985319 || The home cluster sends a 503 Service Unavailable
4882 ERR Mar 09 18:32:37.985319 (1858:1858) GHTTP-http get [HTTP/1.1 503 Service Unavailab]
4883 NOT Mar 09 18:32:38.001617 (339:1862) downnd-XXX arg[0] /usr/sbin/tftpd
4884 NOT Mar 09 18:32:38.011475 (339:1862) downnd-XXX arg[1] -t
4885 NOT Mar 09 18:32:38.011994 (339:1862) downnd-XXX arg[2] 192.168.7.200
4886 NOT Mar 09 18:32:38.015595 (339:1862) downnd-XXX arg[3] -i0
4887 NOT Mar 09 18:32:38.016023 (339:1862) downnd-XXX arg[4] CTLSEPC80084AA8743.tlv
4888 NOT Mar 09 18:32:38.016541 (339:1862) downnd-XXX arg[5] /tmp/CTLFile.tlv
4889 NOT Mar 09 18:32:38.016999 (339:1862) downnd-XXX arg[6] (null)
4890 NOT Mar 09 18:32:38.082496 (618:755) JAVA-Thread-12|cip.setg.IpStacksStateProperty:? -
IpStacksStateProperty changed from "IPv4-stack-state:1 (DHCP BOUND), IPv6-stack-state:199 (IPV6
STACK TURNED OFF)" to "IPv4-stack-state:1 (DHCP BOUND), IPv6-stack-state:199 (IPV6 STACK TURNED
OFF)"
4891 NOT Mar 09 18:32:38.153608 (1862:1862) TFTPDP-pid = 1862

##### 18:32:38.244254 || The phone requests the CTL file from the Home Cluster via port 69
instead of using http and port 6970
4892 NOT Mar 09 18:32:38.244254 (1862:1862) TFTPDP-LIMIT download will be limited to 2048 KB
4893 ERR Mar 09 18:32:38.245933 (1862:1862) TFTPDP-ai_family = 2, sockType = 2, protocol = 17
4894 NOT Mar 09 18:32:38.246634 (1862:1862) TFTPDP-Requesting CTLSEPC80084AA8743.tlv from
192.168.7.200
4895 WRN Mar 09 18:32:38.247306 (1862:1862) TFTPDP-sendto() failed : Address family not supported
by protocol
4896 NOT Mar 09 18:32:38.752784 (1862:1862) TFTPDP-Timeout: retransmit the last packet (1)

##### 18:32:38.754493 || The phone is told "File not found" since the cluster isn't in mixed
mode
4897 WRN Mar 09 18:32:38.754493 (1862:1862) TFTPDP-Error: (1+1)File not found
4898 NOT Mar 09 18:32:38.756996 (339:1850) downnd-XXTP complete - status = 2

##### 18:32:38.767556 || The phone requests the ITL file from the Home Cluster
4899 NOT Mar 09 18:32:38.767556 (339:1882) downnd-GETXXTP
[GT339][src=ITLSEPC80084AA8743.tlv][dest=/tmp/ITLFile.tlv][serv=][serv6=][sec=0]
4900 NOT Mar 09 18:32:38.769540 (339:1882) downnd-In normal mode, call - > makeXXTPrequest
(V6...)
4901 NOT Mar 09 18:32:38.770944 (339:1882) downnd-EMCC reading:
4902 NOT Mar 09 18:32:38.772256 (339:1882) downnd- EMCC Mode - 1
4903 NOT Mar 09 18:32:38.774545 (339:1882) downnd- EMCC Override - 0
4904 NOT Mar 09 18:32:38.775003 (339:1882) downnd- Home Tftp 1 - [14] 192.168.7.200
4905 NOT Mar 09 18:32:38.775430 (339:1882) downnd- Home Tftp 2 - [1]
```

4906 NOT Mar 09 18:32:38.775888 (339:1882) downnd- Home Tftp 3 - [1]  
4907 NOT Mar 09 18:32:38.776651 (339:1882) downnd- Home Tftp 4 - [1]  
4908 NOT Mar 09 18:32:38.777170 (339:1882) downnd-unable to convert the tempTftpSvr2: retVal=0  
4909 NOT Mar 09 18:32:38.777628 (339:1882) downnd-unable to convert the tempTftpSvr4: retVal=0  
4910 NOT Mar 09 18:32:38.778177 (339:1882) downnd-AUTH.SRVR [GT339] look up server - 0 -  
192.168.7.200  
4911 NOT Mar 09 18:32:38.805035 (339:1850) downnd-DDGETTFTP.RESULT [\_2\_ File not found  
]  
4912 NOT Mar 09 18:32:38.832565 (339:1882) downnd-AUTH.SRVR [GT339] look up server - 1 - 0.0.0.0  
4913 NOT Mar 09 18:32:38.883534 (339:1882) downnd-AUTH.SRVR [GT339] authentication retVal = 9  
4914 NOT Mar 09 18:32:38.883717 (339:1882) downnd-XXTP Non secure file requested  
4915 NOT Mar 09 18:32:38.884724 (339:1882) downnd-XXTP start request, server 1 - 192.168.7.200  
4916 NOT Mar 09 18:32:38.885334 (339:1882) downnd-XXTP actualserver [192.168.7.200]  
4917 NOT Mar 09 18:32:38.888997 (339:1886) downnd-XXX arg[0] /usr/sbin/gethttp  
4918 NOT Mar 09 18:32:38.889638 (339:1886) downnd-XXX arg[1] -t  
4919 NOT Mar 09 18:32:38.890126 (339:1886) downnd-XXX arg[2] 192.168.7.200  
4920 NOT Mar 09 18:32:38.890584 (339:1886) downnd-XXX arg[3] -i0  
4921 NOT Mar 09 18:32:38.891103 (339:1886) downnd-XXX arg[4] ITLSEPC80084AA8743.tlv  
4922 NOT Mar 09 18:32:38.891652 (339:1886) downnd-XXX arg[5] /tmp/ITLFile.tlv  
4923 NOT Mar 09 18:32:38.892171 (339:1886) downnd-XXX arg[6] (null)  
4924 NOT Mar 09 18:32:38.932397 (1886:1886) GHTTP-LIMIT download will be limited to 2048 KB

##### 18:32:38.937860 || The ITL file is received

4925 NOT Mar 09 18:32:38.937860 (1886:1886) GHTTP-hdr->HTTP/1.1 200 OK  
4926 NOT Mar 09 18:32:38.938928 (1886:1886) GHTTP-hdr->Content-length: 7879  
4927 NOT Mar 09 18:32:38.939355 (1886:1886) GHTTP-hdr->Cache-Control: no-store  
4928 NOT Mar 09 18:32:38.939813 (1886:1886) GHTTP-hdr->Content-type: \*/\*  
4929 NOT Mar 09 18:32:38.943628 (339:1882) downnd-XXTP complete - status = 100  
4930 NOT Mar 09 18:32:38.952052 (346:1887) SECUREAPP-AUTH: start of pad ('T' 0x0d) at TLV 15  
4931 WRN Mar 09 18:32:38.957881 (346:1887) SECUREAPP-AUTH: hdr ver 1.2 (knows only upto 1.1)  
4932 NOT Mar 09 18:32:38.958370 (346:1887) SECUREAPP-AUTH: skipping 1 trail bytes (pad and/or  
unknown TLVs)  
4933 NOT Mar 09 18:32:38.987455 (339:1882) downnd-DDGETTFTP.RESULT [\_100\_ HTTP NO ERROR  
]  
4934 NOT Mar 09 18:32:39.928521 (413:426) CDP-cdpRcvPkt(): deviceId is HQSW

##### 18:32:40.161238 || The phone reaches out to the TVS server on the Visiting Cluster

4935 NOT Mar 09 18:32:40.161238 (346:1810) SECUREAPP-Sec SSL Connection - Handshake successful.  
4936 NOT Mar 09 18:32:40.164291 (346:1810) SECUREAPP-TVS process request - Successfully sent the  
TVS request to TVS server, bytes written : 180  
4937 NOT Mar 09 18:32:40.183701 (346:1810) SECUREAPP-Close and free connection handler at  
0x2b2d2ac0  
4938 NOT Mar 09 18:32:40.184220 (346:1810) SECUREAPP-Sec SSL Close Connection successful.

##### 18:32:40.672180 || The authentication is successful

4939 NOT Mar 09 18:32:40.672180 (346:1887) SECUREAPP-Hashes match... authentication successful.  
4940 NOT Mar 09 18:32:40.676270 (346:1887) SECUREAPP-AUTH: start of pad ('T' 0x0d) at TLV 15  
4941 WRN Mar 09 18:32:40.677002 (346:1887) SECUREAPP-AUTH: hdr ver 1.2 (knows only upto 1.1)  
4942 NOT Mar 09 18:32:40.677491 (346:1887) SECUREAPP-AUTH: skipping 1 trail bytes (pad and/or  
unknown TLVs)

##### 18:32:40.678040 || The trust list is updated

4943 NOT Mar 09 18:32:40.678040 (346:1887) SECUREAPP-updateFromFile: TL parse to table:  
CTL\_SUCCESS  
4944 NOT Mar 09 18:32:40.678559 (346:1887) SECUREAPP-updateFromFile: Updating master TL table  
4945 INF Mar 09 18:32:40.703372 (618:1845) JAVA-TL update Thread|cip.sec.ISecurityListener:-----

```
----updateCtl,result=8 - -----invoke proxy
4946 INF Mar 09 18:32:40.704715 (618:910) JAVA-configmgr MQThread|cip.sec.ISecurityListener:----
-----updateCtl,result=8 - -----invoke dispatcher
4947 NOT Mar 09 18:32:40.705142 (618:910) JAVA-configmgr
MQThread|cip.cfg.ConfigManager$MySecurityListener:? - ConfigManager updateCTL() rc=8
retryCount=0, failReason:Success
4948 NOT Mar 09 18:32:40.721104 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: - [SipConfig]
endDownloadCTL-time:1552156360720
4949 NOT Mar 09 18:32:41.187578 (618:910) JAVA-CCAPIDevicesendAlarm: phone-app requesting alarm
to be sent
4950 DEB Mar 09 18:32:41.188463 (618:910) JAVA-SIPCC-SIP_ALARM: storeAlarm: stored alarm at
index [1].
4951 DEB Mar 09 18:32:41.189012 (618:910) JAVA-[getDeployMode] deploy-mode:1
4952 NOT Mar 09 18:32:41.195574 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: - [SipConfig]
beginDownloadConfig-time:1552156361195
4953 NOT Mar 09 18:32:41.196276 (618:910) JAVA-configmgr MQThread|cip.cfg.Config: -
[clearTftpTimeout] to reset tftp-timeout error
```

```
##### 18:32:41.198046 || The phone requests the CNF file from the Home Cluster
4954 NOT Mar 09 18:32:41.198046 (618:910) JAVA-configmgr MQThread|cip.cfg.SipConfig:? -
Requesting CONFIG file: ram/SEPC80084AA8743.cnf.xml.59075 from TFTP Service(1), encrypt =
false,isApplyingConfigFromFlash:false
4955 INF Mar 09 18:32:41.198748 (618:910) JAVA-[[MESSAGE_1.0]]: [CONFIG-MGR] -->
tftpRequest(ram/SEPC80084AA8743.cnf.xml.59075) --> [TFTP] :
4956 NOT Mar 09 18:32:41.202288 (339:1899) downd-GETXXTP
[GT339][src=SEPC80084AA8743.cnf.xml][dest=/tmp/ram/SEPC80084AA8743.cnf.xml.59075][serv=][serv6=]
[sec=2]
4957 NOT Mar 09 18:32:41.203051 (339:1899) downd-In normal mode, call - > makeXXTPrequest
(V6...)
4958 NOT Mar 09 18:32:41.204364 (339:1899) downd-EMCC reading:
4959 NOT Mar 09 18:32:41.204852 (339:1899) downd- EMCC Mode - 1
4960 NOT Mar 09 18:32:41.205310 (339:1899) downd- EMCC Override - 0
4961 NOT Mar 09 18:32:41.205768 (339:1899) downd- Home Tftp 1 - [14] 192.168.7.200
4962 NOT Mar 09 18:32:41.206531 (339:1899) downd- Home Tftp 2 - [1]
4963 NOT Mar 09 18:32:41.206989 (339:1899) downd- Home Tftp 3 - [1]
4964 NOT Mar 09 18:32:41.207416 (339:1899) downd- Home Tftp 4 - [1]
4965 NOT Mar 09 18:32:41.208057 (339:1899) downd-unable to convert the tempTftpSvr2: retVal=0
4966 NOT Mar 09 18:32:41.208515 (339:1899) downd-unable to convert the tempTftpSvr4: retVal=0
4967 NOT Mar 09 18:32:41.209064 (339:1899) downd-AUTH.SRVR [GT339] look up server - 0 -
192.168.7.200
4968 NOT Mar 09 18:32:41.261010 (339:1899) downd-AUTH.SRVR [GT339] look up server - 1 - 0.0.0.0
4969 NOT Mar 09 18:32:41.312070 (339:1899) downd-AUTH.SRVR [GT339] authentication retval = 9
4970 NOT Mar 09 18:32:41.312284 (339:1899) downd-XXTP Secure file requested
4971 NOT Mar 09 18:32:41.312406 (339:1899) downd-XXTP authenticated file approved - add .sgn if
necessary -- SEPC80084AA8743.cnf.xml.sgn
4972 NOT Mar 09 18:32:41.312650 (339:1899) downd-XXTP start request, server 1 - 192.168.7.200
4973 NOT Mar 09 18:32:41.313169 (339:1899) downd-XXTP actualserver [192.168.7.200]
4974 NOT Mar 09 18:32:41.317533 (339:1902) downd-XXX arg[0] /usr/sbin/gethttp
4975 NOT Mar 09 18:32:41.318266 (339:1902) downd-XXX arg[1] -t
4976 NOT Mar 09 18:32:41.318693 (339:1902) downd-XXX arg[2] 192.168.7.200
4977 NOT Mar 09 18:32:41.319151 (339:1902) downd-XXX arg[3] -i0
4978 NOT Mar 09 18:32:41.319578 (339:1902) downd-XXX arg[4] SEPC80084AA8743.cnf.xml.sgn
4979 NOT Mar 09 18:32:41.320097 (339:1902) downd-XXX arg[5]
/tmp/ram/SEPC80084AA8743.cnf.xml.59075
4980 NOT Mar 09 18:32:41.320738 (339:1902) downd-XXX arg[6] (null)
4981 NOT Mar 09 18:32:41.360140 (1902:1902) GHTTP-LIMIT download will be limited to 2048 KB
```

```
##### 18:32:41.378666 || The CNF file is received
4982 NOT Mar 09 18:32:41.378666 (1902:1902) GHTTP-hdr->HTTP/1.1 200 OK
4983 NOT Mar 09 18:32:41.378940 (1902:1902) GHTTP-hdr->Content-length: 12277
```

4984 NOT Mar 09 18:32:41.379062 (1902:1902) GHTTP-hdr->Cache-Control: no-store  
4985 NOT Mar 09 18:32:41.379154 (1902:1902) GHTTP-hdr->Content-type: /\*/\*  
4986 NOT Mar 09 18:32:41.384281 (339:1899) downd-XXTP complete - status = 100

##### 18:32:43.821608 || The phone requests the SK file from the Home Cluster

5105 NOT Mar 09 18:32:43.821608 (339:1929) downd-GETXXTP [GT339][src=SKb0ec918f-b9ee-994b-57ae-345883c1fde8.xml][dest=/tmp/cache/SK-2103396823][serv=][serv6=][sec=2]  
5106 NOT Mar 09 18:32:43.823500 (339:1929) downd-In normal mode, call - > makeXXTPrequest (V6...)  
5107 NOT Mar 09 18:32:43.825850 (339:1929) downd-EMCC reading:  
5108 NOT Mar 09 18:32:43.826399 (339:1929) downd- EMCC Mode - 1  
5109 NOT Mar 09 18:32:43.828170 (339:1929) downd- EMCC Override - 0  
5110 NOT Mar 09 18:32:43.828689 (339:1929) downd- Home Tftp 1 - [14] 192.168.7.200  
5111 NOT Mar 09 18:32:43.830215 (339:1929) downd- Home Tftp 2 - [1]  
5112 NOT Mar 09 18:32:43.830642 (339:1929) downd- Home Tftp 3 - [1]  
5113 NOT Mar 09 18:32:43.831191 (339:1929) downd- Home Tftp 4 - [1]  
5114 NOT Mar 09 18:32:43.832381 (339:1929) downd-unable to convert the tempTftpSvr2: retVal=0  
5115 NOT Mar 09 18:32:43.832931 (339:1929) downd-unable to convert the tempTftpSvr4: retVal=0  
5116 NOT Mar 09 18:32:43.834396 (339:1929) downd-AUTH.SRVR [GT339] look up server - 0 - 192.168.7.200  
5117 NOT Mar 09 18:32:43.888722 (339:1929) downd-AUTH.SRVR [GT339] look up server - 1 - 0.0.0.0  
5118 NOT Mar 09 18:32:43.940485 (339:1929) downd-AUTH.SRVR [GT339] authentication retval = 9  
5119 NOT Mar 09 18:32:43.941065 (339:1929) downd-XXTP Secure file requested  
5120 NOT Mar 09 18:32:43.941248 (339:1929) downd-XXTP authenticated file approved - add .sgn if necessary -- SKb0ec918f-b9ee-994b-57ae-345883c1fde8.xml.sgn  
5121 NOT Mar 09 18:32:43.941522 (339:1929) downd-XXTP start request, server 1 - 192.168.7.200  
5122 NOT Mar 09 18:32:43.942926 (339:1929) downd-XXTP actualserver [192.168.7.200]  
5123 NOT Mar 09 18:32:43.952510 (339:1932) downd-XXX arg[0] /usr/sbin/gethttp  
5124 NOT Mar 09 18:32:43.953334 (339:1932) downd-XXX arg[1] -t  
5125 NOT Mar 09 18:32:43.955318 (339:1932) downd-XXX arg[2] 192.168.7.200  
5126 NOT Mar 09 18:32:43.956325 (339:1932) downd-XXX arg[3] -i0  
5127 NOT Mar 09 18:32:43.956783 (339:1932) downd-XXX arg[4] SKb0ec918f-b9ee-994b-57ae-345883c1fde8.xml.sgn  
5128 NOT Mar 09 18:32:43.957423 (339:1932) downd-XXX arg[5] /tmp/cache/SK-2103396823  
5129 NOT Mar 09 18:32:43.958797 (339:1932) downd-XXX arg[6] (null)  
5130 NOT Mar 09 18:32:44.063756 (1932:1932) GHTTP-LIMIT download will be limited to 2048 KB

##### 18:32:44.077399 || The SK template file is received

5131 NOT Mar 09 18:32:44.077399 (1932:1932) GHTTP-hdr->HTTP/1.1 200 OK  
5132 NOT Mar 09 18:32:44.077948 (1932:1932) GHTTP-hdr->Content-length: 4137  
5133 NOT Mar 09 18:32:44.078467 (1932:1932) GHTTP-hdr->Cache-Control: no-store  
5134 NOT Mar 09 18:32:44.079078 (1932:1932) GHTTP-hdr->Content-type: /\*/\*  
5135 NOT Mar 09 18:32:44.085456 (339:1929) downd-XXTP complete - status = 100

##### 18:32:44.55309 || The list of CCM servers is printed (there is only 1 in the Home Cluster).

5319 DEB Mar 09 18:32:44.553090 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportCfgTableInit: For PRIMARY\_CCM: IPv4 Addr: 192.168.7.200 Port: 5060 listen Port: 5060 IPv6 Addr: Port: 5060 listen Port: 5060 transport: 4 Sec Level: 0 IP type: 1  
5320 NOT Mar 09 18:32:44.554432 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not configured a valid cucm for cucm index=SECONDARY\_CCM=2.  
5321 DEB Mar 09 18:32:44.554646 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportCfgTableInit: For SECONDARY\_CCM: IPv4 Addr: Port: 0 listen Port: 0 IPv6 Addr: Port: 0 listen Port: 0 transport: 4 Sec Level: 0 IP type: 0  
5322 NOT Mar 09 18:32:44.555501 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not configured a valid cucm for cucm index=TERTIARY\_CCM=3.  
5323 DEB Mar 09 18:32:44.555653 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportCfgTableInit: For TERTIARY\_CCM: IPv4 Addr: Port: 0 listen Port: 0 IPv6 Addr: Port: 0 listen Port: 0 transport: 4

Sec Level: 0 IP type: 0

5324 NOT Mar 09 18:32:44.556416 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not configured a valid cucm for cucm index=SRST\_CCM=4.

##### 18:32:44.559102 || The phone opens a TCP connection with the CCM on the Home Cluster  
5333 DEB Mar 09 18:32:44.559102 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_tcp\_create\_connection:  
socket connection in progress cpr\_errno = 120 errno = 115 ipaddr: 192.168.7.200, port: 5060  
5334 DEB Mar 09 18:32:44.559682 (618:927) JAVA-SIPCC-SIP SOCK: sip\_tcp\_create\_connection:  
socket:46, set tos/dscp: local address type:1,tos\_dscp\_val:96  
5335 DEB Mar 09 18:32:44.559835 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_transport\_setup\_cc\_conn:  
<PRIMARY\_CCM>: CC TCP socket opened: to <192.168.7.200>:<5060>, local\_port: 51778 handle=<46>  
5336 DEB Mar 09 18:32:44.560323 (618:927) JAVA-SIPCC-SIP\_ALARM: update\_unregister\_alarm\_info:  
Info\_type=CC\_UNREG\_ALARM\_PORT\_INFO ccm\_id=PRIMARY\_CCM phone\_tcp\_port=51778 sip\_info\_msg=  
5337 NOT Mar 09 18:32:44.560506 (618:927) JAVA-set\_active\_ccm: ccm=PRIMARY\_CCM port=51778  
5338 NOT Mar 09 18:32:44.560872 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not  
configured a valid cucm for cucm index=SECONDARY\_CCM=2.  
5339 NOT Mar 09 18:32:44.561025 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_transport\_setup\_cc\_conn:  
<SECONDARY\_CCM>: CC address/port not configured2.  
5340 NOT Mar 09 18:32:44.561544 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not  
configured a valid cucm for cucm index=TERTIARY\_CCM=3.  
5341 NOT Mar 09 18:32:44.561818 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_transport\_setup\_cc\_conn:  
<TERTIARY\_CCM>: CC address/port not configured2.  
5342 NOT Mar 09 18:32:44.562703 (618:927) JAVA-SIP : sip\_transport\_init\_ti\_addrs : Admin has not  
configured a valid cucm for cucm index=SRST\_CCM=4.  
5343 NOT Mar 09 18:32:44.562887 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_transport\_setup\_cc\_conn:  
<SRST\_CCM>: CC address/port not configured2.  
5344 NOT Mar 09 18:32:44.563711 (618:927) JAVA-SIPCC-SIP\_CC\_CONN: sip\_regmgr\_setup\_cc\_conns: NO  
VALID STANDBY CALL CONTROL AVAILABLE!

##### 18:32:45.402533 || ALL LINES UN-REGISTERED --- this is because the phone is unregistering  
from the visiting cluster  
5818 NOT Mar 09 18:32:45.402533 (618:927) JAVA-SIPCC-UI\_API:  
ui\_update\_registration\_state\_all\_lines: \*\*\*\*\*ALL LINES UN-REGISTERED\*\*\*\*\*  
5819 DEB Mar 09 18:32:45.402838 (618:926) JAVA-SIPCC-SIP\_REG\_STATE: ccappFeatureUpdated:  
Updating the Reg State for all lines=1  
5820 DEB Mar 09 18:32:45.403051 (618:926) JAVA-SNAPSHOT-CREATE: CCAPI\_Line\_getLineInfo:  
reference pointer=b4af9478  
5821 DEB Mar 09 18:32:45.403204 (618:926) JAVA-SIPCC-SIP\_CC\_PROV: ccsnap\_gen\_lineEvent: event  
type : REG\_STATE  
5822 DEB Mar 09 18:32:45.403296 (618:926) JAVA-[[MESSAGE\_1.0]]: [SIPCC] --> REG\_STATE() -->  
[PHONE-APP] :  
5823 DEB Mar 09 18:32:45.403601 (618:926) JAVA-SIPCC-SIP\_CC\_PROV: 1/0,  
CCAPI\_lineInfo\_getRegState: returned 0  
5824 DEB Mar 09 18:32:45.403723 (618:926) JAVA-[[MESSAGE\_1.0]]: [PHONE-APP] --> getRegState() --  
> [SIPCC] : sipcc resp: line 1 (|2222) is NOT REGISTERED  
5825 NOT Mar 09 18:32:45.404120 (618:926) JAVA-Thread-4|cip.sipcc.SipCcAdapter\$CcMgmtListener:  
- lineNotify():mgmtState=MGMT\_AWAITING\_CFG\_SYNC(8) line=1 registered=false inService=true  
regRequired = true  
5826 DEB Mar 09 18:32:45.405096 (618:926) JAVA-SNAPSHOT-RELEASE: CCAPI\_Line\_releaseLineInfo:  
reference pointer=b4af9478, ref released  
5827 DEB Mar 09 18:32:45.405371 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND: ccsip\_register\_send\_msg:  
cmd=85=SIP\_REG\_REQ ndx=97  
5828 DEB Mar 09 18:32:45.405585 (618:927) JAVA-SIP : sip\_platform\_cc\_mode\_update : mode =0  
5829 NOT Mar 09 18:32:45.405829 (618:927) JAVA-MED : updatePresentationCapTblValues : enter...  
5830 NOT Mar 09 18:32:45.405951 (618:927) JAVA-MED : updatePresentationCapTblValues : orig  
gcap[1,0,0,0]  
5831 NOT Mar 09 18:32:45.406103 (618:927) JAVA-MED : updatePresentationCapTblValues : new  
gcap[1,0,0,0]  
5832 DEB Mar 09 18:32:45.406195 (618:927) JAVA-MED : escalateDeescalate : Ignoring video cap  
update

5833 NOT Mar 09 18:32:45.406287 (618:927) JAVA-MED : updateFeccCapTblValues : enter...  
5834 NOT Mar 09 18:32:45.406378 (618:927) JAVA-MED : updateFeccCapTblValues : orig gcap[0]  
5835 NOT Mar 09 18:32:45.406470 (618:927) JAVA-MED : updateFeccCapTblValues : new gcap[0]  
5836 DEB Mar 09 18:32:45.406531 (618:927) JAVA-MED : escalateDeescalate : Ignoring video cap  
update  
5837 NOT Mar 09 18:32:45.406622 (618:927) JAVA-SIPCC-SIP\_CTRL: sip\_restart: sip\_taskInited is  
set to true  
5838 NOT Mar 09 18:32:45.408331 (618:927) JAVA-SIPCC-CC\_API: 0/0, cc\_int\_fail\_fallback: SIP ->  
GSM: FAILOVER\_FALLBACK  
5839 DEB Mar 09 18:32:45.410315 (618:927) JAVA-SIPCC-MSG\_SEND\_REQ: SIPSPISendSubscribe: Sending  
SUBSCRIBE...  
5840 DEB Mar 09 18:32:45.415137 (618:927) JAVA-edge\_send\_get: Length of data read from  
edge\_gateway 64  
5841 DEB Mar 09 18:32:45.415382 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipAddSessionIdHeader:  
tracking ID: 7821\_cead41d7-0010-5000-a000-c80084aa8743  
5842 DEB Mar 09 18:32:45.415534 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipAddSessionIdHeader:  
local\_uuid: cead41d700105000a000c80084aa8743 remote\_uuid:  
5843 DEB Mar 09 18:32:45.415870 (618:927) JAVA-SIPCC-SIP\_SUB: sm\_add\_contact: adding device name  
[SEPC80084AA8743] to contact header  
5844 DEB Mar 09 18:32:45.416450 (618:927) JAVA-SIPCC-SIP\_SUB: sipSPIAddRouteHeadersToSubNot:  
Route info not available; will not add Route header.  
5845 DEB Mar 09 18:32:45.416602 (618:927) JAVA-SIPCC-SIP\_SUB: xmlEncodeEventData: Encode event  
data: entered,  
5846 DEB Mar 09 18:32:45.416725 (618:927) JAVA-SIPCC-SIP\_SUB: xmlEncodeEventData: Framed raw  
buffer: length = 570,  
5847 DEB Mar 09 18:32:45.417091 (618:927) JAVA-SIP : sipTransportCreateSendMessage :  
sippmh\_write() with message size=[1503]  
5848 NOT Mar 09 18:32:45.417304 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND: ccsip\_dump\_send\_msg\_info:  
<192.168.7.200:5060>:REFER s: <sip:192.168.7.200> :1000 REFER::c80084aa-87430006-1a48a291-  
451dd0ff@192.168.7.104  
5849 DEB Mar 09 18:32:45.417793 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportSendMessage: Sip msg  
sent handle=<46>,length=<1503>, message=

##### 18:32:45.419807 || A REFER to the Home Cluster for the "DeviceTLInfo" alarm with the  
ITL/TFTP from the Visiting Cluster  
5850 DEB Mar 09 18:32:45.419807 (618:927) JAVA-sipio-sent---> REFER sip:192.168.7.200 SIP/2.0^M  
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK20eb83bf^M  
From: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300122cd20b33-123852dd^M  
To: <sip:192.168.7.200>^M  
Call-ID: c80084aa-87430006-1a48a291-451dd0ff@192.168.7.104^M  
Session-ID: cead41d700105000a000c80084aa8743;remote=00000000000000000000000000000000^M  
Date: Sat, 09 Mar 2019 18:32:45 GMT^M  
CSeq: 1000 REFER^M  
User-Agent: Cisco-CP7821/12.1.1^M  
Expires: 10^M  
Max-Forwards: 70^M  
Contact: <sip:04984998-fe29-08c0-6d47-  
5593bf4ce606@192.168.7.104:51778;transport=tcp>;+u.sip!devicename.ccm.cisco.com="SEPC80084AA8743  
"^M  
Require: norefersub^M  
Referred-By: "2222" <sip:2222@192.168.7.104>^M  
Refer-To: cid:5098d8fa@192.168.7.104^M  
Content-Id: <5098d8fa@192.168.7.104>^M  
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE^M  
Content-Length: 569^M  
Content-Type: application/x-cisco-alarm+xml^M  
Content-Disposition: session;handling=required^M  
^M  
<?xml version="1.0" encoding="UTF-8"?>  
<x-cisco-alarm>  
<Alarm Name="DeviceT  
5851 DEB Mar 09 18:32:45.420021 (618:927) JAVA-LInfo">



```
<ParameterList>
<String name="DeviceName">SEPC80084AA8743</String>
<String name="IPv4Address">192.168.7.104</String>
<String name="IPv6Address"></String>
<String name="CTL_Signature">Not Installed</String>
<String name="CTL_TFTP_Server">N/A</String>
<String name="ITL_Signature">1B A1 C9 07 E9 9E 4D 3C 53 9D C8 14 24 AF 6C 9F 7D CE 4D 6D
</String>
<String name="ITL_TFTP_Server">cucm-115.home.lab</String>
<String name="StatusCode">3</String>
</ParameterList>
</Alarm>
</x-cisco-alarm>
5852 DEB Mar 09 18:32:45.420173 (618:927) JAVA-::End-Of-Sip-Message::
5853 DEB Mar 09 18:32:45.420295 (618:927) JAVA-SIPCC-SIP_TRANS: sipTransportSendMessage:
Starting reTx timer for 32000 secs
5854 DEB Mar 09 18:32:45.420784 (618:927) JAVA-[[MESSAGE_1.0]]: [SIPCC] --> REFER
sip:192.168.7.200 SIP/2.0() --> [192.168.7.200] :
5855 DEB Mar 09 18:32:45.421486 (618:927) JAVA-SIPCC-SIP_MSG_SEND:
ccsip_store_send_msg_for_alarm: local_uuid: , remote_uuid: , type:0, state:0
5856 DEB Mar 09 18:32:45.421638 (618:927) JAVA-SIPCC-SIP_MSG_SEND:
ccsip_store_send_msg_for_alarm: Sent:REFER sip:192.168.7.200 SIP/2.0 Cseq:1000 REFER
CallId:c80084aa-87430006-1a48a291-451dd0ff@192.168.7.104
5857 DEB Mar 09 18:32:45.422157 (618:927) JAVA-SIPCC-MSG_SEND_REQ: SIPSPISendSubscribe: Sending
SUBSCRIBE...
5858 NOT Mar 09 18:32:45.423134 (624:624) metmand-update_sessionid: Received NULL or Invalid
Type
5859 NOT Mar 09 18:32:45.423286 (624:624) metmand-update_sessionid: Local UUID:
5860 NOT Mar 09 18:32:45.423408 (624:624) metmand-update_sessionid: Remote UUID:
5861 DEB Mar 09 18:32:45.426064 (618:927) JAVA-edge_send_get: Length of data read from
edge_gateway 64
5862 DEB Mar 09 18:32:45.426308 (618:927) JAVA-SIPCC-SIP_SESSION_ID: sipAddSessionIdHeader:
tracking ID: 7821_cead41d7-0010-5000-a000-c80084aa8743
5863 DEB Mar 09 18:32:45.426430 (618:927) JAVA-SIPCC-SIP_SESSION_ID: sipAddSessionIdHeader:
local_uuid: cead41d700105000a000c80084aa8743 remote_uuid:
5864 DEB Mar 09 18:32:45.426766 (618:927) JAVA-SIPCC-SIP_SUB: sm_add_contact: adding device name
[SEPC80084AA8743] to contact header
5865 DEB Mar 09 18:32:45.427803 (618:927) JAVA-SIPCC-SIP_SUB: sipSPIAddRouteHeadersToSubNot:
Route info not available; will not add Route header.
5866 DEB Mar 09 18:32:45.427956 (618:927) JAVA-SIPCC-SIP_SUB: xmlEncodeEventData: Encode event
data: entered,
5867 DEB Mar 09 18:32:45.428109 (618:927) JAVA-SIPCC-SIP_SUB: xmlEncodeEventData: Framed raw
buffer: length = 573,
5868 DEB Mar 09 18:32:45.428505 (618:927) JAVA-SIP : sipTransportCreateSendMessage :
sippmh_write() with message size=[1506]
5869 NOT Mar 09 18:32:45.428689 (618:927) JAVA-SIPCC-SIP_MSG_SEND: ccsip_dump_send_msg_info:
<192.168.7.200:5060>:REFER s: <sip:192.168.7.200> :1000 REFER:c80084aa-87430007-4ba0abc2-
6f7623e8@192.168.7.104
5870 DEB Mar 09 18:32:45.429177 (618:927) JAVA-SIPCC-SIP_TRANS: sipTransportSendMessage: Sip msg
sent handle=<46>,length=<1506>, message=
```

```
##### 18:32:45.430978 || A REFER to the Home Cluster for the "DeviceTLInfo" alarm with the
ITL/TFTP from the Home Cluster
5871 DEB Mar 09 18:32:45.430978 (618:927) JAVA-sipio-sent---> REFER sip:192.168.7.200 SIP/2.0^M
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK63f5b3c9^M
From: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300136f85470f-0b656e67^M
To: <sip:192.168.7.200>^M
Call-ID: c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104^M
Session-ID: cead41d700105000a000c80084aa8743;remote=00000000000000000000000000000000^M
Date: Sat, 09 Mar 2019 18:32:45 GMT^M
CSeq: 1000 REFER^M
User-Agent: Cisco-CP7821/12.1.1^M
```

Expires: 10^M  
Max-Forwards: 70^M  
Contact: <sip:04984998-fe29-08c0-6d47-5593bf4ce606@192.168.7.104:51778;transport=tcp>;+u.sip!devicename.ccm.cisco.com="SEPC80084AA8743"  
^M  
Require: norefersub^M  
Referred-By: "2222" <sip:2222@192.168.7.104>^M  
Refer-To: cid:3801f297@192.168.7.104^M  
Content-Id: <3801f297@192.168.7.104>^M  
Allow: ACK,BYE,CANCEL,INVITE,NOTIFY,OPTIONS,REFER,REGISTER,UPDATE,SUBSCRIBE^M  
Content-Length: 572^M  
Content-Type: application/x-cisco-alarm+xml^M  
Content-Disposition: session;handling=required^M  
^M  
<?xml version="1.0" encoding="UTF-8"?>  
<x-cisco-alarm>  
<Alarm Name="DeviceT  
5872 DEB Mar 09 18:32:45.431161 (618:927) JAVA-LInfo">  
<ParameterList>  
<String name="DeviceName">SEPC80084AA8743</String>  
<String name="IPv4Address">192.168.7.104</String>  
<String name="IPv6Address"></String>  
<String name="CTL\_Signature">Not Installed</String>  
<String name="CTL\_TFTP\_Server">N/A</String>  
<String name="ITL\_Signature">A3 6D CF 5D 1E 65 4D 76 CD E3 62 4B 22 BD 45 CF 85 75 44 A6  
</String>  
<String name="ITL\_TFTP\_Server">clstr-2-pub.home.lab</String>  
<String name="StatusCode">3</String>  
</ParameterList>  
</Alarm>  
</x-cisco-alarm>  
5873 DEB Mar 09 18:32:45.431283 (618:927) JAVA-::End-Of-Sip-Message::  
5874 DEB Mar 09 18:32:45.431405 (618:927) JAVA-SIPCC-SIP\_TRANS: sipTransportSendMessage:  
Starting reTx timer for 32000 secs  
5875 DEB Mar 09 18:32:45.432168 (618:927) JAVA-[[MESSAGE\_1.0]]: [SIPCC] --> REFER  
sip:192.168.7.200 SIP/2.0() --> [192.168.7.200] :  
5876 DEB Mar 09 18:32:45.432931 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_send\_msg\_for\_alarm: local\_uuid: , remote\_uuid: , type:0, state:0  
5877 DEB Mar 09 18:32:45.433083 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:  
ccsip\_store\_send\_msg\_for\_alarm: Sent:REFER sip:192.168.7.200 SIP/2.0 Cseq:1000 REFER  
CallId:c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104  
5878 DEB Mar 09 18:32:45.433358 (618:927) JAVA-SIPCC-SIP\_STATE: 97/1, sip\_reg\_sm\_change\_state:  
Registration state change: SIP\_REG\_STATE\_IDLE ---> SIP\_REG\_STATE\_IDLE  
5879 DEB Mar 09 18:32:45.433816 (618:927) JAVA-SIPCC-SIP\_STATE: 1/0, sip\_stop\_ack\_timer: ccb-  
>index=97 ack\_timer\_index=0  
5880 DEB Mar 09 18:32:45.433969 (618:927) JAVA-SIPCC-SIP\_STATE: 1/0, sip\_start\_ack\_timer: ccb-  
>index=97 ack\_timer\_index=0  
5881 NOT Mar 09 18:32:45.434548 (624:624) metmand-update\_sessionid: Received NULL or Invalid  
Type  
5882 NOT Mar 09 18:32:45.434701 (624:624) metmand-update\_sessionid: Local UUID:  
5883 NOT Mar 09 18:32:45.434762 (624:624) metmand-update\_sessionid: Remote UUID:  
5884 DEB Mar 09 18:32:45.435098 (618:927) JAVA-[getDeployMode] deploy-mode:1  
5885 DEB Mar 09 18:32:45.435647 (618:927) JAVA-SIPCC-SIP\_REG: ccsip\_is\_reg\_refresh: Registration  
Refresh is FALSE  
5886 DEB Mar 09 18:32:45.435800 (618:927) JAVA-SIPCC-SIP\_REG\_BULK: ccsip\_handle\_ev\_reg\_req: Bulk  
Reg Conditions met  
5887 DEB Mar 09 18:32:45.436380 (618:927) JAVA-[getDeployMode] deploy-mode:1  
5888 DEB Mar 09 18:32:45.436624 (618:927) JAVA-SIPCC-MSG\_SEND\_REQ: sipSPIBuildRegisterHeaders:  
Sending REGISTER...  
5889 DEB Mar 09 18:32:45.439493 (618:927) JAVA-edge\_send\_get: Length of data read from  
edge\_gateway 64  
5890 DEB Mar 09 18:32:45.439737 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipAddSessionIdHeader:  
tracking ID: 7821\_cead41d7-0010-5000-a000-c80084aa8743  
5891 DEB Mar 09 18:32:45.439889 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipAddSessionIdHeader:

```
local_uuid: cead41d700105000a000c80084aa8743 remote_uuid:
5892 NOT Mar 09 18:32:45.440134 (618:927) JAVA-ccsip_messaging: sipSPIAddContactHeader:
CFGID_DEVICE_NAME = SEPC80084AA8743
5893 NOT Mar 09 18:32:45.440347 (618:927) JAVA-ccsip_messaging: sipSPIAddContactHeader: ccb-
>call_mode = 0, display_name = 2222
5894 DEB Mar 09 18:32:45.441080 (618:927) JAVA-VCM : vcmIsICESupported :
mediaTraversalMode(1)=Standard.
5895 DEB Mar 09 18:32:45.467144 (618:927) JAVA-[getDeployMode] deploy-mode:1
5896 DEB Mar 09 18:32:45.467327 (618:927) JAVA-SIPCC-SIP_SUB: xmlEncodeEventData: Encode event
data: entered,
5897 NOT Mar 09 18:32:45.467816 (618:927) JAVA-SIPCC-SIP_REG: addDefaultOptionInd: support bfc
1
5898 NOT Mar 09 18:32:45.467999 (618:927) JAVA-SIPCC-SIP_REG: addDefaultOptionInd:
frame_rcc_options_ind_msg: check mobility refresh 0
5899 NOT Mar 09 18:32:45.468090 (618:927) JAVA-SIPCC-SIP_REG: addDefaultOptionInd: support
flex_dscp=0
5900 NOT Mar 09 18:32:45.468914 (618:927) JAVA-SIPCC-SIP_REG: xmlEncodeEventData: returned
content after encoding:
<?xml version="1.0" encoding="UTF-8"?>
<x-cisco-remotecc-request>
  <optionsind>
    <combine max="6">
      <remotecc>
        <status></status>
      </remotecc>
      <service-control></service-control>
    </combine>
    <dialog usage="hook status">
      <unot></unot>
      <sub></sub>
    </dialog>
    <dialog usage="shared line">
      <unot></unot>
      <sub></sub>
    </dialog>
    <presence usage="blf speed dial">
      <unot></unot>
      <sub></sub>
    </presence>
    <joinreq></joinreq>
    <cfwdall-anyline></cfwdall-anyline>
    <coaching></coaching>
    <oosalarm></oosalarm>
    <rpidd-orig-called></rpidd-orig-called>
    <x-cisco-number></x-cisco-number>
    <bfcf></bfcf>
    <ix></ix>
    <gatewayrecording></gatewayrecording>
    <conferenceDisplayInstance></conferenceDisplayInstance>
  </optionsind>
</x-cisco-remotecc-request>
5901 DEB Mar 09 18:32:45.469067 (618:927) JAVA-SIPCC-SIP: addOptionsIndBody: Framed buffer:
length = 856,
5902 DEB Mar 09 18:32:45.469464 (618:927) JAVA-SIP : sipTransportCreateSendMessage :
sippmh_write() with message size=[2516]
5903 DEB Mar 09 18:32:45.470013 (618:927) JAVA-SIPCC-SIP_TRANS: sipTransportSendMessage: Sip msg
sent handle=<46>,length=<2516>, message=
```

```
##### 18:32:45.473187 || A register message to the CCM server on the Home Cluster
5904 DEB Mar 09 18:32:45.473187 (618:927) JAVA-sipio-sent---> REGISTER sip:192.168.7.200
SIP/2.0^M
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK66da98ae^M
```

From: <sip:2222@192.168.7.200>;tag=c80084aa8743001411d7279b-7ecf20ad^M  
To: <sip:2222@192.168.7.200>^M  
Call-ID: c80084aa-87430003-255b99f4-783a63d4@192.168.7.104^M  
Max-Forwards: 70^M  
Session-ID: cead41d700105000a000c80084aa8743;remote=00000000000000000000000000000000^M  
Date: Sat, 09 Mar 2019 18:32:45 GMT^M  
CSeq: 113 REGISTER^M  
User-Agent: Cisco-CP7821/12.1.1^M  
Contact: <sip:04984998-fe29-08c0-6d47-5593bf4ce606@192.168.7.104:51778;transport=tcp>;+sip.instance="<urn:uuid:00000000-0000-0000-0000-0000-0000-0000-0000-0000>";+u.sip!devicename.ccm.cisco.com="SEPC80084AA8743";+u.sip!model.ccm.cisco.com="621"  
^M  
Supported: replaces,join,sdp-anat,norefersub,resource-priority,extended-refer,X-cisco-callinfo,X-cisco-serviceuri,X-cisco-escapecodes,X-cisco-service-control,X-cisco-srtp-fallback,X-cisco-monrec,X-cisco-config,X-cisco-sis-7.0.0,X-cisco-xsi-8.5.1^M  
Reason: SIP;cause=200;text="cisco-alarm:23 Name=SEPC80084AA8743 ActiveLoad=si5905 DEB Mar 09 18:32:45.473370 (618:927) JAVA-p78xx.12-1-1-12.loads InactiveLoad=sip78xx.10-3-1-12.loads Last=reset-restart"  
^M  
Expires: 3600^M  
Content-Type: multipart/mixed; boundary=uniqueBoundary^M  
Mime-Version: 1.0^M  
Content-Length: 1313^M  
^M  
--uniqueBoundary^M  
Content-Type: application/x-cisco-remotecc-request+xml^M  
Content-Disposition: session;handling=optional^M  
^M  
<?xml version="1.0" encoding="UTF-8"?>  
<x-cisco-remotecc-request>  
<bulkregisterreq>  
<contact all="true">  
<register></register>  
</contact>  
</bulkregisterreq>  
</x-cisco-remotecc-request>  
^M  
--uniqueBoundary^M  
Content-Type: application/x-cisco-remotecc-request+xml^M  
Content-Disposition: session;handling=optional^M  
^M  
<?xml version="1.0" encoding="UTF-8"?>  
<x-cisco-remotecc-request>  
<optionsind>  
<combine max="6">  
<remotecc>  
<status></status>  
</remotecc>  
<service-control></service-control>  
</combine>  
<dialog usage="hook status">  
<unot></unot>  
<sub></sub>  
</dialog>  
<dialog usage="shared line">  
<unot></unot>  
<sub></sub>  
</dialog>  
  
5906 DEB Mar 09 18:32:45.473462 (618:927) JAVA-<presence usage="blf speed dial">  
<unot></unot>  
<sub></sub>  
</presence>  
<joinreq></joinreq>

```
<cfwdall-anyline></cfwdall-anyline>
<coaching></coaching>
<oosalarm></oosalarm>
<rp-id-orig-called></rp-id-orig-called>
<x-cisco-number></x-cisco-number>
<bfc-p></bfc-p>
<ix></ix>
<gatewayrecording></gatewayrecording>
<conferenceDisplayInstance></conferenceDisplayInstance>
</optionsind>
</x-cisco-remotecc-request>^M
--uniqueBoundary--^M
5907 DEB Mar 09 18:32:45.473584 (618:927) JAVA-::End-Of-Sip-Message::
5908 DEB Mar 09 18:32:45.473737 (618:927) JAVA-SIPCC-ENTRY: LINE 97/1: sipTransportSendMessage
: Stopping reTx timer
5909 DEB Mar 09 18:32:45.473859 (618:927) JAVA-[[MESSAGE_1.0]]: [SIPCC] --> REGISTER
sip:192.168.7.200 SIP/2.0() --> [192.168.7.200] :
5910 DEB Mar 09 18:32:45.474500 (618:927) JAVA-SIPCC-SIP_MSG_SEND:
ccsip_store_send_msg_for_alarm: local_uuid: , remote_uuid: , type:1, state:16
5911 DEB Mar 09 18:32:45.474652 (618:927) JAVA-SIPCC-SIP_MSG_SEND:
ccsip_store_send_msg_for_alarm: Sent:REGISTER sip:192.168.7.200 SIP/2.0 Cseq:113 REGISTER
CallId:c80084aa-87430003-255b99f4-783a63d4@192.168.7.104
5912 DEB Mar 09 18:32:45.474896 (618:927) JAVA-SIPCC-SIP_REG_BULK: ccsip_set_bulk_reg_status:
Transitioning bulk reg status from BULK_REG_NONE to BULK_REG_INITIATED
5913 DEB Mar 09 18:32:45.475018 (618:927) JAVA-SIPCC-SIP_STATE: 97/1, sip_reg_sm_change_state:
Registration state change: SIP_REG_STATE_IDLE ---> SIP_REG_STATE_REGISTERING
5914 NOT Mar 09 18:32:45.475659 (624:624) metmand-update_sessionid: Received NULL or Invalid
Type
5915 NOT Mar 09 18:32:45.475812 (624:624) metmand-update_sessionid: Local UUID:
5916 NOT Mar 09 18:32:45.475965 (624:624) metmand-update_sessionid: Remote UUID:
5917 DEB Mar 09 18:32:45.476880 (618:927) JAVA-SIPCC-HTTPISH: httpish_msg_process_network_msg:
Content Length 0, Bytes Remaining 703.
5918 DEB Mar 09 18:32:45.477094 (618:927) JAVA-SIP : sip_tcp_newmsg_to_spi : Sip message rcv:
message=
```

```
##### 18:32:45.477430 || The first REFER is accepted
5919 DEB Mar 09 18:32:45.477430 (618:927) JAVA-sipio-recv<--- SIP/2.0 202 Accepted^M
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK20eb83bf^M
From: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300122cd20b33-123852dd^M
To: <sip:192.168.7.200>;tag=417801073^M
Date: Sat, 09 Mar 2019 18:32:46 GMT^M
Call-ID: c80084aa-87430006-1a48a291-451dd0ff@192.168.7.104^M
CSeq: 1000 REFER^M
Contact: <sip:192.168.7.200:5060;transport=tcp>^M
Content-Length: 0^M
^M
5920 DEB Mar 09 18:32:45.477552 (618:927) JAVA-::End-Of-Sip-Message::
5921 DEB Mar 09 18:32:45.477643 (618:927) JAVA-[[MESSAGE_1.0]]: [192.168.7.200] --> SIP/2.0 202
Accepted() --> [SIPCC] :
5922 NOT Mar 09 18:32:45.477796 (618:927) JAVA-SIPCC-SIP_MSG_RECV: ccsip_dump_rcv_msg_info:
<192.168.7.200:0 >:202 Acc: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300122cd20b33-
123852dd :1000 REFER::c80084aa-87430006-1a48a291-451dd0ff@192.168.7.104
5923 DEB Mar 09 18:32:45.478376 (618:927) JAVA-SIPCC-SIP_MSG_SEND:
ccsip_store_rcvd_msg_for_alarm: local_uuid: , remote_uuid: , type:0, state:0
5924 DEB Mar 09 18:32:45.478528 (618:927) JAVA-SIPCC-SIP_MSG_SEND:
ccsip_store_rcvd_msg_for_alarm: Rcvd:SIP/2.0 202 Accepted Cseq:1000 REFER CallId:c80084aa-
87430006-1a48a291-451dd0ff@192.168.7.104
5925 DEB Mar 09 18:32:45.479230 (618:927) JAVA-SIPCC-SIP_SESSION_ID: sipGetSessionId: Remote
Session ID: (null)
5926 DEB Mar 09 18:32:45.479963 (618:927) JAVA-[getDeployMode] deploy-mode:1
5927 DEB Mar 09 18:32:45.480176 (618:927) JAVA-SIPCC-SIP_ALARM: remove_stored_alarm: Alarm at
index=0 of request_id=6 sent out successfully
```

5928 DEB Mar 09 18:32:45.482099 (618:927) JAVA-SIPCC-HTTPISH: httpish\_msg\_process\_network\_msg: Content Length 0, Bytes Remaining 319.

5929 DEB Mar 09 18:32:45.482313 (618:927) JAVA-SIP : sip\_tcp\_newmsg\_to\_spi : Sip message rcv: message=

##### 18:32:45.482679 || The second REFER is accepted

5930 DEB Mar 09 18:32:45.482679 (618:927) JAVA-sipio-recv<--- SIP/2.0 202 Accepted^M

Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK63f5b3c9^M

From: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300136f85470f-0b656e67^M

To: <sip:192.168.7.200>;tag=231462831^M

Date: Sat, 09 Mar 2019 18:32:46 GMT^M

Call-ID: c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104^M

CSeq: 1000 REFER^M

Contact: <sip:192.168.7.200:5060;transport=tcp>^M

Content-Length: 0^M

^M

5931 DEB Mar 09 18:32:45.482801 (618:927) JAVA-::End-Of-Sip-Message::

5932 DEB Mar 09 18:32:45.482893 (618:927) JAVA-[[MESSAGE\_1.0]]: [192.168.7.200] --> SIP/2.0 202 Accepted() --> [SIPCC] :

5933 NOT Mar 09 18:32:45.483045 (618:927) JAVA-SIPCC-SIP\_MSG\_RECV: ccsip\_dump\_rcv\_msg\_info: <192.168.7.200:0 >:202 Acc: "2222" <sip:2222@192.168.7.104>;tag=c80084aa874300136f85470f-0b656e67 :1000 REFER::c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104

5934 DEB Mar 09 18:32:45.483625 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:

ccsip\_store\_rcvd\_msg\_for\_alarm: local\_uuid: , remote\_uuid: , type:0, state:0

5935 DEB Mar 09 18:32:45.483778 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:

ccsip\_store\_rcvd\_msg\_for\_alarm: Rcvd:SIP/2.0 202 Accepted Cseq:1000 REFER CallId:c80084aa-87430007-4ba0abc2-6f7623e8@192.168.7.104

5936 DEB Mar 09 18:32:45.484480 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipGetSessionId: Remote Session ID: (null)

5937 DEB Mar 09 18:32:45.485243 (618:927) JAVA-[getDeployMode] deploy-mode:1

5938 DEB Mar 09 18:32:45.485426 (618:927) JAVA-SIPCC-SIP\_ALARM: remove\_stored\_alarm: Alarm at index=1 of request\_id=7 sent out successfully

5939 DEB Mar 09 18:32:45.486067 (618:927) JAVA-SIP : sip\_tcp\_newmsg\_to\_spi : Sip message rcv: message=

##### 18:32:45.486403 || The Home Cluster is trying to do the register

5940 DEB Mar 09 18:32:45.486403 (618:927) JAVA-sipio-recv<--- SIP/2.0 100 Trying^M

Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK66da98ae^M

From: <sip:2222@192.168.7.200>;tag=c80084aa8743001411d7279b-7ecf20ad^M

To: <sip:2222@192.168.7.200>^M

Date: Sat, 09 Mar 2019 18:32:46 GMT^M

Call-ID: c80084aa-87430003-255b99f4-783a63d4@192.168.7.104^M

CSeq: 113 REGISTER^M

Content-Length: 0^M

^M

5941 DEB Mar 09 18:32:45.486525 (618:927) JAVA-::End-Of-Sip-Message::

5942 DEB Mar 09 18:32:45.486647 (618:927) JAVA-[[MESSAGE\_1.0]]: [192.168.7.200] --> SIP/2.0 100 Trying() --> [SIPCC] :

5943 DEB Mar 09 18:32:45.487562 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:

ccsip\_store\_rcvd\_msg\_for\_alarm: local\_uuid: , remote\_uuid: , type:1, state:17

5944 DEB Mar 09 18:32:45.487715 (618:927) JAVA-SIPCC-SIP\_MSG\_SEND:

ccsip\_store\_rcvd\_msg\_for\_alarm: Rcvd:SIP/2.0 100 Trying Cseq:113 REGISTER CallId:c80084aa-87430003-255b99f4-783a63d4@192.168.7.104

5945 DEB Mar 09 18:32:45.488173 (618:927) JAVA-SIPCC-SIP\_BRANCH: sip\_sm\_ccb\_match\_branch\_cseq: Matched branch\_id & CSeq

5946 DEB Mar 09 18:32:45.488325 (618:927) JAVA-SIPCC-SIP\_SESSION\_ID: sipGetSessionId: Remote Session ID: (null)

5947 DEB Mar 09 18:32:45.489149 (618:927) JAVA-SIPCC-SIP\_RESP: sipSPICheckResponse: Response match: callid=c80084aa-87430003-255b99f4-783a63d4@192.168.7.104, cseq=113, cseq\_method=REGISTER

5948 DEB Mar 09 18:32:45.489394 (618:927) JAVA-SIPCC-FUNC\_ENTRY: LINE 97/1: ccsip\_handle\_ev\_lxx

: SIP\_REG\_STATE\_REGISTERING <- SIP(100)  
5949 NOT Mar 09 18:32:45.490370 (624:624) metmand-update\_sessionid: Received NULL or Invalid  
Type  
5950 NOT Mar 09 18:32:45.490523 (624:624) metmand-update\_sessionid: Local UUID:  
5951 NOT Mar 09 18:32:45.490614 (624:624) metmand-update\_sessionid: Remote UUID:  
5952 NOT Mar 09 18:32:45.490828 (624:624) metmand-update\_sessionid: Received NULL or Invalid  
Type  
5953 NOT Mar 09 18:32:45.490920 (624:624) metmand-update\_sessionid: Local UUID:  
5954 NOT Mar 09 18:32:45.491011 (624:624) metmand-update\_sessionid: Remote UUID:  
5955 NOT Mar 09 18:32:45.491164 (624:624) metmand-update\_sessionid: Received NULL or Invalid  
Type  
5956 NOT Mar 09 18:32:45.491255 (624:624) metmand-update\_sessionid: Local UUID:  
5957 NOT Mar 09 18:32:45.491316 (624:624) metmand-update\_sessionid: Remote UUID:  
5958 INF Mar 09 18:32:45.508316 (618:891) JAVA-System P7-display  
MQThread|cip.callui.market.OverviewModel:? - OverviewModel-----propertychange  
regPromptProperty.getValue() = Registration in progress  
5959 DEB Mar 09 18:32:45.508835 (618:891) JAVA-System P7-display  
MQThread|cip.callui.market.OverviewModel\$MyCallAgentListener:OverviewModel notifyDisplay -  
++++bug 1015782 debug++++ notifyText=Registering  
5960 DEB Mar 09 18:32:45.509171 (618:891) JAVA-System P7-display  
MQThread|cip.callui.market.OverviewModel\$MyCallAgentListener:OverviewModel notifyDisplay -  
++++bug 1015782 debug++++ isRegistered=false  
5961 ERR Mar 09 18:32:45.509567 (618:891) JAVA-System P7-display  
MQThread|cip.app.AppFrame:startNotification - Notification: Registeringcan't be display in  
status prompt  
5962 INF Mar 09 18:32:45.510880 (618:891) JAVA-System P7-display  
MQThread|cip.callui.market.OverviewModel:? - OverviewModel-----hasServer  
headSubPromptVal: false  
5963 DEB Mar 09 18:32:45.540942 (618:891) JAVA-SNAPSHOT-CREATE: CCAPI\_Device\_getDeviceInfo:  
g\_deviceInfo.ins\_state=2  
5964 DEB Mar 09 18:32:45.541156 (618:891) JAVA-SNAPSHOT-CREATE: CCAPI\_Device\_getDeviceInfo:  
deviceInfo->sis\_name=  
5965 DEB Mar 09 18:32:45.541248 (618:891) JAVA-SNAPSHOT-CREATE: CCAPI\_Device\_getDeviceInfo:  
reference pointer=b4af9478  
5966 DEB Mar 09 18:32:45.541370 (618:891) JAVA-SNAPSHOT-CREATE: CCAPI\_Device\_getDeviceInfo:  
deviceInfo->ins\_state=2  
5967 DEB Mar 09 18:32:45.541492 (618:891) JAVA-SIPCC-SIP\_CC\_PROV: 0xb4af9478,  
CCAPI\_DeviceInfo\_getCUCMMode: returned 00  
5968 DEB Mar 09 18:32:45.541766 (618:891) JAVA-SNAPSHOT-RELEASE: CCAPI\_Device\_releaseDeviceInfo:  
reference pointer=b4af9478  
5969 DEB Mar 09 18:32:45.593560 (618:927) JAVA-SIPCC-HTTPISH: httpish\_msg\_process\_network\_msg:  
Content Length 381, Bytes Remaining 1615.  
5970 DEB Mar 09 18:32:45.593956 (618:927) JAVA-SIP : sip\_tcp\_newmsg\_to\_spi : Sip message rcv:  
message=

##### 18:32:45.595055 || The Home Cluster successfully did the register  
5971 DEB Mar 09 18:32:45.595055 (618:927) JAVA-sipio-recv<--- SIP/2.0 200 OK^M  
Via: SIP/2.0/TCP 192.168.7.104:51778;branch=z9hG4bK66da98ae^M  
From: <sip:2222@192.168.7.200>;tag=c80084aa8743001411d7279b-7ecf20ad^M  
To: <sip:2222@192.168.7.200>;tag=2121423204^M  
Date: Sat, 09 Mar 2019 18:32:46 GMT^M  
Call-ID: c80084aa-87430003-255b99f4-783a63d4@192.168.7.104^M  
Server: Cisco-CUCM11.5^M  
CSeq: 113 REGISTER^M  
Expires: 120^M  
Contact: <sip:04984998-fe29-08c0-6d47-  
5593bf4ce606@192.168.7.104:51778;transport=tcp>;+sip.instance="<urn:uuid:00000000-0000-0000-  
0000-  
c80084aa8743>";+u.sip!devicename.ccm.cisco.com="SEPC80084AA8743";+u.sip!model.ccm.cisco.com="621  
";x-cisco-newreg^M  
Supported: X-cisco-srtp-fallback,X-cisco-sis-8.0.0^M  
Content-Type: application/x-cisco-remotecc-response+xml^M

```

Content-Length: 381^M
^M
<x-cisco-remotecc-response>
<response>
<code>200</code>
<optionsind>
<combine max="6">
<remotecc><status/></remotecc>
<service-control/>
</combine>
<dialog usage="hook status"><unot/></dialog>
<dialog usage="shared line"><unot/></dialog>
<presence usage="blf speed dial"><unot/></p
5972 DEB Mar 09 18:32:45.595238 (618:927) JAVA-resence>
<joinreq></joinreq>
<ix/>
<bfcf/>
</optionsind>
</response>
</x-cisco-remotecc-response>
^M
5973 DEB Mar 09 18:32:45.595391 (618:927) JAVA-::End-Of-Sip-Message::
5974 DEB Mar 09 18:32:45.595513 (618:927) JAVA-[MESSAGE_1.0]: [192.168.7.200] --> SIP/2.0 200
OK() --> [SIPCC] :

```

### 전화기에 대한 PCAP 검토

이 필터는 전화기와 두 클러스터 사이의 모든 트래픽을 표시합니다.

```
ip.addr == 192.168.7.100 | ip.addr == 192.168.7.100
```

이 필터는 중요한 트래픽을 표시하도록 축소합니다.

```
(ip.addr= 192.168.7.100 | ip.addr == 192.168.7.200 &&(sip || http || tcp.port == 2445 ||
udp.port == 69) &&(frame.number <= 596))
```



phone\_pcap.pcapng The phone receives a notify telling it to restart. After the restart the phone registers back with the visiting cluster

File Edit View Go

(((ip.addr== 192.168.7.100 || ip.addr == 192.168.7.200) && (sip || http || tcp.port == 2445 || udp.port == 69) && (frame.number <= 596)))

No.	Time	Source	Destination	Protocol	Length	Info
342	26.587478	192.168.7.100	192.168.7.104	SIP	631	Request: NOTIFY sip:1000@192.168.7.104:49921   (text/plain)
344	26.599787	192.168.7.104	192.168.7.100	SIP	430	Status: 200 OK
349	26.666236	192.168.7.104	192.168.7.100	SIP	963	Request: REFER sip:192.168.7.100
352	26.669085	192.168.7.100	192.168.7.104	SIP	451	Status: 202 Accepted
355	27.021115	192.168.7.104	192.168.7.100	SIP	1205	Request: REFER sip:192.168.7.100
357	27.023629	192.168.7.100	192.168.7.104	SIP	451	Status: 202 Accepted
359	27.070842	192.168.7.104	192.168.7.100	SIP	1188	Request: REGISTER sip:192.168.7.100 (remove 1 binding)
360	27.071524	192.168.7.100	192.168.7.104	SIP	385	Status: 100 Trying
362	27.072653	192.168.7.100	192.168.7.104	SIP	484	Status: 200 OK (0 bindings)

phone\_pcap.pcapng The phone requests the CTL/ITL/CNF from the visiting cluster

File Edit View Go

(((ip.addr== 192.168.7.100 || ip.addr == 192.168.7.200) && (sip || http || tcp.port == 2445 || udp.port == 69) && (frame.number <= 596)))

No.	Time	Source	Destination	Protocol	Length	Info
372	27.468600	192.168.7.104	192.168.7.100	HTTP	131	GET /CTLSEPC80084AA8743.tlv HTTP/1.1
374	27.468859	192.168.7.100	192.168.7.104	HTTP	130	HTTP/1.1 404 Not Found
382	27.642250	192.168.7.104	192.168.7.100	HTTP	131	GET /ITLSEPC80084AA8743.tlv HTTP/1.1
397	27.643612	192.168.7.100	192.168.7.104	HTTP	686	HTTP/1.1 200 OK (*/*)
411	28.482515	192.168.7.104	192.168.7.100	HTTP	136	GET /SEPC80084AA8743.cnf.xml.sgn HTTP/1.1
415	28.492222	192.168.7.100	192.168.7.104	HTTP	831	HTTP/1.1 200 OK (*/*)

phone\_pcap.pcapng The phone requests the CTL from the home cluster but there isn't one. Then the phone requests the ITL and needs to engage TVS on the VC to validate the signer.

File Edit View Go

(((ip.addr== 192.168.7.100 || ip.addr == 192.168.7.200) && (sip || http || tcp.port == 2445 || udp.port == 69) && (frame.number <= 596)))

No.	Time	Source	Destination	Protocol	Length	Info
445	31.697951	192.168.7.200	192.168.7.104	HTTP	140	HTTP/1.1 503 Service Unavailable
456	32.470464	192.168.7.104	192.168.7.200	TFTP	73	Read Request, File: CTLSEPC80084AA8743.tlv, Transfer type: octet
461	32.652384	192.168.7.104	192.168.7.200	HTTP	131	GET /ITLSEPC80084AA8743.tlv HTTP/1.1
472	32.653307	192.168.7.200	192.168.7.104	HTTP	705	HTTP/1.1 200 OK (*/*)
482	32.833207	192.168.7.104	192.168.7.100	TCP	74	51672 -> 2445 [SYN] Seq=0 Win=29200 Len=0 MSS=1460 SACK_PERM=1 TSval=215005 TSecr=0 WS=16
483	32.833282	192.168.7.100	192.168.7.104	TCP	74	2445 -> 51672 [SYN, ACK] Seq=0 Ack=1 Win=14480 Len=0 MSS=1460 SACK_PERM=1 TSval=1807489 TSecr=215005 WS=128
484	32.833575	192.168.7.104	192.168.7.100	TCP	66	51672 -> 2445 [ACK] Seq=1 Ack=1 Win=29200 Len=0 TSval=215005 TSecr=1807489
485	32.846664	192.168.7.104	192.168.7.100	TLSv1.2	190	Client Hello
486	32.846847	192.168.7.100	192.168.7.104	TCP	66	2445 -> 51672 [ACK] Seq=1 Ack=125 Win=14592 Len=0 TSval=1807503 TSecr=215006
487	32.847319	192.168.7.100	192.168.7.104	TLSv1.2	1175	Server Hello, Certificate, Server Hello Done
488	32.847505	192.168.7.104	192.168.7.100	TCP	66	51672 -> 2445 [ACK] Seq=125 Ack=1110 Win=31424 Len=0 TSval=215007 TSecr=1807503
489	33.362164	192.168.7.104	192.168.7.100	TLSv1.2	408	Client Key Exchange, Change Cipher Spec, Encrypted Handshake Message
491	33.370101	192.168.7.100	192.168.7.104	TLSv1.2	316	New Session Ticket, Change Cipher Spec, Encrypted Handshake Message
492	33.370374	192.168.7.104	192.168.7.100	TCP	66	51672 -> 2445 [ACK] Seq=467 Ack=1360 Win=33648 Len=0 TSval=215059 TSecr=1808026
495	33.866946	192.168.7.104	192.168.7.100	TLSv1.2	295	Application Data
496	33.867758	192.168.7.100	192.168.7.104	TLSv1.2	1111	Application Data
497	33.867851	192.168.7.104	192.168.7.100	TCP	66	51672 -> 2445 [ACK] Seq=696 Ack=2405 Win=35856 Len=0 TSval=215109 TSecr=1808523

phone\_pcap.pcapng The phone requests it's config file and softkey template from the home cluster. Then the phone moves forward with registering to the home cluster.

File Edit View Go

(((ip.addr== 192.168.7.100 || ip.addr == 192.168.7.200) && (sip || http || tcp.port == 2445 || udp.port == 69) && (frame.number <= 596)))

No.	Time	Source	Destination	Protocol	Length	Info
509	35.090712	192.168.7.104	192.168.7.200	HTTP	136	GET /SEPC80084AA8743.cnf.xml.sgn HTTP/1.1
526	35.103308	192.168.7.200	192.168.7.104	HTTP	759	HTTP/1.1 200 OK (*/*)
548	37.509328	192.168.7.104	192.168.7.200	HTTP	155	GET /SKB0ec918f-b9ee-994b-57ae-345883c1fde8.xml.sgn HTTP/1.1
554	37.510070	192.168.7.200	192.168.7.104	HTTP	1307	HTTP/1.1 200 OK (*/*)
570	38.784266	192.168.7.104	192.168.7.200	SIP	121	Request: REFER sip:192.168.7.200
573	38.786423	192.168.7.200	192.168.7.104	SIP	450	Status: 202 Accepted
576	38.794933	192.168.7.104	192.168.7.200	SIP	124	Request: REFER sip:192.168.7.200
578	38.796188	192.168.7.200	192.168.7.104	SIP	451	Status: 202 Accepted
581	38.838310	192.168.7.104	192.168.7.200	SIP	1134	Request: REGISTER sip:192.168.7.200 (1 binding)   (application/x-cisco-remotecr-request+xml) (application/x-cisco-remotecr-request+xml)
583	38.838805	192.168.7.200	192.168.7.104	SIP	385	Status: 100 Trying
585	38.955146	192.168.7.200	192.168.7.104	SIP	1175	Status: 200 OK (1 binding)
586	38.955436	192.168.7.200	192.168.7.104	SIP	1299	Request: REFER sip:049804998-fe29-00c0-6d47-5593bf4ce00@192.168.7.104:50600;transport=tcp   (application/x-cisco-remotecr-request+xml) (text/plain)
590	39.251901	192.168.7.104	192.168.7.200	SIP	977	Request: REFER sip:192.168.7.200
592	39.253935	192.168.7.200	192.168.7.104	SIP	451	Status: 202 Accepted
596	39.262602	192.168.7.104	192.168.7.200	SIP	637	Status: 200 OK

## 관련 정보

- [Cisco Collaboration System 11.x SRND\(Solution Reference Network Design\)](#)
- [EMCC 통화 라우팅 설명 및 구성](#)
- [기술 지원 및 문서 - Cisco 시스템](#)