

Introduction

This chapter provide a brief description of the Cisco Threat Grid Appliance, the intended audience and how to access relevant product documentation. It includes the following:

- About Cisco Threat Grid Appliance, on page 1
- What's New In This Release, on page 2
- Audience, on page 2
- Product Documentation, on page 2
- Threat Grid Support, on page 3

About Cisco Threat Grid Appliance

The Cisco Threat Grid appliance provides safe and highly secure on-premises advanced malware analysis, with deep threat analytics and content. A Threat Grid Appliance provides the complete Threat Grid malware analysis platform, installed on a Cisco Threat Grid M5 Appliance server (v2.7.2 and later). It empowers organizations operating under various compliance and policy restrictions, to submit malware samples to the appliance.



Note

Cisco UCS C220-M3 (TG5000) and Cisco UCS C220 M4 (TG5400) servers are still supported for Threat Grid Appliance but the servers are end of life.

Many organizations that handle sensitive data, such as banks and health services, must follow various regulatory rules and guidelines that do not allow certain types of files, such as malware artifacts, to be sent outside of the network for malware analysis. By maintaining a Cisco Threat Grid Appliance on-premises, organizations are able to send suspicious documents and files to it to be analyzed without leaving the network.

With a Threat Grid Appliance, security teams can analyze all samples using proprietary and highly secure static and dynamic analysis techniques. The appliance correlates the analysis results with hundreds of millions of previously analyzed malware artifacts, to provide a global view of malware attacks and campaigns, and their distributions. A single sample of observed activity and characteristics can quickly be correlated against millions of other samples to fully understand its behaviors within an historical and global context. This ability helps security teams to effectively defend the organization against threats and attacks from advanced malware.

What's New In This Release

The following changes have been implemented in this guide in Version 2.7:

Table 1: Changes in Version 2.8ag - November 8, 2019

Feature or Update	Section
No changes.	

Table 2: Changes in Version 2.8 - October 1, 2019

Feature or Update	Section
Added CICM Configuration appendix	CICM Configuration
Cloud Search Federation feature.	Configure Third-party Detection and Enrichment Services

Audience

This guide is intended to be used by the Threat Grid Appliance administrator after the appliance has been set up and configured, and an initial test malware sample has been successfully submitted and analyzed. It describes how to manage organizations and users for the Threat Grid malware analysis tool, appliance updates, backups, and other server administration tasks.

This guide also provides information for administrators who are integrating the Threat Grid Appliance with other Cisco products and services, such as Cisco Email Security Appliance, Cisco Web Security Appliance, and AMP for Endpoints Private Cloud devices.



Note

For information about Threat Grid Appliance setup and configuration, see the *Cisco Threat Grid Appliance Setup and Configuration Guide*.

Product Documentation

The latest versions of Cisco Threat Grid Appliance product documentation can be found on Cisco.com:

- Cisco Threat Grid Appliance Release Notes
- Cisco Threat Grid Version Lookup Table
- Cisco Threat Grid M5 Hardware Installation Guide



Note

The Cisco Threat Grid M5 Appliance is supported in Threat Grid Version 3.5.27 and later, and appliance version 2.7.2 and later.

Prior versions of Cisco Threat Grid Appliance product documentation can be found on Cisco.com at Threat Grid Install and Upgrade.

Threat Grid Portal UI Online Help

Threat Grid Portal user documentation, including Release Notes, Using Threat Grid Online Help, API documentation, and other information is available from the **Help** menu located in the navigation bar at the top of the user interface.

Email Security Appliance and Web Security Appliance Documentation

For information on connecting an Email Security Appliance (ESA) or Web Security Appliance (WSA), see Connecting ESA/WSA Appliances to a Threat Grid Appliance.

See the instructions for Enabling and Configuring File Reputation and Analysis Services in the online help or user guide for your ESA/WSA:

- Cisco Email Security Appliance User Guide
- Cisco Web Security Appliance User Guide

Threat Grid Support

There are several ways to request support from a Threat Grid engineer:

- Email. Send email to support@threatgrid.com with your query.
- Open a Support Case. You will need your Cisco.com ID (or to generate one) to open a support case.
 You will also need your service contract number, which was included on the order invoice. Enter your support case with the Cisco Support Case Manager.
- Call. For Cisco phone numbers and contact information see the Cisco Contact page.

When requesting support from Threat Grid, please send the following information with your request:

- Appliance version (OpAdmin > Operations > Update Appliance)
- Full service status (service status from the shell)
- Network diagram or description (if applicable)
- Support Mode (Shell or Web interface)
- Support Request Details


Enable Support Mode

If you require support from a Threat Grid engineer, they may ask you to enable Support Mode, which is a live support session that gives Threat Grid support engineers remote access to the appliance. Normal operations of the appliance will not be affected.

You can enable Support Mode from the OpAdmin portal **Support** menu. You can also enable it from the TGSH Dialog, the legacy Face Portal UI, and when booting up in Recovery Mode.

Step 1 In the OpAdmin portal, click the Support menu and choose Live Support Session.

Figure 1: OpAdmin Start a Live Support Session

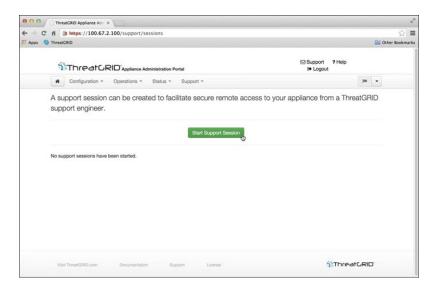

Step 2 Click Start Support Session.

Note You can exit the OpAdmin configuration wizard to enable Support Mode prior to licensing.

Support Snapshots

A support snapshot is basically a snapshot of the running system, which contains logs, psoutput, etc., to help Support staff troubleshoot any issues.

- **Step 1** Verify that SSH is specified for Support Snapshot services.
- **Step 2** From the **Support** menu, choose **Support Snapshots**.
- **Step 3** Take the snapshot.
- Step 4 Once you take the snapshot, download it as a .tar or .gz file, or click Submit, to automatically upload the snapshot to the Threat Grid snapshot server.