

Exemple de configuration d'IPsec dynamique à statique PIX à PIX PIX/ASA 7.x avec NAT et client VPN

Contenu

[Introduction](#)

[Conditions préalables](#)

[Conditions requises](#)

[Components Used](#)

[Conventions](#)

[Configuration](#)

[Diagramme du réseau](#)

[Configurations](#)

[Vérification](#)

[Dépannage](#)

[Clés prépartagées identiques](#)

[Dépannage des commandes](#)

[Exemples de résultats de débogage corrects](#)

[Informations connexes](#)

Introduction

Dans la plupart des cas, un PIX distant qui se connecte à un PIX central n'utilise pas le traduction d'adresses de réseau (NAT). Au lieu de cela, le PIX distant utilise une adresse IP statique extérieure. Dans un exemple où un PIX central qui exécute la version 7.x et plus se connecte à un PIX distant utilisant NAT, il est identique à un petit bureau à domicile tel qu'un PIX 501 ou 506 connecté à un modem filaire ou DSL utilisant le Dynamic Host Control Protocol (DHCP). PIX 7.x et plus et Cisco Adaptive Security Device Manager (ASDM) ne fonctionnent pas sur un PIX 501 ou 506. Par conséquent, avec cet exemple le PIX distant avec le DHCP et NAT est présumé être pour un PIX 501 ou 506 qui exécute le code 6.x. Cette configuration permet au PIX central d'accepter des connexions IPsec dynamiques. Le PIX distant utilise NAT pour joindre les périphériques adressés en privé derrière celui-ci au réseau adressé en privé derrière le PIX central. Le PIX distant peut initier des connexions au PIX central (il connaît le point d'extrémité), mais le PIX central ne peut pas initier des connexions au PIX distant (il ne connaît pas le point d'extrémité).

Dans cet exemple de configuration, Tiger est le PIX distant et Lion est le PIX central. Puisque l'adresse IP de Tiger est inconnue, vous devez configurer Lion pour qu'il accepte dynamiquement les connexions depuis n'importe quel endroit en connaissant la clé pré-partagée générique. Tiger sait quel trafic doit être chiffré (parce qu'il est spécifié par la liste d'accès) et où se trouve le point de terminaison Lion. Tiger doit initier la connexion. Les deux côtés exécutent NAT et nat 0 afin de contourner NAT pour le trafic IPsec.

En outre, l'utilisateur distant dans cette configuration se connecte au PIX central (Lion) à l'aide du Client VPN Cisco 4.x. L'utilisateur distant ne peut pas se connecter au PIX distant (Tiger), car les deux côtés ont attribué dynamiquement des adresses IP et ne savent pas où envoyer la demande.

Référez-vous à [Configuration de PIX à PIX Dynamic-to-Static IPsec avec NAT et Cisco VPN Client](#) afin d'en savoir plus sur le même scénario dans PIX 6.x avec Cisco VPN Client 3.x.

Conditions préalables

Conditions requises

Aucune spécification déterminée n'est requise pour ce document.

Components Used

Les informations contenues dans ce document sont basées sur les versions de matériel et de logiciel suivantes :

- Logiciel Cisco PIX Firewall version 7.x et ultérieure (PIX central)
- Logiciel Cisco PIX Firewall Version 6.3.4 (PIX distant)
- Client VPN Cisco Version 4.x

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

Pour plus d'informations sur les conventions utilisées dans ce document, reportez-vous à [Conventions relatives aux conseils techniques Cisco](#).


Configuration

Cette section vous fournit des informations pour configurer les fonctionnalités décrites dans ce document.

Remarque : utilisez l'[outil de recherche de commandes](#) (clients [enregistrés](#) uniquement) pour obtenir plus d'informations sur les commandes utilisées dans cette section.

Diagramme du réseau

Ce document utilise la configuration réseau suivante :

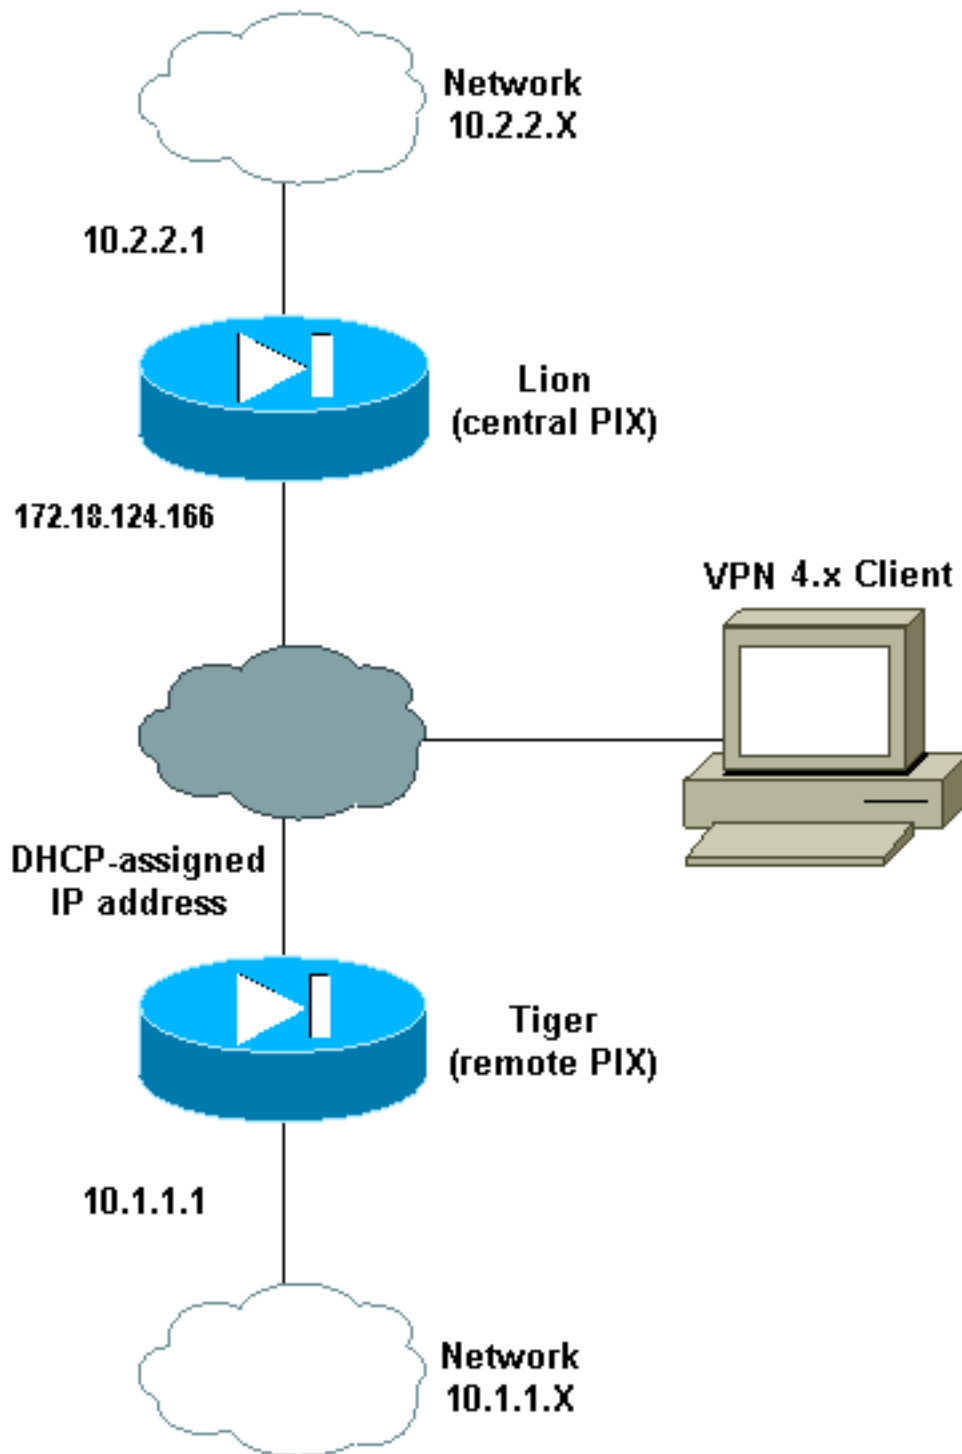

Configurations

Ce document utilise les configurations suivantes :

- [Lion](#)
- [Tigre](#)

Lion
<pre>PIX Version 7.0(0) names ! interface Ethernet0 nameif outside</pre>

```
security-level 0
ip address 172.18.124.166 255.255.255.0
!
interface Ethernet1
 nameif inside
 security-level 100
 ip address 10.2.2.1 255.255.255.0
!
interface Ethernet2
 shutdown
 nameif intf2
 security-level 4
 no ip address
!
interface Ethernet3
 shutdown
 nameif intf3
 security-level 6
 no ip address
!
interface Ethernet4
 shutdown
 nameif intf4
 security-level 8
 no ip address
!
interface Ethernet5
 shutdown
 nameif intf5
 security-level 10
 no ip address
!
enable password 8Ry2YjIyt7RRXU24 encrypted
passwd 2KFQnbNIdI.2KYOU encrypted
hostname lion
domain-name cisco.com
boot system flash:/image.bin
ftp mode passive
access-list 100 extended permit ip 10.2.2.0
255.255.255.0 10.1.1.0 255.255.255.0
access-list 100 extended permit ip 10.2.2.0
255.255.255.0 10.3.3.0 255.255.255.0
pager lines 24
mtu outside 1500
mtu inside 1500
mtu intf2 1500
mtu intf3 1500
mtu intf4 1500
mtu intf5 1500
ip local pool clientpool 10.3.3.1-10.3.3.10
no failover
monitor-interface outside
monitor-interface inside
monitor-interface intf2
monitor-interface intf3
monitor-interface intf4
monitor-interface intf5
asdm image flash:/asdm-501.bin
asdm history enable
arp timeout 14400
nat-control
global (outside) 1 interface
nat (inside) 0 access-list 100
nat (inside) 1 0.0.0.0 0.0.0.0
```

```
route outside 0.0.0.0 0.0.0.0 172.18.124.1 1
timeout xlate 3:00:00
timeout conn 1:00:00 half-closed 0:10:00 udp 0:02:00
icmp 0:00:02
timeout sunrpc 0:10:00 h323 0:05:00 h225 1:00:00 mgcp
0:05:00
timeout mgcp-pat 0:05:00 sip 0:30:00 sip_media 0:02:00
timeout uauth 0:05:00 absolute
aaa-server TACACS+ protocol tacacs+
aaa-server RADIUS protocol radius
group-policy unityclient internal
group-policy unityclient attributes
  wins-server value 10.1.1.3
  dns-server value 10.1.1.3
  vpn-idle-timeout 30
  default-domain value cisco.com
  user-authentication disable
username cisco password 3USUcOPFUiMCO4Jk encrypted
http server enable
http 0.0.0.0 0.0.0.0 outside
http 0.0.0.0 0.0.0.0 inside
no snmp-server location
no snmp-server contact
snmp-server community public
snmp-server enable traps snmp
crypto ipsec transform-set myset esp-des esp-md5-hmac
crypto dynamic-map cisco 1 set transform-set myset
crypto map dyn-map 20 ipsec-isakmp dynamic cisco
crypto map dyn-map interface outside
isakmp enable outside
isakmp policy 20 authentication pre-share
isakmp policy 20 encryption des
isakmp policy 20 hash md5
isakmp policy 20 group 2
isakmp policy 20 lifetime 3600
isakmp policy 65535 authentication pre-share
isakmp policy 65535 encryption 3des
isakmp policy 65535 hash sha
isakmp policy 65535 group 2
isakmp policy 65535 lifetime 86400
telnet timeout 5
ssh timeout 5
ssh version 1
console timeout 0
tunnel-group DefaultL2LGroup type ipsec-l2l
tunnel-group DefaultL2LGroup general-attributes
  authentication-server-group none
tunnel-group DefaultL2LGroup ipsec-attributes
  pre-shared-key *
tunnel-group unityclient type ipsec-ra
tunnel-group unityclient general-attributes
  address-pool clientpool
  authentication-server-group none
  default-group-policy unityclient
tunnel-group unityclient ipsec-attributes
  pre-shared-key *
!
class-map inspection_default
  match default-inspection-traffic
!
!
policy-map global_policy
  class inspection_default
    inspect dns maximum-length 512
```

```
inspect ftp
inspect h323 h225
inspect h323 ras
inspect http
inspect netbios
inspect rsh
inspect rtsp
inspect skinny
inspect esmtp
inspect sqlnet
inspect sunrpc
inspect tftp
inspect sip
inspect xdmcp
!
service-policy global_policy global
Cryptochecksum:4e20a2153437d60c7f01054808d41b42
: end
```

Tigre

```
PIX Version 6.3(4)
interface ethernet0 auto
interface ethernet1 auto
interface ethernet2 auto shutdown
interface ethernet3 auto shutdown
interface ethernet4 auto shutdown
interface ethernet5 auto shutdown
nameif ethernet0 outside security0
nameif ethernet1 inside security100
nameif ethernet2 intf2 security4
nameif ethernet3 intf3 security6
nameif ethernet4 intf4 security8
nameif ethernet5 intf5 security10
enable password 8Ry2YjIyt7RRXU24 encrypted
passwd 2KFQnbNIdI.2KYOU encrypted
hostname tiger
domain-name cisco.com
fixup protocol dns maximum-length 512
fixup protocol ftp 21
fixup protocol h323 h225 1720
fixup protocol h323 ras 1718-1719
fixup protocol http 80
fixup protocol rsh 514
fixup protocol rtsp 554
fixup protocol sip 5060
fixup protocol sip udp 5060
fixup protocol skinny 2000
fixup protocol smtp 25
fixup protocol sqlnet 1521
fixup protocol tftp 69
names
access-list 101 permit ip 10.1.1.0 255.255.255.0
10.2.2.0 255.255.255.0
pager lines 24
mtu outside 1500
mtu inside 1500
mtu intf2 1500
mtu intf3 1500
mtu intf4 1500
mtu intf5 1500
!--- This command configures the outside interface !---
as a DHCP client and it is assumed that the IP address
```

```
!--- 172.18.124.167 is assigned by the DHCP server. ip
address outside dhcp ip address inside 10.1.1.1
255.255.255.0 no ip address intf2 no ip address intf3 no
ip address intf4 no ip address intf5 ip audit info
action alarm ip audit attack action alarm no failover
failover timeout 0:00:00 failover poll 15 no failover ip
address outside no failover ip address inside no
failover ip address intf2 no failover ip address intf3
no failover ip address intf4 no failover ip address
intf5 pdm history enable arp timeout 14400 nat (inside)
0 access-list 101 route outside 0.0.0.0 0.0.0.0
172.18.124.1 1 timeout xlate 3:00:00 timeout conn
1:00:00 half-closed 0:10:00 udp 0:02:00 rpc 0:10:00 h225
1:00:00 timeout h323 0:05:00 mgcp 0:05:00 sip 0:30:00
sip_media 0:02:00 timeout uauth 0:05:00 absolute aaa-
server TACACS+ protocol tacacs+ aaa-server TACACS+ max-
failed-attempts 3 aaa-server TACACS+ deadtime 10 aaa-
server RADIUS protocol radius aaa-server RADIUS max-
failed-attempts 3 aaa-server RADIUS deadtime 10 aaa-
server LOCAL protocol local no snmp-server location no
snmp-server contact snmp-server community public no
snmp-server enable traps floodguard enable sysopt
connection permit-ipsec crypto ipsec transform-set myset
esp-des esp-md5-hmac crypto map newmap 10 ipsec-isakmp
crypto map newmap 10 match address 101 crypto map newmap
10 set peer 172.18.124.166 crypto map newmap 10 set
transform-set myset crypto map newmap interface outside
isakmp enable outside isakmp key ***** address
172.18.124.166 netmask 255.255.255.255 isakmp policy 10
authentication pre-share isakmp policy 10 encryption des
isakmp policy 10 hash md5 isakmp policy 10 group 2
isakmp policy 10 lifetime 3600 telnet timeout 5 ssh
timeout 5 console timeout 0 terminal width 80
Cryptochecksum:906331b1b1ca162ea53e951588efb070 : end
```

Vérification

Référez-vous à cette section pour vous assurer du bon fonctionnement de votre configuration.

L'[Outil Interpréteur de sortie \(clients enregistrés uniquement\) \(OIT\)](#) prend en charge certaines commandes `show`. Utilisez l'OIT pour afficher une analyse de la sortie de la commande `show`.

Remarque : Vous devez exécuter les commandes `clear` en mode de configuration.

- `clear crypto ipsec sa` - Réinitialise les associations IPsec après des tentatives échouées de négociation d'un tunnel VPN.
- `clear crypto isakmp sa` - Réinitialise les associations de sécurité ISAKMP (Internet Security Association and Key Management Protocol) après des tentatives infructueuses de négociation d'un tunnel VPN.
- `show crypto engine ipsec` : affiche les sessions chiffrées.

Dépannage

Clés prépartagées identiques

Si le tunnel IPsec LAN à LAN (L2L) n'est pas établi, vérifiez si la clé pré-partagée pour

DefaultRAGroup et la clé pré-partagée pour DefaultL2LGroup sont identiques. Si c'est le cas, le PIX/ASA termine d'abord le tunnel sur le groupe DefaultRAGroup et le tunnel L2L est susceptible d'échouer. Assurez-vous que les clés pré-partagées des deux groupes de tunnels par défaut sont différentes.

Dépannage des commandes

L'[Outil Interpréteur de sortie \(clients enregistrés uniquement\) \(OIT\)](#) prend en charge certaines [commandes show](#). Utilisez l'OIT pour afficher une analyse de la sortie de la commande **show**.

Remarque : Consulter les [renseignements importants sur les commandes de débogage](#) avant d'utiliser les commandes de **débogage**.

- **debug crypto ipsec** - Utilisé pour voir si un client négocie la partie IPsec de la connexion VPN.
- **debug crypto isakmp [level]** - Utilisé pour voir si les homologues négocient la partie ISAKMP du VPN.

Exemples de résultats de débogage corrects

Voici quelques exemples de bons résultats de commande **debug** :

- [PIX central \(7.0.0\)](#)
- [NAT dynamique PIX distant \(6.3.4\)](#)
- [Client VPN 4.0.5 sur Central PIX 7.0](#)

PIX central (7.0.0)

```
lion(config)# 2nd try, on central PIX from remote PIXApr 05 16:48:31 [IKEv1 DEBUG]:
IP = 172.18.124.167, processing SA payload
Apr 05 16:48:31 [IKEv1 DEBUG]: IP = 172.18.124.167, Oakley proposal is acceptable
Apr 05 16:48:31 [IKEv1 DEBUG]: IP = 172.18.124.167, processing IKE SA
Apr 05 16:48:31 [IKEv1 DEBUG]: IP = 172.18.124.167, IKE SA Proposal # 1, Transform
# 1 acceptable Matches global IKE entry # 3
Apr 05 16:48:31 [IKEv1 DEBUG]: IP = 172.18.124.167, constructing ISA_SA for isakmp
Apr 05 16:48:31 [IKEv1 DEBUG]: IP = 172.18.124.167, constructing Fragmentation VID
+ extended capabilities payload
Apr 05 16:48:31 [IKEv1]: IP = 172.18.124.167, IKE DECODE SENDING Message (msgid=0)
with payloads : HDR + SA (1) + VENDOR (13) + NONE (0) total length : 104
Apr 05 16:48:32 [IKEv1]: IP = 172.18.124.167, IKE DECODE RECEIVED Message (msgid=0)
with payloads : HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) +VENDOR (13)
+ VENDOR (13) + NONE (0) total length : 256
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, processing ke payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, processing ISA_KE
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, processing nonce payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, processing VID payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, Received xauth V6 VID
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, processing VID payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, Received DPD VID
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, processing VID payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, Received Cisco Unity client VID
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, processing VID payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, Processing IOS/PIX Vendor ID
payload (version: 1.0.0, capabilities: 00000025)
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, constructing ke payload
```


Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, constructing nonce payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, constructing Cisco Unity VID payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, constructing xauth V6 VID payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, Send IOS VID
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, Constructing ASA spoofing IOS
Vendor ID payload (version: 1.0.0, capabilities: 20000001)
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, constructing VID payload
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, Send Altiga/Cisco VPN3000/Cisco
ASA GW VID
Apr 05 16:48:32 [IKEv1]: IP = 172.18.124.167, Connection landed on tunnel_group
DefaultL2LGroup
Apr 05 16:48:32 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Generating keys for Responder...
Apr 05 16:48:32 [IKEv1]: IP = 172.18.124.167, IKE DECODE SENDING Message
(msgid=0) with payloads : HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13)
+ VENDOR (13) + VENDOR (13) + NONE (0) total length : 256
Apr 05 16:48:32 [IKEv1]: IP = 172.18.124.167, IKE DECODE RECEIVED Message (msg
id=0) with payloads : HDR + ID (5) + HASH (8) + NONE (0) total length : 71
Apr 05 16:48:32 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Processing ID
Apr 05 16:48:32 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
processing hash
Apr 05 16:48:32 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
computing hash
Apr 05 16:48:32 [IKEv1]: IP = 172.18.124.167, Connection landed on tunnel_group
DefaultL2LGroup
Apr 05 16:48:32 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
constructing ID
Apr 05 16:48:32 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
construct hash payload
Apr 05 16:48:32 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
computing hash
Apr 05 16:48:32 [IKEv1 DEBUG]: IP = 172.18.124.167, Constructing IOS keep
alive payload: proposal=32767/32767 sec.
Apr 05 16:48:32 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
constructing dpd vid payload
Apr 05 16:48:32 [IKEv1]: IP = 172.18.124.167, IKE DECODE SENDING Message
(msgid=0) with payloads : HDR + ID (5) + HASH (8) + IOS KEEPALIVE (14)
+ VENDOR (13) + NONE (0) total length : 102
Apr 05 16:48:33 [IKEv1]: IP = 172.18.124.167, IKE DECODE RECEIVED Message
(msgid=ba80c56e) with payloads : HDR + HASH (8) + NOTIFY (11) + NONE (0)
total length : 76
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
processing hash
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Processing Notify payload
Apr 05 16:48:33 [IKEv1]: Received unexpected event EV_ACTIVATE_NEW_SA in
state MM_TM_INIT_MODECFG_H
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Delay Quick Mode processing, Cert/Trans Exch/RM DSID in progress
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Resume Quick Mode processing, Cert/Trans Exch/RM DSID completed
Apr 05 16:48:33 [IKEv1]: Group = DefaultL2LGroup, IP = 172.18.124.167, PHASE 1COMPLETED
Apr 05 16:48:33 [IKEv1]: IP = 172.18.124.167, Keep-alive type for this connection: DPD
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Starting phase 1 rekey timer: 3420000 (ms)
Apr 05 16:48:33 [IKEv1]: IP = 172.18.124.167, IKE DECODE RECEIVED Message
(msgid=20c2120e) with payloads : HDR + HASH (8) + SA (1) + NONCE (10) + ID
(5) + ID (5) + NONE (0) total length : 164
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
processing hash
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
processing SA payload
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,

```

processing nonce payload
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Processing ID
Apr 05 16:48:33 [IKEv1]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Received remote IP Proxy Subnet data in ID Payload: Address 10.1.1.0,
Mask 255.255.255.0, Protocol 0, Port 0
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Processing ID
Apr 05 16:48:33 [IKEv1]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Received local IP Proxy Subnet data in ID Payload: Address 10.2.2.0,
Mask 255.255.255.0, Protocol 0, Port 0
Apr 05 16:48:33 [IKEv1]: QM IsRekeyed old sa not found by addr
Apr 05 16:48:33 [IKEv1]: Group = DefaultL2LGroup, IP = 172.18.124.167,
IKE Remote Peer configured for SA: cisco
Apr 05 16:48:33 [IKEv1]: Group = DefaultL2LGroup, IP = 172.18.124.167,
processing IPSEC SA
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
IPSec SA Proposal # 1, Transform # 1 acceptable Matches global IPSec SA entry # 1
Apr 05 16:48:33 [IKEv1]: Group = DefaultL2LGroup, IP = 172.18.124.167,
IKE: requesting SPI!
Apr 05 16:48:33 [IKEv1 DEBUG]: IKE got SPI from key engine: SPI = 0xd5243861
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
oakley constructing quick mode
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
constructing blank hash
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
constructing ISA_SA for ipsec
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
constructing ipsec nonce payload
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
constructing proxy ID
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Transmitting Proxy Id:
Remote subnet: 10.1.1.0 Mask 255.255.255.0 Protocol 0 Port 0
Local subnet: 10.2.2.0 mask 255.255.255.0 Protocol 0 Port 0
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
constructing qm hash
Apr 05 16:48:33 [IKEv1]: IP = 172.18.124.167, IKE DECODE SENDING Message
(msgid=20c2120e) with payloads : HDR + HASH (8) + SA (1) + NONCE (10) +
ID (5) + ID (5) + NONE (0) total length : 164
Apr 05 16:48:33 [IKEv1]: IP = 172.18.124.167, IKE DECODE RECEIVED Message
(msgid=20c2120e) with payloads : HDR + HASH (8) + NONE (0) total length : 48
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
processing hash
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
loading all IPSEC SAs
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Generating Quick Mode Key!
Apr 05 16:48:33 [IKEv1 DEBUG]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Generating Quick Mode Key!
Apr 05 16:48:33 [IKEv1]: Group = DefaultL2LGroup, IP = 172.18.124.167,
Security negotiation complete for User (DefaultL2LGroup) Responder,
Inbound SPI = 0xd5243861, Outbound SPI = 0x7bb1lead
Apr 05 16:48:33 [IKEv1 DEBUG]: IKE got a KEY_ADD msg for SA: SPI = 0x7bb1lead
Apr 05 16:48:33 [IKEv1 DEBUG]: pitcher: rcv KEY_UPDATE, spi 0xd5243861
Apr 05 16:48:33 [IKEv1]: Group = DefaultL2LGroup, IP = 172.18.124.167,
PHASE 2 COMPLETED (msgid=20c2120e)

```

[NAT dynamique PIX distant \(6.3.4\)](#)

```

tiger(config)#
ISAKMP (0): beginning Main Mode exchange

```

```
crypto_isakmp_process_block:src:172.18.124.166, dest:172.18.124.167 spt:500
dpt:500 OAK_MM exchange
ISAKMP (0): processing SA payload. message ID = 0

ISAKMP (0): Checking ISAKMP transform 1 against priority 10 policy
ISAKMP:      encryption DES-CBC
ISAKMP:      hash MD5
ISAKMP:      default group 2
ISAKMP:      auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (basic) of 3600
ISAKMP (0): atts are acceptable. Next payload is 0
ISAKMP (0): processing vendor id payload

ISAKMP (0): SA is doing pre-shared key authentication using id type
ID_FQDN return status is IKMP_NO_ERROR
crypto_isakmp_process_block:src:172.18.124.166, dest:172.18.124.167
spt:500 dpt:500 OAK_MM exchange
ISAKMP (0): processing KE payload. message ID = 0
ISAKMP (0): processing NONCE payload. message ID = 0
ISAKMP (0): processing vendor id payload
ISAKMP (0): processing vendor id payload
ISAKMP (0): received xauth v6 vendor id
ISAKMP (0): processing vendor id payload
ISAKMP (0): speaking to another IOS box!
ISAKMP (0): processing vendor id payload
ISAKMP (0): speaking to a VPN3000 concentrator
ISAKMP (0): ID payload
      next-payload : 8
      type          : 2
      protocol      : 17
      port          : 500
      length        : 19
ISAKMP (0): Total payload length: 23
return status is IKMP_NO_ERROR
crypto_isakmp_process_block:src:172.18.124.166, dest:172.18.124.167 spt:500 dpt:500
OAK_MM exchange
ISAKMP (0): processing ID payload. message ID = 0
ISAKMP (0): processing HASH payload. message ID = 0
ISAKMP (0): processing vendor id payload

ISAKMP (0): remote peer supports dead peer detection

ISAKMP (0): SA has been authenticated

ISAKMP (0): beginning Quick Mode exchange, M-ID of 549589518:20c2120eIPSEC(key_engine):
got a queue event...
IPSEC(spi_response): getting spi 0x7bb1lead(2075205293) for SA
      from 172.18.124.166 to 172.18.124.167 for prot 3

return status is IKMP_NO_ERROR
ISAKMP (0): sending INITIAL_CONTACT notify
ISAKMP (0): sending NOTIFY message 24578 protocol 1
VPN Peer: ISAKMP: Added new peer: ip:172.18.124.166/500 Total VPN Peers:1
VPN Peer: ISAKMP: Peer ip:172.18.124.166/500 Ref cnt incremented to:1 Total VPN Peers:1
crypto_isakmp_process_block:src:172.18.124.166, dest:172.18.124.167 spt:500 dpt:500
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_IDLE
ISAKMP (0): processing SA payload. message ID = 549589518

ISAKMP : Checking IPsec proposal 1

ISAKMP: transform 1, ESP_DES
```

```

ISAKMP:  attributes in transform:
ISAKMP:      SA life type in seconds
ISAKMP:      SA life duration (basic) of 28800
ISAKMP:      SA life type in kilobytes
ISAKMP:      SA life duration (VPI) of  0x0 0x46 0x50 0x0
ISAKMP:      encaps is 1
ISAKMP:      authenticator is HMAC-MD5
ISAKMP (0):  atts are acceptable.IPSEC(validate_proposal_request):  proposal part #1,
(key eng. msg.) dest= 172.18.124.166, src= 172.18.124.167,
  dest_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
  src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
  protocol= ESP, transform= esp-des esp-md5-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4

ISAKMP (0):  processing NONCE payload. message ID = 549589518

ISAKMP (0):  processing ID payload. message ID = 549589518
ISAKMP (0):  processing ID payload. message ID = 549589518
ISAKMP (0):  Creating IPsec SAs
  inbound SA from 172.18.124.166 to 172.18.124.167 (proxy 10.2.2.0 to 10.1.1.0)
  has spi 2075205293 and conn_id 1 and flags 4
  lifetime of 28800 seconds
  lifetime of 4608000 kilobytes
  outbound SA from 172.18.124.167 to 172.18.124.166 (proxy 10.1.1.0 to 10.2.2.0)
  has spi 3575920737 and conn_id 2 and flags 4
  lifetime of 28800 seconds
  lifetime of 4608000 kilobytesIPSEC(key_engine):  got a queue event...
IPSEC(initialize_sas):  ,
(key eng. msg.) dest= 172.18.124.166, src= 172.18.124.166,
  dest_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
  src_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
  protocol= ESP, transform= esp-des esp-md5-hmac ,
  lifedur= 28800s and 4608000kb,
  spi= 0x7bb1lead(2075205293), conn_id= 1, keysize= 0, flags= 0x4IPSEC(initialize_sas):  ,
(key eng. msg.) src= 172.18.124.167, dest= 172.18.124.166,
  src_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
  dest_proxy= 10.2.2.0/255.255.255.0/0/0 (type=4),
  protocol= ESP, transform= esp-des esp-md5-hmac ,
  lifedur= 28800s and 4608000kb,
  spi= 0xd5243861(3575920737), conn_id= 2, keysize= 0, flags= 0x4

VPN Peer: IPSEC: Peer ip:172.18.124.166/500 Ref cnt incremented to:2 Total VPN Peers:1
VPN Peer: IPSEC: Peer ip:172.18.124.166/500 Ref cnt incremented to:3 Total VPN Peers:1
return status is IKMP_NO_ERROR

```

[Client VPN 4.0.5 sur Central PIX 7.0](#)

```

lion(config)# Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, processing SA payload
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, processing ke payload
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, processing ISA_KE
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, processing nonce payload
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, Processing ID
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, processing VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, Received xauth V6 VID
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, processing VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, Received DPD VID
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, processing VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, Received NAT-Traversal ver02 VID
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, processing VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, Received Fragmentation VID
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, IKE Peer included IKE fragmentation
capability flags:  Main Mode:          True Aggressive Mode:  False

```

Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, processing VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: IP = 64.102.51.191, Received Cisco Unity client VID
Apr 05 16:49:56 [IKEv1]: IP = 64.102.51.191, Connection landed on tunnel_group unityclient
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191, processing IKE SA
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191, IKE SA Proposal # 1,
Transform # 14 acceptable Matches global IKE entry # 3
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191, constructing ISA_SA
for isakmp
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing ke payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing nonce payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Generating keys for Responder...
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing ID
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
construct hash payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
computing hash
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing Cisco Unity VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing xauth V6 VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing dpd vid payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing Fragmentation VID + extended capabilities payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Send Altiga/Cisco VPN3000/Cisco ASA GW VID
Apr 05 16:49:56 [IKEv1]: IP = 64.102.51.191, IKE DECODE SENDING Message
(msgid=0) with payloads : HDR + SA (1) + KE (4) + NONCE (10) + ID (5) +
HASH (8) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR
(13) + NONE (0) total length : 378
Apr 05 16:49:56 [IKEv1]: IP = 64.102.51.191, IKE DECODE RECEIVED Message
(msgid=0) with payloads : HDR + HASH (8) + NOTIFY (11) + VENDOR (13) +
VENDOR (13) + NONE (0) total length : 116
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191, processing hash
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191, computing hash
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Processing Notify payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
processing VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Processing IOS/PIX Vendor ID payload (version: 1.0.0, capabilities: 00000408)
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
processing VID payload
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Received Cisco Unity client VID
Apr 05 16:49:56 [IKEv1]: IP = 64.102.51.191, IKE DECODE RECEIVED Message
(msgid=a0bb428) with payloads : HDR + HASH (8) + ATTR (14) + NONE (0)
total length: 196
Apr 05 16:49:56 [IKEv1 DEBUG]: process_attr(): Enter!
Apr 05 16:49:56 [IKEv1 DEBUG]: Processing cfg Request attributes
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for IPV4 address!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for IPV4 net mask!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for DNS server address!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for WINS server address!
Apr 05 16:49:56 [IKEv1]: Group = unityclient, IP = 64.102.51.191, Received
unsupported transaction mode attribute: 5
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for Banner!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for Save PW setting!

Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for Default Domain Name!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for Split Tunnel List!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for Split DNS!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for PFS setting!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for backup ip-sec peer list!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for Application Version!
Apr 05 16:49:56 [IKEv1]: Group = unityclient, IP = 64.102.51.191, Client Type: WinNT
Client Application Version: 4.0.5 (Rel)
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for FWTYPE!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for DHCP hostname
for DDNS is: tthotus-xp!
Apr 05 16:49:56 [IKEv1 DEBUG]: MODE_CFG: Received request for UDP Port!
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing blank hash
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing qm hash
Apr 05 16:49:56 [IKEv1]: IP = 64.102.51.191, IKE DECODE SENDING Message
(msgid=a0bb428) with payloads : HDR + HASH (8) + ATTR (14) + NONE (0)
total length : 157
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Delay Quick Mode processing, Cert/Trans Exch/RM DSID in progress
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Resume Quick Mode processing, Cert/Trans Exch/RM DSID completed
Apr 05 16:49:56 [IKEv1]: Group = unityclient, IP = 64.102.51.191, PHASE 1 COMPLETED
Apr 05 16:49:56 [IKEv1]: IP = 64.102.51.191, Keep-alive type for this connection: DPD
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Starting phase 1 rekey timer: 3420000 (ms)
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
sending notify message
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing blank hash
Apr 05 16:49:56 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing qm hash
Apr 05 16:49:56 [IKEv1]: IP = 64.102.51.191, IKE DECODE SENDING Message
(msgid=9be7674c) with payloads : HDR + HASH (8) + NOTIFY (11) + NONE
(0) total length : 84
Apr 05 16:49:57 [IKEv1]: IP = 64.102.51.191, IKE DECODE RECEIVED Message
(msgid=833e7945) with payloads : HDR + HASH (8) + SA (1) + NONCE (10)
+ ID (5) + ID (5) + NONE (0) total length : 1022
Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191, processing hash
Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
processing SA payload
Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
processing nonce payload
Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191, Processing ID
Apr 05 16:49:57 [IKEv1]: Group = unityclient, IP = 64.102.51.191,
Received remote Proxy Host data in ID Payload: Address 10.3.3.1, Protocol 0, Port 0
Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191, Processing ID
Apr 05 16:49:57 [IKEv1]: Group = unityclient, IP = 64.102.51.191,
Received local IP Proxy Subnet data in ID Payload: Address 0.0.0.0,
Mask 0.0.0.0, Protocol 0, Port 0
Apr 05 16:49:57 [IKEv1]: QM IsRekeyed old sa not found by addr
Apr 05 16:49:57 [IKEv1]: Group = unityclient, IP = 64.102.51.191,
IKE Remote Peer configured for SA: cisco
Apr 05 16:49:57 [IKEv1]: Group = unityclient, IP = 64.102.51.191,
processing IPSEC SA
Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
IPSecSA Proposal # 14, Transform # 1 acceptable Matches global IPsec SA entry # 1
Apr 05 16:49:57 [IKEv1]: Group = unityclient, IP = 64.102.51.191, IKE: requesting SPI!
Apr 05 16:49:57 [IKEv1 DEBUG]: IKE got SPI from key engine: SPI = 0x05953824
Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
oakley constructing quick mode
Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing blank hash

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing ISA_SA for ipsec

Apr 05 16:49:57 [IKEv1]: Group = unityclient, IP = 64.102.51.191,
Overriding Initiator's IPSec rekeying duration from 2147483 to 28800 seconds

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing ipsec nonce payload

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing proxy ID

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Transmitting Proxy Id:
Remote host: 10.3.3.1 Protocol 0 Port 0
Local subnet: 0.0.0.0 mask 0.0.0.0 Protocol 0 Port 0

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Sending RESPONDER LIFETIME notification to Initiator

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing qm hash

Apr 05 16:49:57 [IKEv1]: IP = 64.102.51.191, IKE DECODE SENDING Message
(msgid=833e7945) with payloads : HDR + HASH (8) + SA (1) + NONCE (10)
+ ID (5) + ID (5) + NOTIFY (11) + NONE (0) total length : 176

Apr 05 16:49:57 [IKEv1]: IP = 64.102.51.191, IKE DECODE RECEIVED Message
(msgid=833e7945) with payloads : HDR + HASH (8) + NONE (0) total length : 48

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
processing hash

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
loading all IPSEC SAs

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Generating Quick Mode Key!

Apr 05 16:49:57 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Generating Quick Mode Key!

Apr 05 16:49:57 [IKEv1]: Group = unityclient, IP = 64.102.51.191,
Security negotiation complete for User (unityclient) Responder,
Inbound SPI = 0x05953824, Outbound SPI = 0xd08c6486

Apr 05 16:49:57 [IKEv1 DEBUG]: IKE got a KEY_ADD msg for SA: SPI = 0xd08c6486

Apr 05 16:49:57 [IKEv1 DEBUG]: pitcher: rcv KEY_UPDATE, spi 0x5953824

Apr 05 16:49:57 [IKEv1]: Group = unityclient, IP = 64.102.51.191,
Adding static route for client address: 10.3.3.1

Apr 05 16:49:57 [IKEv1]: Group = unityclient, IP = 64.102.51.191, PHASE 2 COMP
LETED (msgid=833e7945)

Apr 05 16:50:07 [IKEv1]: IP = 64.102.51.191, IKE DECODE RECEIVED Message
(msgid=403ee701) with payloads : HDR + HASH (8) + NOTIFY (11) + NONE
(0) total length : 80

Apr 05 16:50:07 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
processing hash

Apr 05 16:50:07 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Processing Notify payload

Apr 05 16:50:07 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Received keep-alive of type DPD R-U-THERE (seq number 0x4b55b6e4)

Apr 05 16:50:07 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Sending keep-alive of type DPD R-U-THERE-ACK (seq number 0x4b55b6e4)

Apr 05 16:50:07 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing blank hash

Apr 05 16:50:07 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
constructing qm hash

Apr 05 16:50:07 [IKEv1]: IP = 64.102.51.191, IKE DECODE SENDING Message
(msgid=78998a29) with payloads : HDR + HASH (8) + NOTIFY (11) + NONE
(0) total length : 80

Apr 05 16:50:17 [IKEv1]: IP = 64.102.51.191, IKE DECODE RECEIVED Message
(msgid=dba719e9) with payloads : HDR + HASH (8) + NOTIFY (11) + NONE (0)
total length : 80

Apr 05 16:50:17 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191, processing hash

Apr 05 16:50:17 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Processing Notify payload

Apr 05 16:50:17 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,
Received keep-alive of type DPD R-U-THERE (seq number 0x4b55b6e5)

```
Apr 05 16:50:17 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,  
  Sending keep-alive of type DPD R-U-THERE-ACK (seq number 0x4b55b6e5)  
Apr 05 16:50:17 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,  
  constructing blank hash  
Apr 05 16:50:17 [IKEv1 DEBUG]: Group = unityclient, IP = 64.102.51.191,  
  constructing qm hash  
Apr 05 16:50:17 [IKEv1]: IP = 64.102.51.191, IKE DECODE SENDING Message  
  (msgid=40456779) with payloads : HDR + HASH (8) + NOTIFY (11) + NONE  
  (0) total length : 80
```

[Informations connexes](#)

- [Assistance produit des dispositifs de sécurité adaptatifs dédiés de la gamme Cisco ASA 5500](#)
- [Logiciels pare-feu Cisco PIX](#)
- [Références des commandes du pare-feu Cisco Secure PIX](#)
- [Notices de champs relatives aux produits de sécurité \(y compris PIX\)](#)
- [Demandes de commentaires \(RFC\)](#)
- [Support et documentation techniques - Cisco Systems](#)