

# Esempio di trasparenza NAT IOS IPsec con configurazione client VPN

## Sommario

[Introduzione](#)

[Prerequisiti](#)

[Requisiti](#)

[Componenti usati](#)

[Convenzioni](#)

[Configurazione](#)

[Esempio di rete](#)

[Configurazione router](#)

[Verifica](#)

[Risoluzione dei problemi](#)

[Comandi per la risoluzione dei problemi](#)

[Informazioni correlate](#)

## [Introduzione](#)

Questo documento rappresenta una configurazione di esempio per il supporto Cisco IOS® della funzionalità di trasparenza IPsec Network Address Translation (NAT). Introduce il supporto per il traffico IPsec per viaggiare attraverso NAT o PAT (Port Address Translation) nella rete risolvendo molte incompatibilità note tra NAT e IPsec.

## [Prerequisiti](#)

### [Requisiti](#)

Nessun requisito specifico previsto per questo documento.

### [Componenti usati](#)

Le informazioni fornite in questo documento si basano sulle seguenti versioni software e hardware:

- Cisco 2621 Router 12.2.13.7T1 e versioni successive
- Cisco VPN Client 3.6.3 (configurazione non visualizzata)

Le informazioni discusse in questo documento fanno riferimento a dispositivi usati in uno specifico ambiente di emulazione. Su tutti i dispositivi menzionati nel documento la configurazione è stata ripristinata ai valori predefiniti. Se la rete è operativa, valutare attentamente eventuali conseguenze derivanti dall'uso dei comandi.

## Convenzioni

Per ulteriori informazioni sulle convenzioni usate, consultare il documento [Cisco sulle convenzioni nei suggerimenti tecnici](#).


## Configurazione

In questa sezione vengono presentate le informazioni necessarie per configurare le funzionalità descritte più avanti nel documento.

**Nota:** per ulteriori informazioni sui comandi menzionati in questo documento, usare lo [strumento di ricerca](#) dei comandi (solo utenti [registrati](#)).

## Esempio di rete

Nel documento viene usata questa impostazione di rete:

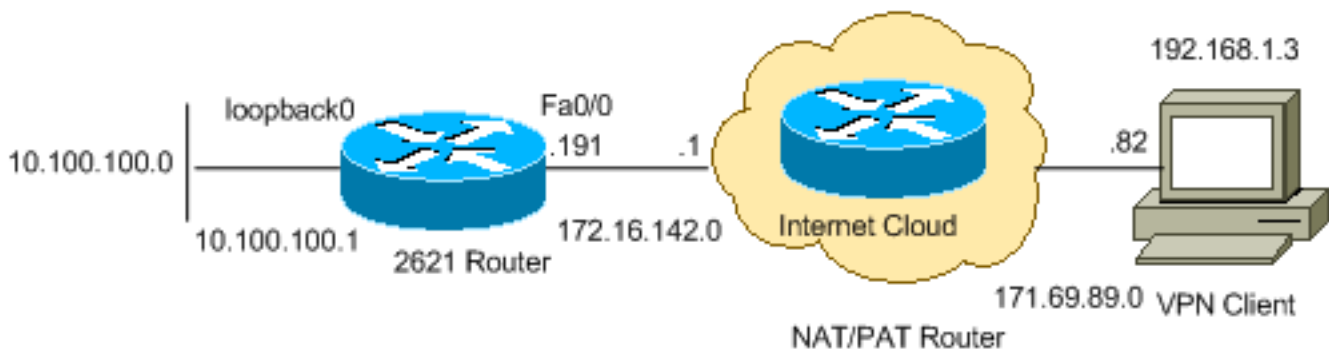

## Configurazione router

Attenersi alla seguente procedura:

1. Immettere il comando **show version** per visualizzare la versione software in esecuzione sullo switch.

```
2621#show version
Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-IK9O3S3-M), Version 12.2(13.7)T1,
MAINTENANCE INTERIM SOFTWARE
TAC Support: http://www.cisco.com/tac
Copyright (c) 1986-2002 by cisco Systems, Inc.
Compiled Sat 21-Dec-02 14:10 by ccai
Image text-base: 0x80008098, data-base: 0x818B6330
```

```
ROM: System Bootstrap, Version 11.3(2)XA4, RELEASE SOFTWARE (fc1)
ROM: C2600 Software (C2600-IK9O3S3-M), Version 12.2(13.7)T1,
MAINTENANCE INTERIM SOFTWARE
```

```
2621 uptime is 33 minutes
System returned to ROM by reload
System image file is "flash:c2600-ik9o3s3-mz.122-13.7.T1"
```

```
cisco 2621 (MPC860) processor (revision 0x102) with 60416K/5120K bytes of memory.
Processor board ID JAB0407020V (2751454139)
M860 processor: part number 0, mask 49
Bridging software.
```

X.25 software, Version 3.0.0.  
Primary Rate ISDN software, Version 1.1.  
2 FastEthernet/IEEE 802.3 interface(s)  
2 Channelized T1/PRI port(s)  
32K bytes of non-volatile configuration memory.  
16384K bytes of processor board System flash (Read/Write)

Configuration register is 0x2102

## 2. Eseguire il comando **show run**.

```
2621#show run
```

```
Building configuration...
```

```
Current configuration : 2899 bytes
```

```
!  
version 12.2  
service timestamps debug datetime msec localtime  
service timestamps log datetime msec localtime  
no service password-encryption  
!  
hostname 2621  
!  
boot system flash  
logging queue-limit 100  
enable secret 5 $1$dGFC$VA28yOWzxlCKyjldq8SkE/  
!  
username cisco password 0 cisco123  
username client password 0 testclient  
aaa new-model  
!  
!  
aaa authentication login userauthen local  
aaa authorization network foo local  
aaa session-id common  
ip subnet-zero  
ip cef  
!  
!  
no ip domain lookup  
ip domain name cisco.com  
!  
!  
!  
crypto isakmp policy 20  
  encr 3des  
  hash md5  
  authentication pre-share  
  group 2  
crypto isakmp keepalive 40 5  
!--- Allows an IPsec node to send NAT keepalive !--- packets every 20 seconds. crypto  
isakmp nat keepalive 20  
!  
crypto isakmp client configuration group cisco  
  key test1234  
  pool test  
  acl 120  
!  
!  
!--- Transform set "test" which uses Triple DES !--- encryptions and MD5 (HMAC variant) !--  
- for data packet authentication: crypto ipsec transform-set test esp-3des esp-md5-hmac  
crypto ipsec transform-set foo esp-3des esp-sha-hmac  
!  
crypto ipsec profile greprotect
```

```
!  
!  
!--- Dynamic crypto map. crypto dynamic-map dynmap 1  
set transform-set foo  
match address 199  
!  
!  
crypto map test client authentication list userauthen  
crypto map test isakmp authorization list foo  
crypto map test client configuration address respond  
!--- Adds a dynamic crypto map set to a static crypto map set. crypto map test 20 ipsec-  
isakmp dynamic dynmap  
!  
!  
!  
voice call carrier capacity active  
!  
!  
!  
!  
!  
!  
no voice hpi capture buffer  
no voice hpi capture destination  
!  
!  
mta receive maximum-recipients 0  
!  
!  
controller T1 0/0  
    framing sf  
    linecode ami  
!  
controller T1 0/1  
    framing sf  
    linecode ami  
!  
!  
!  
interface Loopback0  
    ip address 10.100.100.1 255.255.255.0  
    ip nat inside  
!  
interface FastEthernet0/0  
    ip address 172.16.142.191 255.255.255.0  
    ip nat outside  
    no ip route-cache  
    no ip mroute-cache  
    duplex auto  
    speed auto  
!--- Applies a crypto map set to an interface. crypto map test  
!  
interface FastEthernet0/1  
    ip address 10.130.13.13 255.255.0.0  
    duplex auto  
    speed auto  
!  
ip local pool test 192.168.1.1 192.168.1.250  
ip nat inside source route-map nonat interface FastEthernet0/0 overload  
no ip http server  
no ip http secure-server  
ip classless  
ip route 0.0.0.0 0.0.0.0 172.16.142.1
```

```

!
ip pim bidir-enable
!
!
access-list 101 permit ip any any
access-list 101 permit esp any any
access-list 101 permit udp any any eq isakmp
access-list 101 permit ip 192.168.0.0 0.0.255.255 10.100.100.0 0.0.0.255
access-list 111 permit ip 10.100.100.0 0.0.0.255 10.10.10.0 0.0.0.255
access-list 112 deny ip 10.100.100.0 0.0.0.255 10.10.10.0 0.0.0.255
access-list 112 deny ip 10.100.100.0 0.0.0.255 192.168.1.0 0.0.0.255
access-list 112 permit ip 10.100.100.0 0.0.0.255 any
access-list 120 permit ip 10.100.100.0 0.0.0.255 192.168.1.0 0.0.0.255
!--- IPsec access list defines which traffic to protect. access-list 199 permit ip
10.100.100.0 0.0.0.255 192.168.1.0 0.0.0.255
access-list 199 permit ip host 172.16.142.191 192.168.1.0 0.0.0.255
!
route-map nonat permit 10
 match ip address 112
!
radius-server authorization permit missing Service-Type
call rsvp-sync
!
!
mgcp profile default
!
dial-peer cor custom
!
!
!
!
!
line con 0
 exec-timeout 0 0
line aux 0
line vty 0 4
 password cisco
!
!
end

2621#

```

## Verifica

Per verificare che la configurazione funzioni correttamente, consultare questa sezione.

Lo [strumento Output Interpreter](#) (solo utenti [registrati](#)) (OIT) supporta alcuni comandi **show**. Usare l'OIT per visualizzare un'analisi dell'output del comando **show**.

- **show crypto isakmp sa**: visualizza tutte le associazioni di sicurezza (SA) IKE (Internet Key Exchange) correnti in un peer.

```

2621#show crypto isakmp sa
  f_vrf/i_vrf      dst          src          state        conn-id slot
  /              172.16.142.191 171.69.89.82  QM_IDLE     4        0

```

- **show crypto ipsec sa**: visualizza le impostazioni utilizzate dalle associazioni di protezione correnti.

```

2621#show crypto ipsec sa

interface: FastEthernet0/0

```

Crypto map tag: test, local addr. 172.16.142.191

protected vrf:

```
local ident (addr/mask/prot/port): (10.100.100.0/255.255.255.0/0/0)
!--- Subnet behind local VPN router. remote ident (addr/mask/prot/port):
(192.168.1.3/255.255.255.255/0/0) !--- Subnet behind remote VPN router. current_peer:
171.69.89.82:4500 PERMIT, flags={} #pkts encaps: 11, #pkts encrypt: 11, #pkts digest 11
#pkts decaps: 11, #pkts decrypt: 11, #pkts verify 11 #pkts compressed: 0, #pkts
decompressed: 0 #pkts not compressed: 0, #pkts compr. failed: 0 #pkts not decompressed: 0,
#pkts decompress failed: 0 #send errors 0, #recv errors 0 local crypto endpt.:
172.16.142.191, remote crypto endpt.: 171.69.89.82 !--- IP address of Encapsulating Security
Payload (ESP) endpoints. path mtu 1500, media mtu 1500 current outbound spi: 9A12903F
inbound esp sas: spi: 0xD44C2AFE(3561761534) !--- SPI inbound (ESP tunnel). transform: esp-
3des esp-sha-hmac , in use settings ={Tunnel UDP-Encaps, } slot: 0, conn id: 2002, flow_id:
3, crypto map: test
sa timing: remaining key lifetime (k/sec): (4513510/3476)
IV size: 8 bytes
replay detection support: Y
```

inbound ah sas:

inbound pcp sas:

outbound esp sas:

```
spi: 0x9A12903F(2584907839)
!--- Security parameter index (SPI) outbound (ESP tunnel). transform: esp-3des esp-sha-hmac
, in use settings ={Tunnel UDP-Encaps, } slot: 0, conn id: 2003, flow_id: 4, crypto map:
test
sa timing: remaining key lifetime (k/sec): (4513511/3476)
IV size: 8 bytes
replay detection support: Y
```

outbound ah sas:

outbound pcp sas:

protected vrf:

```
local ident (addr/mask/prot/port): (172.16.142.191/255.255.255.255/0/0)
!--- Next tunnel. remote ident (addr/mask/prot/port): (192.168.1.3/255.255.255.255/0/0)
current_peer: 171.69.89.82:4500 PERMIT, flags={} #pkts encaps: 0, #pkts encrypt: 0, #pkts
digest 0 #pkts decaps: 0, #pkts decrypt: 0, #pkts verify 0 #pkts compressed: 0, #pkts
decompressed: 0 #pkts not compressed: 0, #pkts compr. failed: 0 #pkts not decompressed: 0,
#pkts decompress failed: 0 #send errors 0, #recv errors 0 local crypto endpt.:
172.16.142.191, remote crypto endpt.: 171.69.89.82 path mtu 1500, media mtu 1500 current
outbound spi: 1CD14C06 inbound esp sas: spi: 0x1EAC399E(514603422) transform: esp-3des esp-
sha-hmac , in use settings ={Tunnel UDP-Encaps, } slot: 0, conn id: 2000, flow_id: 1, crypto
map: test sa timing: remaining key lifetime (k/sec): (4434590/3471) IV size: 8 bytes replay
detection support: Y inbound ah sas: inbound pcp sas: outbound esp sas: spi:
0x1CD14C06(483478534) transform: esp-3des esp-sha-hmac , in use settings ={Tunnel UDP-
Encaps, } slot: 0, conn id: 2001, flow_id: 2, crypto map: test sa timing: remaining key
lifetime (k/sec): (4434590/3469) IV size: 8 bytes replay detection support: Y outbound ah
sas: outbound pcp sas:
```

- **show cryption engine connection active:** visualizza le statistiche del motore di crittografia. Mostra i conteggi dei pacchetti.

```
2621#show crypto engine connection active
```

ID	Interface	IP-Address	State	Algorithm	Encrypt	Decrypt
4	FastEthernet0/0	172.16.142.191	set	HMAC_MD5+3DES_56_C	0	0
2000	FastEthernet0/0	172.16.142.191	set	HMAC_SHA+3DES_56_C	0	0
2001	FastEthernet0/0	172.16.142.191	set	HMAC_SHA+3DES_56_C	0	0
2002	FastEthernet0/0	172.16.142.191	set	HMAC_SHA+3DES_56_C	0	11
2003	FastEthernet0/0	172.16.142.191	set	HMAC_SHA+3DES_56_C	11	0

- **show crypto engine [brief] | configuration]:** visualizza un riepilogo delle informazioni di

configurazione per i motori di crittografia. Utilizzare questo comando in modalità di esecuzione privilegiata. Con questo comando vengono visualizzati tutti i motori di crittografia e viene visualizzato il nome del prodotto AIM-VPN.

```
2621#show crypto engine configuration
```

```
crypto engine name: unknown
```

*!--- Name of the crypto engine as assigned with the !--- key-name argument in the **crypto key generate dss** command.*

```
crypto engine type: software
```

*!--- If "software" is listed, the crypto engine resides in either !--- the Route Switch Processor (RSP) (the Cisco IOS crypto engine) or !--- in a second-generation Versatile Interface Processor (VIP2). serial number: A3FFDBBB crypto engine state: installed !--- The state "installed" indicates that a crypto engine is located !--- in the given slot, but is not configured for encryption. crypto engine in slot: N/A platform: Cisco Software Crypto Engine Encryption Process Info: input queue size: 500 input queue top: 34 input queue bot: 34 input queue count: 0 Crypto Adjacency Counts: Lock Count: 0 Unlock Count: 0 crypto lib version: 14.0.0 ipsec lib version: 2.0.0*

- **show crypto isakmp sa detail nat**: visualizza i dettagli relativi a ISAKMP SA NAT.

```
2621#show crypto isakmp sa detail nat
```

```
Codes: C - IKE configuration mode, D - Dead Peer Detection
```

```
K - Keepalives, N - NAT-traversal
```

```
X - IKE Extended Authentication
```

```
psk - Preshared key, rsig - RSA signature
```

```
renc - RSA encryption
```

```
f_vrf/i_vrf Conn id Local Remote Encr Hash Auth DH Lifetime Capabilities
/ 4 172.16.142.191 171.69.89.82 3des md5 2 23:56:43 CDXN
```

```
NAT keepalive(sec) 20
```

```
In local 172.16.142.191:4500 remote cisco:4500
```

**f\_vrf/i\_vrf** - Routing e inoltro virtuali della porta anteriore (F\_VRF) e VRF (I\_VRF) interno dell'associazione di sicurezza IKE. Se FVRF è globale, l'output visualizza `f_vrf` come campo vuoto.

## Risoluzione dei problemi

Utilizzare questa sezione per risolvere i problemi relativi alla configurazione.

### Comandi per la risoluzione dei problemi

Lo [strumento Output Interpreter](#) (solo utenti [registrati](#)) (OIT) supporta alcuni comandi **show**. Usare l'OIT per visualizzare un'analisi dell'output del comando **show**.

Per ulteriori informazioni sulla risoluzione dei problemi, consultare il documento sulla [risoluzione dei problemi di sicurezza IP - Comprensione e uso dei comandi di debug](#).

**Nota:** consultare le [informazioni importanti sui comandi di debug](#) prima di usare i comandi di debug.

Questa configurazione riceve i pacchetti keepalive NAT ogni 20 secondi come configurato.

- **debug crypto ipsec**: visualizza le negoziazioni IPsec della fase 2.
- **debug crypto isakmp**: visualizza le negoziazioni ISAKMP della fase 1.
- **debug crypto engine**: visualizza il traffico crittografato.

```
2621#
```

2621#

```
*Mar 1 00:32:03.171: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:32:03.171: ISAKMP: set new node 1489874950 to QM_IDLE
*Mar 1 00:32:03.175: ISAKMP (0:4): processing HASH payload. message
                                ID = 1489874950
*Mar 1 00:32:03.175: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                                spi 0, message ID = 1489874950, sa = 82443410
*Mar 1 00:32:03.175: ISAKMP (0:4): deleting node 1489874950 error FALSE
                                reason "informational (in) state 1"
*Mar 1 00:32:03.175: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_INFO_NOTIFY
*Mar 1 00:32:03.175: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                                New State = IKE_P1_COMPLETE

*Mar 1 00:32:13.115: ISAKMP (0:4): purging node 428915319
*Mar 1 00:32:23.199: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:32:23.199: ISAKMP: set new node -1483946735 to QM_IDLE
*Mar 1 00:32:23.203: ISAKMP (0:4): processing HASH payload. message ID = -1483946735
*Mar 1 00:32:23.203: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                                spi 0, message ID = -1483946735, sa = 82443410
*Mar 1 00:32:23.203: ISAKMP (0:4): deleting node -1483946735 error
                                FALSE reason "informational (in) state 1"
*Mar 1 00:32:23.203: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_INFO_NOTIFY
*Mar 1 00:32:23.203: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                                New State = IKE_P1_COMPLETE

*Mar 1 00:32:33.147: ISAKMP (0:4): purging node -1677054470
```

- **debug ip packet [detail]:** visualizza le informazioni generali sul debug IP e le transazioni di protezione IPSO (IP security option).
- **debug ip icmp:** visualizza le informazioni sulle transazioni ICMP (Internal Control Message Protocol).

Generic IP:

```
ICMP packet debugging is on
IP packet debugging is on (detailed)
```

```
*Mar 1 00:38:43.735: IP: s=171.69.89.82 (FastEthernet0/0), d=172.16.142.191
                                (FastEthernet0/0), len 108, rcvd 3
*Mar 1 00:38:43.735: UDP src=4500, dst=4500
*Mar 1 00:38:48.863: IP: s=192.168.1.3 (FastEthernet0/0), d=10.100.100.1,
                                len 60, rcvd 4
*Mar 1 00:38:48.863: ICMP type=8, code=0
*Mar 1 00:38:48.863: ICMP: echo reply sent, src 10.100.100.1, dst 192.168.1.3
*Mar 1 00:38:48.867: IP: s=10.100.100.1 (local), d=192.168.1.3 (FastEthernet0/0),
                                len 60, sending
*Mar 1 00:38:48.867: ICMP type=0, code=0
*Mar 1 00:38:49.863: IP: s=192.168.1.3 (FastEthernet0/0), d=10.100.100.1,
                                len 60, rcvd 4
*Mar 1 00:38:49.863: ICMP type=8, code=0
*Mar 1 00:38:49.863: ICMP: echo reply sent, src 10.100.100.1, dst 192.168.1.3
*Mar 1 00:38:49.863: IP: s=10.100.100.1 (local), d=192.168.1.3 (FastEthernet0/0),
                                len 60, sending
*Mar 1 00:38:49.867: ICMP type=0, code=0
*Mar 1 00:38:50.863: IP: s=192.168.1.3 (FastEthernet0/0), d=10.100.100.1,
                                len 60, rcvd 4
*Mar 1 00:38:50.867: ICMP type=8, code=0
*Mar 1 00:38:50.867: ICMP: echo reply sent, src 10.100.100.1, dst 192.168.1.3
*Mar 1 00:38:50.867: IP: s=10.100.100.1 (local), d=192.168.1.3 (FastEthernet0/0),
                                len 60, sending
*Mar 1 00:38:50.867: ICMP type=0, code=0
*Mar 1 00:38:51.867: IP: s=192.168.1.3 (FastEthernet0/0), d=10.100.100.1,
                                len 60, rcvd 4
```



```
*Mar 1 00:38:51.867: ICMP type=8, code=0
*Mar 1 00:38:51.867: ICMP: echo reply sent, src 10.100.100.1, dst 192.168.1.3
```

- **debug crypto ipsec:** visualizza le negoziazioni IPsec della fase 2.
- **debug crypto isakmp:** visualizza le negoziazioni ISAKMP della fase 1.
- **debug crypto engine:** visualizza il traffico crittografato.

```
2621#
2621#
2621#
2621#
```

```
*Mar 1 00:27:54.735: ISAKMP (0:0): received packet from 171.69.89.82 dport
                    500 sport 500 Global (N) NEW SA
*Mar 1 00:27:54.739: ISAKMP: Created a peer struct for 171.69.89.82, peer port 500
*Mar 1 00:27:54.739: ISAKMP: Locking peer struct 0x82C88D44, IKE refcount
                    1 for crypto_ikmp_config_initialize_sa
*Mar 1 00:27:54.739: ISAKMP (0:0): Setting client config settings 82A819DC
*Mar 1 00:27:54.739: ISAKMP (0:0): (Re)Setting client xauth list and state
*Mar 1 00:27:54.739: ISAKMP: local port 500, remote port 500
*Mar 1 00:27:54.743: ISAKMP: Find a dup sa in the avl tree during calling
                    isadb_insert sa = 82443410
*Mar 1 00:27:54.743: ISAKMP (0:4): processing SA payload. message ID = 0
*Mar 1 00:27:54.743: ISAKMP (0:4): processing ID payload. message ID = 0
*Mar 1 00:27:54.743: ISAKMP (0:4): peer matches *none* of the profiles
*Mar 1 00:27:54.743: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.743: ISAKMP (0:4): vendor ID seems Unity/DPD but major 215 mismatch
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID is XAUTH
*Mar 1 00:27:54.747: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID is DPD
*Mar 1 00:27:54.747: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID seems Unity/DPD but major 123 mismatch
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID is NAT-T v2
*Mar 1 00:27:54.747: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID seems Unity/DPD but major 194 mismatch
*Mar 1 00:27:54.751: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.751: ISAKMP (0:4): vendor ID is Unity
*Mar 1 00:27:54.751: ISAKMP (0:4): Authentication by xauth preshared
*Mar 1 00:27:54.751: ISAKMP (0:4): Checking ISAKMP transform 1 against
                    priority 20 policy
*Mar 1 00:27:54.751: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.751: ISAKMP: hash SHA
*Mar 1 00:27:54.751: ISAKMP: default group 2
*Mar 1 00:27:54.751: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.751: ISAKMP: life type in seconds
*Mar 1 00:27:54.751: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.755: ISAKMP: keylength of 256
*Mar 1 00:27:54.755: ISAKMP (0:4): Encryption algorithm offered does not
                    match policy!
*Mar 1 00:27:54.755: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.755: ISAKMP (0:4): Checking ISAKMP transform 2 against
                    priority 20 policy
*Mar 1 00:27:54.755: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.755: ISAKMP: hash MD5
*Mar 1 00:27:54.755: ISAKMP: default group 2
*Mar 1 00:27:54.755: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.755: ISAKMP: life type in seconds
*Mar 1 00:27:54.755: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.759: ISAKMP: keylength of 256
*Mar 1 00:27:54.759: ISAKMP (0:4): Encryption algorithm offered does not
                    match policy!
*Mar 1 00:27:54.759: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.759: ISAKMP (0:4): Checking ISAKMP transform 3 against
                    priority 20 policy
*Mar 1 00:27:54.759: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.759: ISAKMP: hash SHA
```

\*Mar 1 00:27:54.759: ISAKMP: default group 2  
\*Mar 1 00:27:54.759: ISAKMP: auth pre-share  
\*Mar 1 00:27:54.759: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.759: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.759: ISAKMP: keylength of 256  
\*Mar 1 00:27:54.763: ISAKMP (0:4): Encryption algorithm offered does not match policy!  
\*Mar 1 00:27:54.763: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.763: ISAKMP (0:4): Checking ISAKMP transform 4 against priority 20 policy  
\*Mar 1 00:27:54.763: ISAKMP: encryption AES-CBC  
\*Mar 1 00:27:54.763: ISAKMP: hash MD5  
\*Mar 1 00:27:54.763: ISAKMP: default group 2  
\*Mar 1 00:27:54.763: ISAKMP: auth pre-share  
\*Mar 1 00:27:54.763: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.763: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.763: ISAKMP: keylength of 256  
\*Mar 1 00:27:54.763: ISAKMP (0:4): Encryption algorithm offered does not match policy!  
\*Mar 1 00:27:54.767: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.767: ISAKMP (0:4): Checking ISAKMP transform 5 against priority 20 policy  
\*Mar 1 00:27:54.767: ISAKMP: encryption AES-CBC  
\*Mar 1 00:27:54.767: ISAKMP: hash SHA  
\*Mar 1 00:27:54.767: ISAKMP: default group 2  
\*Mar 1 00:27:54.767: ISAKMP: auth XAUTHInitPreShared  
\*Mar 1 00:27:54.767: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.767: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.767: ISAKMP: keylength of 192  
\*Mar 1 00:27:54.767: ISAKMP (0:4): Encryption algorithm offered does not match policy!  
\*Mar 1 00:27:54.771: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.771: ISAKMP (0:4): Checking ISAKMP transform 6 against priority 20 policy  
\*Mar 1 00:27:54.771: ISAKMP: encryption AES-CBC  
\*Mar 1 00:27:54.771: ISAKMP: hash MD5  
\*Mar 1 00:27:54.771: ISAKMP: default group 2  
\*Mar 1 00:27:54.771: ISAKMP: auth XAUTHInitPreShared  
\*Mar 1 00:27:54.771: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.771: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.771: ISAKMP: keylength of 192  
\*Mar 1 00:27:54.771: ISAKMP (0:4): Encryption algorithm offered does not match policy!  
\*Mar 1 00:27:54.771: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.775: ISAKMP (0:4): Checking ISAKMP transform 7 against priority 20 policy  
\*Mar 1 00:27:54.775: ISAKMP: encryption AES-CBC  
\*Mar 1 00:27:54.775: ISAKMP: hash SHA  
\*Mar 1 00:27:54.775: ISAKMP: default group 2  
\*Mar 1 00:27:54.775: ISAKMP: auth pre-share  
\*Mar 1 00:27:54.775: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.775: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.775: ISAKMP: keylength of 192  
\*Mar 1 00:27:54.775: ISAKMP (0:4): Encryption algorithm 1 00:27:54.783: ISAKMP: hash SHA offered does not match policy!  
\*Mar 1 00:27:54.775: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.775: ISAKMP (0:4): Checking ISAKMP transform 8 against priority 20 policy  
\*Mar 1 00:27:54.779: ISAKMP: encryption AES-CBC  
\*Mar 1 00:27:54.779: ISAKMP: hash MD5  
\*Mar 1 00:27:54.779: ISAKMP: default group 2  
\*Mar 1 00:27:54.779: ISAKMP: auth pre-share  
\*Mar 1 00:27:54.779: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.779: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B

\*Mar 1 00:27:54.779: ISAKMP: keylength of 192  
\*Mar 1 00:27:54.779: ISAKMP (0:4): Encryption algorithm offered does not match policy!  
\*Mar 1 00:27:54.779: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.779: ISAKMP (0:4): Checking ISAKMP transform 9 against priority 20 policy  
\*Mar 1 00:27:54.783: ISAKMP: encryption AES-CBC  
\*Mar  
\*Mar 1 00:27:54.783: ISAKMP: default group 2  
\*Mar 1 00:27:54.783: ISAKMP: auth XAUTHInitPreShared  
\*Mar 1 00:27:54.783: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.783: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.783: ISAKMP: keylength of 128  
\*Mar 1 00:27:54.783: ISAKMP (0:4): Encryption algorithm offered does not match policy!  
\*Mar 1 00:27:54.783: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.783: ISAKMP (0:4): Checking ISAKMP transform 10 against priority 20 policy  
\*Mar 1 00:27:54.783: ISAKMP: encryption AES-CBC  
\*Mar 1 00:27:54.787: ISAKMP: hash MD5  
\*Mar 1 00:27:54.787: ISAKMP: default group 2  
\*Mar 1 00:27:54.787: ISAKMP: auth XAUTHInitPreShared  
\*Mar 1 00:27:54.787: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.787: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.787: ISAKMP: keylength of 128  
\*Mar 1 00:27:54.787: ISAKMP (0:4): Encryption algorithm offered does not match policy!  
\*Mar 1 00:27:54.787: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.787: ISAKMP (0:4): Checking ISAKMP transform 11 against priority 20 policy  
\*Mar 1 00:27:54.787: ISAKMP: encryption AES-CBC  
\*Mar 1 00:27:54.787: ISAKMP: hash SHA  
\*Mar 1 00:27:54.791: ISAKMP: default group 2  
\*Mar 1 00:27:54.791: ISAKMP: auth pre-share  
\*Mar 1 00:27:54.791: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.791: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.791: ISAKMP: keylength of 128  
\*Mar 1 00:27:54.791: ISAKMP (0:4): Encryption algorithm offered does not match policy!  
\*Mar 1 00:27:54.791: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.791: ISAKMP (0:4): Checking ISAKMP transform 12 against priority 20 policy  
\*Mar 1 00:27:54.791: ISAKMP: encryption AES-CBC  
\*Mar 1 00:27:54.791: ISAKMP: hash MD5  
\*Mar 1 00:27:54.791: ISAKMP: default group 2  
\*Mar 1 00:27:54.795: ISAKMP: auth pre-share  
\*Mar 1 00:27:54.795: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.795: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.795: ISAKMP: keylength of 128  
\*Mar 1 00:27:54.795: ISAKMP (0:4): Encryption algorithm offered does not match policy!  
\*Mar 1 00:27:54.795: ISAKMP (0:4): atts are not acceptable. Next payload 7:54.795: ISAKMP: hash SHA is 3  
\*Mar 1 00:27:54.795: ISAKMP (0:4): Checking ISAKMP transform 13 against priority 20 policy  
\*Mar 1 00:27:54.795: ISAKMP: encryption 3DES-CBC  
\*Mar 1 00:2  
\*Mar 1 00:27:54.795: ISAKMP: default group 2  
\*Mar 1 00:27:54.795: ISAKMP: auth XAUTHInitPreShared  
\*Mar 1 00:27:54.799: ISAKMP: life type in seconds  
\*Mar 1 00:27:54.799: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B  
\*Mar 1 00:27:54.799: ISAKMP (0:4): Hash algorithm offered does not match policy!  
\*Mar 1 00:27:54.799: ISAKMP (0:4): atts are not acceptable. Next payload is 3  
\*Mar 1 00:27:54.799: ISAKMP (0:4): Checking ISAKMP transform 14 against

```

                priority 20 policy
*Mar 1 00:27:54.799: ISAKMP: encryption 3DES-CBC
*Mar 1 00:27:54.799: ISAKMP: hash MD5
*Mar 1 00:27:54.799: ISAKMP: default group 2
*Mar 1 00:27:54.799: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.799: ISAKMP: life type in seconds
*Mar 1 00:27:54.803: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.803: ISAKMP (0:4): atts are acceptable. Next payload is 3
*Mar 1 00:27:55.015: ISAKMP (0:4): processing KE payload. message ID = 0
*Mar 1 00:27:55.287: ISAKMP (0:4): processing NONCE payload. message ID = 0
*Mar 1 00:27:55.287: ISAKMP (0:4): vendor ID is NAT-T v2
*Mar 1 00:27:55.287: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_AM_EXCH
*Mar 1 00:27:55.291: ISAKMP (0:4): Old State = IKE_READY New State =
                IKE_R_AM_AAA_AWAIT

*Mar 1 00:27:55.291: ISAKMP: got callback 1
*Mar 1 00:27:55.295: ISAKMP (0:4): SKEYID state generated
*Mar 1 00:27:55.299: ISAKMP (0:4): constructed NAT-T vendor-02 ID
*Mar 1 00:27:55.299: ISAKMP (0:4): SA is doing pre-shared key authentication
                plus XAUTH using id type ID_IPV4_ADDR
*Mar 1 00:27:55.299: ISAKMP (4): ID payload
    next-payload : 10
    type          : 1
    addr          : 172.16.142.191
    protocol      : 17
    port          : 0
    length        : 8
*Mar 1 00:27:55.299: ISAKMP (4): Total payload length: 12
*Mar 1 00:27:55.303: ISAKMP (0:4): constructed HIS NAT-D
*Mar 1 00:27:55.303: ISAKMP (0:4): constructed MINE NAT-D
*Mar 1 00:27:55.303: ISAKMP (0:4): sending packet to 171.69.89.82
                my_port 500 peer_port 500 (R) AG_INIT_EXCH
*Mar 1 00:27:55.303: ISAKMP (0:4): Input = IKE_MSG_FROM_AAA,
                PRESHARED_KEY_REPLY
*Mar 1 00:27:55.303: ISAKMP (0:4): Old State = IKE_R_AM_AAA_AWAIT
                New State = IKE_R_AM2

*Mar 1 00:27:55.391: ISAKMP (0:4): received packet from 171.69.89.82
                dport 4500 sport 4500 Global (R) AG_INIT_EXCH
*Mar 1 00:27:55.395: ISAKMP (0:4): processing HASH payload. message ID = 0
*Mar 1 00:27:55.395: ISAKMP (0:4): processing NOTIFY INITIAL_CONTACT protocol 1
    spi 0, message ID = 0, sa = 82443410
*Mar 1 00:27:55.399: ISAKMP (0:4): Process initial contact,
bring down existing phase 1 and 2 SA's with local 172.16.142.191
                remote 171.69.89.82 remote port 4500
*Mar 1 00:27:55.399: ISAKMP (0:4): returning IP addr to the address pool
*Mar 1 00:27:55.399: ISAKMP:received payload type 17
*Mar 1 00:27:55.399: ISAKMP (0:4): Detected NAT-D payload
*Mar 1 00:27:55.399: ISAKMP (0:4): recalc my hash for NAT-D
*Mar 1 00:27:55.399: ISAKMP (0:4): NAT match MINE hash
*Mar 1 00:27:55.399: ISAKMP:received payload type 17
*Mar 1 00:27:55.399: ISAKMP (0:4): Detected NAT-D payload
*Mar 1 00:27:55.399: ISAKMP (0:4): recalc his hash for NAT-D
*Mar 1 00:27:55.403: ISAKMP (0:4): NAT does not match HIS hash
*Mar 1 00:27:55.403: hash received: 93 31 EB 5E 30 E2 A0 C4 D3 6F 3E B1 B7
                F AE C3
*Mar 1 00:27:55.403: his nat hash : 14 64 77 EC E8 DC 78 B9 F9 DC 2B 46
                CB E8 1D 4
*Mar 1 00:27:55.403: ISAKMP (0:4): SA has been authenticated with 171.69.89.82
*Mar 1 00:27:55.407: ISAKMP (0:4): Detected port floating to port = 4500
*Mar 1 00:27:55.407: ISAKMP: Trying to insert a peer 171.69.89.82/4500/,
                and inserted successfully.
*Mar 1 00:27:55.407: ISAKMP (0:4): IKE_DPD is enabled, initializing timers
*Mar 1 00:27:55.407: ISAKMP: set new node 772423690 to CONF_XAUTH

```

\*Mar 1 00:27:55.411: ISAKMP (0:4): sending packet to 171.69.89.82 my\_port  
4500 peer\_port 4500 (R) QM\_IDLE

\*Mar 1 00:27:55.411: ISAKMP (0:4): purging node 772423690

\*Mar 1 00:27:55.411: ISAKMP: Sending phase 1 responder lifetime 86400

\*Mar 1 00:27:55.411: ISAKMP (0:4): peer matches \*none\* of the profiles

\*Mar 1 00:27:55.411: ISAKMP (0:4): Input = IKE\_MSG\_FROM\_PEER, IKE\_AM\_EXCH

\*Mar 1 00:27:55.411: ISAKMP (0:4): Old State = IKE\_R\_AM2 New State =  
IKE\_P1\_COMPLETE

\*Mar 1 00:27:55.415: IPSEC(key\_engine): got a queue event...

\*Mar 1 00:27:55.415: ISAKMP (0:4): Need XAUTH

\*Mar 1 00:27:55.415: ISAKMP (0:4): Input = IKE\_MSG\_INTERNAL,  
IKE\_PHASE1\_COMPLETE

\*Mar 1 00:27:55.415: ISAKMP (0:4): Old State = IKE\_P1\_COMPLETE  
New State = IKE\_XAUTH\_AAA\_START\_LOGIN\_AWAIT

\*Mar 1 00:27:55.419: ISAKMP: got callback 1

\*Mar 1 00:27:55.419: ISAKMP: set new node -266369278 to CONF\_XAUTH

\*Mar 1 00:27:55.419: ISAKMP/xauth: request attribute XAUTH\_USER\_NAME\_V2

\*Mar 1 00:27:55.419: ISAKMP/xauth: request attribute XAUTH\_USER\_PASSWORD\_V2

\*Mar 1 00:27:55.419: ISAKMP (0:4): initiating peer config to 171.69.89.82.  
ID = -266369278

\*Mar 1 00:27:55.423: ISAKMP (0:4): sending packet to 171.69.89.82 my\_port  
4500 peer\_port 4500 (R) CONF\_XAUTH

\*Mar 1 00:27:55.423: ISAKMP (0:4): Input = IKE\_MSG\_FROM\_AAA,  
IKE\_AAA\_START\_LOGIN

\*Mar 1 00:27:55.423: ISAKMP (0:4): Old State = IKE\_XAUTH\_AAA\_START\_LOGIN\_AWAIT  
New State = IKE\_XAUTH\_REQ\_SENT

\*Mar 1 00:27:55.959: ISAKMP (0:3): purging node 1153289263

\*Mar 1 00:28:00.423: ISAKMP (0:4): retransmitting phase 2 CONF\_XAUTH  
-266369278 ...

\*Mar 1 00:28:00.423: ISAKMP (0:4): incrementing error counter on sa:  
retransmit phase 2

\*Mar 1 00:28:00.423: ISAKMP (0:4): incrementing error counter on sa:  
retransmit phase 2

\*Mar 1 00:28:00.423: ISAKMP (0:4): retransmitting phase 2 -266369278 CONF\_XAUTH

\*Mar 1 00:28:00.423: ISAKMP (0:4): sending packet to 171.69.89.82 my\_port  
4500 peer\_port 4500 (R) CONF\_XAUTH

\*Mar 1 00:28:02.635: ISAKMP (0:4): received packet from 171.69.89.82 dport  
4500 sport 4500 Global (R) CONF\_XAUTH

\*Mar 1 00:28:02.635: ISAKMP (0:4): processing transaction payload from  
171.69.89.82. message ID = -266369278

\*Mar 1 00:28:02.639: ISAKMP: Config payload REPLY

\*Mar 1 00:28:02.639: ISAKMP/xauth: reply attribute XAUTH\_USER\_NAME\_V2

\*Mar 1 00:28:02.639: ISAKMP/xauth: reply attribute XAUTH\_USER\_PASSWORD\_V2

\*Mar 1 00:28:02.639: ISAKMP (0:4): deleting node -266369278 error FALSE  
reason "done with xauth request/reply exchange"

\*Mar 1 00:28:02.639: ISAKMP (0:4): Input = IKE\_MSG\_FROM\_PEER, IKE\_CFG\_REPLY

\*Mar 1 00:28:02.639: ISAKMP (0:4): Old State = IKE\_XAUTH\_REQ\_SENT  
New State = IKE\_XAUTH\_AAA\_CONT\_LOGIN\_AWAIT

\*Mar 1 00:28:02.643: ISAKMP: got callback 1

\*Mar 1 00:28:02.643: ISAKMP: set new node -1548124746 to CONF\_XAUTH

\*Mar 1 00:28:02.643: ISAKMP (0:4): initiating peer config to 171.69.89.82.  
ID = -1548124746

\*Mar 1 00:28:02.647: ISAKMP (0:4): sending packet to 171.69.89.82 my\_port  
4500 peer\_port 4500 (R) CONF\_XAUTH

\*Mar 1 00:28:02.647: ISAKMP (0:4): Input = IKE\_MSG\_FROM\_AAA,  
IKE\_AAA\_CONT\_LOGIN

\*Mar 1 00:28:02.647: ISAKMP (0:4): Old State = IKE\_XAUTH\_AAA\_CONT\_LOGIN\_AWAIT  
New State = IKE\_XAUTH\_SET\_SENT

```

*Mar 1 00:28:02.663: ISAKMP (0:4): received packet from 171.69.89.82 dport
      4500 sport 4500 Global (R) CONF_XAUTH
*Mar 1 00:28:02.663: ISAKMP (0:4): processing transaction payload from
      171.69.89.82. message ID = -1548124746
*Mar 1 00:28:02.663: ISAKMP: Config payload ACK
*Mar 1 00:28:02.663: ISAKMP (0:4):      XAUTH ACK Processed
*Mar 1 00:28:02.667: ISAKMP (0:4): deleting node -1548124746 error FALSE
      reason "done with transaction"
*Mar 1 00:28:02.667: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_CFG_ACK
*Mar 1 00:28:02.667: ISAKMP (0:4): Old State = IKE_XAUTH_SET_SENT
      New State = IKE_P1_COMPLETE

*Mar 1 00:28:02.667: ISAKMP (0:4): Input = IKE_MSG_INTERNAL,
      IKE_PHASE1_COMPLETE
*Mar 1 00:28:02.667: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
      New State = IKE_P1_COMPLETE

*Mar 1 00:28:02.675: ISAKMP (0:4): received packet from 171.69.89.82
      dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:02.675: ISAKMP: set new node 1973520613 to QM_IDLE
*Mar 1 00:28:02.679: ISAKMP (0:4): processing transaction payload from
      171.69.89.82. message ID = 1973520613
*Mar 1 00:28:02.679: ISAKMP: Config payload REQUEST
*Mar 1 00:28:02.679: ISAKMP (0:4): checking request:
*Mar 1 00:28:02.679: ISAKMP:      IP4_ADDRESS
*Mar 1 00:28:02.679: ISAKMP:      IP4_NETMASK
*Mar 1 00:28:02.679: ISAKMP:      IP4_DNS
*Mar 1 00:28:02.683: ISAKMP:      IP4_NBNS
*Mar 1 00:28:02.683: ISAKMP:      ADDRESS_EXPIRY
*Mar 1 00:28:02.683: ISAKMP:      APPLICATION_VERSION
*Mar 1 00:28:02.683: ISAKMP:      UNKNOWN Unknown Attr: 0x7000
*Mar 1 00:28:02.683: ISAKMP:      UNKNOWN Unknown Attr: 0x7001
*Mar 1 00:28:02.683: ISAKMP:      DEFAULT_DOMAIN
*Mar 1 00:28:02.683: ISAKMP:      SPLIT_INCLUDE
*Mar 1 00:28:02.683: ISAKMP:      UNKNOWN Unknown Attr: 0x7003
*Mar 1 00:28:02.683: ISAKMP:      UNKNOWN Unknown Attr: 0x7007
*Mar 1 00:28:02.683: ISAKMP:      UNKNOWN Unknown Attr: 0x7008
*Mar 1 00:28:02.683: ISAKMP:      UNKNOWN Unknown Attr: 0x7009
*Mar 1 00:28:02.687: ISAKMP:      UNKNOWN Unknown Attr: 0x700A
*Mar 1 00:28:02.687: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER,
      IKE_CFG_REQUEST
*Mar 1 00:28:02.687: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
      New State = IKE_CONFIG_AUTHOR_AAA_AWAIT

*Mar 1 00:28:02.691: ISAKMP: got callback 1
*Mar 1 00:28:02.695: ISAKMP (0:4): attributes sent in message:
*Mar 1 00:28:02.695:      Address: 0.2.0.0
*Mar 1 00:28:02.695: ISAKMP (0:4): allocating address 192.168.1.3
*Mar 1 00:28:02.695: ISAKMP: Sending private address: 192.168.1.3
*Mar 1 00:28:02.695: ISAKMP: Sending ADDRESS_EXPIRY seconds left to
      use the address: 86392
*Mar 1 00:28:02.695: ISAKMP: Sending APPLICATION_VERSION string:
      Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-IK903S3-M), Version 12.2(13.7)T1,
      MAINTENANCE INTERIM SOFTWARE

TAC Support: http://www.cisco.com/tac
Copyright (c) 1986-2002 by cisco Systems, Inc.
Compiled Sat 21-Dec-02 14:10 by ccai
*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7000)
*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7001)
*Mar 1 00:28:02.699: ISAKMP: Sending split include name 120 network
      10.100.100.0 mask 255.255.255.0 protocol 0,
      src port 0, dst port 0

```

```

*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7003)
*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7007)
*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7008)
*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7009)
*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x700A)
*Mar 1 00:28:02.703: ISAKMP (0/4): responding to peer config from
      171.69.89.82. ID = 1973520613
*Mar 1 00:28:02.703: ISAKMP (0/4): sending packet to 171.69.89.82 my_port
      4500 peer_port 4500 (R) CONF_ADDR
*Mar 1 00:28:02.707: ISAKMP (0/4): deleting node 1973520613 error FALSE
      reason ""
*Mar 1 00:28:02.707: ISAKMP (0/4): Input = IKE_MESG_FROM_AAA,
      IKE_AAA_GROUP_ATTR
*Mar 1 00:28:02.707: ISAKMP (0/4): Old State = IKE_CONFIG_AUTHOR_AAA_AWAIT
      New State = IKE_P1_COMPLETE

*Mar 1 00:28:02.775: ISAKMP (0/4): received packet from 171.69.89.82
      dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:02.775: ISAKMP: set new node 1783469429 to QM_IDLE
*Mar 1 00:28:02.787: ISAKMP (0/4): processing HASH payload. message
      ID = 1783469429
*Mar 1 00:28:02.787: ISAKMP (0/4): processing SA payload. message
      ID = 1783469429
*Mar 1 00:28:02.787: ISAKMP (0/4): Checking IPsec proposal 1
*Mar 1 00:28:02.787: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.787: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.787: ISAKMP:     authenticator is HMAC-MD5
*Mar 1 00:28:02.787: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.791: ISAKMP:     key length is 256
*Mar 1 00:28:02.791: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.791: ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*Mar 1 00:28:02.791: ISAKMP (0/4): atts are acceptable.
*Mar 1 00:28:02.791: ISAKMP (0/4): Checking IPsec proposal 1
*Mar 1 00:28:02.791: ISAKMP (0/4): transform 1, IPPCP LZS
*Mar 1 00:28:02.791: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.791: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.795: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.795: ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*Mar 1 00:28:02.795: ISAKMP (0/4): atts are acceptable.
*Mar 1 00:28:02.795: IPSEC(validate_proposal_request): proposal part #1,
      (key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
      local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
      remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
      protocol= ESP, transform= esp-aes 256 esp-md5-hmac ,
      lifedur= 0s and 0kb,
      spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x400
*Mar 1 00:28:02.799: IPSEC(validate_proposal_request): proposal part #2,
      (key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
      local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
      remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
      protocol= PCP, transform= comp-lzs ,
      lifedur= 0s and 0kb,
      spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.799: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.799: IPSEC(validate_transform_proposal): no IPSEC cryptomap
      exists for local address 172.16.142.191
*Mar 1 00:28:02.799: ISAKMP (0/4): IPsec policy invalidated proposal
*Mar 1 00:28:02.803: ISAKMP (0/4): Checking IPsec proposal 2
*Mar 1 00:28:02.803: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.803: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.803: ISAKMP:     authenticator is HMAC-SHA
*Mar 1 00:28:02.803: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.803: ISAKMP:     key length is 256
*Mar 1 00:28:02.803: ISAKMP:     SA life type in seconds

```

```
*Mar 1 00:28:02.803: ISAKMP: SA life duration (VPI) of 0x0
                                0x20 0xC4 0x9B
*Mar 1 00:28:02.803: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.807: ISAKMP (0:4): Checking IPsec proposal 2
*Mar 1 00:28:02.807: ISAKMP (0:4): transform 1, IPPCP LZS
*Mar 1 00:28:02.807: ISAKMP: attributes in transform:
*Mar 1 00:28:02.807: ISAKMP: encaps is 61443
*Mar 1 00:28:02.807: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.807: ISAKMP: SA life duration (VPI) of 0x0
                                0x20 0xC4 0x9B
*Mar 1 00:28:02.807: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.807: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes 256 esp-sha-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x400
*Mar 1 00:28:02.811: IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= PCP, transform= comp-lzs ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.815: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.815: IPSEC(validate_transform_proposal): no IPSEC
cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.815: ISAKMP (0:4): IPsec policy invalidated proposal
*Mar 1 00:28:02.815: ISAKMP (0:4): Checking IPsec proposal 3
*Mar 1 00:28:02.815: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.815: ISAKMP: attributes in transform:
*Mar 1 00:28:02.815: ISAKMP: authenticator is HMAC-MD5
*Mar 1 00:28:02.815: ISAKMP: encaps is 61443
*Mar 1 00:28:02.815: ISAKMP: key length is 128
*Mar 1 00:28:02.819: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.819: ISAKMP: SA life duration (VPI) of 0x0 0x20
                                0xC4 0x9B
*Mar 1 00:28:02.819: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.819: ISAKMP (0:4): Checking IPsec proposal 3
*Mar 1 00:28:02.819: ISAKMP (0:4): transform 1, IPPCP LZS
*Mar 1 00:28:02.819: ISAKMP: attributes in transform:
*Mar 1 00:28:02.819: ISAKMP: encaps is 61443
*Mar 1 00:28:02.819: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.823: ISAKMP: SA life duration (VPI) of 0x0 0x20
                                0xC4 0x9B
*Mar 1 00:28:02.823: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.823: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x400
*Mar 1 00:28:02.827: IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= PCP, transform= comp-lzs ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.827: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.827: IPSEC(validate_transform_proposal): no IPSEC
cryptomap exists for local address 172.16.142.191
```



```

*Mar 1 00:28:02.827: ISAKMP (0:4): IPsec policy invalidated proposal
*Mar 1 00:28:02.831: ISAKMP (0:4): Checking IPsec proposal 4
*Mar 1 00:28:02.831: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.831: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.831: ISAKMP:     authenticator is HMAC-SHA
*Mar 1 00:28:02.831: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.831: ISAKMP:     key length is 128
*Mar 1 00:28:02.831: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.831: ISAKMP:     SA life duration (VPI) of   0x0
                                0x20 0xC4 0x9B
*Mar 1 00:28:02.831: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.835: ISAKMP (0:4): Checking IPsec proposal 4
*Mar 1 00:28:02.835: ISAKMP (0:4): transform 1, IPsec LZS
*Mar 1 00:28:02.835: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.835: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.835: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.835: ISAKMP:     SA life duration (VPI) of   0x0 0x20
                                0xC4 0x9B
*Mar 1 00:28:02.835: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.835: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
  local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
  remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes esp-sha-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x400
*Mar 1 00:28:02.839: IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
  local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
  remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
  protocol= PCP, transform= comp-lzs ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.843: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.843: IPSEC(validate_transform_proposal): no IPSEC
  cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.843: ISAKMP (0:4): IPsec policy invalidated proposal
*Mar 1 00:28:02.843: ISAKMP (0:4): Checking IPsec proposal 5
*Mar 1 00:28:02.843: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.843: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.843: ISAKMP:     authenticator is HMAC-MD5
*Mar 1 00:28:02.843: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.843: ISAKMP:     key length is 256
*Mar 1 00:28:02.847: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.847: ISAKMP:     SA life duration (VPI) of   0x0
                                0x20 0xC4 0x9B
*Mar 1 00:28:02.847: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.847: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
  local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
  remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes 256 esp-md5-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x400
*Mar 1 00:28:02.851: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.851: IPSEC(validate_transform_proposal): no IPSEC
  cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.851: ISAKMP (0:4): IPsec policy invalidated proposal
*Mar 1 00:28:02.851: ISAKMP (0:4): Checking IPsec proposal 6
*Mar 1 00:28:02.851: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.851: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.851: ISAKMP:     authenticator is HMAC-SHA
*Mar 1 00:28:02.855: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.855: ISAKMP:     key length is 256

```

```

*Mar 1 00:28:02.855: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.855: ISAKMP: SA life duration (VPI) of 0x0
                                0x20 0xC4 0x9B
*Mar 1 00:28:02.855: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.855: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes 256 esp-sha-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x400
*Mar 1 00:28:02.859: IPSEC(kei_proxy): head = test, map->ivrf =
*Mar 1 00:28:02.859: IPSEC(validate_transform_proposal): no IPSEC
                                cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.859: ISAKMP (0:4): IPSec policy invalidated proposal
*Mar 1 00:28:02.859: ISAKMP (0:4): Checking IPSec proposal 7
*Mar 1 00:28:02.859: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.863: ISAKMP: attributes in transform:
*Mar 1 00:28:02.863: ISAKMP: authenticator is HMAC-MD5
*Mar 1 00:28:02.863: ISAKMP: encaps is 61443
*Mar 1 00:28:02.863: ISAKMP: key length is 128
*Mar 1 00:28:02.863: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.863: ISAKMP: SA life duration (VPI) of 0x0 0x20
                                0xC4 0x9B
*Mar 1 00:28:02.863: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.863: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x400
*Mar 1 00:28:02.867: IPSEC(kei_proxy): head = test, map->ivrf =
*Mar 1 00:28:02.867: IPSEC(validate_transform_proposal): no IPSEC
                                cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.867: ISAKMP (0:4): IPSec policy invalidated proposal
*Mar 1 00:28:02.867: ISAKMP (0:4): Checking IPSec proposal 8
*Mar 1 00:28:02.871: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.871: ISAKMP: attributes in transform:
*Mar 1 00:28:02.871: ISAKMP: authenticator is HMAC-SHA
*Mar 1 00:28:02.871: ISAKMP: encaps is 61443
*Mar 1 00:28:02.871: ISAKMP: key length is 128
*Mar 1 00:28:02.871: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.871: ISAKMP: SA life duration (VPI) of 0x0
                                0x20 0xC4 0x9B
*Mar 1 00:28:02.871: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.875: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes esp-sha-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x400
*Mar 1 00:28:02.875: IPSEC(kei_proxy): head = test, map->ivrf =
*Mar 1 00:28:02.875: IPSEC(validate_transform_proposal): no IPSEC
                                cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.879: ISAKMP (0:4): IPSec policy invalidated proposal
*Mar 1 00:28:02.879: ISAKMP (0:4): Checking IPSec proposal 9
*Mar 1 00:28:02.879: ISAKMP: transform 1, ESP_3DES
*Mar 1 00:28:02.879: ISAKMP: attributes in transform:
*Mar 1 00:28:02.879: ISAKMP: authenticator is HMAC-MD5
*Mar 1 00:28:02.879: ISAKMP: encaps is 61443
*Mar 1 00:28:02.879: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.879: ISAKMP: SA life duration (VPI) of 0x0 0x20

```



```

*Mar 1 00:28:03.179: ISAKMP (0:4): Node 1783469429, Input =
                                IKE_MSG_FROM_IPSEC, IKE_SPI_REPLY
*Mar 1 00:28:03.179: ISAKMP (0:4): Old State = IKE_QM_SPI_STARVE
                                New State = IKE_QM_R_QM2
*Mar 1 00:28:03.239: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:03.247: ISAKMP: Locking peer struct 0x82C88D44, IPSEC
                                refcount 1 for for stuff_ke
*Mar 1 00:28:03.247: ISAKMP (0:4): Creating IPsec SAs
*Mar 1 00:28:03.251: inbound SA from 171.69.89.82 to 172.16.142.191
                                (f/i) 0/ 0
                                (proxy 192.168.1.3 to 172.16.142.191)
*Mar 1 00:28:03.251: has spi 0x1EAC399E and conn_id 2000 and
                                flags 400
*Mar 1 00:28:03.263: IPSEC(create_sa): sa created,
                                (sa) sa_dest= 171.69.89.82, sa_prot= 50,
                                sa_spi= 0x1CD14C06(483478534),
                                sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 2001
*Mar 1 00:28:06.675: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:06.679: ISAKMP: set new node -2064779316 to QM_IDLE
*Mar 1 00:28:06.687: ISAKMP (0:4): processing HASH payload. message
                                ID = -2064779316
*Mar 1 00:28:06.687: ISAKMP (0:4): processing SA payload. message
                                ID = -2064779316
*Mar 1 00:28:06.687: ISAKMP (0:4): Checking IPsec proposal 1
*Mar 1 00:28:06.687: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:06.687: ISAKMP: attributes in transform:
*Mar 1 00:28:06.691: ISAKMP: authenticator is HMAC-MD5
*Mar 1 00:28:06.691: ISAKMP: encaps is 61443
*Mar 1 00:28:06.691: ISAKMP: key length is 256
*Mar 1 00:28:06.691: ISAKMP: SA life type in seconds
*Mar 1 00:28:06.691: ISAKMP: SA life duration (VPI) of 0x0 0x20
0xC4 0x9B
*Mar 1 00:28:06.691: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:06.691: ISAKMP (0:4): Checking IPsec proposal 1
*Mar 1 00:28:06.691: ISAKMP (0:4): transform 1, IPPCP LZS
*Mar 1 00:28:06.691: ISAKMP: attributes in transform:
*Mar 1 00:28:06.695: ISAKMP: encaps is 61443
*Mar 1 00:28:06.695: ISAKMP: SA life type in seconds
*Mar 1 00:28:06.695: ISAKMP: SA life duration (VPI) of 0x0 0x20
0xC4 0x9B
*Mar 1 00:28:06.695: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:06.835: IPSEC(spi_response): getting spi 3561761534 for SA
                                from 172.16.142.191 to 171.69.89.82 for prot 3
*Mar 1 00:28:06.835: ISAKMP: received ke message (2/1)
*Mar 1 00:28:07.127: ISAKMP (0:4): sending packet to 171.69.89.82
                                my_port 4500 peer_port 4500 (R) QM_IDLE
*Mar 1 00:28:07.127: ISAKMP (0:4): Node -2064779316, Input =
                                IKE_MSG_FROM_IPSEC, IKE_SPI_REPLY
*Mar 1 00:28:07.127: ISAKMP (0:4): Old State = IKE_QM_SPI_STARVE
                                New State = IKE_QM_R_QM2
*Mar 1 00:28:07.143: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:07.151: ISAKMP: Locking peer struct 0x82C88D44, IPSEC
                                refcount 2 for for stuff_ke
*Mar 1 00:28:07.151: ISAKMP (0:4): Creating IPsec SAs
*Mar 1 00:28:07.151: inbound SA from 171.69.89.82 to
                                172.16.142.191 (f/i) 0/ 0
                                (proxy 192.168.1.3 to 10.100.100.0)
*Mar 1 00:28:07.151: has spi 0xD44C2AFE and conn_id 2002
                                and flags 400
*Mar 1 00:28:07.151: lifetime of 2147483 seconds

```

```
*Mar 1 00:28:07.151:          has client flags 0x10
*Mar 1 00:28:07.151:          outbound SA from 172.16.142.191 to
                               171.69.89.82 (f/i) 0/ 0 (proxy 10.100.100.0
                               to 192.168.1.3 ),
(sa) sa_dest= 171.69.89.82, sa_prot= 50,
    sa_spi= 0x9A12903F(2584907839),
    sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 2003
*Mar 1 00:28:15.983: ISAKMP (0:3): purging node -457362469
*Mar 1 00:28:22.863: ISAKMP (0:4): received packet from 171.69.89.82
                               dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:22.863: ISAKMP: set new node 442126453 to QM_IDLE
*Mar 1 00:28:22.867: ISAKMP (0:4): processing HASH payload. message
                               ID = 442126453
*Mar 1 00:28:22.867: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                               spi 0, message ID = 442126453, sa = 82443410
*Mar 1 00:28:22.867: ISAKMP (0:4): deleting node 442126453 error
                               FALSE reason "informational (in) state 1"
*Mar 1 00:28:22.867: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER,
                               IKE_INFO_NOTIFY
*Mar 1 00:28:22.867: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                               New State = IKE_P1_COMPLETE

*Mar 1 00:28:28.643: ISAKMP (0:3): purging node -118562945
*Mar 1 00:28:28.651: ISAKMP (0:3): purging node 24622273
*Mar 1 00:28:28.659: ISAKMP (0:3): purging node -1276758667
*Mar 1 00:28:38.667: ISAKMP (0:3): purging SA., sa=8242A5AC,
                               delme=8242A5AC
*Mar 1 00:28:38.667: ISAKMP (0:3): purging node 452292968
*Mar 1 00:28:38.667: ISAKMP (0:3): purging node 1331016929
*Mar 1 00:28:38.667: ISAKMP (0:3): returning address 192.168.1.2 to pool
*Mar 1 00:28:38.667: ISAKMP: Unlocking IKE struct 0x827CBB44 for
                               declare_sa_dead(), count 0
*Mar 1 00:28:42.891: ISAKMP (0:4): received packet from 171.69.89.82
                               dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:42.891: ISAKMP: set new node 505402511 to QM_IDLE
*Mar 1 00:28:42.895: ISAKMP (0:4): processing HASH payload. message
                               ID = 505402511
*Mar 1 00:28:42.895: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                               spi 0, message ID = 505402511, sa = 82443410
*Mar 1 00:28:42.895: ISAKMP (0:4): deleting node 505402511 error
                               FALSE reason "informational (in) state 1"
*Mar 1 00:28:42.895: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER,
                               IKE_INFO_NOTIFY
*Mar 1 00:28:42.895: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                               New State = IKE_P1_COMPLETE

*Mar 1 00:28:52.707: ISAKMP (0:4): purging node 1973520613
*Mar 1 00:28:53.255: ISAKMP (0:4): purging node 1783469429
*Mar 1 00:28:57.155: ISAKMP (0:4): purging node -2064779316
*Mar 1 00:29:02.919: ISAKMP (0:4): received packet from 171.69.89.82
                               dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:29:02.919: ISAKMP: set new node -526976638 to QM_IDLE
*Mar 1 00:29:02.923: ISAKMP (0:4): processing HASH payload.
                               message ID = -526976638
*Mar 1 00:29:02.923: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                               spi 0, message ID = -526976638, sa = 82443410
*Mar 1 00:29:02.923: ISAKMP (0:4): deleting node -526976638 error
                               FALSE reason "informational (in) state 1"
*Mar 1 00:29:02.923: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER,
                               IKE_INFO_NOTIFY
*Mar 1 00:29:02.923: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                               New State = IKE_P1_COMPLETE

*Mar 1 00:29:12.867: ISAKMP (0:4): purging node 442126453
```

```
*Mar 1 00:29:22.951: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:29:22.955: ISAKMP: set new node 1718060095 to QM_IDLE
*Mar 1 00:29:22.955: ISAKMP (0:4): processing HASH payload. message
                                ID = 1718060095
*Mar 1 00:29:22.955: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                                spi 0, message ID = 1718060095, sa = 82443410
*Mar 1 00:29:22.955: ISAKMP (0:4): deleting node 1718060095 error
                                FALSE reason "informational (in) state 1"
*Mar 1 00:29:22.959: ISAKMP (0:4): Input = IKE_MESG_FROM_PEER,
                                IKE_INFO_NOTIFY
*Mar 1 00:29:22.959: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                                New State = IKE_P1_COMPLETE
```

## [Informazioni correlate](#)

- [Pagina di supporto per Cisco VPN Client](#)
- [Negoziazione IPsec/protocolli IKE](#)
- [Documentazione e supporto tecnico – Cisco Systems](#)