

# TACACS+ 使用によるレイヤ 2 トンネル プロトコル認証の設定

## 内容

[概要](#)

[前提条件](#)

[要件](#)

[使用するコンポーネント](#)

[表記法](#)

[設定](#)

[ネットワーク図](#)

[TACACS+ サーバ設定](#)

[ルータの設定](#)

[確認](#)

[両方のルータからのShowコマンド出力](#)

[両方のルータからのバージョン出力の表示](#)

[考えられる問題：LAC からの不適切なデバッグ](#)

[不具合の原因：LNS からの不適切なデバッグ](#)

[LNS アカウンティングレコード](#)

[トラブルシューティング](#)

[トラブルシューティングのためのコマンド](#)

[デバッグ出力](#)

[関連情報](#)

## 概要

このドキュメントでは、TACACS+ 使用によるレイヤ 2 トンネル プロトコル ( L2TP ) の設定方法について説明します。これには、L2TPアクセスコンセントレータ(LAC)TACACS+サーバ、L2TPネットワークサーバ(LNS)TACACS+サーバ、およびルータの設定例が含まれます。

## 前提条件

### 要件

このドキュメントに特有の要件はありません。

### 使用するコンポーネント

このドキュメントの情報は、次のソフトウェアとハードウェアのバージョンに基づいています。

- Cisco 2511 ルータ 2 台
- Cisco IOS(R) ソフトウェア リリース 12.0 ( 2 ) .T
- Cisco Secure UNIX、Cisco Secure Windows、またはTACACS+フリーウェア

このドキュメントの情報は、特定のラボ環境にあるデバイスに基づいて作成されました。このドキュメントで使用するすべてのデバイスは、初期（デフォルト）設定の状態から起動しています。対象のネットワークが実稼働中である場合には、どのようなコマンドについても、その潜在的な影響について確実に理解しておく必要があります。

## 表記法

ドキュメントの表記法の詳細は、「[シスコテクニカルティップスの表記法](#)」を参照してください。


## 設定

このセクションでは、このドキュメントで説明する機能を設定するために必要な情報を提供しています。

注：この文書で使用されているコマンドの詳細を調べるには、「Command Lookup ツール」を使用してください（登録ユーザのみ）。

## ネットワーク図

このドキュメントでは、次の図で示されるネットワーク設定を使用しています。

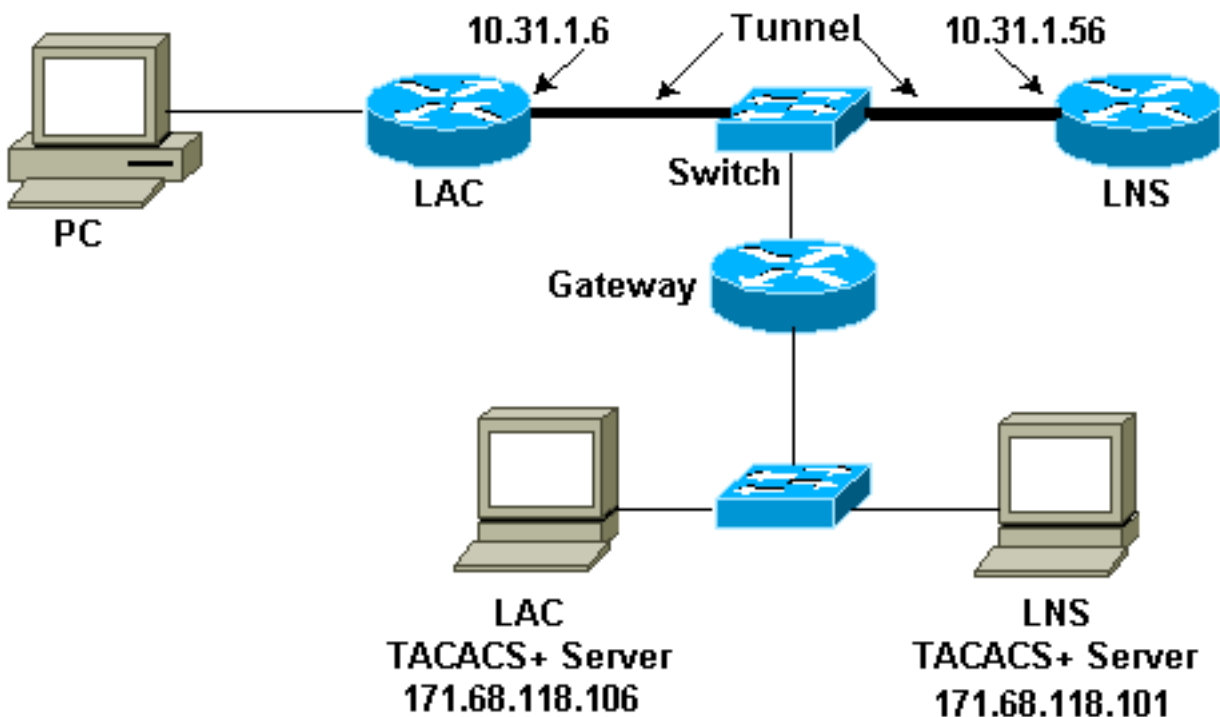

## TACACS+ サーバ設定

### LAC設定 : Cisco Secure UNIX

```
# ./ViewProfile -p 9900 -u rtp.cisco.com user = rtp.cisco.com{
service=ppp {
protocol=vpdn {
set tunnel-type=l2tp
set tunnel-id=rtp_tunnel
set ip-addresses="10.31.1.56"
}
}

}

# ./ViewProfile -p 9900 -u rtp_tunnel
user = rtp_tunnel{
password = chap "FGHIJ"
service=ppp {
protocol=lcp {
}
}
protocol=ip {
}
}

}

}
```

## [LNSの設定 : Cisco Secure UNIX](#)

```
# ./ViewProfile -p 9900 -u janedoe@rtp.cisco.com
user = janedoe@rtp.cisco.com{
password = chap "rtprules"
service=ppp {
protocol=lcp {
}
}
protocol=ip {
}
}

}

# ./ViewProfile -p 9900 -u ABCDE
user = ABCDE{
password = chap "FGHIJ"
service=ppp {
protocol=lcp {
}
}
protocol=ip {
}
}

}

}
```

## [LAC設定 – Cisco Secure Windows](#)

Cisco Secure WindowsでLACを設定するには、次の手順を実行します。

1. ユーザrtp\_tunnelを通常のPPPユーザ ( ユーザ設定のパスワードまたはCHAPパスワード ) として設定します。
2. ユーザをgroup\_1に入れ、サービスPPP/IPをチェックします。このボックスが表示されている場合は、[PPP/LCP]をオンにします。
3. ユーザrtp.cisco.comを設定します。パスワードは「Do not care」です。
4. [グループ設定]に表示されていないオプションがある場合は、[インターフェイスの設定]に移

動し、ボックスを選択して表示します。

5. ユーザをgroup\_2に入れ、サービスPPP/VPDNを確認します。tunnel-idはrtp\_tunnel、ipアドレスリストは10.31.1.56で、その下にある長方形のカスタム属性ボックスにtunnel-type=l2tpと入力します。

## LNSの設定 : Cisco Secure Windows

Cisco Secure Windows用にLNSを設定するには、次の手順を実行します。

1. ユーザ「ABCDE」および「janedoe@rtp.cisco.com」を通常のPPPユーザ ( ユーザ設定のパスワードおよびCHAPパスワード ) として設定します。
2. ユーザをgroup\_3に入れ、サービスPPP/IPをチェックします。このボックスが表示されている場合は、[PPP/LCP]をオンにします。

## LAC TACACS+フリーウェア設定

```
user = rtp.cisco.com {
service = ppp protocol = vpdn {
tunnel-type = l2tp
tunnel-id = rtp_tunnel
ip-addresses = "10.31.1.56"
}
}
```

```
user = rtp_tunnel {
chap = cleartext "FGHIJ"
service = ppp protocol = ip {
default attribute = permit
}
}
```

## LNS TACACS+フリーウェア設定

```
key = "cisco"
```

```
user = janedoe@rtp.cisco.com {
chap = cleartext "rtprules"
service = ppp protocol = ip {
default attribute = permit
}
}
```

```
user = ABCDE {
chap = cleartext "FGHIJ"
service = ppp protocol = ip {
default attribute = permit
}
}
```

## ルータの設定

LAC ルータの設定
version 12.0

```
service timestamps debug datetime
service timestamps log uptime
no service password-encryption
!
hostname LAC
!
aaa new-model
aaa authentication ppp default if-needed tacacs+
aaa authorization network default tacacs+
aaa accounting network default start-stop tacacs+
enable secret level 7 5 $1$Dj3K$9jkyuJR6fJV2JO./Qt01C1
enable password ww
!
username john password 0 doe
ip subnet-zero
no ip domain-lookup
!
vpdn enable
!
vpdn search-order domain
!
interface Loopback0
no ip address
no ip directed-broadcast
!
interface Ethernet0
ip address 10.31.1.144 255.255.255.0
no ip directed-broadcast
!
interface Serial0
no ip address
no ip directed-broadcast
no ip mroute-cache
shutdown
!
interface Serial1
no ip address
no ip directed-broadcast
shutdown
!
interface Async1
ip unnumbered Ethernet0
no ip directed-broadcast
ip tcp header-compression passive
encapsulation ppp
async mode dedicated
peer default ip address pool default
ppp authentication chap
!
ip local pool default 10.5.5.5 10.5.5.50
ip classless
ip route 0.0.0.0 0.0.0.0 10.31.1.1
!
tacacs-server host 171.68.118.106
tacacs-server key cisco
!
line con 0
transport input none
line 1
exec-timeout 0 0
autoselect during-login
autoselect ppp
modem Dialin
transport preferred none
```

```
transport output none
speed 38400
flowcontrol hardware
line 2 16
modem InOut
transport input all
speed 38400
flowcontrol hardware
line aux 0
line vty 0 4
password WW
!
end
```

## LNS ルータの設定

```
version 12.0
service timestamps debug datetime
service timestamps log uptime
no service password-encryption
!
hostname LNS
!
aaa new-model
aaa authentication ppp default if-needed tacacs+
aaa authorization network default tacacs+
aaa accounting network default start-stop tacacs+
enable secret 5 $1$wfMI$ixUG9hw7yhmsv.87.krpZ1
enable password WW
!
username john password 0 doe
ip subnet-zero
no ip domain-lookup
!
vpdn enable
!
vpdn-group 1
accept dialin l2tp virtual-template 1 remote rtp_tunnel
local name ABCDE
!
interface Ethernet0
ip address 10.31.1.56 255.255.255.0
no ip directed-broadcast
!
interface Virtual-Template1
ip unnumbered Ethernet0
no ip directed-broadcast
peer default ip address pool default
ppp authentication chap
!
interface Serial0
no ip address
no ip directed-broadcast
no ip mroute-cache
shutdown
!
interface Serial1
no ip address
no ip directed-broadcast
shutdown
!
interface Async1
```

```
ip unnumbered Ethernet0
no ip directed-broadcast
ip tcp header-compression passive
encapsulation ppp
async mode dedicated
peer default ip address pool setup_pool
ppp authentication chap pap
!
!
!
!
ip local pool default 10.6.1.1 10.6.1.2
ip classless
ip route 0.0.0.0 0.0.0.0 10.31.1.1
!
tacacs-server host 171.68.118.101
tacacs-server key cisco
!
line con 0
transport input none
line 1 8
autoselect during-login
autoselect ppp
modem Dialin
speed 115200
flowcontrol hardware
line aux 0
line vty 0 4
password WW
!
end
```

## 確認

### 両方のルータからのShowコマンド出力

ここでは、設定が正しく機能していることを確認するために使用する情報を示します。

一部の show コマンドは[アウトプット インタープリタ ツールによってサポートされています \(登録ユーザ専用\)](#)。このツールを使用することによって、show コマンド出力の分析結果を表示できます。

### LACルータ

```
LAC#show vpdn session
```

```
L2TP Session Information (Total tunnels=1 sessions=1)
```

```
LocID RemID TunID Intf Username State Last Chg
1 1 76 As1 janedoe@rtp.c est 00:00:32
```

```
% No active L2F tunnels
```

```
LAC#show vpdn tunnel
```

```
L2TP Tunnel Information (Total tunnels=1 sessions=1)
```

```
LocID RemID Remote Name State Remote Address Port Sessions
```

```
76 58 ABCDE est 10.31.1.56 1701 1
```

```
% No active L2F tunnels
```

## LNSルータ

```
LNS#show vpdn session
```

```
L2TP Session Information (Total tunnels=1 sessions=1)
```

```
LocID RemID TunID Intf Username State Last Chg  
1 1 58 Vi1 janedoe@rtp.c est 00:01:55
```

```
% No active L2F tunnels
```

```
LNS#show vpdn tunnel
```

```
L2TP Tunnel Information (Total tunnels=1 sessions=1)
```

```
LocID RemID Remote Name State Remote Address Port Sessions  
58 76 rtp_tunnel est 10.31.1.144 1701 1
```

```
% No active L2F tunnels
```

## 両方のルータからのバージョン出力の表示

```
LAC#show version
```

```
Cisco Internetwork Operating System Software  
IOS (tm) 2500 Software (C2500-IS-L), Version 12.0(2)T, RELEASE SOFTWARE (fc1)  
Copyright (c) 1986-1998 by cisco Systems, Inc.  
Compiled Wed 09-Dec-98 02:31 by dschwart  
Image text-base: 0x030403B0, data-base: 0x00001000
```

```
ROM: System Bootstrap, Version 11.0(10c), SOFTWARE  
BOOTFLASH: 3000 Bootstrap Software (IGS-BOOT-R), Version 11.0(10c), RELEASE SOFTWARE (fc1)
```

```
LAC uptime is 20 hours, 22 minutes  
System restarted by reload at 16:13:55 UTC Fri Jan 29 1999  
System image file is "flash:c2500-is-l.120-2.T"
```

```
cisco 2511 (68030) processor (revision M) with 14336K/2048K bytes of memory.  
Processor board ID 07041186, with hardware revision 00000000  
Bridging software.  
X.25 software, Version 3.0.0.  
1 Ethernet/IEEE 802.3 interface(s)  
2 Serial network interface(s)  
16 terminal line(s)  
32K bytes of non-volatile configuration memory.  
16384K bytes of processor board System flash (Read ONLY)  
Configuration register is 0x2102
```

## 考えられる問題 : LAC からの不適切なデバッグ

このデバッグ出力には、ルータの設定が誤っているときにシーケンスが停止する箇所に関するコメントが含まれています。

```
LAC#show debug
```

```
General OS:  
AAA Authentication debugging is on  
AAA Authorization debugging is on
```



```
AAA Accounting debugging is on
VPN:
L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on
LAC#
Jan 30 12:17:09: As1 AAA/AUTHOR/FSM: (0): LCP succeeds trivially
20:03:18: %LINK-3-UPDOWN: Interface Async1, changed state to up
Jan 30 12:17:09: As1 VPDN: Looking for tunnel -- rtp.cisco.com --
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0 adapter=0
port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x278B90) user='rtp.cisco.com'
ruser='' port='Async1'
rem_addr='' authn_type=NONE service=LOGIN priv=0
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447): Port='Async1'
list='default' service=NET
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) user='rtp.cisco.com'
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447) found list "default"
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) Method=TACACS+
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): user=rtp.cisco.com
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV protocol=vpdn
Jan 30 12:17:09: TAC+: (898425447): received author response status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR (898425447): Post authorization status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-type=l2tp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-id=rtp_tunnel
!--- If the wrong tunnel termination IP address !--- is in the profile: Jan 30 12:56:30:
AAA/AUTHOR/VPDN: Processing AV ip-addresses=1.1.1.1
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV ip-addresses=10.31.1.56
Jan 30 12:17:09: As1 VPDN: Get tunnel info for rtp.cisco.com with LAC
rtp_tunnel, IP 10.31.1.56
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x278B90) user='rtp.cisco.com'
ruser='' port='Async1'
rem_addr='' authn_type=NONE service=LOGIN priv=0
!--- If the wrong tunnel termination IP !--- address is in the profile: Jan 30 12:56:30: As1
VPDN: Forward to address 1.1.1.1
!--- The connection eventually drops on this end and no !--- debug is seen on the other end. Jan
30 12:17:09: As1 VPDN: Forward to address 10.31.1.56 Jan 30 12:17:09: As1 VPDN: Forwarding...
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1 Jan 30 12:17:09: AAA: name=Async1
flags=0x11 type=4 shelf=0 slot=0 adapter=0 port=1 channel=0 Jan 30 12:17:09: AAA/AUTHEN:
create_user (0x22CDEC) user='janedoe@rtp.cisco.com' ruser='' port='Async1' rem_addr='async'
authn_type=CHAP service=PPP priv=1 Jan 30 12:17:09: As1 VPDN: Bind interface direction=1 Jan 30
12:17:09: Tnl/C1 74/1 L2TP: Session FS enabled Jan 30 12:17:09: Tnl/C1 74/1 L2TP: Session state
change from idle to wait-for-tunnel Jan 30 12:17:09: As1 74/1 L2TP: Create session Jan 30
12:17:09: Tnl 74 L2TP: SM State idle Jan 30 12:17:09: Tnl 74 L2TP: O SCCRQ Jan 30 12:17:09: Tnl
74 L2TP: Tunnel state change from idle to wait-ctl-reply Jan 30 12:17:09: Tnl 74 L2TP: SM State
wait-ctl-reply Jan 30 12:17:09: As1 VPDN: janedoe@rtp.cisco.com is forwarded Jan 30 12:17:10:
Tnl 74 L2TP: I SCCRP from ABCDE Jan 30 12:17:10: Tnl 74 L2TP: Got a challenge from remote peer,
ABCDE Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1 Jan 30 12:17:10: AAA/AUTHEN:
create_user (0x23232C) user='rtp_tunnel' ruser='' port='' rem_addr='' authn_type=CHAP
service=PPP priv=1 Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): port='' list='default'
action=SENDAUTH service=PPP Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): found list default
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = UNKNOWN Jan 30 12:17:10: AAA/AUTHEN/START
(1598999635): Method=TACACS+ Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193
id=1598999635 Jan 30 12:17:10: TAC+: ver=192 id=1598999635 received AUTHEN status = ERROR Jan 30
12:17:10: AAA: parse name= idb type=-1 tty=-1 Jan 30 12:17:10: AAA/AUTHEN: create_user
```

```
(0x232470) user='rtp_tunnel' ruser='' port='' rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: TAC+: ver=192 id=3400389836 received AUTHEN status = PASS Jan 30 12:17:10:
AAA/AUTHEN: free_user (0x232470) user='rtp_tunnel' ruser='' port='' rem_addr='' authen_type=CHAP
service=PPP priv=1 Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = PASS Jan 30 12:17:10:
AAA/AUTHEN: free_user (0x23232C) user='rtp_tunnel' ruser='' port='' rem_addr='' authen_type=CHAP
service=PPP priv=1 !--- Change the CHAP passwords. The password rtp_tunnel !--- in the LAC
TACACS+ users' file does not match the !--- password for "local name ABCDE" from the router !---
in the LNS TACACS+ users' file: Jan 30 13:24:23: Tnl 88 L2TP: Tunnel Authentication fails for
ABCDE
Jan 30 13:24:23: Tnl 88 L2TP: Expected 7C959CA96C1E4AAA68BB3D481249488B
Jan 30 13:24:23: Tnl 88 L2TP: Got E4118FB4C8C4467EA4BF8872276C20B2

Jan 30 12:17:10: Tnl 74 L2TP: Got a response from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x22FBA4) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): found list default
Jan 30 12:17:10: AAA/AUTHEN (2964849625): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=2964849625
20:03:20: %LINEPROTO-5-UPDOWN: Line protocol on Interface Async1,
changed state to up
Jan 30 12:17:11: TAC+: ver=192 id=2964849625 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x22FC8C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel is not open
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel is not open
Jan 30 12:17:11: TAC+: ver=192 id=1474818051 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FC8C) user='rtp_tunnel' ruser=''
port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (2964849625): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FBA4) user='rtp_tunnel' ruser=''
port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel state change from wait-ctl-reply to
established
Jan 30 12:17:11: Tnl 74 L2TP: O SCCCN to ABCDE tnlid 56
Jan 30 12:17:11: Tnl 74 L2TP: SM State established
Jan 30 12:17:11: As1 74/1 L2TP: O ICRQ to ABCDE 56/0
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-for-tunnel
to wait-reply
Jan 30 12:17:11: Tnl 74 L2TP: Dropping old CM, Ns 0, expected 1
Jan 30 12:17:11: As1 74/1 L2TP: O ICCN to ABCDE 56/1
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-reply to
established
```

LAC#

## 不具合の原因 : LNS からの不適切なデバッグ

このデバッグ出力には、ルータの設定が誤っているときにシーケンスが停止する箇所に関するコメントが含まれています。

LNS#**show debug**

General OS:

AAA Authentication debugging is on

```

AAA Authorization debugging is on
AAA Accounting debugging is on
VPN:
L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on
LNS#
Jan 30 12:17:09: L2TP: I SCCRQ from rtp_tunnel tnl 74
Jan 30 12:17:09: Tnl 56 L2TP: New tunnel created for remote rtp_tunnel,
address 10.31.1.144

!--- Instead of the LAC sending the "rtp_tunnel" !--- (see the user profile on the TACACS+
server), it sends "junk". !--- We are expecting "rtp_tunnel" as in "accept dialin l2tp !---
virtual-template 1 remote rtp_tunnel" in this configuration: Jan 30 13:05:16: L2TP: I SCCRQ from
junk tnl 81
Jan 30 13:05:16: L2X: Never heard of junk
Jan 30 13:05:16: L2TP: Could not find info block for junk
Jan 30 12:17:09: Tnl 56 L2TP: Got a challenge in SCCRQ, rtp_tunnel
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x21F6D0) user='ABCDE'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): found list default
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = UNKNOWN
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): Method=TACACS+
Jan 30 12:17:09: TAC+: send AUTHEN/START packet ver=193 id=3194595626
Jan 30 12:17:09: TAC+: ver=192 id=3194595626 received AUTHEN status = ERROR
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x2281AC) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: TAC+: ver=192 id=3639011179 received AUTHEN status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x2281AC) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x21F6D0) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: Tnl 56 L2TP: O SCCRP to rtp_tunnel tnlid 74
Jan 30 12:17:09: Tnl 56 L2TP: Tunnel state change from idle to wait-ctl-reply
Jan 30 12:17:10: Tnl 56 L2TP: O Resend SCCRP, flg TLF, ver 2, len 152,
tnl 74, cl 0, ns 0, nr 1
Jan 30 12:17:10: Tnl 56 L2TP: I SCCCN from rtp_tunnel tnl 74
Jan 30 12:17:10: Tnl 56 L2TP: Got a Challenge Response in SCCCN from rtp_tunnel
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x227F3C) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/STARTTranslating "rtp.cisco.com"
(4117701992): port='' list='default' action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): found list default
Jan 30 12:17:10: AAA/AUTHEN (4117701992): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=4117701992
Jan 30 12:17:11: TAC+: ver=192 id=4117701992 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: TAC+: ver=192 id=2827432721 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (4117701992): status = PASS

```

```

Jan 30 12:17:11: AAA/AUTHEN: free_user (0x227F3C) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel state change from wait-ctl-reply
to established
Jan 30 12:17:11: Tnl 56 L2TP: SM State established
Jan 30 12:17:11: Tnl 56 L2TP: I ICRQ from rtp_tunnel tnl 74
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session FS enabled
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: New session created
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: O ICRP to rtp_tunnel 74/1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-for-tunnel
to wait-connect
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: I ICCN from rtp_tunnel tnl 74, cl 1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-connect
to established
Jan 30 12:17:11: Vi1 VTEMPLATE: Reuse Vi1, recycle queue size 0
Jan 30 12:17:11: Vi1 VTEMPLATE: Hardware address 00e0.1e68.942c
Jan 30 12:17:11: Vi1 VPDN: Virtual interface created for janedoe@rtp.cisco.com
Jan 30 12:17:11: Vi1 VPDN: Set to Async interface
Jan 30 12:17:11: Vi1 VPDN: Clone from Vtemplate 1 filterPPP=0 blocking
Jan 30 12:17:11: Vi1 VTEMPLATE: Has a new cloneblk vtemplate, now it has
vtemplate
Jan 30 12:17:11: Vi1 VTEMPLATE: ***** CLONE VACCESS1 *****
Jan 30 12:17:11: Vi1 VTEMPLATE: Clone from Virtual-Templatel
interface Virtual-Access1
default ip address
no ip address
encap ppp
ip unnumbered Ethernet0
peer default ip address pool default
ppp authentication chap
ip unnum ethernet0
peer def ip address pool default
ppp authen chap
end

Jan 30 12:17:12: janedoe@rtp.cisco.com 56/1 L2TP: Session with no hwidb
20:12:14: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up
Jan 30 12:17:13: Vi1 AAA/AUTHOR/FSM: (0): LCP succeeds trivially
Jan 30 12:17:13: Vi1 VPDN: Bind interface direction=2
Jan 30 12:17:13: Vi1 VPDN: PPP LCP accepted rcv CONFACK
Jan 30 12:17:13: Vi1 VPDN: PPP LCP accepted sent CONFACK
Jan 30 12:17:13: Vi1 L2X: Discarding packet because of no mid/session
Jan 30 12:17:13: AAA: parse name=Virtual-Access1 idb type=21 tty=-1
Jan 30 12:17:13: AAA: name=Virtual-Access1 flags=0x11 type=5 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:13: AAA/AUTHEN: create_user (0x1F5100) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): port='Virtual-Access1' list=''
action=LOGIN service=PPP
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): using "default" list
Jan 30 12:17:13: AAA/AUTHEN (562517969): status = UNKNOWN
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): Method=TACACS+
Jan 30 12:17:13: TAC+: send AUTHEN/START packet ver=193 id=562517969
Jan 30 12:17:14: TAC+: ver=192 id=562517969 received AUTHEN status = GETPASS
Jan 30 12:17:14: AAA: parse name=Virtual-Access1 idb type=-1 tty=-1
Jan 30 12:17:14: AAA: name=Virtual-Access1 flags=0x11 type=6 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:14: AAA/AUTHEN: create_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1

```

Jan 30 12:17:14: TAC+: ver=192 id=2384902384 received AUTHEN status = PASS  
Jan 30 12:17:14: AAA/AUTHEN: free\_user (0x1F5270) user='janedoe@rtp.cisco.com'  
ruser='' port='Virtual-Access1' rem\_addr='' authen\_type=CHAP  
service=PPP priv=1

*!--- Here, the tunnel is ok, but the user !--- enters a bad password in dialing: Jan 30*  
**13:39:44: AAA/AUTHEN (1958732267): status = FAIL**

**21:34:45: %VPDN-6-AUTHENFAIL: L2F HGW 10.31.1.144, AAA authentication  
failure for Vii user**

**janedoe@rtp.cisco.com; Authentication failure**

Jan 30 12:17:14: AAA/AUTHEN (562517969): status = PASS  
Jan 30 12:17:14: Vii AAA/AUTHOR/LCP: Authorize LCP  
Jan 30 12:17:14: AAA/AUTHOR/LCP Vii (413543389): Port='Virtual-Access1'  
list='' service=NET  
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vii (413543389) user='janedoe@rtp.cisco.com'  
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vii (413543389) send AV service=ppp  
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vii (413543389) send AV protocol=lcp  
Jan 30 12:17:14: AAA/AUTHOR/LCP (413543389) found list "default"  
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vii (413543389) Method=TACACS+  
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): user=janedoe@rtp.cisco.com  
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV service=ppp  
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV protocol=lcp  
Jan 30 12:17:14: TAC+: (413543389): received author response status = PASS\_ADD  
Jan 30 12:17:14: AAA/AUTHOR (413543389): Post authorization status = PASS\_ADD  
Jan 30 12:17:14: AAA/ACCT/NET/START User janedoe@rtp.cisco.com, Port  
Virtual-Access1, List ""  
Jan 30 12:17:14: AAA/ACCT/NET: Found list "default"  
Jan 30 12:17:14: Vii AAA/AUTHOR/FSM: (0): Can we start IPCP?  
Jan 30 12:17:14: AAA/AUTHOR/FSM Vii (1358526470): Port='Virtual-Access1'  
list='' service=NET  
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vii (1358526470) user='janedoe@rtp.cisco.com'  
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vii (1358526470) send AV service=ppp  
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vii (1358526470) send AV protocol=ip  
Jan 30 12:17:14: AAA/AUTHOR/FSM (1358526470) found list "default"  
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vii (1358526470) Method=TACACS+  
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): user=janedoe@rtp.cisco.com  
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV service=ppp  
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV protocol=ip  
Jan 30 12:17:14: TAC+: (1358526470): received author response status = PASS\_ADD  
Jan 30 12:17:14: AAA/AUTHOR (1358526470): Post authorization status = PASS\_ADD  
Jan 30 12:17:14: Vii AAA/AUTHOR/FSM: We can start IPCP  
Jan 30 12:17:14: TAC+: (1442592025): received acct response status = UNKNOWN  
20:12:16: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,  
changed state to up  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 0.0.0.0  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Processing AV service=ppp  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Processing AV protocol=ip  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Authorization succeeded  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0,  
we want 0.0.0.0  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0,  
we want 10.6.1.1  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Processing AV service=ppp  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Processing AV protocol=ip  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Authorization succeeded  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0,  
we want 10.6.1.1  
Jan 30 12:17:16: Vii AAA/AUTHOR/IPCP: Start. Her address 10.6.1.1,  
we want 10.6.1.1  
Jan 30 12:17:16: AAA/AUTHOR/IPCP Vii (3572380713): Port='Virtual-Access1'  
list='' service=NET  
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vii (3572380713) user='janedoe@rtp.cisco.com'  
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vii (3572380713) send AV service=ppp  
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vii (3572380713) send AV protocol=ip

```
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV addr*10.6.1.1
Jan 30 12:17:16: AAA/AUTHOR/IPCP (3572380713) found list "default"
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) Method=TACACS+
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): user=janedoe@rtp.cisco.com
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV addr*10.6.1.1
Jan 30 12:17:17: TAC+: (3572380713): received author response status = PASS_ADD
Jan 30 12:17:17: AAA/AUTHOR (3572380713): Post authorization status = PASS_ADD
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV addr*10.6.1.1
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Done. Her address 10.6.1.1,
we want 10.6.1.1
```

LNS#

## LNS アカウンティングレコード

これはLNS TACACS+サーバ上にあります。

```
Sat Jan 30 05:27:01 1999 10.31.1.56 janedoe@rtp.cisco.com
Virtual-Access1 unknown
start task_id=4 start_time=917700054 timezone=UTC service=ppp
```

```
Sat Jan 30 05:27:27 1999 10.31.1.56 janedoe@rtp.cisco.com
Virtual-Access1 unknown
stop task_id=4 start_time=917700054 timezone=UTC service=ppp
protocol=ip addr=10.6.1.1 disc-cause=2 disc-cause-ext=1011
pre-bytes-in=0 pre-bytes-out=8
pre-paks-in=0 pre-paks-out=2 bytes_in=862 bytes_out=142
paks_in=19 paks_out=8 pre-session-time=1
```

## トラブルシューティング

ここでは、設定のトラブルシューティングに使用できる情報を示します。

## トラブルシューティングのためのコマンド

注：debug コマンドを使用する前に、「debug コマンドに関する重要な情報」を参照してください。

- **debug aaa authentication** : AAA/TACACS+ 認証に関する情報を表示します。
- **debug aaa authorization** : AAA/TACACS+ 許可に関する情報を表示します。
- **debug aaa accounting** : アカウンティング可能なイベントが発生したときの情報を表示します。このコマンドで表示される情報は、アカウンティング情報のサーバへの転送に使用されるアカウンティング プロトコルに依存しません。
- **debug tacacs+** : TACACS+ に関連する詳細なデバッグ情報を表示します。
- **debug vtemplate** : 仮想テンプレートからクローニングされた時点から、コールが終了して仮想アクセス インターフェイスがダウン状態になるまでの、仮想アクセス インターフェイスのクローニング情報を表示します。
- **debug vpdn errors** : PPP トンネルの確立を阻害するエラー、または確立されたトンネルをクローズする原因になるエラーを表示します。
- **debug vpdn events** : 通常の PPP トンネル確立またはシャットダウンの一部であるイベントに関するメッセージを表示します。

- **debug vpdn l2x-errors** : レイヤ 2 の確立を阻害したり、または通常動作を阻害したりするレイヤ 2 プロトコルのエラーを表示します。
- **debug vpdn l2x-events** : レイヤ2の通常のPPPトンネル確立またはシャットダウンの一部であるイベントに関するメッセージを表示します。

## デバッグ出力

### LAC ルータからの正常なデバッグ

```
LAC#show debug
General OS:
AAA Authentication debugging is on
AAA Authorization debugging is on
AAA Accounting debugging is on
VPN:
L2X protocol events debugging is on
L2X protocol errors debugging is on
VPDN events debugging is on
VPDN errors debugging is on
VTEMPLATE:
Virtual Template debugging is on
LAC#
Jan 30 12:17:09: As1 AAA/AUTHOR/FSM: (0): LCP succeeds trivially
20:03:18: %LINK-3-UPDOWN: Interface Async1, changed state to up
Jan 30 12:17:09: As1 VPDN: Looking for tunnel -- rtp.cisco.com --
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0 adapter=0
port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x278B90) user='rtp.cisco.com'
ruser=''
port='Async1' rem_addr='' authen_type=NONE service=LOGIN priv=0
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447): Port='Async1' list='default'
service=NET
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) user='rtp.cisco.com'
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) send AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN (898425447) found list "default"
Jan 30 12:17:09: AAA/AUTHOR/VPDN: (898425447) Method=TACACS+
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): user=rtp.cisco.com
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/TAC+: (898425447): send AV protocol=vpdn
Jan 30 12:17:09: TAC+: (898425447): received author response status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR (898425447): Post authorization status = PASS_ADD
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV service=ppp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV protocol=vpdn
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-type=l2tp
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV tunnel-id=rtp_tunnel
Jan 30 12:17:09: AAA/AUTHOR/VPDN: Processing AV ip-addresses=10.31.1.56
Jan 30 12:17:09: As1 VPDN: Get tunnel info for rtp.cisco.com with LAC
rtp_tunnel, IP 10.31.1.56
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x278B90) user='rtp.cisco.com' ruser=''
port='Async1' rem_addr='' authen_type=NONE service=LOGIN priv=0
Jan 30 12:17:09: As1 VPDN: Forward to address 10.31.1.56
Jan 30 12:17:09: As1 VPDN: Forwarding...
Jan 30 12:17:09: AAA: parse name=Async1 idb type=10 tty=1
Jan 30 12:17:09: AAA: name=Async1 flags=0x11 type=4 shelf=0 slot=0 adapter=0
port=1 channel=0
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x22CDEC) user='janedoe@rtp.cisco.com'
ruser='' port='Async1' rem_addr='async' authen_type=CHAP
```

```
service=PPP priv=1
Jan 30 12:17:09: As1 VPDN: Bind interface direction=1
Jan 30 12:17:09: Tnl/C1 74/1 L2TP: Session FS enabled
Jan 30 12:17:09: Tnl/C1 74/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:09: As1 74/1 L2TP: Create session
Jan 30 12:17:09: Tnl 74 L2TP: SM State idle
Jan 30 12:17:09: Tnl 74 L2TP: O SCCRQ
Jan 30 12:17:09: Tnl 74 L2TP: Tunnel state change from idle to wait-ctl-reply
Jan 30 12:17:09: Tnl 74 L2TP: SM State wait-ctl-reply
Jan 30 12:17:09: As1 VPDN: janedoe@rtp.cisco.com is forwarded
Jan 30 12:17:10: Tnl 74 L2TP: I SCCRP from ABCDE
Jan 30 12:17:10: Tnl 74 L2TP: Got a challenge from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x23232C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): found list default
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (1598999635): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=1598999635
Jan 30 12:17:10: TAC+: ver=192 id=1598999635 received AUTHEN status = ERROR
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x232470) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: TAC+: ver=192 id=3400389836 received AUTHEN status = PASS
Jan 30 12:17:10: AAA/AUTHEN: free_user (0x232470) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN (1598999635): status = PASS
Jan 30 12:17:10: AAA/AUTHEN: free_user (0x23232C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: Tnl 74 L2TP: Got a response from remote peer, ABCDE
Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x22FBA4) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): found list default
Jan 30 12:17:10: AAA/AUTHEN (2964849625): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (2964849625): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=2964849625
20:03:20: %LINEPROTO-5-UPDOWN: Line protocol on Interface Async1,
changed state to up
Jan 30 12:17:11: TAC+: ver=192 id=2964849625 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x22FC8C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel
is not open
Jan 30 12:17:11: As1 74/1 L2TP: Discarding data packet because tunnel
is not open
Jan 30 12:17:11: TAC+: ver=192 id=1474818051 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FC8C) user='rtp_tunnel'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (2964849625): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x22FBA4) user='rtp_tunnel'
```



```
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 74 L2TP: Tunnel state change from wait-ctl-reply to
established
Jan 30 12:17:11: Tnl 74 L2TP: O SCCCN to ABCDE tnlid 56
Jan 30 12:17:11: Tnl 74 L2TP: SM State established
Jan 30 12:17:11: As1 74/1 L2TP: O ICRQ to ABCDE 56/0
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-for-tunnel
to wait-reply
Jan 30 12:17:11: Tnl 74 L2TP: Dropping old CM, Ns 0, expected 1
Jan 30 12:17:11: As1 74/1 L2TP: O ICCN to ABCDE 56/1
Jan 30 12:17:11: As1 74/1 L2TP: Session state change from wait-reply to
established
LAC#
```

## LNS ルータからの正常なデバッグ

LNS#**show debug**

General OS:

AAA Authentication debugging is on

AAA Authorization debugging is on

AAA Accounting debugging is on

VPN:

L2X protocol events debugging is on

L2X protocol errors debugging is on

VPDN events debugging is on

VPDN errors debugging is on

VTEMPLATE:

Virtual Template debugging is on

LNS#

```
Jan 30 12:17:09: L2TP: I SCCRQ from rtp_tunnel tnl 74
Jan 30 12:17:09: Tnl 56 L2TP: New tunnel created for remote
rtp_tunnel, address 10.31.1.144
Jan 30 12:17:09: Tnl 56 L2TP: Got a challenge in SCCRQ, rtp_tunnel
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x21F6D0) user='ABCDE'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): port='' list='default'
action=SENDAUTH service=PPP
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): found list default
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = UNKNOWN
Jan 30 12:17:09: AAA/AUTHEN/START (3194595626): Method=TACACS+
Jan 30 12:17:09: TAC+: send AUTHEN/START packet ver=193 id=3194595626
Jan 30 12:17:09: TAC+: ver=192 id=3194595626 received AUTHEN status = ERROR
Jan 30 12:17:09: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:09: AAA/AUTHEN: create_user (0x2281AC) user='ABCDE'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: TAC+: ver=192 id=3639011179 received AUTHEN status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x2281AC) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: AAA/AUTHEN (3194595626): status = PASS
Jan 30 12:17:09: AAA/AUTHEN: free_user (0x21F6D0) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:09: Tnl 56 L2TP: O SCCRP to rtp_tunnel tnlid 74
Jan 30 12:17:09: Tnl 56 L2TP: Tunnel state change from idle to
wait-ctl-reply
Jan 30 12:17:10: Tnl 56 L2TP: O Resend SCCRP, flg TLF, ver 2, len 152,
tnl 74, cl 0, ns 0, nr 1
Jan 30 12:17:10: Tnl 56 L2TP: I SCCCN from rtp_tunnel tnl 74
Jan 30 12:17:10: Tnl 56 L2TP: Got a Challenge Response in SCCCN from rtp_tunnel
```

```

Jan 30 12:17:10: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:10: AAA/AUTHEN: create_user (0x227F3C) user='ABCDE'
ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:10: AAA/AUTHEN/STARTTranslating "rtp.cisco.com"
(4117701992): port='' list='default' action=SENDAUTH service=PPP
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): found list default
Jan 30 12:17:10: AAA/AUTHEN (4117701992): status = UNKNOWN
Jan 30 12:17:10: AAA/AUTHEN/START (4117701992): Method=TACACS+
Jan 30 12:17:10: TAC+: send AUTHEN/START packet ver=193 id=4117701992
Jan 30 12:17:11: TAC+: ver=192 id=4117701992 received AUTHEN status = ERROR
Jan 30 12:17:11: AAA: parse name= idb type=-1 tty=-1
Jan 30 12:17:11: AAA/AUTHEN: create_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: TAC+: ver=192 id=2827432721 received AUTHEN status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x228E68) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: AAA/AUTHEN (4117701992): status = PASS
Jan 30 12:17:11: AAA/AUTHEN: free_user (0x227F3C) user='ABCDE' ruser='' port=''
rem_addr='' authen_type=CHAP service=PPP priv=1
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel Authentication success
Jan 30 12:17:11: Tnl 56 L2TP: Tunnel state change from wait-ctl-reply
to established
Jan 30 12:17:11: Tnl 56 L2TP: SM State established
Jan 30 12:17:11: Tnl 56 L2TP: I ICRQ from rtp_tunnel tnl 74
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session FS enabled
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from idle to
wait-for-tunnel
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: New session created
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: O ICRP to rtp_tunnel 74/1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-for-tunnel
to wait-connect
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: I ICCN from rtp_tunnel tnl 74, cl 1
Jan 30 12:17:11: Tnl/Cl 56/1 L2TP: Session state change from wait-connect
to established
Jan 30 12:17:11: Vi1 VTEMPLATE: Reuse Vi1, recycle queue size 0
Jan 30 12:17:11: Vi1 VTEMPLATE: Hardware address 00e0.1e68.942c
Jan 30 12:17:11: Vi1 VPDN: Virtual interface created for janedoe@rtp.cisco.com
Jan 30 12:17:11: Vi1 VPDN: Set to Async interface
Jan 30 12:17:11: Vi1 VPDN: Clone from Vtemplate 1 filterPPP=0 blocking
Jan 30 12:17:11: Vi1 VTEMPLATE: Has a new cloneblk vtemplate, now it has vtemplate
Jan 30 12:17:11: Vi1 VTEMPLATE: ***** CLONE VACCESS1 *****
Jan 30 12:17:11: Vi1 VTEMPLATE: Clone from Virtual-Templatel
interface Virtual-Access1
default ip address
no ip address
encap ppp
ip unnumbered Ethernet0
peer default ip address pool default
ppp authentication chap
ip unnum ethernet0
peer def ip address pool default
ppp authen chap
end

Jan 30 12:17:12: janedoe@rtp.cisco.com 56/1 L2TP: Session with no hwidb
20:12:14: %LINK-3-UPDOWN: Interface Virtual-Access1, changed state to up
Jan 30 12:17:13: Vi1 AAA/AUTHOR/FSM: (0): LCP succeeds trivially
Jan 30 12:17:13: Vi1 VPDN: Bind interface direction=2
Jan 30 12:17:13: Vi1 VPDN: PPP LCP accepted rcv CONFACK
Jan 30 12:17:13: Vi1 VPDN: PPP LCP accepted sent CONFACK
Jan 30 12:17:13: Vi1 L2X: Discarding packet because of no mid/session
Jan 30 12:17:13: AAA: parse name=Virtual-Access1 idb type=21 tty=-1
Jan 30 12:17:13: AAA: name=Virtual-Access1 flags=0x11 type=5 shelf=0 slot=0

```

```
adapter=0 port=1 channel=0
Jan 30 12:17:13: AAA/AUTHEN: create_user (0x1F5100) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): port='Virtual-Access1' list=''
action=LOGIN service=PPP
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): using "default" list
Jan 30 12:17:13: AAA/AUTHEN (562517969): status = UNKNOWN
Jan 30 12:17:13: AAA/AUTHEN/START (562517969): Method=TACACS+
Jan 30 12:17:13: TAC+: send AUTHEN/START packet ver=193 id=562517969
Jan 30 12:17:14: TAC+: ver=192 id=562517969 received AUTHEN status = GETPASS
Jan 30 12:17:14: AAA: parse name=Virtual-Access1 idb type=-1 tty=-1
Jan 30 12:17:14: AAA: name=Virtual-Access1 flags=0x11 type=6 shelf=0 slot=0
adapter=0 port=1 channel=0
Jan 30 12:17:14: AAA/AUTHEN: create_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:14: TAC+: ver=192 id=2384902384 received AUTHEN status = PASS
Jan 30 12:17:14: AAA/AUTHEN: free_user (0x1F5270) user='janedoe@rtp.cisco.com'
ruser='' port='Virtual-Access1' rem_addr='' authen_type=CHAP
service=PPP priv=1
Jan 30 12:17:14: AAA/AUTHEN (562517969): status = PASS
Jan 30 12:17:14: Vi1 AAA/AUTHOR/LCP: Authorize LCP
Jan 30 12:17:14: AAA/AUTHOR/LCP Vi1 (413543389): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) user='janedoe@rtp.cisco.com'
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) send AV protocol=lcp
Jan 30 12:17:14: AAA/AUTHOR/LCP (413543389) found list "default"
Jan 30 12:17:14: AAA/AUTHOR/LCP: Vi1 (413543389) Method=TACACS+
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): user=janedoe@rtp.cisco.com
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (413543389): send AV protocol=lcp
Jan 30 12:17:14: TAC+: (413543389): received author response status = PASS_ADD
Jan 30 12:17:14: AAA/AUTHOR (413543389): Post authorization status = PASS_ADD
Jan 30 12:17:14: AAA/ACCT/NET/START User janedoe@rtp.cisco.com,
Port Virtual-Access1, List ""
Jan 30 12:17:14: AAA/ACCT/NET: Found list "default"
Jan 30 12:17:14: Vi1 AAA/AUTHOR/FSM: (0): Can we start IPCP?
Jan 30 12:17:14: AAA/AUTHOR/FSM Vi1 (1358526470): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) user='janedoe@rtp.cisco.com'
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) send AV protocol=ip
Jan 30 12:17:14: AAA/AUTHOR/FSM (1358526470) found list "default"
Jan 30 12:17:14: AAA/AUTHOR/FSM: Vi1 (1358526470) Method=TACACS+
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): user=janedoe@rtp.cisco.com
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV service=ppp
Jan 30 12:17:14: AAA/AUTHOR/TAC+: (1358526470): send AV protocol=ip
Jan 30 12:17:14: TAC+: (1358526470): received author response status = PASS_ADD
Jan 30 12:17:14: AAA/AUTHOR (1358526470): Post authorization status = PASS_ADD
Jan 30 12:17:14: Vi1 AAA/AUTHOR/FSM: We can start IPCP
Jan 30 12:17:14: TAC+: (1442592025): received acct response status = UNKNOWN
20:12:16: %LINEPROTO-5-UPDOWN: Line protocol on Interface Virtual-Access1,
changed state to up
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 0.0.0.0
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0, we want 0.0.0.0
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 10.6.1.1
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
```

```
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0, we want 10.6.1.1
Jan 30 12:17:16: Vi1 AAA/AUTHOR/IPCP: Start. Her address 10.6.1.1, we want 10.6.1.1
Jan 30 12:17:16: AAA/AUTHOR/IPCP Vi1 (3572380713): Port='Virtual-Access1'
list='' service=NET
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) user='janedoe@rtp.cisco.com'
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) send AV addr*10.6.1.1
Jan 30 12:17:16: AAA/AUTHOR/IPCP (3572380713) found list "default"
Jan 30 12:17:16: AAA/AUTHOR/IPCP: Vi1 (3572380713) Method=TACACS+
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): user=janedoe@rtp.cisco.com
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV service=ppp
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV protocol=ip
Jan 30 12:17:16: AAA/AUTHOR/TAC+: (3572380713): send AV addr*10.6.1.1
Jan 30 12:17:17: TAC+: (3572380713): received author response status = PASS_ADD
Jan 30 12:17:17: AAA/AUTHOR (3572380713): Post authorization status = PASS_ADD
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV service=ppp
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV protocol=ip
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Processing AV addr*10.6.1.1
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Authorization succeeded
Jan 30 12:17:17: Vi1 AAA/AUTHOR/IPCP: Done. Her address 10.6.1.1, we want 10.6.1.1
LNS#
```

## [関連情報](#)

- [Cisco Secure UNIX に関するサポート ページ](#)
- [TACACS/TACACS+ サポート ページ](#)
- [Cisco IOSでのTACACS+に関するドキュメント](#)
- [Cisco Secure ACS for Windows に関するサポート ページ](#)
- [テクニカルサポート - Cisco Systems](#)