

IVR を使用したVoIP

内容

[概要](#)

[前提条件](#)

[要件](#)

[使用するコンポーネント](#)

[表記法](#)

[設定](#)

[ネットワーク図](#)

[設定](#)

[確認](#)

[Raleigh5300A 出力](#)

[SanJose5300A 出力](#)

[Raleigh3600A 出力](#)

[SanJose3640A 出力](#)

[トラブルシュート](#)

[トラブルシューティングのためのコマンド](#)

[関連情報](#)

概要

このドキュメントでは、ゲートウェイのある VoIP ネットワークで基本的な Interactive Voice Response (IVR) を設定およびトラブルシューティングする方法について説明します。IVR は、発話またはデュアルトーン多重周波数 (DTMF) シグナリング (より一般的) の形のユーザ入力に応答して電話回線を介して録音メッセージの形で情報を提供するシステムを表す用語です。例には、電話および自動化された株価情報システムから残高を確認できる銀行が含まれます。

前提条件

要件

このドキュメントに特有の要件はありません。

使用するコンポーネント

このドキュメントの情報は、次のソフトウェアとハードウェアのバージョンに基づいています。

- ルータで実行中の Cisco IOS® ソフトウェア リリース 12.1(1)。

このマニュアルの情報は、特定のラボ環境に置かれたデバイスに基づいて作成されました。このドキュメントで使用するすべてのデバイスは、初期 (デフォルト) 設定の状態から起動していま

す。実稼動中のネットワークで作業をしている場合、実際にコマンドを使用する前に、その潜在的な影響について理解しておく必要があります。

表記法

ドキュメント表記の詳細は、『[シスコテクニカルティップスの表記法](#)』を参照してください。


設定

このセクションでは、このドキュメントで説明する機能を設定するために必要な情報を提供しています。

注：このドキュメントで使用されているコマンドの詳細を調べるには、[Command Lookup Tool](#) ([登録ユーザ専用](#)) を使用してください。

ネットワーク図

このドキュメントでは、次の図に示すネットワーク設定を使用します。

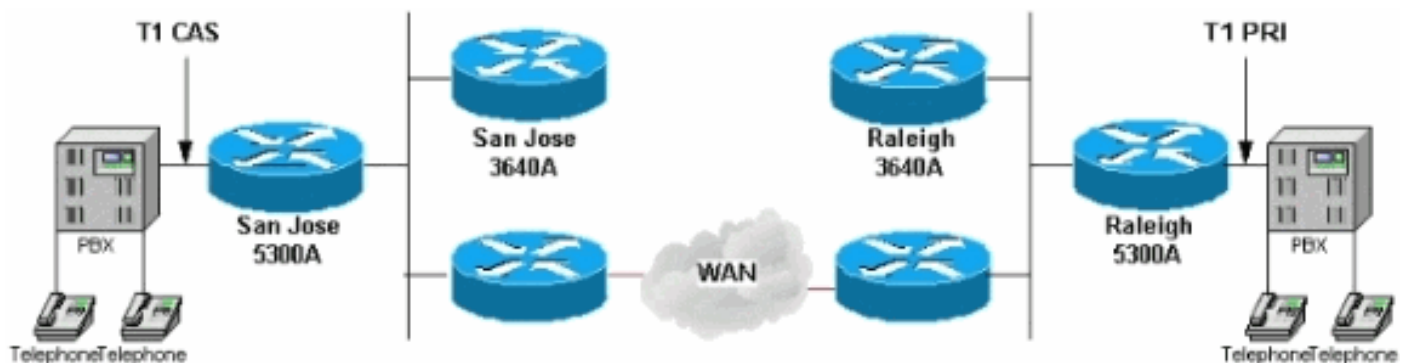

このネットワーク図の Raleigh5300 では、`clid_authen_collect` 内部スクリプトを使用して IVR を実行します。このスクリプトは、着信コールの自動番号識別 (ANI) を見ます。これは、デバイスを受信したコールが、発信者番号や着信番号識別サービス (DNIS)、特定のデバイスに到達するためにコールされた番号を識別するのに役立ちます。次に、これらのユーザ名とパスワードの照合を試みます。スクリプトが (この例のように) ユーザ名とパスワードとの照合に失敗した場合、アカウント番号とパスワードを取得するために音声プロンプトを使用します (通常「PIN」と呼ばれます)。発信者がユーザ名とパスワードを入力し、認証された後、スクリプトはコールする接続先番号の入力を促します。

この IVR 設定は非常に基本的な設定です。実際の環境では、ユーザ名とパスワードは Remote Authentication Dial-In User Service (RADIUS) サーバに保存されます。認証、許可、アカウントテイング (AAA) 認証ログイン H.323 は、ローカルではなく RADIUS を指します。これは、IVR が実行されるルータ設定の `aaa authentication login h323 group radius` コマンドで達成されます。

`dial-peer voice 1` コマンド配下で、IVR アプリケーションを設定します。この例では、`clid_authen_collect` スクリプトを指します。ソフトウェアの IVR にはさまざまな設定があります。これを確認するには、EXEC コマンドの [show call application voice \[summary\]](#) を入力します。詳細については、『[Cisco アクセスプラットフォームの自動音声応答装置の設定](#)』を参照してください。

設定

このドキュメントでは、次の構成を使用します。

- [Raleigh 5300A](#)
- [Raleigh 3640A](#)
- [San Jose 5300A](#)
- [San Jose 3640A](#)

Raleigh 5300A

```
Raleigh5300A#show run
Building configuration...

Current configuration:
!
! Last configuration change at 00:42:21 UTC Tue Mar 28
2000
! NVRAM config last updated at 00:42:22 UTC Tue Mar 28
2000
!
version 12.1
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname Raleigh5300A
!
logging buffered 50000 debugging
AAA new-model
AAA authentication login default none
AAA authentication login h323 local
enable secret password !--- Choose a strong password
with at least one capital letter, !--- one number, and
one special character. ! username 1234 password 0 5678
spe 1/0 1/7 firmware location
system:/ucode/mica_port_firmware !! resource-pool
disable !!! clock calendar-valid ip subnet-zero !
isdn switch-type primary-5ess isdn voice-call-failure 0
mta receive maximum-recipients 0 !! controller T1 0
framing esf clock source line primary linecode b8zs pri-
group timeslots 1-24 ! controller T1 1 clock source line
secondary 1 ! controller T1 2 ! controller T1 3 ! !
voice-port 0:D !! dial-peer voice 1 pots application
clid_authen_collect incoming called-number 4085556400
answer-address 9195552001 destination-pattern
919#9195552... port 0:D prefix 919 ! dial-peer voice 2
voip destination-pattern 4085556400 tech-prefix 408#
session target ras ! num-exp 6... 4085556... !--- This
command is used to configure a Cisco IOS® gateway to
route the calls coming to a main direct inward dial
(DID) number to an AutoAttendant. gateway ! interface
Ethernet0 no ip address shutdown ! interface Serial0:23
no ip address ip mroute-cache isdn switch-type primary-
5ess isdn incoming-voice modem fair-queue 64 256 0 no
cdp enable ! interface FastEthernet0 ip address
172.16.120.2 255.255.255.0 duplex auto speed auto h323-
gateway voip interface h323-gateway voip id RALgk1
ipaddr 172.16.120.1 1718 h323-gateway voip h323-id
RAL5300A@cisco.com h323-gateway voip tech-prefix 919# !
ip classless ip route 172.16.110.0 255.255.255.0
172.16.120.10 no ip http server ! line con 0 transport
```

```
input none line 1 48 transport output lat pad telnet
rlogin udptn v120 lapb-ta line aux 0 line vty 0 4
password cisco ! ntp clock-period 17179842 ntp server
172.16.110.10 end
```

Raleigh 3640A

```
Raleigh3640A#show run
Building configuration...
```

```
Current configuration:
```

```
!
version 12.1
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname Raleigh3640A
!
logging buffered 50000 debugging
enable secret password
!--- Choose a strong password with at least one capital
letter, !--- one number, and one special character. !!
!!! ip subnet-zero ! ip dvmrp route-limit 20000 !!!
!! interface Ethernet1/0 ip address 172.16.120.1
255.255.255.0 ! interface Serial1/0 no ip address no ip
mroute-cache no fair-queue ! interface TokenRing1/0 no
ip address shutdown ring-speed 16 ! ip classless ip
route 172.16.110.0 255.255.255.0 172.16.120.10 no ip
http server !! gatekeeper zone local RALgk1 cisco.com
zone remote SJgk1 cisco.com 172.16.110.1 1719 zone
prefix SJgk1 408..... gw-type-prefix 408#* no shutdown
!! line con 0 transport input none line aux 0 line vty
0 4 password cisco login ! ntp clock-period 17179856 ntp
server 172.16.110.10 end
```

San Jose 5300A

```
SanJose5300A#show run
Building configuration...
```

```
Current configuration:
```

```
!
! Last configuration change at 00:15:49 UTC Tue Mar 28
2000
! NVRAM config last updated at 00:15:50 UTC Tue Mar 28
2000
!
version 12.1
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname SanJose5300A
!
logging buffered 50000 debugging
enable secret password
!--- Choose a strong password with at least one capital
letter, !--- one number, and one special character. !!
! resource-pool disable ! ! ! ! ! ip subnet-zero ! isdn
voice-call-failure 0 mta receive maximum-recipients 0 !
```

```
! controller T1 0 framing esf clock source line primary
linecode b8zs ds0-group 1 timeslots 1-4 type e&m-
immediate-start ! controller T1 1 clock source line
secondary 1 ! controller T1 2 ! controller T1 3 ! !
voice-port 0:1 ! ! dial-peer voice 1 pots answer-address
4085556001 destination-pattern 408#4085556... direct-
inward-dial port 0:1 prefix 6 ! dial-peer voice 2 voip
destination-pattern 9195552... tech-prefix 919# session
target ras ! num-exp 2... 9195552... gateway ! interface
Ethernet0 no ip address ! interface FastEthernet0 ip
address 172.16.110.2 255.255.255.0 duplex auto speed
auto h323-gateway voip interface h323-gateway voip id
SJgk1 ipaddr 172.16.110.1 1718 h323-gateway voip h323-id
SJ5300A@cisco.com h323-gateway voip tech-prefix 408# !
ip classless ip route 172.16.120.0 255.255.255.0
172.16.110.10 no ip http server ! ! ! line con 0
transport input none line aux 0 line vty 0 4 password
cisco login ! ntp clock-period 17179924 ntp server
172.16.110.10 end
```

San Jose 3640A

```
SanJose3640A#show run
Building configuration...

Current configuration:
!
! NVRAM config last updated at 00:05:33 UTC Tue Mar 28
2000
!
version 12.1
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname SanJose3640A
!
boot system flash c3640-ix-mz.120-7.T
logging buffered 50000 debugging
enable secret password !--- Choose a strong password
with at least one capital letter, !--- one number, and
one special character. ! ! ! ! ! ip subnet-zero ! ip
dvmrp route-limit 20000 ! ! interface Ethernet1/0 ip
address 172.16.110.1 255.255.255.0 ! interface Serial1/0
no ip address no ip mroute-cache shutdown no fair-queue
! interface Ethernet1/1 no ip address shutdown ! ip
classless ip route 172.16.120.0 255.255.255.0
172.16.110.10 no ip http server ! tftp-server
flash:c3640-ix-mz.121-1.bin ! gatekeeper zone local
SJgk1 cisco.com zone remote RALgk1 cisco.com
172.16.120.1 1719 zone prefix RALgk1 919..... gw-type-
prefix 919#* no shutdown ! ! line con 0 transport input
none line aux 0 line vty 0 4 password cisco login ! ntp
clock-period 17179867 ntp server 172.16.110.10 end
```

確認

このセクションでは、設定が正常に動作しているかどうかを確認するための情報について説明しています。

[アウトプット インタープリタ ツール \(登録ユーザ専用\) \(OIT\)](#) は、特定の `show` コマンドをサポートします。OIT を使用して、`show` コマンドの出力の分析を表示します。

- [show gateway](#) : 現在のゲートウェイ ステータスを表示します。
- [show gatekeeper calls](#) : ゲートキーパーが認識しているすべての進行中のコールのステータスを表示します。
- [show gatekeeper gw-type-prefix](#) : ゲートウェイのテクノロジー プレフィクス テーブルを表示します。
- [show flash](#) : フラッシュ メモリの内容を表示します。
- [show call application voice clid_authen_collect](#) : 設定された音声アプリケーションのリストを表示します。
- [show gatekeeper endpoints](#) : ゲートキーパーのすべての登録エンドポイントのステータスを表示します。
- [show log](#) : debug コマンドが有効な場合、ロギング バッファからの debug 出力を表示します。
- [show call active voice \[brief\]](#) : すべての音声ポートのコール ステータスを表示します。
- [show debugging](#) : 常にどの debug コマンドが有効になっているかを表示します。

このドキュメントに示す設定をルータに入力した後、ネットワークが正常に動作していることを確認することが重要です。ここに示すコマンドとそれぞれの出力により、このドキュメントで説明した設定が正しく実装されていることを確認できます。

IVR の最も一般的な問題には、次のものがあります。

- アプリケーションが、単純な旧式の電話サービス (POTS) ダイアルピアで正しく設定されていません。着信テレフォニー コールが POTS ダイアルピアと一致していることをアプリケーションで確認します。設定で、または着信者番号がダイアルピア サブコマンド `incoming called-number <number>` と一致する場合、`matching port` コマンドで、POTS ダイアルピアは最初のダイアルピアと一致します。アプリケーションが実際に存在することを、[show call application voice \[summary\] コマンドで確認します](#)。アプリケーション名に構文エラーがないことを確認します。
- `direct-inward-dial` がダイアルピア POTS に設定されていないことを確認します。
- 適切な音声ファイルがフラッシュにロードされていることを確認します。
- ユーザ名とパスワードの認証が正しく設定されていることを確認します。

[Raleigh5300A 出力](#)

```
Raleigh5300A#show gateway
Gateway RAL5300A@cisco.com is registered to Gatekeeper RALgk1
```

```
Alias list (CLI configured)
H323-ID RAL5300A@cisco.com
Alias list (last RCF)
H323-ID RAL5300A@cisco.com
```

```
H323 resource thresholding is Disabled
```

```
Raleigh5300A#show flash
```

```
System flash directory:
```

```
File Length Name/status
  1 7084904 c5300-is-mz.121-1.bin
  2 23186 enter_account.au
  3 38087 enter_destination.au
  4 20414 enter_pin.au
  5 17513 auth_failed.au
[7184432 bytes used, 1204176 available, 8388608 total]
8192K bytes of processor board System flash (Read/Write)
```

```
Raleigh5300A#show call application voice clid_authen_collect
```

```
Idle call list has 1 calls on it.
```

```
Application clid_authen_collect
```

```
The script is compiled into the image
```

```
It has 0 calls active.
```

```
The TCL Script is:
```

```
-----
# clid_authen_collect.tcl
#-----
# September 1998, David Ramsthaller
#
# Copyright (c) 1998, 1999 by cisco Systems, Inc.
# All rights reserved.
#-----
# Mimic the clid_authen_collect script in the SP1.0 release.
#
# It authenticates using (ani, dnis) for (account, password). If
# that fails, it collects account and pin number, then authenticates
# using (account, pin).
#
# If authentication passes, it collects the destination number and
# places the call.
#
# The main routine is at the bottom. Start reading the script there.
#
```

```
proc do_get_account {} {
    global state
    global account

    set prompt(url) flash:enter_account.au
    set prompt(interrupt) true
    set prompt(abortKey) *
    set prompt(terminationKey) #
    set patterns(account) .+
    set event [promptAndCollect prompt info patterns ]

    if {$event == "collect success"} {
        set state get_pin
        set account $info(digits)
        return 0
    }

    if {$event == "collect aborted"} {
        set state get_account
        return 0
    }
}
```

```

    if {$event == "collect fail" || $event == "collect timeout"} {
        set state get_account
        return 0
    }
    set state end
    return 0
}

proc do_get_pin {} {
    global state
    global pin

    set prompt(url) flash:enter_pin.au
    set prompt(interrupt) true
    set prompt(abortKey) *
    set prompt(terminationKey) #
    set patterns(account) .+
    set event [promptAndCollect prompt info patterns ]

    if {$event == "collect success"} {
        set state authenticate
        set pin $info(digits)
        return 0
    }

    if {$event == "collect aborted"} {
        set state get_account
        return 0
    }

    if {$event == "collect fail" || $event == "collect timeout"} {
        # timeout
        if {$info(code) == 102} {
            set state get_pin
            return 0
        }

        # invalid number
        if {$info(code) == 28} {
            set state get_pin
            return 0
        }
    }

    set state end
    return 0
}

proc do_authenticate {} {
    global state
    global pin
    global account

    set event [authenticate $account $pin info]

```



```

if { $event == "authenticated" } {
    set state authen_pass
    return 0
}

if {$event == "authentication failed"} {
    set state authen_fail
    return 0
}

set state end
return 0
}

proc do_get_dest {} {
    global state
    global destination

    set prompt(url) flash:enter_destination.au
    set prompt(interrupt) true
    set prompt(abortKey) *
    set prompt(terminationKey) #
    set prompt(dialPlan) true

    set event [promptAndCollect prompt info ]

    if {$event == "collect success"} {
        set state place_call
        set destination $info(digits)
        return 0
    }

    if {$event == "collect aborted"} {
        set state get_dest
        return 0
    }

    if {$event == "collect fail" || $event == "collect timeout"} {
        set state get_dest
        return 0
    }
    set state end
    return 0
}

proc do_authen_pass {} {
    global state
    global destination

    set dnislens [string len [dnis]]

    if { [did] && $dnislens } {
        set destination [dnis]
    }
}

```

```

        set state place_call
    } else {
        set state get_dest
    }
    return 0
}

```

```

proc do_place_call {} {
    global state
    global destination

    set event [placeCall $destination callInfo info]

    if {$event == "active"} {
        set state active
        return 0
    }
    if {$event == "call fail"} {
        set state place_fail
        return 0
    }

    set state end
    return 0
}

```

```

proc do_active_notimer {} {
    global state

    set event [waitEvent]
    while { $event == "digit" } {
        set event [waitEvent]
    }
    set state end
    return 0
}

```

```

proc do_active_last_timer {} {
    global state

    set event [startTimer [creditTimeLeft] info]
    while { $event == "digit" } {
        set event [startTimer $info(timeLeft) info]
    }
    if { $event == "timeout" } {
        clearOutgoingLeg retInfo
        set state out_of_time
    } else {
        set state end
    }

    return 0
}

```

```

proc do_active_timer {} {

```

```

global state

if { [creditTimeLeft] < 10 } {
    do_active_last_timer
    return 0
}
set delay [expr [creditTimeLeft] - 10]
set event [startTimer $delay info]
while { $event == "digit" } {
    set event [startTimer $info(timeLeft) info]
}
if { $event == "timeout" } {
    insertMessage flash:beep.au retInfo
    do_active_last_timer
} else {
    set state end
}

return 0
}

proc do_active {} {
    global state

    if { ( [creditTimeLeft] == "unlimited") ||
        ([creditTimeLeft] == "uninitialized") } {
        do_active_notimer
    } else {
        do_active_timer
    }
    return 0
}

proc do_out_of_time {} {
    global state

    set prompt(url) flash:out_of_time.au
    set prompt(playComplete) true
    set event [promptAndCollect prompt info ]
    set state end
    return 0
}

proc do_authen_fail {} {
    global state

    set prompt(url) flash:auth_failed.au
    set prompt(playComplete) true
    set event [promptAndCollect prompt info ]
    set state end
    return 0
}

proc do_place_fail {} {
    global state

```

```

    playFailureTone 5 retInfo
    set state end
    return 0
}

#-----
# And here is the main loop
#

acceptCall

set event [authenticate [ani] [dnis] info]

if {$event != "authenticated"} {
    set state get_account
} else {
    set state authen_pass
}

while {$state != "end"} {
    puts "cid([callID]) running state $state"
    if {$state == "get_account"} {
        do_get_account
    } elseif {$state == "get_pin"} {
        do_get_pin
    } elseif {$state == "authenticate"} {
        do_authenticate
    } elseif {$state == "get_dest"} {
        do_get_dest
    } elseif {$state == "place_call"} {
        do_place_call
    } elseif {$state == "active"} {
        do_active
    } elseif {$state == "authen_fail"} {
        do_authen_fail
    } elseif {$state == "authen_pass"} {
        do_authen_pass
    } elseif {$state == "place_fail"} {
        do_place_fail
    } elseif {$state == "out_of_time"} {
        do_out_of_time
    } else {
        break
    }
}
}

```

Raleigh ルータには、有効な debug コマンドがあります。show debug コマンドで次のように表示されます。

```
Raleigh5300A#show debug
```

```

General OS: AAA Authentication debugging is on
ISDN: ISDN Q931 packets debugging is on

```

```
ISDN Q931 packets debug DSLs. (On/Off/No DSL:1/0/-) DSL 0 --> 7 1 - - - - -
- -
H.323 RAS: H.323 RAS Messages debugging is on
voip AAA: voip AAA debugging is on
voip: voip ccAPI function enter/exit debugging is on
ivr: ivr state transitions debugging is on
```

ここに示すデバッグが有効な間に、コールが発信されるとします。このようなコールで発生する出力は次のとおりです。

Raleigh5300A#**show log**

```
Syslog logging: enabled (0 messages dropped, 0 flushes, 0 overruns)
  Console logging: level debugging, 5422 messages logged
  Monitor logging: level debugging, 0 messages logged
  Buffer logging: level debugging, 5422 messages logged
  Trap logging: level informational, 230 message lines logged
```

Log Buffer (50000 bytes):

```
Mar 28 00:44:50.741: RASLib::ras_sendto: msg length 76
                        from 172.16.120.2:49831 to 172.16.120.1:1719
Mar 28 00:44:50.741: RASLib::RASSendRRQ: RRQ (seq# 12164)
                        sent to 172.16.120.1
Mar 28 00:44:50.745: RASLib::RASRecvData: successfully
                        rcvd message of length 52 from 172.16.120.1:1719
Mar 28 00:44:50.745: RASLib::RASRecvData: RCF (seq# 12164)
                        rcvd from [172.16.120.1:1719] on sock [0x6179E6A4]
Mar 28 00:45:18.433: ISDN Se0:23: RX <- SETUP pd = 8 callref = 0x02
Mar 28 00:45:18.433: Bearer Capability i = 0x8090A2
Mar 28 00:45:18.433: Channel ID i = 0xA98393
Mar 28 00:45:18.433: Calling Party Number i = 0x2180,
                        '9195552010', Plan:ISDN, Type:National
Mar 28 00:45:18.433: Called Party Number i = 0xA1,
                        '4085556400', Plan:ISDN, Type:National
Mar 28 00:45:18.437: ISDN Se0:23: TX -> CALL_PROC pd = 8 callref = 0x8002
Mar 28 00:45:18.437: Channel ID i = 0xA98393
Mar 28 00:45:18.437: ISDN Se0:23: TX -> ALERTING pd = 8 callref = 0x8002
Mar 28 00:45:18.437: cc_api_call_setup_ind (vdbPtr=0x61B9ADAC,
                        callInfo={called=4085556400,
                        calling=9195552010, fdest=0 peer_tag=1}, callID=0x61A088C4)
Mar 28 00:45:18.441: start_h323_accounting:
Mar 28 00:45:18.441: start_h323_ccapi_accounting: Error: Null userp
Mar 28 00:45:18.441: cc_process_call_setup_ind (event=0x61BB59E8)
                        handed call to app "clid_authen_collect"
Mar 28 00:45:18.441: App clid_authen_collect: Handling callID 52
Mar 28 00:45:18.441: callingNumber=9195552010, calledNumber=4085556400,
                        redirectNumber=
Mar 28 00:45:18.441: accountNumber=, finalDestFlag=0,
                        guid=lacb.27d8.98f4.006b.0000.0000.2071.a5e8
Mar 28 00:45:18.441: peer_tag=1
Mar 28 00:45:18.441: ccCallHandoff (callID=0x34)
Mar 28 00:45:18.445: :/acceptCall/
Mar 28 00:45:18.445: Accepting CallID=52
Mar 28 00:45:18.445: ccCallSetupAck (callID=0x34)
Mar 28 00:45:18.445: ccCallProceeding (callID=0x34, prog_ind=0x0)
Mar 28 00:45:18.445: ccCallConnect (callID=0x34)
Mar 28 00:45:18.445: :/ani/
Mar 28 00:45:18.445: :/dnis/
Mar 28 00:45:18.445: :[authenticate]
Mar 28 00:45:18.445: authenticate
Mar 28 00:45:18.445: account=9195552010
```

```
Mar 28 00:45:18.445: password=4085556400
Mar 28 00:45:18.445: start_authentication service: ivr tcl authentication
Mar 28 00:45:18.445: AAA: parse name= idb type=-1 tty=-1
Mar 28 00:45:18.445: AAA/MEMORY: create_user (0x61EBED14) user='9195552010'
      ruser='' port='' rem_addr=''
      authen_type=ASCII service=LOGIN priv=0
Mar 28 00:45:18.445: AAA/AUTHEN/START (2776990538):
      port='' list='h323' action=LOGIN service=LOGIN
Mar 28 00:45:18.445: AAA/AUTHEN/START (2776990538): found list h323
Mar 28 00:45:18.445: AAA/AUTHEN/START (2776990538): Method=LOCAL
Mar 28 00:45:18.445: AAA/AUTHEN (2776990538): User not found, end of method list
Mar 28 00:45:18.445: AAA/AUTHEN (2776990538): status = FAIL
Mar 28 00:45:18.445: voip_authenticate: Authentication server ERROR: server MSG:
Mar 28 00:45:18.445: AAA/MEMORY: free_user (0x61EBED14)
      user='9195552010' ruser='' port=''
      rem_addr='' authen_type=ASCII service=LOGIN priv=0
Mar 28 00:45:18.449: ISDN Se0:23: TX -> CONNECT pd = 8 callref = 0x8002
Mar 28 00:45:18.449: cid(52) ta_get_event returning authentication failed
Mar 28 00:45:18.449: :[callID]
Mar 28 00:45:18.449: :/puts/
Mar 28 00:45:18.449: cid( 52) running state get_account
Mar 28 00:45:18.453: TA_PromptCmd. CallID=52

Mar 28 00:45:18.453: ccCallApp (callID=0x34)
Mar 28 00:45:18.453: prompt and collect app got callID 52
Mar 28 00:45:18.453: Playing prompt enter_account.au
Mar 28 00:45:18.453: Prompt interrupt enabled
Mar 28 00:45:18.453: No return on play complete
Mar 28 00:45:18.453: Not matching against dial plan
Mar 28 00:45:18.453: Abort key is * Termination key is #
Mar 28 00:45:18.453: Matching against 1 patterns.
Mar 28 00:45:18.453: Pattern .+
Mar 28 00:45:18.453: ccCallSetContext (callID=0x34, context=0x61A3AAA4)
Mar 28 00:45:18.453: ms_create() Iniz ply_timer
Mar 28 00:45:18.453: ccAssociateStream (callID=0x34 coder=5
      vad=0 recordFunc=0x0 evQ=0x61BE4420)
Mar 28 00:45:18.453: cc_API_call_associated (vdbPtr=0x61B9ADAC,
      callID=0x34, disp=0)
Mar 28 00:45:18.453: ms_associateDone(): xmitFunc = playFunc 0x60B8B358
Mar 28 00:45:18.453: ms_associateDone(): CallID 52 First Buf Play
      at 6d07h of enter_account.au
Mar 28 00:45:18.453: ms_associateDone() 6d07h, Tstart(ply: iSndDly 1000, pSnce 0)
Mar 28 00:45:18.545: ISDN Se0:23: RX <- CONNECT_ACK pd = 8 callref = 0x02
Mar 28 00:45:18.545: ISDN Se0:23: CALL_PROGRESS: CALL_CONNECTED
      call id 0x1B, bchan -1, dsl 0
Mar 28 00:45:19.453: $ $ms_process() >>ms_start_play()
Mar 28 00:45:19.453: ms_start_play() 6d07h mgdTstop(ply)
Mar 28 00:45:20.241: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
      callID=0x34, digit=1,
      flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:20.245: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:20.353: cc_api_call_digit (vdbPtr=0x61B9ADAC,
      callID=0x34, digit=1, duration=160) digit=1
Mar 28 00:45:20.353: ms_stop_play() call 52 mgdTstop at 6d07h
Mar 28 00:45:20.353: ms_stop_play(): Play Stopped at 6d07h
Mar 28 00:45:20.353: ccDisassociateStream (callID=0x34)
Mar 28 00:45:20.521: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
      callID=0x34, digit=2,
      flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:20.525: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:20.593: cc_api_call_digit (vdbPtr=0x61B9ADAC,
      callID=0x34, digit=2, duration=120) digit=2
Mar 28 00:45:20.781: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
```

```
                callID=0x34, digit=3,
                flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:20.785: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:20.853: cc_api_call_digit (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=3, duration=120) digit=3
Mar 28 00:45:21.101: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=4,
                flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:21.105: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:21.193: cc_api_call_digit (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=4, duration=140) digit=4
Mar 28 00:45:21.553: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=#,
                flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:21.553: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:21.673: cc_api_call_digit (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=#, duration=170) digit=#
Mar 28 00:45:21.673: pcapp CallID 52 returning PCAPP_MATCHED. string=1234
Mar 28 00:45:21.673: ccCallAppReturn (callID=0x34)
Mar 28 00:45:21.673: ms_delete() invoking ms_stop_play() for just in case...
Mar 28 00:45:21.673: ms_stop_play() call 52 mgdTstop at 6d07h
Mar 28 00:45:21.673: ms_delete(): mc_delete_dynamicS() mc_delete_read()
Mar 28 00:45:21.673: cid(52) ta_get_event returning collect success
Mar 28 00:45:21.677: :[callID]
Mar 28 00:45:21.677: :/puts/
Mar 28 00:45:21.677: cid( 52) running state get_pin
Mar 28 00:45:21.677: ta_PromptCmd. CallID=52

Mar 28 00:45:21.677: ccCallApp (callID=0x34)
Mar 28 00:45:21.681: prompt and collect app got callID 52
Mar 28 00:45:21.681:     Playing prompt enter_pin.au
Mar 28 00:45:21.681:     Prompt interrupt enabled
Mar 28 00:45:21.681:     No return on play complete
Mar 28 00:45:21.681:     Not matching against dial plan
Mar 28 00:45:21.681:     Abort key is *     Termination key is #
Mar 28 00:45:21.681:     Matching against 1 patterns.
Mar 28 00:45:21.681:     Pattern .+
Mar 28 00:45:21.681: ccCallSetContext (callID=0x34, context=0x61A986B0)
Mar 28 00:45:21.681: ms_create() Iniz ply_timer
Mar 28 00:45:21.681: ccAssociateStream (callID=0x34 coder=5 vad=0
                recordFunc=0x0 evQ=0x61BE4420)
Mar 28 00:45:21.681: cc_api_call_associated (vdbPtr=0x61B9ADAC,
                callID=0x34, disp=0)
Mar 28 00:45:21.681: ms_associateDone(): xmitFunc = playFunc 0x60B8B358
Mar 28 00:45:21.681: ms_associateDone(): CallID 52 First Buf
                Play at 6d07h of enter_pin.au
Mar 28 00:45:21.681: ms_associateDone() 6d07h, Tstart(ply:
                iSndDly 1000, pSnce 0)
Mar 28 00:45:22.681: $ $ms_process() >>ms_start_play()
Mar 28 00:45:22.681: ms_start_play() 6d07h mgdTstop(ply)
Mar 28 00:45:23.433: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC, callID=0x34,
                digit=5, flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:23.433: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:23.533: cc_api_call_digit (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=5, duration=150) digit=5
Mar 28 00:45:23.533: ms_stop_play() call 52 mgdTstop at 6d07h
Mar 28 00:45:23.533: ms_stop_play(): Play Stopped at 6d07h
Mar 28 00:45:23.533: ccDisassociateStream (callID=0x34)
Mar 28 00:45:23.693: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=6,
                flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:23.693: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:23.793: cc_api_call_digit (vdbPtr=0x61B9ADAC,
```

```

                callID=0x34, digit=6, duration=150) digit=6
Mar 28 00:45:24.041: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=7, flags=0x1,
                timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:24.045: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:24.121: cc_api_call_digit (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=7, duration=130) digit=7
Mar 28 00:45:24.321: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=8,
                flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:24.325: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:24.421: cc_api_call_digit (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=8, duration=150) digit=8
Mar 28 00:45:24.653: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=#,
                flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:24.653: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:24.741: cc_api_call_digit (vdbPtr=0x61B9ADAC,
                callID=0x34, digit=#, duration=140) digit=#
Mar 28 00:45:24.745: pcapp CallID 52 returning PCAPP_MATCHED. string=5678
Mar 28 00:45:24.745: ccCallAppReturn (callID=0x34)
Mar 28 00:45:24.745: ms_delete() invoking ms_stop_play() for just in case...
Mar 28 00:45:24.745: ms_stop_play() call 52 mgdTstop at 6d07h
Mar 28 00:45:24.745: ms_delete(): mc_delete_dynamicS() mc_delete_read()
Mar 28 00:45:24.745: cid(52) ta_get_event returning collect success
Mar 28 00:45:24.745: :[callID]
Mar 28 00:45:24.745: :/puts/
Mar 28 00:45:24.745: cid( 52) running state authenticate
Mar 28 00:45:24.749: :[authenticate]
Mar 28 00:45:24.749: authenticate
Mar 28 00:45:24.749:     account=1234
Mar 28 00:45:24.749:     password=5678
Mar 28 00:45:24.749: start_authetication service: ivr tcl authentication
Mar 28 00:45:24.749: AAA: parse name= idb type=-1 tty=-1
Mar 28 00:45:24.749: AAA/MEMORY: create_user (0x61B0354C) user='1234' ruser=''
                port='' rem_addr='' authen_type=ASCII service=LOGIN priv=0
Mar 28 00:45:24.749: AAA/AUTHEN/START (3238629809): port=''
                list='h323' action=LOGIN service=LOGIN
Mar 28 00:45:24.749: AAA/AUTHEN/START (3238629809): found list h323
Mar 28 00:45:24.749: AAA/AUTHEN/START (3238629809): Method=LOCAL
Mar 28 00:45:24.749: AAA/AUTHEN (3238629809): status = GETPASS
Mar 28 00:45:24.749: AAA/AUTHEN/CONT (3238629809): continue_login (user='1234')
Mar 28 00:45:24.749: AAA/AUTHEN (3238629809): status = GETPASS
Mar 28 00:45:24.749: AAA/AUTHEN/CONT (3238629809): Method=LOCAL
Mar 28 00:45:24.749: AAA/AUTHEN (3238629809): status = PASS
Mar 28 00:45:24.749: AAA/MEMORY: free_user (0x61B0354C) user='1234' ruser=''
                port='' rem_addr='' authen_type=ASCII service=LOGIN priv=0
Mar 28 00:45:24.749: cid(52) ta_get_event returning authenticated
Mar 28 00:45:24.753: :[callID]
Mar 28 00:45:24.753: :/puts/
Mar 28 00:45:24.753: cid( 52) running state authen_pass
Mar 28 00:45:24.753: :/dnis/
Mar 28 00:45:24.753: :/did/
Mar 28 00:45:24.757: :[callID]
Mar 28 00:45:24.757: :/puts/
Mar 28 00:45:24.757: cid( 52) running state get_dest
Mar 28 00:45:24.757: ta_PromptCmd. CallID=52

Mar 28 00:45:24.757: ccCallApp (callID=0x34)
Mar 28 00:45:24.757: prompt and collect app got callID 52
Mar 28 00:45:24.757:     Playing prompt enter_destination.au
Mar 28 00:45:24.757:     Prompt interrupt enabled
Mar 28 00:45:24.757:     No return on play complete
```



```
Mar 28 00:45:24.757:      Matching against dial plan
Mar 28 00:45:24.757:      Abort key is *      Termination key is #
Mar 28 00:45:24.757:      Matching against 0 patterns.
Mar 28 00:45:24.757: ccCallSetContext (callID=0x34, context=0x61A3AAA4)
Mar 28 00:45:24.761: ms_create() Iniz ply_timer
Mar 28 00:45:24.761: ccAssociateStream (callID=0x34 coder=5 vad=0
      recordFunc=0x0 evQ=0x61BE4420)
Mar 28 00:45:24.761: cc_api_call_associated (vdbPtr=0x61B9ADAC,
      callID=0x34, disp=0)
Mar 28 00:45:24.761: ms_associateDone(): xmitFunc = playFunc 0x60B8B358
Mar 28 00:45:24.761: ms_associateDone(): CallID 52 First Buf Play
      at 6d07h of enter_destination.au
Mar 28 00:45:24.761: ms_associateDone() 6d07h, Tstart(ply: iSndDly 1000, pSnce 0)
Mar 28 00:45:25.761: $ $ms_process() >>ms_start_play()
Mar 28 00:45:25.761: ms_start_play() 6d07h mgdTstop(ply)
Mar 28 00:45:29.393: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
      callID=0x34, digit=6,
      flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:29.393: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:29.573: cc_api_call_digit (vdbPtr=0x61B9ADAC,
      callID=0x34, digit=6, duration=230) digit=6
Mar 28 00:45:29.573: ms_stop_play() call 52 mgdTstop at 6d07h
Mar 28 00:45:29.573: ms_stop_play(): Play Stopped at 6d07h
Mar 28 00:45:29.573: ccDisassociateStream (callID=0x34)
Mar 28 00:45:29.801: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
      callID=0x34, digit=4,
      flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:29.805: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:29.921: cc_api_call_digit (vdbPtr=0x61B9ADAC, callID=0x34,
      digit=4, duration=170) digit=4
Mar 28 00:45:30.181: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
      callID=0x34, digit=0,
      flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:30.185: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:30.281: cc_api_call_digit (vdbPtr=0x61B9ADAC, callID=0x34,
      digit=0, duration=150) digit=0
Mar 28 00:45:30.533: cc_api_call_digit_begin (vdbPtr=0x61B9ADAC,
      callID=0x34, digit=0,
      flags=0x1, timestamp=0xDB1154A6, expiration=0x0)
Mar 28 00:45:30.533: pcapp CallID 52 event CC_EV_CALL_DIGIT_BEGIN ignored
Mar 28 00:45:30.673: cc_api_call_digit (vdbPtr=0x61B9ADAC, callID=0x34,
      digit=0, duration=190) digit=0
Mar 28 00:45:30.673: pcapp CallID 52 returning PCAPP_MATCHED. string=6400
Mar 28 00:45:30.673: ccCallAppReturn (callID=0x34)
Mar 28 00:45:30.673: ms_delete() invoking ms_stop_play() for just in case...
Mar 28 00:45:30.673: ms_stop_play() call 52 mgdTstop at 6d07h
Mar 28 00:45:30.673: ms_delete(): mc_delete_dynamicS() mc_delete_read()
Mar 28 00:45:30.673: cid(52) ta_get_event returning collect success
Mar 28 00:45:30.677: :[callID]
Mar 28 00:45:30.677: :/puts/
Mar 28 00:45:30.677: cid( 52) running state place_call
Mar 28 00:45:30.677: :[placeCall]
Mar 28 00:45:30.677: Placing call for callID 52 to destination=6400
Mar 28 00:45:30.677: ccCallApp (callID=0x34)
Mar 28 00:45:30.681: placecall CallID 52 got event CC_EV_CALL_HANDOFF
Mar 28 00:45:30.681: ccCallSetContext (callID=0x34, context=0x61EBED14)
Mar 28 00:45:30.681: Matched peers(1)
Mar 28 00:45:30.681: placecall pc_setupPeer cid(52), destPat(4085556400), matched(10),
      prefix(), peer(61C088AC)
Mar 28 00:45:30.681: ccCallSetupRequest (Inbound call = 0x34, outbound peer =2, dest=,
      params=0x61A650F8 mode=0, *callID=0x61BC6EF0)
Mar 28 00:45:30.681: callingNumber=9195552010, calledNumber=4085556400, redirectNumber=
Mar 28 00:45:30.681: accountNumber=1234, finalDestFlag=0,
      guid=lacb.27d8.98f4.006b.0000.0000.2071.a5e8
```

Mar 28 00:45:30.681: peer_tag=2
Mar 28 00:45:30.681: ccIFCallSetupRequest: (vdbPtr=0x6174EC64, dest=,
callParams={called=4085556400,
calling=9195552010, fdest=0, voice_peer_tag=2}, mode=0x0)
Mar 28 00:45:30.681: ccCallSetContext (callID=0x35, context=0x61C72B0C)
Mar 28 00:45:30.681: placecall cid(52) state change PC_CS_INIT to PC_CS_CALL_SETTING
Mar 28 00:45:30.681: RASLib::ras_sendto: msg length 115 from 172.16.120.2:49831
to 172.16.120.1:1719
Mar 28 00:45:30.685: RASLib::RASSendARQ: ARQ (seq# 12165) sent to 172.16.120.1
Mar 28 00:45:30.685: start_h323_accounting:
Mar 28 00:45:30.685: start_h323_ccapi_accounting: Error: Null userp
Mar 28 00:45:30.689: RASLib::RASRecvData: successfully rcvd message
of length 7 from 172.16.120.1:1719
Mar 28 00:45:30.689: RASLib::RASRecvData: RIP (seq# 12165) rcvd
from [172.16.120.1:1719] on sock[6179E6A4]
Mar 28 00:45:30.705: RASLib::RASRecvData: successfully rcvd message
of length 24 from 172.16.120.1:1719
Mar 28 00:45:30.705: RASLib::RASRecvData: ACF (seq# 12165) rcvd from
[172.16.120.1:1719] on sock [0x6179E6A4]
Mar 28 00:45:31.713: cc_api_call_alert(vdbPtr=0x6174EC64, callID=0x35,
prog_ind=0x8, sig_ind=0x1)
Mar 28 00:45:31.713: placecall CallID 53 got event CC_EV_CALL_ALERT
Mar 28 00:45:31.713: ccConferenceCreate (confID=0x61BC6F40, callID1=0x34,
callID2=0x35, tag=0x0)
Mar 28 00:45:31.713: cc_api_bridge_done (confID=0x14, srcIF=0x6174EC64, srcCallID=0x35,
dstCallID=0x34, disposition=0, tag=0x0)
Mar 28 00:45:31.713: placecall cid(52) state change PC_CS_CALL_SETTING to
PC_CS_CONFERENCING_ALERT
Mar 28 00:45:31.713: cc_api_bridge_done (confID=0x14, srcIF=0x61B9ADAC, srcCallID=0x34,
dstCallID=0x35, disposition=0, tag=0x0)
Mar 28 00:45:31.713: cc_api_caps_ind (dstVdbPtr=0x6174EC64, dstCallId=0x35,
srcCallId=0x34, caps={codec=0xEBF7, fax_rate=0xFF,
vad=0x3, modem=0x3 codec_bytes=48, signal_type=2})
Mar 28 00:45:31.717: placecall CallID 52 got event CC_EV_CONF_CREATE_DONE
Mar 28 00:45:31.717: placecall cid(52) state change PC_CS_CONFERENCING_ALERT
to PC_CS_CONFERENCE_ALERT
Mar 28 00:45:32.321: cc_api_caps_ind (dstVdbPtr=0x61B9ADAC, dstCallId=0x34,
srcCallId=0x35, caps={codec=0x4, fax_rate=0x2, vad=0x2, modem=0x1
codec_bytes=20, signal_type=0})
Mar 28 00:45:32.321: cc_api_caps_ack (dstVdbPtr=0x61B9ADAC, dstCallId=0x34,
srcCallId=0x35, caps={codec=0x4, fax_rate=0x2, vad=0x2, modem=0x1
codec_bytes=20, signal_type=0})
Mar 28 00:45:32.325: cc_api_caps_ack (dstVdbPtr=0x6174EC64, dstCallId=0x35,
srcCallId=0x34, caps={codec=0x4, fax_rate=0x2, vad=0x2, modem=0x1
codec_bytes=20, signal_type=0})
Mar 28 00:45:35.745: RASLib::ras_sendto: msg length 76 from 172.16.120.2:49831
to 172.16.120.1:1719
Mar 28 00:45:35.745: RASLib::RASSendRRQ: RRQ (seq# 12166) sent to 172.16.120.1
Mar 28 00:45:35.749: RASLib::RASRecvData: successfully rcvd message of
length 52 from 172.16.120.1:1719
Mar 28 00:45:35.749: RASLib::RASRecvData: RCF (seq# 12166) rcvd from
[172.16.120.1:1719] on sock [0x6179E6A4]
Mar 28 00:45:40.673: cc_api_call_digit (vdbPtr=0x61B9ADAC, callID=0x34,
digit=T, duration=0)
Mar 28 00:45:40.673: placecall CallID 52 got event CC_EV_CALL_DIGIT
Mar 28 00:45:43.845: cc_api_call_connected(vdbPtr=0x6174EC64, callID=0x35)
Mar 28 00:45:43.845: placecall CallID 53 got event CC_EV_CALL_CONNECTED
Mar 28 00:45:43.845: placecall CallID 52 returning PLACECALL_ACTIVE.
Mar 28 00:45:43.845: ccCallAppReturn (callID=0x34)
Mar 28 00:45:43.845: pCall(0x61B00C24), settlement_credit_time=0
Mar 28 00:45:43.845: ccCallSetContext (callID=0x35, context=0x61B00C24)
Mar 28 00:45:43.845: cid(52) ta_get_event returning active
Mar 28 00:45:43.845: :[callID]
Mar 28 00:45:43.845: :/puts/

Mar 28 00:45:43.845: cid(52) running state active
Mar 28 00:45:43.849: :/creditTimeLeft/
Mar 28 00:45:43.849: :[waitEvent]
Mar 28 00:45:43.849: Waiting Event for callID 52
Mar 28 00:45:51.269: cc_api_call_disconnected(vdbPtr=0x6174EC64, callID=0x35, cause=0x10)
Mar 28 00:45:51.273: ccConferenceDestroy (confID=0x14, tag=0x0)
Mar 28 00:45:51.273: cc_api_bridge_drop_done (confID=0x14, srcIF=0x6174EC64,
srcCallID=0x35, dstCallID=0x34, disposition=0 tag=0x0)
Mar 28 00:45:51.273: cc_api_bridge_drop_done (confID=0x14, srcIF=0x61B9ADAC,
srcCallID=0x34,
dstCallID=0x35, disposition=0 tag=0x0)
Mar 28 00:45:51.273: ccCallDisconnect (callID=0x35, cause=0x10 tag=0x0)
Mar 28 00:45:51.273: RASLib::ras_sendto: msg length 76 from 172.16.120.2:49831
to 172.16.120.1:1719
Mar 28 00:45:51.273: RASLib::RASSendDRQ: DRQ (seq# 12167) sent to 172.16.120.1
Mar 28 00:45:51.277: RASLib::RASRecvData: successfully rcvd message of length
3 from 172.16.120.1:1719
Mar 28 00:45:51.277: RASLib::RASRecvData: DCF (seq# 12167) rcvd from
[172.16.120.1:1719] on sock [0x6179E6A4]
Mar 28 00:45:51.277: stop_h323_ccapi_accounting: Error: Null userp
Mar 28 00:45:51.281: cc_api_call_disconnect_done(vdbPtr=0x6174EC64,
callID=0x35, disp=0, tag=0x0)
Mar 28 00:45:51.281: cid(53) outgoing disconnected
Mar 28 00:45:51.281: cid(52) ta_get_event returning outgoing disconnected
Mar 28 00:45:51.281: ta_WaitEventCmd(): ta_get_event(event [outgoing disconnected])
Mar 28 00:45:51.281: TCL script eval for callID 52 completed. code=OK
Mar 28 00:45:51.281: ccCallDisconnect (callID=0x34, cause=0x10 tag=0x0)
Mar 28 00:45:51.297: stop_h323_ccapi_accounting: Error: Null userp
Mar 28 00:45:51.297: cc_api_call_disconnect_done(vdbPtr=0x61B9ADAC,
callID=0x34, disp=0, tag=0x0)
Mar 28 00:45:51.305: %ISDN-6-DISCONNECT: Interface Serial0:18 disconnected
from 9195552010 , call lasted 32 seconds
Mar 28 00:45:51.305: ISDN Se0:23: TX -> DISCONNECT pd = 8 callref = 0x8002
Mar 28 00:45:51.305: Cause i = 0x8090 - Normal call clearing
Mar 28 00:45:51.353: ISDN Se0:23: RX <- RELEASE pd = 8 callref = 0x02
Mar 28 00:45:51.353: ISDN Se0:23: TX -> RELEASE_COMP pd = 8 callref = 0x8002
Mar 28 00:45:51.365: %LINK-3-UPDOWN: Interface Serial0:18, changed state to down
Mar 28 00:46:20.748: RASLib::ras_sendto: msg length 76 from 172.16.120.2:49831
to 172.16.120.1:1719
Mar 28 00:46:20.748: RASLib::RASSendRRQ: RRQ (seq# 12168) sent to 172.16.120.1
Mar 28 00:46:20.752: RASLib::RASRecvData: successfully rcvd message of
length 52 from 172.16.120.1:1719
Mar 28 00:46:20.752: RASLib::RASRecvData: RCF (seq# 12168) rcvd from
[172.16.120.1:1719] on sock [0x6179E6A4]

Raleigh5300A#

Raleigh5300A#

Raleigh5300A#**show call active voice**

GENERIC:

SetupTime=54456184 ms

Index=1

PeerAddress=9195552010

PeerSubAddress=

PeerId=1

PeerIfIndex=56

LogicalIfIndex=26

ConnectTime=54456185

CallDuration=00:00:44

CallState=4

CallOrigin=2

ChargedUnits=0

InfoType=2

TransmitPackets=1475

TransmitBytes=75244
ReceivePackets=318
ReceiveBytes=10176
TELE:
ConnectionId=[0x1ACB27D8 0x98F4006F 0x0 0x20755AB8]
TxDuration=29800 ms
VoiceTxDuration=6360 ms
FaxTxDuration=0 ms
CoderTypeRate=g729r8
NoiseLevel=-55
ACOMLevel=0
OutSignalLevel=-42
InSignalLevel=-56
InfoActivity=2
ERLLevel=15
SessionTarget=
ImgPages=0
 GENERIC:
SetupTime=54457502 ms
Index=1
PeerAddress=4085556400
PeerSubAddress=
PeerId=2
PeerIfIndex=57
LogicalIfIndex=0
ConnectTime=54458807
CallDuration=00:00:18
CallState=4
CallOrigin=1
ChargedUnits=0
InfoType=2
TransmitPackets=318
TransmitBytes=6360
ReceivePackets=1121
ReceiveBytes=22420
VOIP:
ConnectionId[0x1ACB27D8 0x98F4006F 0x0 0x20755AB8]
RemoteIPAddress=172.16.110.2
RemoteUDPPort=17942
RoundTripDelay=2 ms
SelectedQoS=best-effort
tx_DtmfRelay=inband-voice
SessionProtocol=cisco
SessionTarget=ras
OnTimeRvPayout=15900
GapFillWithSilence=0 ms
GapFillWithPrediction=0 ms
GapFillWithInterpolation=0 ms
GapFillWithRedundancy=0 ms
HiWaterPayoutDelay=70 ms
LoWaterPayoutDelay=50 ms
ReceiveDelay=50 ms
LostPackets=0
EarlyPackets=0
LatePackets=0
VAD = enabled
CoderTypeRate=g729r8
CodecBytes=20
SignalingType=cas
Raleigh5300A#

Raleigh5300A#**show call active voice brief**

<ID>: <start>hs.<index> +<connect> pid:<peer_id> <dir> <addr> <state>

dur hh:mm:ss tx:<packets>/<bytes> rx:<packets>/<bytes> <state>
IP <ip>:<udp> rtt:<time>ms pl:<play>/<gap>ms lost:<lost>/<early>/<late>
delay:<last>/<min>/<max>ms <codec>
FR <protocol><y/n><y/n><y/n><on/off> [int dlci cid] vad: dtmf: seq:
sig: <codec> (payload size)
Tele <int>: tx:<tot>/<v>/<fax>ms <codec> noise:<l> acom:<l> i/o:<l>/<l> dBm

6F : 54456184hs.1 +1 pid:1 Answer 9195552010 active
dur 00:00:40 tx:1279/73076 rx:172/5504
Tele 0:D:54: tx:25890/3440/0ms g729r8 noise:-55 acom:0 i/0:-55/-41 dBm

6F : 54457502hs.1 +1305 pid:2 Originate 4085556400 active
dur 00:00:14 tx:172/3440 rx:925/18500
IP 172.16.110.2:17942 rtt:2ms pl:15900/0ms lost:0/0/0 delay:50/50/70ms g729r8

SanJose5300A 出力

SanJose5300A#**show gateway**

Gateway SJ5300A@cisco.com is registered to Gatekeeper SJgk1

Alias list (CLI configured)

H323-ID SJ5300A@cisco.com

Alias list (last RCF)

H323-ID SJ5300A@cisco.com

H323 resource thresholding is Disabled

SanJose5300A#**show log**

Syslog logging: enabled (0 messages dropped, 0 flushes, 0 overruns)

Console logging: level debugging, 1787 messages logged

Monitor logging: level debugging, 0 messages logged

Buffer logging: level debugging, 1787 messages logged

Trap logging: level informational, 97 message lines logged

Log Buffer (50000 bytes):

Mar 28 00:45:25.585: RASLib::ras_sendto: msg length 74 from
172.16.110.2:52521 to 172.16.110.1:1719
Mar 28 00:45:25.585: RASLib::RASSendRRQ: RRQ (seq# 12137) sent to 172.16.110.1
Mar 28 00:45:25.589: RASLib::RASRecvData: successfully rcvd message of
length 52 from 172.16.110.1:1719
Mar 28 00:45:25.589: RASLib::RASRecvData: RCF (seq# 12137) rcvd from
[172.16.110.1:1719] on sock [0x61752218]
Mar 28 00:45:30.705: RASLib::ras_sendto: msg length 122 from
172.16.110.2:52521 to 172.16.110.1:1719
Mar 28 00:45:30.705: RASLib::RASSendARQ: ARQ (seq# 12138) sent to 172.16.110.1
Mar 28 00:45:30.709: RASLib::RASRecvData: successfully rcvd message
of length 24 from 172.16.110.1:1719
Mar 28 00:45:30.713: RASLib::RASRecvData: ACF (seq# 12138) rcvd from
[172.16.110.1:1719] on sock [0x61752218]
Mar 28 00:45:30.713: cc_api_call_setup_ind (vdbPtr=0x616F8D2C,
callInfo={called=408#4085556400,
calling=9195552010, fdest=1 peer_tag=2}, callID=0x6199B54C)
Mar 28 00:45:30.713: cc_process_call_setup_ind (event=0x619B2D6C) handed
call to app "SESSION"
Mar 28 00:45:30.713: sess_appl: ev(23=CC_EV_CALL_SETUP_IND), cid(39), disp(0)
Mar 28 00:45:30.713: ccCallSetContext (callID=0x27, context=0x61A60F64)

Mar 28 00:45:30.713: ssaCallSetupInd finalDest cllng(9195552010),
called(408#4085556400)
Mar 28 00:45:30.713: ssaSetupPeer cid(39) peer list: tag(1) called
number (408#4085556400)
Mar 28 00:45:30.713: ssaSetupPeer cid(39), destPat(408#4085556400),
matched(11), prefix(6), peer(61A03B88)
Mar 28 00:45:30.713: ccCallProceeding (callID=0x27, prog_ind=0x0)
Mar 28 00:45:30.713: ccCallSetupRequest (Inbound call = 0x27, outbound peer =1, dest=,
params=0x61A60F78 mode=0, *callID=0x619BB9F0)
Mar 28 00:45:30.713: callingNumber=9195552010, calledNumber=408#4085556400,
redirectNumber=
Mar 28 00:45:30.713: accountNumber=, finalDestFlag=1,
guid=1acb.27d8.98f4.006b.0000.0000.2071.a5e8
Mar 28 00:45:30.713: peer_tag=1
Mar 28 00:45:30.713: ccIFCallSetupRequest: (vdbPtr=0x619AC884, dest=,
callParams={called=408#4085556400,
calling=9195552010, fdest=1, voice_peer_tag=1}, mode=0x0)
Mar 28 00:45:30.717: ccCallSetContext (callID=0x28, context=0x6194F3AC)
Mar 28 00:45:30.717: cc_api_call_proceeding(vdbPtr=0x619AC884, callID=0x28,
prog_ind=0x0)
Mar 28 00:45:30.717: sess_appl: ev(20=CC_EV_CALL_PROCEEDING), cid(40), disp(0)
Mar 28 00:45:30.717: ssaTraceSct: cid(40)st(1)oldst(0)cfid(-1)csz(0)
in(0)fDest(0)-cid2(39)st2(1)oldst2(0)
Mar 28 00:45:30.717: ssaIgnore cid(40), st(1),oldst(1), ev(20)
Mar 28 00:45:31.701: cc_api_call_alert(vdbPtr=0x619AC884, callID=0x28,
prog_ind=0x8, sig_ind=0x1)
Mar 28 00:45:31.701: sess_appl: ev(7=CC_EV_CALL_ALERT), cid(40), disp(0)
Mar 28 00:45:31.701: ssaTraceSct: cid(40)st(1)oldst(1)cfid(-1)csz(0)
in(0)fDest(0)-cid2(39)st2(1)oldst2(0)
Mar 28 00:45:31.701: ccCallAlert (callID=0x27, prog_ind=0x8, sig_ind=0x1)
Mar 28 00:45:31.701: ccConferenceCreate (confID=0x619BBA38, callID1=0x27,
callID2=0x28, tag=0x0)
Mar 28 00:45:31.701: cc_api_bridge_done (confID=0x14, srcIF=0x616F8D2C, srcCallID=0x27,
dstCallID=0x28, disposition=0, tag=0x0)
Mar 28 00:45:31.705: cc_api_bridge_done (confID=0x14, srcIF=0x619AC884, srcCallID=0x28,
dstCallID=0x27, disposition=0, tag=0x0)
Mar 28 00:45:31.705: cc_api_caps_ind (dstVdbPtr=0x616F8D2C, dstCallId=0x27,
srcCallId=0x28,caps={codec=0xEBF7, fax_rate=0xFF,
vad=0x3, modem=0x3 codec_bytes=1637472312, signal_type=2})
Mar 28 00:45:31.705: sess_appl: ev(28=CC_EV_CONF_CREATE_DONE), cid(39), disp(0)
Mar 28 00:45:31.705: ssaTraceSct: cid(39)st(3)oldst(0)cfid(20)csz(0)
in(1)fDest(1)-cid2(40)st2(3)oldst2(1)
Mar 28 00:45:32.517: cc_api_caps_ind (dstVdbPtr=0x619AC884, dstCallId=0x28,
srcCallId=0x27,caps={codec=0x4, fax_rate=0x2, vad=0x2, modem=0x1
codec_bytes=20, signal_type=0})
Mar 28 00:45:32.517: cc_api_caps_ack (dstVdbPtr=0x619AC884, dstCallId=0x28,
srcCallId=0x27, caps={codec=0x4, fax_rate=0x2, vad=0x2, modem=0x1
codec_bytes=20, signal_type=0})
Mar 28 00:45:32.521: cc_api_caps_ack (dstVdbPtr=0x616F8D2C, dstCallId=0x27,
srcCallId=0x28,caps={codec=0x4, fax_rate=0x2, vad=0x2, modem=0x1
codec_bytes=20, signal_type=0})
Mar 28 00:45:43.834: cc_api_call_connected(vdbPtr=0x619AC884, callID=0x28)
Mar 28 00:45:43.834: sess_appl: ev(8=CC_EV_CALL_CONNECTED), cid(40), disp(0)
Mar 28 00:45:43.834: ssaTraceSct: cid(40)st(4)oldst(1)cfid(20)csz(0)
in(0)fDest(0)-cid2(39)st2(4)oldst2(3)
Mar 28 00:45:43.834: ccCallConnect (callID=0x27)
Mar 28 00:45:43.834: ssaFlushPeerTagQueue cid(39) peer list: (empty)
Mar 28 00:45:51.258: cc_api_call_disconnected(vdbPtr=0x619AC884,
callID=0x28, cause=0x10)
Mar 28 00:45:51.258: sess_appl: ev(12=CC_EV_CALL_DISCONNECTED), cid(40), disp(0)
Mar 28 00:45:51.258: ssaTraceSct: cid(40)st(5)oldst(4)cfid(20)csz(0)
in(0)fDest(0)-cid2(39)st2(5)oldst2(3)
Mar 28 00:45:51.258: ssa: Disconnected cid(40) state(5) cause(0x10)
Mar 28 00:45:51.258: ccConferenceDestroy (confID=0x14, tag=0x0)

Mar 28 00:45:51.258: cc_api_bridge_drop_done (confID=0x14, srcIF=0x616F8D2C, srcCallID=0x27, dstCallID=0x28, disposition=0 tag=0x0)
Mar 28 00:45:51.258: cc_api_bridge_drop_done (confID=0x14, srcIF=0x619AC884, srcCallID=0x28, dstCallID=0x27, disposition=0 tag=0x0)
Mar 28 00:45:51.258: sess_appl: ev(29=CC_EV_CONF_DESTROY_DONE), cid(39), disp(0)
Mar 28 00:45:51.258: ssaTraceSct: cid(39)st(6)oldst(3)cfid(20)csz(0) in(1)fDest(1)-cid2(40)st2(6)oldst2(5)
Mar 28 00:45:51.258: ccCallDisconnect (callID=0x27, cause=0x10 tag=0x0)
Mar 28 00:45:51.258: ccCallDisconnect (callID=0x28, cause=0x10 tag=0x0)
Mar 28 00:45:51.262: RASLib::ras_sendto: msg length 76 from 172.16.110.2:52521 to 172.16.110.1:1719
Mar 28 00:45:51.262: RASLib::RASSendDRQ: DRQ (seq# 12139) sent to 172.16.110.1
Mar 28 00:45:51.266: RASLib::RASRecvData: successfully rcvd message of length 3 from 172.16.110.1:1719
Mar 28 00:45:51.266: RASLib::RASRecvData: DCF (seq# 12139) rcvd from [172.16.110.1:1719] on sock [0x61752218]
Mar 28 00:45:51.266: cc_api_call_disconnect_done(vdbPtr=0x0, callID=0x27, disp=0, tag=0x0)
Mar 28 00:45:51.270: sess_appl: ev(13=CC_EV_CALL_DISCONNECT_DONE), cid(39), disp(0)
Mar 28 00:45:51.270: ssaTraceSct: cid(39)st(7)oldst(6)cfid(-1)csz(0) in(1)fDest(1)-cid2(40)st2(7)oldst2(5)
Mar 28 00:45:51.278: cc_api_call_disconnect_done(vdbPtr=0x619AC884, callID=0x28, disp=0, tag=0x61726DDC)
Mar 28 00:45:51.278: sess_appl: ev(13=CC_EV_CALL_DISCONNECT_DONE), cid(40), disp(0)
Mar 28 00:45:51.278: ssaTraceSct: cid(40)st(7)oldst(5)cfid(-1)csz(1)in(0)fDest(0)
Mar 28 00:46:10.590: RASLib::ras_sendto: msg length 74 from 172.16.110.2:52521 to 172.16.110.1:1719
Mar 28 00:46:10.590: RASLib::RASSendRRQ: RRQ (seq# 12140) sent to 172.16.110.1
Mar 28 00:46:10.594: RASLib::RASRecvData: successfully rcvd message of length 52 from 172.16.110.1:1719
Mar 28 00:46:10.594: RASLib::RASRecvData: RCF (seq# 12140) rcvd from [172.16.110.1:1719] on sock [0x61752218]
Mar 28 00:46:55.595: RASLib::ras_sendto: msg length 74 from 172.16.110.2:52521 to 172.16.110.1:1719
Mar 28 00:46:55.595: RASLib::RASSendRRQ: RRQ (seq# 12141) sent to 172.16.110.1
Mar 28 00:46:55.599: RASLib::RASRecvData: successfully rcvd message of length 52 from 172.16.110.1:1719
Mar 28 00:46:55.599: RASLib::RASRecvData: RCF (seq# 12141) rcvd from [172.16.110.1:1719] on sock [0x61752218]
Mar 28 00:47:40.600: RASLib::ras_sendto: msg length 74 from 172.16.110.2:52521 to 172.16.110.1:1719
Mar 28 00:47:40.600: RASLib::RASSendRRQ: RRQ (seq# 12142) sent to 172.16.110.1
Mar 28 00:47:40.604: RASLib::RASRecvData: successfully rcvd message of length 52 from 172.16.110.1:1719
Mar 28 00:47:40.604: RASLib::RASRecvData: RCF (seq# 12142) rcvd from [172.16.110.1:1719] on sock [0x61752218]
Mar 28 00:48:25.604: RASLib::ras_sendto: msg length 74 from 172.16.110.2:52521 to 172.16.110.1:1719
Mar 28 00:48:25.604: RASLib::RASSendRRQ: RRQ (seq# 12143) sent to 172.16.110.1
Mar 28 00:48:25.608: RASLib::RASRecvData: successfully rcvd message of length 52 from 172.16.110.1:1719
Mar 28 00:48:25.608: RASLib::RASRecvData: RCF (seq# 12143) rcvd from [172.16.110.1:1719] on sock [0x61752218]

SanJose5300A#
SanJose5300A#

SanJose5300A#

SanJose5300A#**show call active voice brief**

<ID>: <start>hs.<index> +<connect> pid:<peer_id> <dir> <addr> <state>
dur hh:mm:ss tx:<packets>/<bytes> rx:<packets>/<bytes> <state>
IP <ip>:<udp> rtt:<time>ms pl:<play>/<gap>ms lost:<lost>/<early>/<late>
delay:<last>/<min>/<max>ms <codec>
FR <protocol><y/n><y/n><y/n><on/off> [int dlci cid] vad: dtmf: seq:

sig: <codec> (payload size)
Tele <int>: tx:<tot>/<v>/<fax>ms <codec> noise:<l> acom:<l> i/o:<l>/<l> dBm

6F : 54422877hs.1 +1301 pid:2 Answer 9195552010 active
dur 00:00:38 tx:2122/42440 rx:836/16720
IP 172.16.120.2:16938 rtt:2ms pl:16720/0ms lost:0/0/0 delay:30/30/70ms g729r8

6F : 54422895hs.1 +1283 pid:1 Originate 408#4085556400 active
dur 00:00:38 tx:836/-8996 rx:2143/68576
Tele 0:1 (42): tx:50050/42860/0ms g729r8 noise:-66 acom:0 i/o:-40/-71 dBm

SanJose5300A#**show call actvice voice**

GENERIC:
SetupTime=54422877 ms
Index=1
PeerAddress=9195552010
PeerSubAddress=
PeerId=2
PeerIfIndex=17
LogicalIfIndex=0
ConnectTime=54424178
CallDuration=00:00:44
CallState=4
CallOrigin=2
ChargedUnits=0
InfoType=2
TransmitPackets=2414
TransmitBytes=48280
ReceivePackets=836
ReceiveBytes=16720
VOIP:
ConnectionId[0x1ACB27D8 0x98F4006F 0x0 0x20755AB8]
RemoteIPAddress=172.16.120.2
RemoteUDPPort=16938
RoundTripDelay=2 ms
SelectedQoS=best-effort
tx_DtmfRelay=inband-voice
SessionProtocol=cisco
SessionTarget=
OnTimeRvPlayout=16720
GapFillWithSilence=0 ms
GapFillWithPrediction=0 ms
GapFillWithInterpolation=0 ms
GapFillWithRedundancy=0 ms
HiWaterPlayoutDelay=70 ms
LoWaterPlayoutDelay=30 ms
ReceiveDelay=30 ms
LostPackets=0
EarlyPackets=0
LatePackets=0
VAD = enabled
CoderTypeRate=g729r8
CodecBytes=20
SignalingType=cas
GENERIC:
SetupTime=54422895 ms
Index=1
PeerAddress=408#4085556400
PeerSubAddress=
PeerId=1
PeerIfIndex=16

LogicalIfIndex=13
ConnectTime=54424178
CallDuration=00:00:44
CallState=4
CallOrigin=1
ChargedUnits=0
InfoType=2
TransmitPackets=836
TransmitBytes=-12488
ReceivePackets=2434
ReceiveBytes=77888
TELE:
ConnectionId=[0x1ACB27D8 0x98F4006F 0x0 0x20755AB8]
TxDuration=55880 ms
VoiceTxDuration=48690 ms
FaxTxDuration=0 ms
CoderTypeRate=g729r8
NoiseLevel=-66
ACOMLevel=0
OutSignalLevel=-70
InSignalLevel=-42
InfoActivity=2
ERLLevel=15
SessionTarget=
ImgPages=0
SanJose5300A#

Raleigh3600A 出力

Raleigh3640A#**show debug**

H.323 RAS:

H.323 RAS Messages debugging is on

Raleigh3640A#und all

Raleigh3640A#**show gatekeeper endpoint**

GATEKEEPER ENDPOINT REGISTRATION

=====

CallSignalAddr	Port	RASSignalAddr	Port	Zone Name	Type	F
172.16.120.2	1720	172.16.120.2	49831	RALgk1	VOIP-GW	

H323-ID: RAL5300A@cisco.com

Total number of active registrations = 1

Raleigh3640A#**show gatekeeper gw-type-prefix**

GATEWAY TYPE PREFIX TABLE

=====

Prefix: 408#*

Prefix: 919#*

Zone RALgk1 master gateway list:

172.16.120.2:1720 RAL5300A

Raleigh3640A#**show log**

Syslog logging: enabled (0 messages dropped, 0 flushes, 0 overruns)

Console logging: level debugging, 277 messages logged

Monitor logging: level debugging, 0 messages logged

Buffer logging: level debugging, 277 messages logged

Trap logging: level informational, 107 message lines logged

Log Buffer (50000 bytes):

Mar 28 00:44:50.742: RASLib::RASRecvData: successfully rcvd
message of length 76 from 172.16.120.2:49831

Mar 28 00:44:50.742: RASLib::RASRecvData: RRQ (seq# 12164)
rcvd from [172.16.120.2:49831] on sock [0x60F2F9A0]

Mar 28 00:44:50.746: RASLib::ras_sendto: msg length 52
from 172.16.120.1:1719 to 172.16.120.2:49831

Mar 28 00:44:50.746: RASLib::RASSendRCF: RCF (seq# 12164)
sent to 172.16.120.2

Mar 28 00:45:30.682: RASLib::RASRecvData: successfully
rcvd message of length 115 from 172.16.120.2:49831

Mar 28 00:45:30.686: RASLib::RASRecvData: ARQ (seq# 12165)
rcvd from [172.16.120.2:49831] on sock [0x60F2F9A0]
RASLib::parse_arq_nonstd: ARQ Nonstd
decode succeeded, remlen = 0

Mar 28 00:45:30.686: RASLib::ras_sendto: msg length 7 from
172.16.120.1:1719 to 172.16.120.2:49831

Mar 28 00:45:30.686: RASLib::RASSendRIP: RIP (seq# 12165) sent to 172.16.120.2

Mar 28 00:45:30.686: RASLib::RAS_WK_TInit: ipsock [0x60F0ED1C] setup successful

Mar 28 00:45:30.690: RASLib::ras_sendto: msg length 79
from 172.16.120.1:55415 to 172.16.110.1:1719

Mar 28 00:45:30.690: RASLib::RASSendLRQ: LRQ (seq# 28) sent to 172.16.110.1

Mar 28 00:45:30.698: RASLib::RASRecvData: successfully
rcvd message of length 128 from 172.16.110.1:1719

Mar 28 00:45:30.698: RASLib::RASRecvData: LCF (seq# 28)
rcvd from [172.16.110.1:1719] on sock [0x60F0ED1C]
RASLib::parse_lcf_nonstd: LCF Nonstd
decode succeeded, remlen = 0

Mar 28 00:45:30.702: RASLib::ras_sendto: msg length 24 from
172.16.120.1:1719 to 172.16.120.2:49831

Mar 28 00:45:30.702: RASLib::RASSendACF: ACF (seq# 12165) sent to 172.16.120.2

Mar 28 00:45:35.746: RASLib::RASRecvData: successfully rcvd message of
length 76 from 172.16.120.2:49831

Mar 28 00:45:35.746: RASLib::RASRecvData: RRQ (seq# 12166) rcvd
from [172.16.120.2:49831] on sock [0x60F2F9A0]

Mar 28 00:45:35.750: RASLib::ras_sendto: msg length 52 from
172.16.120.1:1719 to 172.16.120.2:49831

Mar 28 00:45:35.750: RASLib::RASSendRCF: RCF (seq# 12166) sent to 172.16.120.2

Mar 28 00:45:51.274: RASLib::RASRecvData: successfully rcvd
message of length 76 from 172.16.120.2:49831

Mar 28 00:45:51.274: RASLib::RASRecvData: DRQ (seq# 12167)
rcvd from [172.16.120.2:49831] on sock [0x60F2F9A0]

Mar 28 00:45:51.274: RASLib::ras_sendto: msg length 3
from 172.16.120.1:1719 to 172.16.120.2:49831

Mar 28 00:45:51.278: RASLib::RASSendDCF: DCF (seq# 12167)
sent to 172.16.120.2

Mar 28 00:46:20.750: RASLib::RASRecvData: successfully
rcvd message of length 76 from 172.16.120.2:49831

Mar 28 00:46:20.750: RASLib::RASRecvData: RRQ (seq# 12168)
rcvd from [172.16.120.2:49831] on sock [0x60F2F9A0]

Mar 28 00:46:20.750: RASLib::ras_sendto: msg length 52 from
172.16.120.1:1719 to 172.16.120.2:49831

Mar 28 00:46:20.754: RASLib::RASSendRCF: RCF (seq# 12168)
sent to 172.16.120.2

Mar 28 00:47:05.750: RASLib::RASRecvData: successfully
rcvd message of length 76 from 172.16.120.2:49831

Mar 28 00:47:05.754: RASLib::RASRecvData: RRQ (seq# 12169)
rcvd from [172.16.120.2:49831] on sock [0x60F2F9A0]

Mar 28 00:47:05.754: RASLib::ras_sendto: msg length 52
from 172.16.120.1:1719 to 172.16.120.2:49831

Mar 28 00:47:05.758: RASLib::RASSendRCF: RCF (seq# 12169)
sent to 172.16.120.2

Mar 28 00:47:50.754: RASLib::RASRecvData: successfully

```
rcvd message of length 76 from 172.16.120.2:49831
Mar 28 00:47:50.758: RASLib::RASRecvData: RRQ (seq# 12170)
rcvd from [172.16.120.2:49831] on sock [0x60F2F9A0]
Mar 28 00:47:50.758: RASLib::ras_sendto: msg length 52
from 172.16.120.1:1719 to 172.16.120.2:49831
Mar 28 00:47:50.758: RASLib::RASSendRCF: RCF (seq# 12170) sent to 172.16.120.2
Raleigh3640A#
```

Raleigh3640A#

Raleigh3640A#**show gatekeeper call**

Total number of active calls = 1.

GATEKEEPER CALL INFO

=====

LocalCallID	Age(secs)	BW				
24-6872	45	64(Kbps)				
Endpt(s): Alias	E.164Addr	CallSignalAddr	Port	RASSignalAddr	Port	
src EP: RAL5300A	9195552010	172.16.120.2	1720	172.16.120.2	49831	
dst EP:	408#408555640	172.16.110.2	1720	172.16.110.2	1720	

Raleigh3640A#

SanJose3640A 出力

SanJose3640A#**show debug**

H.323 RAS:

H.323 RAS Messages debugging is on

SanJose3640A#**show gatekeeper endpoint**

GATEKEEPER ENDPOINT REGISTRATION

=====

CallSignalAddr	Port	RASSignalAddr	Port	Zone Name	Type	F
172.16.110.2	1720	172.16.110.2	52521	SJgk1	VOIP-GW	

H323-ID: SJ5300A@cisco.com

Total number of active registrations = 1

SanJose3640A#**show gatekeeper gw-type-prefix**

GATEWAY TYPE PREFIX TABLE

=====

Prefix: 919#*

Prefix: 408#*

Zone SJgk1 master gateway list:

172.16.110.2:1720 SJ5300A

SanJose3640A#**show log**

Syslog logging: enabled (0 messages dropped, 0 flushes, 0 overruns)

Console logging: level debugging, 1301 messages logged

Monitor logging: level debugging, 0 messages logged

Buffer logging: level debugging, 1293 messages logged

Trap logging: level informational, 103 message lines logged

Log Buffer (50000 bytes):

Mar 28 00:45:25.592: RASLib::RASRecvData: successfully rcvd
message of length 74 from 172.16.110.2:52521

Mar 28 00:45:25.592: RASLib::RASRecvData: RRQ (seq# 12137) rcvd

```

from [172.16.110.2:52521] on sock [0x60FE9B04]
Mar 28 00:45:25.596: RASLib::ras_sendto: msg length 52 from
172.16.110.1:1719 to 172.16.110.2:52521
Mar 28 00:45:25.596: RASLib::RASSendRCF: RCF (seq# 12137) sent to 172.16.110.2
Mar 28 00:45:30.692: RASLib::RASRecvData: successfully rcvd message
of length 79 from 172.16.120.1:55415
Mar 28 00:45:30.692: RASLib::RASRecvData: LRQ (seq# 28) rcvd from
[172.16.120.1:55415] on sock [0x60FE9B04]
RASLib::parse_lrq_nonstd: LRQ Nonstd decode succeeded, remlen = 0
Mar 28 00:45:30.696: RASLib::ras_sendto: msg length 128 from
172.16.110.1:1719 to 172.16.120.1:55415
Mar 28 00:45:30.696: RASLib::RASSendLCF: LCF (seq# 28) sent to 172.16.120.1
Mar 28 00:45:30.712: RASLib::RASRecvData: successfully rcvd message
of length 122 from 172.16.110.2:52521
Mar 28 00:45:30.712: RASLib::RASRecvData: ARQ (seq# 12138) rcvd from
[172.16.110.2:52521] on sock [0x60FE9B04]
RASLib::parse_arq_nonstd: ARQ Nonstd decode succeeded, remlen = 0
Mar 28 00:45:30.716: RASLib::ras_sendto: msg length 24 from 172.16.110.1:1719
to 172.16.110.2:52521
Mar 28 00:45:30.716: RASLib::RASSendACF: ACF (seq# 12138) sent to 172.16.110.2
Mar 28 00:45:51.268: RASLib::RASRecvData: successfully rcvd message
of length 76 from 172.16.110.2:52521
Mar 28 00:45:51.268: RASLib::RASRecvData: DRQ (seq# 12139) rcvd
from [172.16.110.2:52521] on sock [0x60FE9B04]
Mar 28 00:45:51.268: RASLib::ras_sendto: msg length 3 from
172.16.110.1:1719 to 172.16.110.2:52521
Mar 28 00:45:51.268: RASLib::RASSendDCF: DCF (seq# 12139) sent to 172.16.110.2
Mar 28 00:46:10.596: RASLib::RASRecvData: successfully rcvd message of
length 74 from 172.16.110.2:52521
Mar 28 00:46:10.596: RASLib::RASRecvData: RRQ (seq# 12140) rcvd
from [172.16.110.2:52521] on sock [0x60FE9B04]
Mar 28 00:46:10.600: RASLib::ras_sendto: msg length 52 from 172.16.110.1:1719
to 172.16.110.2:52521
Mar 28 00:46:10.600: RASLib::RASSendRCF: RCF (seq# 12140) sent to 172.16.110.2
Mar 28 00:46:55.600: RASLib::RASRecvData: successfully rcvd message of
length 74 from 172.16.110.2:52521
Mar 28 00:46:55.600: RASLib::RASRecvData: RRQ (seq# 12141) rcvd from
[172.16.110.2:52521] on sock [0x60FE9B04]
Mar 28 00:46:55.604: RASLib::ras_sendto: msg length 52 from 172.16.110.1:1719
to 172.16.110.2:52521
Mar 28 00:46:55.604: RASLib::RASSendRCF: RCF (seq# 12141) sent to 172.16.110.2
Mar 28 00:47:40.604: RASLib::RASRecvData: successfully rcvd message of
length 74 from 172.16.110.2:52521
Mar 28 00:47:40.608: RASLib::RASRecvData: RRQ (seq# 12142) rcvd from
[172.16.110.2:52521] on sock [0x60FE9B04]
Mar 28 00:47:40.608: RASLib::ras_sendto: msg length 52 from 172.16.110.1:1719
to 172.16.110.2:52521
Mar 28 00:47:40.608: RASLib::RASSendRCF: RCF (seq# 12142) sent to 172.16.110.2
Mar 28 00:48:25.608: RASLib::RASRecvData: successfully rcvd message of
length 74 from 172.16.110.2:52521
Mar 28 00:48:25.612: RASLib::RASRecvData: RRQ (seq# 12143) rcvd from
[172.16.110.2:52521] on sock [0x60FE9B04]
Mar 28 00:48:25.612: RASLib::ras_sendto: msg length 52 from 172.16.110.1:1719
to 172.16.110.2:52521
Mar 28 00:48:25.612: RASLib::RASSendRCF: RCF (seq# 12143) sent to 172.16.110.2
SanJose3640A#

```

SanJose3640A#

SanJose3640A#**show gatekeeper calls**

Total number of active calls = 1.

GATEKEEPER CALL INFO

=====

LocalCallID	Age(secs)	BW
21-6872	63	64(Kbps)

Endpt(s):	Alias	E.164Addr	CallSignalAddr	Port	RASignalAddr	Port
src EP:		9195552010				
dst EP:	SJ5300A	408#408555640	172.16.110.2	1720	172.16.110.2	52521

トラブルシューティング

このセクションでは、設定のトラブルシューティングを行うための情報について説明します。

トラブルシューティングのためのコマンド

アウトプット インタープリタ ツール (登録ユーザ専用) (OIT) は、特定の show コマンドをサポートします。 OIT を使用して、show コマンドの出力の分析を表示します。

注： debug コマンドを発行する前に、『debug コマンドの重要な情報』を参照してください。

- [debug voip aaa](#) : ゲートウェイ aaa のデバッグ メッセージのシステム コンソールへの出力を有効にします。
- [debug isdn q931](#) : ローカルルータ (ユーザ側) とネットワーク間の ISDN ネットワーク接続 (レイヤ3) のコールセットアップとティアダウンに関する情報を表示します。
- [debug voip ccapi inout](#) : コール制御 API をデバッグします。
- [debug voip ivr](#) : IVR アプリケーションをデバッグします。
- [debug ras](#) : 登録のタイプとアドレッシング、アドミッション、および送受信したステータス プロトコル (RAS) メッセージを表示します。

関連情報

- [TCL IVR API Version 1.0 Programmer's Guide](#)
- [Cisco アクセス プラットフォームの自動音声応答装置の設定](#)
- [Cisco H.323 ゲートウェイに関するセキュリティおよびアカウントの拡張](#)
- [音声に関する技術サポート](#)
- [音声とユニファイド コミュニケーションに関する製品サポート](#)
- [Cisco IP Telephony のトラブルシューティング](#)
- [テクニカル サポートとドキュメント - Cisco Systems](#)