

VPN konfigurace: Host Name: RV042G, Domain Name: router88c6a4.com. LAN IP: 192.168.1.1, Subnet Mask: 255.255.255.0.

Setup (LAN) > Network (LAN) > LAN Setting > Device IP Address (192.168.1.1)

Network

Host Name : (Required by some ISPs)

Domain Name : (Required by some ISPs)

IP Mode

Mode	WAN	LAN
<input checked="" type="radio"/> IPv4 Only	IPv4	IPv4
<input type="radio"/> Dual-Stack IP	IPv4 and IPv6	IPv4 and IPv6

LAN Setting

MAC Address : 64:9E:F3:88:C6:A4

Device IP Address :

Subnet Mask :

Multiple Subnet : Enable

WAN Setting


Interface	Connection Type	Configuration
WAN1	Obtain an IP automatically	
WAN2	Obtain an IP automatically	

DMZ Setting

Enable DMZ

LAN Setting (LAN) > Device IP Address (192.168.1.1)

1. VPN konfiguratsiyasida Subnet Mask (255.255.255.0) va Multiple Subnet (255.255.255.0) o'zaro bog'lanishi kerak.

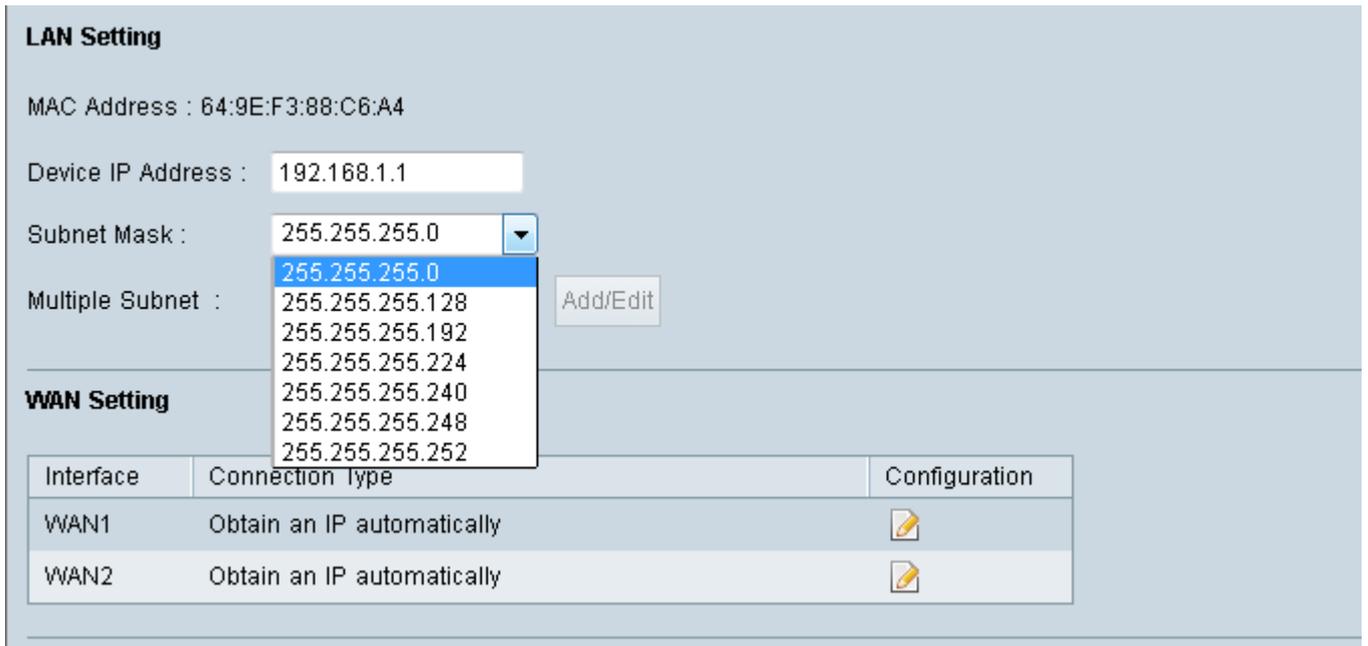

3. Subnet Mask (255.255.255.0) va Multiple Subnet (255.255.255.0) o'zaro bog'lanishi kerak.

4. (Multiple Subnet) ni o'zaro bog'lanishi kerak. Multiple Subnet (255.255.255.0) ni o'zaro bog'lanishi kerak.

5. VPN konfiguratsiyasida Subnet Mask (255.255.255.0) va Multiple Subnet (255.255.255.0) o'zaro bog'lanishi kerak.

VPN konfiguratsiyasida Subnet Mask va Multiple Subnet o'zaro bog'lanishi kerak.

VPN konfiguratsiyasida Subnet Mask (255.255.255.0) va Multiple Subnet (255.255.255.0) o'zaro bog'lanishi kerak. RV042, RV042G va RV082 VPN Router konfiguratsiyasida Subnet Mask (255.255.255.0) va Multiple Subnet (255.255.255.0) o'zaro bog'lanishi kerak.

1. VPN konfiguratsiyasida Subnet Mask (255.255.255.0) va Multiple Subnet (255.255.255.0) o'zaro bog'lanishi kerak. VPN > Gateway to Gateway konfiguratsiyasida Subnet Mask (255.255.255.0) va Multiple Subnet (255.255.255.0) o'zaro bog'lanishi kerak.

Gateway To Gateway

Add a New Tunnel

Tunnel No. 1

Tunnel Name : TestTunnel

Interface : WAN1

Enable :

Local Group Setup

Local Security Gateway Type : IP Only

IP Address : 156.26.31.119

Local Security Group Type : Subnet

IP Address : 192.168.1.0

Subnet Mask : 255.255.255.0

Remote Group Setup

Remote Security Gateway Type : IP Only

IP Address : 192.0.2.2

Remote Security Group Type : Subnet

IP Address : 192.168.2.0

Subnet Mask : 255.255.255.0

IPSec Setup

Keying Mode : IKE with Preshared key

Phase 1 DH Group : Group 1 - 768 bit

Phase 1 Encryption : DES

Phase 1 Authentication : MD5

Phase 1 SA Life Time : 28800 seconds

Perfect Forward Secrecy :

Phase 2 DH Group : Group 1 - 768 bit

Phase 2 Encryption : DES

Phase 2 Authentication : MD5

Phase 2 SA Life Time : 3600 seconds

Preshared Key : VPNkey

Minimum Preshared Key Complexity : Enable

Preshared Key Strength Meter : 

Advanced +

Save

Cancel

이 번역에 관하여

Cisco는 전 세계 사용자에게 다양한 언어로 지원 콘텐츠를 제공하기 위해 기계 번역 기술과 수작업 번역을 병행하여 이 문서를 번역했습니다. 아무리 품질이 높은 기계 번역이라도 전문 번역가의 번역 결과물만큼 정확하지는 않습니다. Cisco Systems, Inc.는 이 같은 번역에 대해 어떠한 책임도 지지 않으며 항상 원본 영문 문서(링크 제공됨)를 참조할 것을 권장합니다.