

IOS IPsec NAT transparantie met VPN-clientconfiguratievoorbeld

Inhoud

[Inleiding](#)

[Voorwaarden](#)

[Vereisten](#)

[Gebruikte componenten](#)

[Conventies](#)

[Configureren](#)

[Netwerkdigram](#)

[Routerconfiguratie](#)

[Verifiëren](#)

[Problemen oplossen](#)

[Opdrachten voor troubleshooting](#)

[Gerelateerde informatie](#)

[Inleiding](#)

Dit document is een voorbeeldconfiguratie voor Cisco IOS® ondersteuning van de IPsec Network Address Translation (NAT) Transparency-functie. Hiermee wordt ondersteuning geïntroduceerd voor IPsec-verkeer om door NAT of Point Address Translation (PAT) in het netwerk te reizen door vele bekende incompatibelen tussen NAT en IPsec te adresseren.

[Voorwaarden](#)

[Vereisten](#)

Er zijn geen specifieke vereisten van toepassing op dit document.

[Gebruikte componenten](#)

De informatie in dit document is gebaseerd op de volgende software- en hardware-versies:

- Cisco 2621 router 12.2.13.7T1 en hoger
- Cisco VPN-client 3.6.3 (configuratie niet weergegeven)

De informatie in dit document is gebaseerd op de apparaten in een specifieke laboratoriumomgeving. Alle apparaten die in dit document worden beschreven, hadden een opgeschoonde (standaard)configuratie. Als uw netwerk live is, moet u de potentiële impact van elke opdracht begrijpen.

Conventies

Raadpleeg [Cisco Technical Tips Conventions \(Conventies voor technische tips van Cisco\)](#) voor meer informatie over documentconventies.


Configureren

Deze sectie bevat informatie over het configureren van de functies die in dit document worden beschreven.

N.B.: Gebruik het [Opdrachtupgereedschap \(alleen geregistreeerde klanten\)](#) om meer informatie te vinden over de opdrachten die in dit document worden gebruikt.

Netwerkdigram

Het netwerk in dit document is als volgt opgebouwd:

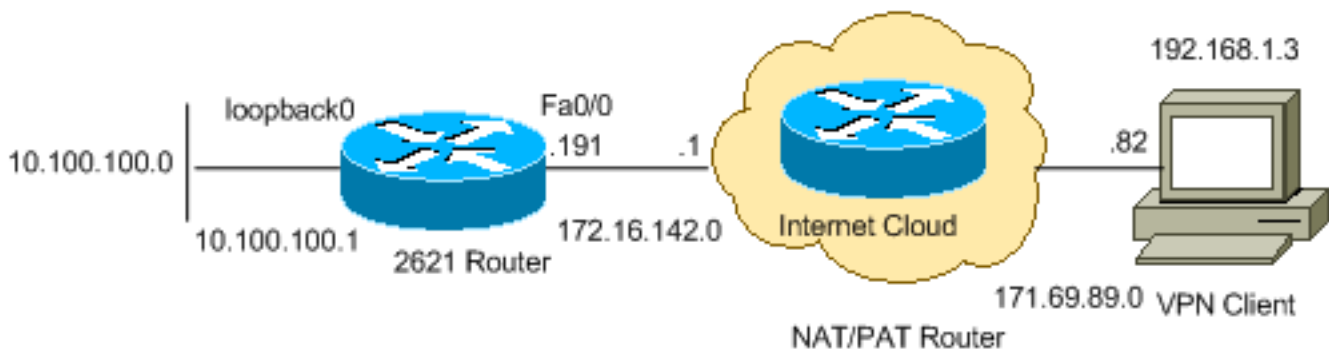

Routerconfiguratie

Voer de volgende stappen uit:

1. Geef de opdracht `Versie` op om de softwareversie weer te geven die de switch uitvoert.

```
2621#show version
Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-IK903S3-M), Version 12.2(13.7)T1,
MAINTENANCE INTERIM SOFTWARE
TAC Support: http://www.cisco.com/tac
Copyright (c) 1986-2002 by cisco Systems, Inc.
Compiled Sat 21-Dec-02 14:10 by ccai
Image text-base: 0x80008098, data-base: 0x818B6330
```

```
ROM: System Bootstrap, Version 11.3(2)XA4, RELEASE SOFTWARE (fc1)
ROM: C2600 Software (C2600-IK903S3-M), Version 12.2(13.7)T1,
MAINTENANCE INTERIM SOFTWARE
```

```
2621 uptime is 33 minutes
System returned to ROM by reload
System image file is "flash:c2600-ik9o3s3-mz.122-13.7.T1"
```

```
cisco 2621 (MPC860) processor (revision 0x102) with 60416K/5120K bytes of memory.
Processor board ID JAB0407020V (2751454139)
M860 processor: part number 0, mask 49
Bridging software.
X.25 software, Version 3.0.0.
```

Primary Rate ISDN software, Version 1.1.
2 FastEthernet/IEEE 802.3 interface(s)
2 Channelized T1/PRI port(s)
32K bytes of non-volatile configuration memory.
16384K bytes of processor board System flash (Read/Write)

Configuration register is 0x2102

2. Geef de show run opdracht op.

```
2621#show run
```

```
Building configuration...
```

```
Current configuration : 2899 bytes
```

```
!
```

```
version 12.2
```

```
service timestamps debug datetime msec localtime
```

```
service timestamps log datetime msec localtime
```

```
no service password-encryption
```

```
!
```

```
hostname 2621
```

```
!
```

```
boot system flash
```

```
logging queue-limit 100
```

```
enable secret 5 $1$dGFC$VA28yOWzxlCKyjldq8SkE/
```

```
!
```

```
username cisco password 0 cisco123
```

```
username client password 0 testclient
```

```
aaa new-model
```

```
!
```

```
!
```

```
aaa authentication login userauthen local
```

```
aaa authorization network foo local
```

```
aaa session-id common
```

```
ip subnet-zero
```

```
ip cef
```

```
!
```

```
!
```

```
no ip domain lookup
```

```
ip domain name cisco.com
```

```
!
```

```
!
```

```
!
```

```
crypto isakmp policy 20
```

```
  encr 3des
```

```
  hash md5
```

```
  authentication pre-share
```

```
  group 2
```

```
crypto isakmp keepalive 40 5
```

```
!--- Allows an IPsec node to send NAT keepalive !--- packets every 20 seconds. crypto
```

```
isakmp nat keepalive 20
```

```
!
```

```
crypto isakmp client configuration group cisco
```

```
  key test1234
```

```
  pool test
```

```
  acl 120
```

```
!
```

```
!
```

```
!--- Transform set "test" which uses Triple DES !--- encryptions and MD5 (HMAC variant) !--
```

```
- for data packet authentication: crypto ipsec transform-set test esp-3des esp-md5-hmac
```

```
crypto ipsec transform-set foo esp-3des esp-sha-hmac
```

```
!
```

```
crypto ipsec profile greprotect
```

```
!
```

```
!  
!--- Dynamic crypto map. crypto dynamic-map dynmap 1  
set transform-set foo  
match address 199  
!  
!  
crypto map test client authentication list userauthen  
crypto map test isakmp authorization list foo  
crypto map test client configuration address respond  
!--- Adds a dynamic crypto map set to a static crypto map set. crypto map test 20 ipsec-  
isakmp dynamic dynmap  
!  
!  
!  
voice call carrier capacity active  
!  
!  
!  
!  
!  
!  
no voice hpi capture buffer  
no voice hpi capture destination  
!  
!  
mta receive maximum-recipients 0  
!  
!  
controller T1 0/0  
framing sf  
linecode ami  
!  
controller T1 0/1  
framing sf  
linecode ami  
!  
!  
!  
interface Loopback0  
ip address 10.100.100.1 255.255.255.0  
ip nat inside  
!  
interface FastEthernet0/0  
ip address 172.16.142.191 255.255.255.0  
ip nat outside  
no ip route-cache  
no ip mroute-cache  
duplex auto  
speed auto  
!--- Applies a crypto map set to an interface. crypto map test  
!  
interface FastEthernet0/1  
ip address 10.130.13.13 255.255.0.0  
duplex auto  
speed auto  
!  
ip local pool test 192.168.1.1 192.168.1.250  
ip nat inside source route-map nonat interface FastEthernet0/0 overload  
no ip http server  
no ip http secure-server  
ip classless  
ip route 0.0.0.0 0.0.0.0 172.16.142.1  
!
```

```

ip pim bidir-enable
!
!
access-list 101 permit ip any any
access-list 101 permit esp any any
access-list 101 permit udp any any eq isakmp
access-list 101 permit ip 192.168.0.0 0.0.255.255 10.100.100.0 0.0.0.255
access-list 111 permit ip 10.100.100.0 0.0.0.255 10.10.10.0 0.0.0.255
access-list 112 deny ip 10.100.100.0 0.0.0.255 10.10.10.0 0.0.0.255
access-list 112 deny ip 10.100.100.0 0.0.0.255 192.168.1.0 0.0.0.255
access-list 112 permit ip 10.100.100.0 0.0.0.255 any
access-list 120 permit ip 10.100.100.0 0.0.0.255 192.168.1.0 0.0.0.255
!--- IPsec access list defines which traffic to protect. access-list 199 permit ip
10.100.100.0 0.0.0.255 192.168.1.0 0.0.0.255
access-list 199 permit ip host 172.16.142.191 192.168.1.0 0.0.0.255
!
route-map nonat permit 10
 match ip address 112
!
radius-server authorization permit missing Service-Type
call rsvp-sync
!
!
mgcp profile default
!
dial-peer cor custom
!
!
!
!
!
line con 0
 exec-timeout 0 0
line aux 0
line vty 0 4
 password cisco
!
!
end

2621#

```

Verifiëren

Gebruik dit gedeelte om te bevestigen dat de configuratie correct werkt.

Het [Uitvoer Tolk](#) ([uitsluitend geregistreerde](#) klanten) (OIT) ondersteunt bepaalde **show** opdrachten. Gebruik de OIT om een analyse van **tonen** opdrachtoutput te bekijken.

- **toon crypto isakmp sa** - Toont alle huidige IKE (Internet Key Exchange) veiligheidsassociaties (SAs) bij een peer.

```

2621#show crypto isakmp sa
  f_vrf/i_vrf    dst          src          state        conn-id slot
  /             172.16.142.191 171.69.89.82  QM_IDLE     4        0

```

- **Laat crypto ipsec sa-displays** de instellingen die worden gebruikt door de huidige SAs.

```

2621#show crypto ipsec sa

interface: FastEthernet0/0
  Crypto map tag: test, local addr. 172.16.142.191

```

```

protected vrf:
  local ident (addr/mask/prot/port): (10.100.100.0/255.255.255.0/0/0)
  !--- Subnet behind local VPN router. remote ident (addr/mask/prot/port):
  (192.168.1.3/255.255.255.255/0/0) !--- Subnet behind remote VPN router. current_peer:
  171.69.89.82:4500 PERMIT, flags={} #pkts encaps: 11, #pkts encrypt: 11, #pkts digest 11
  #pkts decaps: 11, #pkts decrypt: 11, #pkts verify 11 #pkts compressed: 0, #pkts
  decompressed: 0 #pkts not compressed: 0, #pkts compr. failed: 0 #pkts not decompressed: 0,
  #pkts decompress failed: 0 #send errors 0, #recv errors 0 local crypto endpt.:
  172.16.142.191, remote crypto endpt.: 171.69.89.82 !--- IP address of Encapsulating Security
  Payload (ESP) endpoints. path mtu 1500, media mtu 1500 current outbound spi: 9A12903F
  inbound esp sas: spi: 0xD44C2AFE(3561761534) !--- SPI inbound (ESP tunnel). transform: esp-
  3des esp-sha-hmac , in use settings = {Tunnel UDP-Encaps, } slot: 0, conn id: 2002, flow_id:
  3, crypto map: test
    sa timing: remaining key lifetime (k/sec): (4513510/3476)
    IV size: 8 bytes
    replay detection support: Y

  inbound ah sas:

  inbound pcp sas:

  outbound esp sas:
    spi: 0x9A12903F(2584907839)
  !--- Security parameter index (SPI) outbound (ESP tunnel). transform: esp-3des esp-sha-hmac
  , in use settings = {Tunnel UDP-Encaps, } slot: 0, conn id: 2003, flow_id: 4, crypto map:
  test
    sa timing: remaining key lifetime (k/sec): (4513511/3476)
    IV size: 8 bytes
    replay detection support: Y

  outbound ah sas:

  outbound pcp sas:

protected vrf:
  local ident (addr/mask/prot/port): (172.16.142.191/255.255.255.255/0/0)
  !--- Next tunnel. remote ident (addr/mask/prot/port): (192.168.1.3/255.255.255.255/0/0)
  current_peer: 171.69.89.82:4500 PERMIT, flags={} #pkts encaps: 0, #pkts encrypt: 0, #pkts
  digest 0 #pkts decaps: 0, #pkts decrypt: 0, #pkts verify 0 #pkts compressed: 0, #pkts
  decompressed: 0 #pkts not compressed: 0, #pkts compr. failed: 0 #pkts not decompressed: 0,
  #pkts decompress failed: 0 #send errors 0, #recv errors 0 local crypto endpt.:
  172.16.142.191, remote crypto endpt.: 171.69.89.82 path mtu 1500, media mtu 1500 current
  outbound spi: 1CD14C06 inbound esp sas: spi: 0x1EAC399E(514603422) transform: esp-3des esp-
  sha-hmac , in use settings = {Tunnel UDP-Encaps, } slot: 0, conn id: 2000, flow_id: 1, crypto
  map: test sa timing: remaining key lifetime (k/sec): (4434590/3471) IV size: 8 bytes replay
  detection support: Y inbound ah sas: inbound pcp sas: outbound esp sas: spi:
  0x1CD14C06(483478534) transform: esp-3des esp-sha-hmac , in use settings = {Tunnel UDP-
  Encaps, } slot: 0, conn id: 2001, flow_id: 2, crypto map: test sa timing: remaining key
  lifetime (k/sec): (4434590/3469) IV size: 8 bytes replay detection support: Y outbound ah
  sas: outbound pcp sas:

```

- **toont crypto motor verbinding actief**—Hiermee worden cryptografie motorstatistieken weergegeven. Dit toont pakketellingen.

```
2621#show crypto engine connection active
```

ID	Interface	IP-Address	State	Algorithm	Encrypt	Decrypt
4	FastEthernet0/0	172.16.142.191	set	HMAC_MD5+3DES_56_C	0	0
2000	FastEthernet0/0	172.16.142.191	set	HMAC_SHA+3DES_56_C	0	0
2001	FastEthernet0/0	172.16.142.191	set	HMAC_SHA+3DES_56_C	0	0
2002	FastEthernet0/0	172.16.142.191	set	HMAC_SHA+3DES_56_C	0	11
2003	FastEthernet0/0	172.16.142.191	set	HMAC_SHA+3DES_56_C	11	0

- **show crypto motor [kort | configuratie]** — Geeft een samenvatting van de configuratieinformatie voor de cryptomotoren. Gebruik deze opdracht in bevoorrechte EXEC-

modus. Deze opdracht geeft alle cryptomotoren weer en geeft de productnaam van AIM-VPN weer.

```
2621#show crypto engine configuration
```

```
crypto engine name: unknown
!--- Name of the crypto engine as assigned with the !--- key-name argument in the crypto key
generate dss command.
```

```
crypto engine type: software
!--- If "software" is listed, the crypto engine resides in either !--- the Route Switch
Processor (RSP) (the Cisco IOS crypto engine) or !--- in a second-generation Versatile
Interface Processor (VIP2). serial number: A3FFDBBB crypto engine state: installed !--- The
state "installed" indicates that a crypto engine is located !--- in the given slot, but is
not configured for encryption. crypto engine in slot: N/A platform: Cisco Software Crypto
Engine Encryption Process Info: input queue size: 500 input queue top: 34 input queue bot:
34 input queue count: 0 Crypto Adjacency Counts: Lock Count: 0 Unlock Count: 0 crypto lib
version: 14.0.0 ipsec lib version: 2.0.0
```

- **Laat crypto isakmp als detail nat-displays ISAKMP SA NAT-details zien.**

```
2621#show crypto isakmp sa detail nat
```

```
Codes: C - IKE configuration mode, D - Dead Peer Detection
```

```
K - Keepalives, N - NAT-traversal
```

```
X - IKE Extended Authentication
```

```
psk - Preshared key, rsig - RSA signature
```

```
renc - RSA encryption
```

```
f_vrf/i_vrf Conn id Local Remote Encr Hash Auth DH Lifetime Capabilities
/ 4 172.16.142.191 171.69.89.82 3des md5 2 23:56:43 CDXN
NAT keepalive(sec) 20
In local 172.16.142.191:4500 remote cisco:4500
```

f_vrf/i_vrf - De virtuele routing en het doorsturen van de voordeur (F_VRF) en de binnenkant VRF (I_VRF) van IKE SA. Als het FVRF mondiaal is, toont de uitvoer **f_vrf** als een leeg veld.

Problemen oplossen

Gebruik dit gedeelte om de configuratie van het probleem op te lossen.

Opdrachten voor troubleshooting

Het [Uitvoer Tolk](#) ([uitsluitend geregistreeerde](#) klanten) (OIT) ondersteunt bepaalde **show** opdrachten. Gebruik de OIT om een analyse van **tonen** opdrachtoutput te bekijken.

Raadpleeg [IP-beveiligingsproblemen](#) oplossen - [Opdrachten](#) voor extra informatie over probleemoplossing [begrijpen en gebruiken](#).

Opmerking: Raadpleeg [Belangrijke informatie over debug Commands](#) voordat u **debug**-opdrachten gebruikt.

Deze configuratie ontvangt NAT-toetsen elke 20 seconden zoals ingesteld.

- **debug crypto ipsec**-displays de IPsec onderhandelingen van fase 2.
- **debug crypto isakmp** - Hiermee geeft u de ISAKMP-onderhandelingen van fase 1 weer.
- **debug van crypto motor** - toont het verkeer dat wordt versleuteld.

```
2621#
```

```
2621#
```

```
*Mar 1 00:32:03.171: ISAKMP (0:4): received packet from 171.69.89.82
```

```
dport 4500 sport 4500 Global (R) QM_IDLE
```

```

*Mar 1 00:32:03.171: ISAKMP: set new node 1489874950 to QM_IDLE
*Mar 1 00:32:03.175: ISAKMP (0:4): processing HASH payload. message
                        ID = 1489874950
*Mar 1 00:32:03.175: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                        spi 0, message ID = 1489874950, sa = 82443410
*Mar 1 00:32:03.175: ISAKMP (0:4): deleting node 1489874950 error FALSE
                        reason "informational (in) state 1"
*Mar 1 00:32:03.175: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_INFO_NOTIFY
*Mar 1 00:32:03.175: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                        New State = IKE_P1_COMPLETE

*Mar 1 00:32:13.115: ISAKMP (0:4): purging node 428915319
*Mar 1 00:32:23.199: ISAKMP (0:4): received packet from 171.69.89.82
                        dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:32:23.199: ISAKMP: set new node -1483946735 to QM_IDLE
*Mar 1 00:32:23.203: ISAKMP (0:4): processing HASH payload. message ID = -1483946735
*Mar 1 00:32:23.203: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                        spi 0, message ID = -1483946735, sa = 82443410
*Mar 1 00:32:23.203: ISAKMP (0:4): deleting node -1483946735 error
                        FALSE reason "informational (in) state 1"
*Mar 1 00:32:23.203: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_INFO_NOTIFY
*Mar 1 00:32:23.203: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                        New State = IKE_P1_COMPLETE

*Mar 1 00:32:33.147: ISAKMP (0:4): purging node -1677054470

```

- **debug ip pakket [detail]**-Hiermee geeft u algemene IP-zuiveringsinformatie en IP-beveiligingsopties (IPSO) op.
- **debug ip icmp**-displays informatie over de transacties van het Intern Control Message Protocol (ICMP).

Generic IP:

```

ICMP packet debugging is on
IP packet debugging is on (detailed)

```

```

*Mar 1 00:38:43.735: IP: s=171.69.89.82 (FastEthernet0/0), d=172.16.142.191
                        (FastEthernet0/0), len 108, rcvd 3
*Mar 1 00:38:43.735: UDP src=4500, dst=4500
*Mar 1 00:38:48.863: IP: s=192.168.1.3 (FastEthernet0/0), d=10.100.100.1,
                        len 60, rcvd 4
*Mar 1 00:38:48.863: ICMP type=8, code=0
*Mar 1 00:38:48.863: ICMP: echo reply sent, src 10.100.100.1, dst 192.168.1.3
*Mar 1 00:38:48.867: IP: s=10.100.100.1 (local), d=192.168.1.3 (FastEthernet0/0),
                        len 60, sending
*Mar 1 00:38:48.867: ICMP type=0, code=0
*Mar 1 00:38:49.863: IP: s=192.168.1.3 (FastEthernet0/0), d=10.100.100.1,
                        len 60, rcvd 4
*Mar 1 00:38:49.863: ICMP type=8, code=0
*Mar 1 00:38:49.863: ICMP: echo reply sent, src 10.100.100.1, dst 192.168.1.3
*Mar 1 00:38:49.863: IP: s=10.100.100.1 (local), d=192.168.1.3 (FastEthernet0/0),
                        len 60, sending
*Mar 1 00:38:49.867: ICMP type=0, code=0
*Mar 1 00:38:50.863: IP: s=192.168.1.3 (FastEthernet0/0), d=10.100.100.1,
                        len 60, rcvd 4
*Mar 1 00:38:50.867: ICMP type=8, code=0
*Mar 1 00:38:50.867: ICMP: echo reply sent, src 10.100.100.1, dst 192.168.1.3
*Mar 1 00:38:50.867: IP: s=10.100.100.1 (local), d=192.168.1.3 (FastEthernet0/0),
                        len 60, sending
*Mar 1 00:38:50.867: ICMP type=0, code=0
*Mar 1 00:38:51.867: IP: s=192.168.1.3 (FastEthernet0/0), d=10.100.100.1,
                        len 60, rcvd 4
*Mar 1 00:38:51.867: ICMP type=8, code=0
*Mar 1 00:38:51.867: ICMP: echo reply sent, src 10.100.100.1, dst 192.168.1.3

```

- **debug crypto ipsec**-displays de IPsec onderhandelingen van fase 2.

- **debug crypto isakmp** - Hiermee geeft u de ISAKMP-onderhandelingen van fase 1 weer.
- **debug van crypto motor-displays** het verkeer dat versleuteld wordt.

```

2621#
2621#
2621#
2621#
*Mar 1 00:27:54.735: ISAKMP (0:0): received packet from 171.69.89.82 dport
                    500 sport 500 Global (N) NEW SA
*Mar 1 00:27:54.739: ISAKMP: Created a peer struct for 171.69.89.82, peer port 500
*Mar 1 00:27:54.739: ISAKMP: Locking peer struct 0x82C88D44, IKE refcount
                    1 for crypto_ikmp_config_initialize_sa
*Mar 1 00:27:54.739: ISAKMP (0:0): Setting client config settings 82A819DC
*Mar 1 00:27:54.739: ISAKMP (0:0): (Re)Setting client xauth list and state
*Mar 1 00:27:54.739: ISAKMP: local port 500, remote port 500
*Mar 1 00:27:54.743: ISAKMP: Find a dup sa in the avl tree during calling
                    isadb_insert sa = 82443410
*Mar 1 00:27:54.743: ISAKMP (0:4): processing SA payload. message ID = 0
*Mar 1 00:27:54.743: ISAKMP (0:4): processing ID payload. message ID = 0
*Mar 1 00:27:54.743: ISAKMP (0:4): peer matches *none* of the profiles
*Mar 1 00:27:54.743: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.743: ISAKMP (0:4): vendor ID seems Unity/DPD but major 215 mismatch
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID is XAUTH
*Mar 1 00:27:54.747: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID is DPD
*Mar 1 00:27:54.747: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID seems Unity/DPD but major 123 mismatch
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID is NAT-T v2
*Mar 1 00:27:54.747: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.747: ISAKMP (0:4): vendor ID seems Unity/DPD but major 194 mismatch
*Mar 1 00:27:54.751: ISAKMP (0:4): processing vendor id payload
*Mar 1 00:27:54.751: ISAKMP (0:4): vendor ID is Unity
*Mar 1 00:27:54.751: ISAKMP (0:4) Authentication by xauth preshared
*Mar 1 00:27:54.751: ISAKMP (0:4): Checking ISAKMP transform 1 against
                    priority 20 policy
*Mar 1 00:27:54.751: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.751: ISAKMP: hash SHA
*Mar 1 00:27:54.751: ISAKMP: default group 2
*Mar 1 00:27:54.751: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.751: ISAKMP: life type in seconds
*Mar 1 00:27:54.751: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.755: ISAKMP: keylength of 256
*Mar 1 00:27:54.755: ISAKMP (0:4): Encryption algorithm offered does not
                    match policy!
*Mar 1 00:27:54.755: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.755: ISAKMP (0:4): Checking ISAKMP transform 2 against
                    priority 20 policy
*Mar 1 00:27:54.755: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.755: ISAKMP: hash MD5
*Mar 1 00:27:54.755: ISAKMP: default group 2
*Mar 1 00:27:54.755: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.755: ISAKMP: life type in seconds
*Mar 1 00:27:54.755: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.759: ISAKMP: keylength of 256
*Mar 1 00:27:54.759: ISAKMP (0:4): Encryption algorithm offered does not
                    match policy!
*Mar 1 00:27:54.759: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.759: ISAKMP (0:4): Checking ISAKMP transform 3 against
                    priority 20 policy
*Mar 1 00:27:54.759: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.759: ISAKMP: hash SHA
*Mar 1 00:27:54.759: ISAKMP: default group 2
*Mar 1 00:27:54.759: ISAKMP: auth pre-share
*Mar 1 00:27:54.759: ISAKMP: life type in seconds

```

*Mar 1 00:27:54.759: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.759: ISAKMP: keylength of 256
*Mar 1 00:27:54.763: ISAKMP (0:4): Encryption algorithm offered does not match policy!
*Mar 1 00:27:54.763: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.763: ISAKMP (0:4): Checking ISAKMP transform 4 against priority 20 policy
*Mar 1 00:27:54.763: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.763: ISAKMP: hash MD5
*Mar 1 00:27:54.763: ISAKMP: default group 2
*Mar 1 00:27:54.763: ISAKMP: auth pre-share
*Mar 1 00:27:54.763: ISAKMP: life type in seconds
*Mar 1 00:27:54.763: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.763: ISAKMP: keylength of 256
*Mar 1 00:27:54.763: ISAKMP (0:4): Encryption algorithm offered does not match policy!
*Mar 1 00:27:54.767: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.767: ISAKMP (0:4): Checking ISAKMP transform 5 against priority 20 policy
*Mar 1 00:27:54.767: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.767: ISAKMP: hash SHA
*Mar 1 00:27:54.767: ISAKMP: default group 2
*Mar 1 00:27:54.767: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.767: ISAKMP: life type in seconds
*Mar 1 00:27:54.767: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.767: ISAKMP: keylength of 192
*Mar 1 00:27:54.767: ISAKMP (0:4): Encryption algorithm offered does not match policy!
*Mar 1 00:27:54.771: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.771: ISAKMP (0:4): Checking ISAKMP transform 6 against priority 20 policy
*Mar 1 00:27:54.771: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.771: ISAKMP: hash MD5
*Mar 1 00:27:54.771: ISAKMP: default group 2
*Mar 1 00:27:54.771: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.771: ISAKMP: life type in seconds
*Mar 1 00:27:54.771: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.771: ISAKMP: keylength of 192
*Mar 1 00:27:54.771: ISAKMP (0:4): Encryption algorithm offered does not match policy!
*Mar 1 00:27:54.771: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.775: ISAKMP (0:4): Checking ISAKMP transform 7 against priority 20 policy
*Mar 1 00:27:54.775: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.775: ISAKMP: hash SHA
*Mar 1 00:27:54.775: ISAKMP: default group 2
*Mar 1 00:27:54.775: ISAKMP: auth pre-share
*Mar 1 00:27:54.775: ISAKMP: life type in seconds
*Mar 1 00:27:54.775: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.775: ISAKMP: keylength of 192
*Mar 1 00:27:54.775: ISAKMP (0:4): Encryption algorithm 1 00:27:54.783: ISAKMP: hash SHA offered does not match policy!
*Mar 1 00:27:54.775: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.775: ISAKMP (0:4): Checking ISAKMP transform 8 against priority 20 policy
*Mar 1 00:27:54.779: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.779: ISAKMP: hash MD5
*Mar 1 00:27:54.779: ISAKMP: default group 2
*Mar 1 00:27:54.779: ISAKMP: auth pre-share
*Mar 1 00:27:54.779: ISAKMP: life type in seconds
*Mar 1 00:27:54.779: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.779: ISAKMP: keylength of 192
*Mar 1 00:27:54.779: ISAKMP (0:4): Encryption algorithm offered does not match policy!

*Mar 1 00:27:54.779: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.779: ISAKMP (0:4): Checking ISAKMP transform 9 against priority
20 policy
*Mar 1 00:27:54.783: ISAKMP: encryption AES-CBC
*Mar
*Mar 1 00:27:54.783: ISAKMP: default group 2
*Mar 1 00:27:54.783: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.783: ISAKMP: life type in seconds
*Mar 1 00:27:54.783: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.783: ISAKMP: keylength of 128
*Mar 1 00:27:54.783: ISAKMP (0:4): Encryption algorithm offered does not match
policy!
*Mar 1 00:27:54.783: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.783: ISAKMP (0:4): Checking ISAKMP transform 10 against
priority 20 policy
*Mar 1 00:27:54.783: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.787: ISAKMP: hash MD5
*Mar 1 00:27:54.787: ISAKMP: default group 2
*Mar 1 00:27:54.787: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.787: ISAKMP: life type in seconds
*Mar 1 00:27:54.787: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.787: ISAKMP: keylength of 128
*Mar 1 00:27:54.787: ISAKMP (0:4): Encryption algorithm offered does not match
policy!
*Mar 1 00:27:54.787: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.787: ISAKMP (0:4): Checking ISAKMP transform 11 against
priority 20 policy
*Mar 1 00:27:54.787: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.787: ISAKMP: hash SHA
*Mar 1 00:27:54.791: ISAKMP: default group 2
*Mar 1 00:27:54.791: ISAKMP: auth pre-share
*Mar 1 00:27:54.791: ISAKMP: life type in seconds
*Mar 1 00:27:54.791: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.791: ISAKMP: keylength of 128
*Mar 1 00:27:54.791: ISAKMP (0:4): Encryption algorithm offered does not
match policy!
*Mar 1 00:27:54.791: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.791: ISAKMP (0:4): Checking ISAKMP transform 12 against
priority 20 policy
*Mar 1 00:27:54.791: ISAKMP: encryption AES-CBC
*Mar 1 00:27:54.791: ISAKMP: hash MD5
*Mar 1 00:27:54.791: ISAKMP: default group 2
*Mar 1 00:27:54.795: ISAKMP: auth pre-share
*Mar 1 00:27:54.795: ISAKMP: life type in seconds
*Mar 1 00:27:54.795: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.795: ISAKMP: keylength of 128
*Mar 1 00:27:54.795: ISAKMP (0:4): Encryption algorithm offered does not
match policy!
*Mar 1 00:27:54.795: ISAKMP (0:4): atts are not acceptable. Next payload
7:54.795: ISAKMP: hash SHA is 3
*Mar 1 00:27:54.795: ISAKMP (0:4): Checking ISAKMP transform 13 against
priority 20 policy
*Mar 1 00:27:54.795: ISAKMP: encryption 3DES-CBC
*Mar 1 00:2
*Mar 1 00:27:54.795: ISAKMP: default group 2
*Mar 1 00:27:54.795: ISAKMP: auth XAUTHInitPreShared
*Mar 1 00:27:54.799: ISAKMP: life type in seconds
*Mar 1 00:27:54.799: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.799: ISAKMP (0:4): Hash algorithm offered does not match policy!
*Mar 1 00:27:54.799: ISAKMP (0:4): atts are not acceptable. Next payload is 3
*Mar 1 00:27:54.799: ISAKMP (0:4): Checking ISAKMP transform 14 against
priority 20 policy
*Mar 1 00:27:54.799: ISAKMP: encryption 3DES-CBC
*Mar 1 00:27:54.799: ISAKMP: hash MD5

```

*Mar 1 00:27:54.799: ISAKMP:      default group 2
*Mar 1 00:27:54.799: ISAKMP:      auth XAUTHInitPreShared
*Mar 1 00:27:54.799: ISAKMP:      life type in seconds
*Mar 1 00:27:54.803: ISAKMP:      life duration (VPI) of 0x0 0x20 0xC4 0x9B
*Mar 1 00:27:54.803: ISAKMP (0:4): atts are acceptable. Next payload is 3
*Mar 1 00:27:55.015: ISAKMP (0:4): processing KE payload. message ID = 0
*Mar 1 00:27:55.287: ISAKMP (0:4): processing NONCE payload. message ID = 0
*Mar 1 00:27:55.287: ISAKMP (0:4): vendor ID is NAT-T v2
*Mar 1 00:27:55.287: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_AM_EXCH
*Mar 1 00:27:55.291: ISAKMP (0:4): Old State = IKE_READY New State =
      IKE_R_AM_AAA_AWAIT

*Mar 1 00:27:55.291: ISAKMP: got callback 1
*Mar 1 00:27:55.295: ISAKMP (0:4): SKEYID state generated
*Mar 1 00:27:55.299: ISAKMP (0:4): constructed NAT-T vendor-02 ID
*Mar 1 00:27:55.299: ISAKMP (0:4): SA is doing pre-shared key authentication
      plus XAUTH using id type ID_IPV4_ADDR
*Mar 1 00:27:55.299: ISAKMP (4): ID payload
      next-payload : 10
      type          : 1
      addr          : 172.16.142.191
      protocol      : 17
      port          : 0
      length        : 8
*Mar 1 00:27:55.299: ISAKMP (4): Total payload length: 12
*Mar 1 00:27:55.303: ISAKMP (0:4): constructed HIS NAT-D
*Mar 1 00:27:55.303: ISAKMP (0:4): constructed MINE NAT-D
*Mar 1 00:27:55.303: ISAKMP (0:4): sending packet to 171.69.89.82
      my_port 500 peer_port 500 (R) AG_INIT_EXCH
*Mar 1 00:27:55.303: ISAKMP (0:4): Input = IKE_MSG_FROM_AAA,
      PRESHARED_KEY_REPLY
*Mar 1 00:27:55.303: ISAKMP (0:4): Old State = IKE_R_AM_AAA_AWAIT
      New State = IKE_R_AM2

*Mar 1 00:27:55.391: ISAKMP (0:4): received packet from 171.69.89.82
      dport 4500 sport 4500 Global (R) AG_INIT_EXCH
*Mar 1 00:27:55.395: ISAKMP (0:4): processing HASH payload. message ID = 0
*Mar 1 00:27:55.395: ISAKMP (0:4): processing NOTIFY INITIAL_CONTACT protocol 1
      spi 0, message ID = 0, sa = 82443410
*Mar 1 00:27:55.399: ISAKMP (0:4): Process initial contact,
bring down existing phase 1 and 2 SA's with local 172.16.142.191
      remote 171.69.89.82 remote port 4500
*Mar 1 00:27:55.399: ISAKMP (0:4): returning IP addr to the address pool
*Mar 1 00:27:55.399: ISAKMP:received payload type 17
*Mar 1 00:27:55.399: ISAKMP (0:4): Detected NAT-D payload
*Mar 1 00:27:55.399: ISAKMP (0:4): recalc my hash for NAT-D
*Mar 1 00:27:55.399: ISAKMP (0:4): NAT match MINE hash
*Mar 1 00:27:55.399: ISAKMP:received payload type 17
*Mar 1 00:27:55.399: ISAKMP (0:4): Detected NAT-D payload
*Mar 1 00:27:55.399: ISAKMP (0:4): recalc his hash for NAT-D
*Mar 1 00:27:55.403: ISAKMP (0:4): NAT does not match HIS hash
*Mar 1 00:27:55.403: hash received: 93 31 EB 5E 30 E2 A0 C4 D3 6F 3E B1 B7
      F AE C3
*Mar 1 00:27:55.403: his nat hash : 14 64 77 EC E8 DC 78 B9 F9 DC 2B 46
      CB E8 1D 4
*Mar 1 00:27:55.403: ISAKMP (0:4): SA has been authenticated with 171.69.89.82
*Mar 1 00:27:55.407: ISAKMP (0:4): Detected port floating to port = 4500
*Mar 1 00:27:55.407: ISAKMP: Trying to insert a peer 171.69.89.82/4500/,
      and inserted successfully.
*Mar 1 00:27:55.407: ISAKMP (0:4): IKE_DPD is enabled, initializing timers
*Mar 1 00:27:55.407: ISAKMP: set new node 772423690 to CONF_XAUTH
*Mar 1 00:27:55.411: ISAKMP (0:4): sending packet to 171.69.89.82 my_port
      4500 peer_port 4500 (R) QM_IDLE
*Mar 1 00:27:55.411: ISAKMP (0:4): purging node 772423690

```

```

*Mar 1 00:27:55.411: ISAKMP: Sending phase 1 responder lifetime 86400

*Mar 1 00:27:55.411: ISAKMP (0:4): peer matches *none* of the profiles
*Mar 1 00:27:55.411: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_AM_EXCH
*Mar 1 00:27:55.411: ISAKMP (0:4): Old State = IKE_R_AM2 New State =
      IKE_P1_COMPLETE

*Mar 1 00:27:55.415: IPSEC(key_engine): got a queue event...
*Mar 1 00:27:55.415: ISAKMP (0:4): Need XAUTH
*Mar 1 00:27:55.415: ISAKMP (0:4): Input = IKE_MSG_INTERNAL,
      IKE_PHASE1_COMPLETE
*Mar 1 00:27:55.415: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
      New State = IKE_XAUTH_AAA_START_LOGIN_AWAIT

*Mar 1 00:27:55.419: ISAKMP: got callback 1
*Mar 1 00:27:55.419: ISAKMP: set new node -266369278 to CONF_XAUTH
*Mar 1 00:27:55.419: ISAKMP/xauth: request attribute XAUTH_USER_NAME_V2
*Mar 1 00:27:55.419: ISAKMP/xauth: request attribute XAUTH_USER_PASSWORD_V2
*Mar 1 00:27:55.419: ISAKMP (0:4): initiating peer config to 171.69.89.82.
      ID = -266369278
*Mar 1 00:27:55.423: ISAKMP (0:4): sending packet to 171.69.89.82 my_port
      4500 peer_port 4500 (R) CONF_XAUTH
*Mar 1 00:27:55.423: ISAKMP (0:4): Input = IKE_MSG_FROM_AAA,
      IKE_AAA_START_LOGIN
*Mar 1 00:27:55.423: ISAKMP (0:4): Old State = IKE_XAUTH_AAA_START_LOGIN_AWAIT
      New State = IKE_XAUTH_REQ_SENT

*Mar 1 00:27:55.959: ISAKMP (0:3): purging node 1153289263
*Mar 1 00:28:00.423: ISAKMP (0:4): retransmitting phase 2 CONF_XAUTH
      -266369278 ...
*Mar 1 00:28:00.423: ISAKMP (0:4): incrementing error counter on sa:
      retransmit phase 2
*Mar 1 00:28:00.423: ISAKMP (0:4): incrementing error counter on sa:
      retransmit phase 2
*Mar 1 00:28:00.423: ISAKMP (0:4): retransmitting phase 2 -266369278 CONF_XAUTH
*Mar 1 00:28:00.423: ISAKMP (0:4): sending packet to 171.69.89.82 my_port
      4500 peer_port 4500 (R) CONF_XAUTH
*Mar 1 00:28:02.635: ISAKMP (0:4): received packet from 171.69.89.82 dport
      4500 sport 4500 Global (R) CONF_XAUTH
*Mar 1 00:28:02.635: ISAKMP (0:4): processing transaction payload from
      171.69.89.82. message ID = -266369278
*Mar 1 00:28:02.639: ISAKMP: Config payload REPLY
*Mar 1 00:28:02.639: ISAKMP/xauth: reply attribute XAUTH_USER_NAME_V2
*Mar 1 00:28:02.639: ISAKMP/xauth: reply attribute XAUTH_USER_PASSWORD_V2
*Mar 1 00:28:02.639: ISAKMP (0:4): deleting node -266369278 error FALSE
      reason "done with xauth request/reply exchange"
*Mar 1 00:28:02.639: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_CFG_REPLY
*Mar 1 00:28:02.639: ISAKMP (0:4): Old State = IKE_XAUTH_REQ_SENT
      New State = IKE_XAUTH_AAA_CONT_LOGIN_AWAIT

*Mar 1 00:28:02.643: ISAKMP: got callback 1
*Mar 1 00:28:02.643: ISAKMP: set new node -1548124746 to CONF_XAUTH
*Mar 1 00:28:02.643: ISAKMP (0:4): initiating peer config to 171.69.89.82.
      ID = -1548124746
*Mar 1 00:28:02.647: ISAKMP (0:4): sending packet to 171.69.89.82 my_port
      4500 peer_port 4500 (R) CONF_XAUTH
*Mar 1 00:28:02.647: ISAKMP (0:4): Input = IKE_MSG_FROM_AAA,
      IKE_AAA_CONT_LOGIN
*Mar 1 00:28:02.647: ISAKMP (0:4): Old State = IKE_XAUTH_AAA_CONT_LOGIN_AWAIT
      New State = IKE_XAUTH_SET_SENT

*Mar 1 00:28:02.663: ISAKMP (0:4): received packet from 171.69.89.82 dport
      4500 sport 4500 Global (R) CONF_XAUTH
*Mar 1 00:28:02.663: ISAKMP (0:4): processing transaction payload from

```

171.69.89.82. message ID = -1548124746

*Mar 1 00:28:02.663: ISAKMP: Config payload ACK

*Mar 1 00:28:02.663: ISAKMP (0:4): XAUTH ACK Processed

*Mar 1 00:28:02.667: ISAKMP (0:4): deleting node -1548124746 error FALSE
reason "done with transaction"

*Mar 1 00:28:02.667: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER, IKE_CFG_ACK

*Mar 1 00:28:02.667: ISAKMP (0:4): Old State = IKE_XAUTH_SET_SENT
New State = IKE_P1_COMPLETE

*Mar 1 00:28:02.667: ISAKMP (0:4): Input = IKE_MSG_INTERNAL,
IKE_PHASE1_COMPLETE

*Mar 1 00:28:02.667: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
New State = IKE_P1_COMPLETE

*Mar 1 00:28:02.675: ISAKMP (0:4): received packet from 171.69.89.82
dport 4500 sport 4500 Global (R) QM_IDLE

*Mar 1 00:28:02.675: ISAKMP: set new node 1973520613 to QM_IDLE

*Mar 1 00:28:02.679: ISAKMP (0:4): processing transaction payload from
171.69.89.82. message ID = 1973520613

*Mar 1 00:28:02.679: ISAKMP: Config payload REQUEST

*Mar 1 00:28:02.679: ISAKMP (0:4): checking request:

*Mar 1 00:28:02.679: ISAKMP: IP4_ADDRESS

*Mar 1 00:28:02.679: ISAKMP: IP4_NETMASK

*Mar 1 00:28:02.679: ISAKMP: IP4_DNS

*Mar 1 00:28:02.683: ISAKMP: IP4_NBNS

*Mar 1 00:28:02.683: ISAKMP: ADDRESS_EXPIRY

*Mar 1 00:28:02.683: ISAKMP: APPLICATION_VERSION

*Mar 1 00:28:02.683: ISAKMP: UNKNOWN Unknown Attr: 0x7000

*Mar 1 00:28:02.683: ISAKMP: UNKNOWN Unknown Attr: 0x7001

*Mar 1 00:28:02.683: ISAKMP: DEFAULT_DOMAIN

*Mar 1 00:28:02.683: ISAKMP: SPLIT_INCLUDE

*Mar 1 00:28:02.683: ISAKMP: UNKNOWN Unknown Attr: 0x7003

*Mar 1 00:28:02.683: ISAKMP: UNKNOWN Unknown Attr: 0x7007

*Mar 1 00:28:02.683: ISAKMP: UNKNOWN Unknown Attr: 0x7008

*Mar 1 00:28:02.683: ISAKMP: UNKNOWN Unknown Attr: 0x7009

*Mar 1 00:28:02.687: ISAKMP: UNKNOWN Unknown Attr: 0x700A

*Mar 1 00:28:02.687: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER,
IKE_CFG_REQUEST

*Mar 1 00:28:02.687: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
New State = IKE_CONFIG_AUTHOR_AAA_AWAIT

*Mar 1 00:28:02.691: ISAKMP: got callback 1

*Mar 1 00:28:02.695: ISAKMP (0:4): attributes sent in message:

*Mar 1 00:28:02.695: Address: 0.2.0.0

*Mar 1 00:28:02.695: ISAKMP (0:4): allocating address 192.168.1.3

*Mar 1 00:28:02.695: ISAKMP: Sending private address: 192.168.1.3

*Mar 1 00:28:02.695: ISAKMP: Sending ADDRESS_EXPIRY seconds left to
use the address: 86392

*Mar 1 00:28:02.695: ISAKMP: Sending APPLICATION_VERSION string:
Cisco Internetwork Operating System Software
IOS (tm) C2600 Software (C2600-IK903S3-M), Version 12.2(13.7)T1,
MAINTENANCE INTERIM SOFTWARE

TAC Support: <http://www.cisco.com/tac>

Copyright (c) 1986-2002 by cisco Systems, Inc.

Compiled Sat 21-Dec-02 14:10 by ccai

*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7000)

*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7001)

*Mar 1 00:28:02.699: ISAKMP: Sending split include name 120 network
10.100.100.0 mask 255.255.255.0 protocol 0,
src port 0, dst port 0

*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7003)

*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7007)

*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7008)

```

*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x7009)
*Mar 1 00:28:02.699: ISAKMP (0/4): Unknown Attr: UNKNOWN (0x700A)
*Mar 1 00:28:02.703: ISAKMP (0/4): responding to peer config from
    171.69.89.82. ID = 1973520613
*Mar 1 00:28:02.703: ISAKMP (0/4): sending packet to 171.69.89.82 my_port
    4500 peer_port 4500 (R) CONF_ADDR
*Mar 1 00:28:02.707: ISAKMP (0/4): deleting node 1973520613 error FALSE
    reason ""
*Mar 1 00:28:02.707: ISAKMP (0/4): Input = IKE_MESG_FROM_AAA,
    IKE_AAA_GROUP_ATTR
*Mar 1 00:28:02.707: ISAKMP (0/4): Old State = IKE_CONFIG_AUTHOR_AAA_AWAIT
    New State = IKE_P1_COMPLETE

*Mar 1 00:28:02.775: ISAKMP (0/4): received packet from 171.69.89.82
    dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:02.775: ISAKMP: set new node 1783469429 to QM_IDLE
*Mar 1 00:28:02.787: ISAKMP (0/4): processing HASH payload. message
    ID = 1783469429
*Mar 1 00:28:02.787: ISAKMP (0/4): processing SA payload. message
    ID = 1783469429
*Mar 1 00:28:02.787: ISAKMP (0/4): Checking IPsec proposal 1
*Mar 1 00:28:02.787: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.787: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.787: ISAKMP:     authenticator is HMAC-MD5
*Mar 1 00:28:02.787: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.791: ISAKMP:     key length is 256
*Mar 1 00:28:02.791: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.791: ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*Mar 1 00:28:02.791: ISAKMP (0/4): atts are acceptable.
*Mar 1 00:28:02.791: ISAKMP (0/4): Checking IPsec proposal 1
*Mar 1 00:28:02.791: ISAKMP (0/4): transform 1, IPPCP LZS
*Mar 1 00:28:02.791: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.791: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.795: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.795: ISAKMP:     SA life duration (VPI) of  0x0 0x20 0xC4 0x9B
*Mar 1 00:28:02.795: ISAKMP (0/4): atts are acceptable.
*Mar 1 00:28:02.795: IPSEC(validate_proposal_request): proposal part #1,
    (key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
    local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
    remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
    protocol= ESP, transform= esp-aes 256 esp-md5-hmac ,
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x400
*Mar 1 00:28:02.799: IPSEC(validate_proposal_request): proposal part #2,
    (key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
    local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
    remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
    protocol= PCP, transform= comp-lzs ,
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.799: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.799: IPSEC(validate_transform_proposal): no IPSEC cryptomap
    exists for local address 172.16.142.191
*Mar 1 00:28:02.799: ISAKMP (0/4): IPsec policy invalidated proposal
*Mar 1 00:28:02.803: ISAKMP (0/4): Checking IPsec proposal 2
*Mar 1 00:28:02.803: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.803: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.803: ISAKMP:     authenticator is HMAC-SHA
*Mar 1 00:28:02.803: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.803: ISAKMP:     key length is 256
*Mar 1 00:28:02.803: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.803: ISAKMP:     SA life duration (VPI) of  0x0
    0x20 0xC4 0x9B
*Mar 1 00:28:02.803: ISAKMP (0/4): atts are acceptable.

```

*Mar 1 00:28:02.807: ISAKMP (0:4): Checking IPsec proposal 2
*Mar 1 00:28:02.807: ISAKMP (0:4): transform 1, IPPCP LZS
*Mar 1 00:28:02.807: ISAKMP: attributes in transform:
*Mar 1 00:28:02.807: ISAKMP: encaps is 61443
*Mar 1 00:28:02.807: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.807: ISAKMP: SA life duration (VPI) of 0x0
0x20 0xC4 0x9B
*Mar 1 00:28:02.807: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.807: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes 256 esp-sha-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x400
*Mar 1 00:28:02.811: IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= PCP, transform= comp-lzs ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.815: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.815: IPSEC(validate_transform_proposal): no IPSEC
cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.815: ISAKMP (0:4): IPsec policy invalidated proposal
*Mar 1 00:28:02.815: ISAKMP (0:4): Checking IPsec proposal 3
*Mar 1 00:28:02.815: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.815: ISAKMP: attributes in transform:
*Mar 1 00:28:02.815: ISAKMP: authenticator is HMAC-MD5
*Mar 1 00:28:02.815: ISAKMP: encaps is 61443
*Mar 1 00:28:02.815: ISAKMP: key length is 128
*Mar 1 00:28:02.819: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.819: ISAKMP: SA life duration (VPI) of 0x0 0x20
0xC4 0x9B
*Mar 1 00:28:02.819: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.819: ISAKMP (0:4): Checking IPsec proposal 3
*Mar 1 00:28:02.819: ISAKMP (0:4): transform 1, IPPCP LZS
*Mar 1 00:28:02.819: ISAKMP: attributes in transform:
*Mar 1 00:28:02.819: ISAKMP: encaps is 61443
*Mar 1 00:28:02.819: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.823: ISAKMP: SA life duration (VPI) of 0x0 0x20
0xC4 0x9B
*Mar 1 00:28:02.823: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.823: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x400
*Mar 1 00:28:02.827: IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= PCP, transform= comp-lzs ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.827: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.827: IPSEC(validate_transform_proposal): no IPSEC
cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.827: ISAKMP (0:4): IPsec policy invalidated proposal
*Mar 1 00:28:02.831: ISAKMP (0:4): Checking IPsec proposal 4
*Mar 1 00:28:02.831: ISAKMP: transform 1, ESP_AES


```

*Mar 1 00:28:02.831: ISAKMP:      attributes in transform:
*Mar 1 00:28:02.831: ISAKMP:      authenticator is HMAC-SHA
*Mar 1 00:28:02.831: ISAKMP:      encaps is 61443
*Mar 1 00:28:02.831: ISAKMP:      key length is 128
*Mar 1 00:28:02.831: ISAKMP:      SA life type in seconds
*Mar 1 00:28:02.831: ISAKMP:      SA life duration (VPI) of  0x0
                                0x20 0xC4 0x9B
*Mar 1 00:28:02.831: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.835: ISAKMP (0:4): Checking IPsec proposal 4
*Mar 1 00:28:02.835: ISAKMP (0:4): transform 1, IPsec LZS
*Mar 1 00:28:02.835: ISAKMP:      attributes in transform:
*Mar 1 00:28:02.835: ISAKMP:      encaps is 61443
*Mar 1 00:28:02.835: ISAKMP:      SA life type in seconds
*Mar 1 00:28:02.835: ISAKMP:      SA life duration (VPI) of  0x0 0x20
                                0xC4 0x9B
*Mar 1 00:28:02.835: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.835: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
  local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
  remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes esp-sha-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x400
*Mar 1 00:28:02.839: IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
  local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
  remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
  protocol= PCP, transform= comp-lzs ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.843: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.843: IPSEC(validate_transform_proposal): no IPSEC
                    cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.843: ISAKMP (0:4): IPsec policy invalidated proposal
*Mar 1 00:28:02.843: ISAKMP (0:4): Checking IPsec proposal 5
*Mar 1 00:28:02.843: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.843: ISAKMP:      attributes in transform:
*Mar 1 00:28:02.843: ISAKMP:      authenticator is HMAC-MD5
*Mar 1 00:28:02.843: ISAKMP:      encaps is 61443
*Mar 1 00:28:02.843: ISAKMP:      key length is 256
*Mar 1 00:28:02.847: ISAKMP:      SA life type in seconds
*Mar 1 00:28:02.847: ISAKMP:      SA life duration (VPI) of  0x0
                                0x20 0xC4 0x9B
*Mar 1 00:28:02.847: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.847: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
  local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
  remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-aes 256 esp-md5-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x400
*Mar 1 00:28:02.851: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.851: IPSEC(validate_transform_proposal): no IPSEC
                    cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.851: ISAKMP (0:4): IPsec policy invalidated proposal
*Mar 1 00:28:02.851: ISAKMP (0:4): Checking IPsec proposal 6
*Mar 1 00:28:02.851: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.851: ISAKMP:      attributes in transform:
*Mar 1 00:28:02.851: ISAKMP:      authenticator is HMAC-SHA
*Mar 1 00:28:02.855: ISAKMP:      encaps is 61443
*Mar 1 00:28:02.855: ISAKMP:      key length is 256
*Mar 1 00:28:02.855: ISAKMP:      SA life type in seconds
*Mar 1 00:28:02.855: ISAKMP:      SA life duration (VPI) of  0x0
                                0x20 0xC4 0x9B

```

*Mar 1 00:28:02.855: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.855: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes 256 esp-sha-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 256, flags= 0x400
*Mar 1 00:28:02.859: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.859: IPSEC(validate_transform_proposal): no IPSEC
cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.859: ISAKMP (0:4): IPSec policy invalidated proposal
*Mar 1 00:28:02.859: ISAKMP (0:4): Checking IPSec proposal 7
*Mar 1 00:28:02.859: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.863: ISAKMP: attributes in transform:
*Mar 1 00:28:02.863: ISAKMP: authenticator is HMAC-MD5
*Mar 1 00:28:02.863: ISAKMP: encaps is 61443
*Mar 1 00:28:02.863: ISAKMP: key length is 128
*Mar 1 00:28:02.863: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.863: ISAKMP: SA life duration (VPI) of 0x0 0x20
0xC4 0x9B
*Mar 1 00:28:02.863: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.863: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x400
*Mar 1 00:28:02.867: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.867: IPSEC(validate_transform_proposal): no IPSEC
cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.867: ISAKMP (0:4): IPSec policy invalidated proposal
*Mar 1 00:28:02.867: ISAKMP (0:4): Checking IPSec proposal 8
*Mar 1 00:28:02.871: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:02.871: ISAKMP: attributes in transform:
*Mar 1 00:28:02.871: ISAKMP: authenticator is HMAC-SHA
*Mar 1 00:28:02.871: ISAKMP: encaps is 61443
*Mar 1 00:28:02.871: ISAKMP: key length is 128
*Mar 1 00:28:02.871: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.871: ISAKMP: SA life duration (VPI) of 0x0
0x20 0xC4 0x9B
*Mar 1 00:28:02.871: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.875: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-aes esp-sha-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 128, flags= 0x400
*Mar 1 00:28:02.875: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.875: IPSEC(validate_transform_proposal): no IPSEC
cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.879: ISAKMP (0:4): IPSec policy invalidated proposal
*Mar 1 00:28:02.879: ISAKMP (0:4): Checking IPSec proposal 9
*Mar 1 00:28:02.879: ISAKMP: transform 1, ESP_3DES
*Mar 1 00:28:02.879: ISAKMP: attributes in transform:
*Mar 1 00:28:02.879: ISAKMP: authenticator is HMAC-MD5
*Mar 1 00:28:02.879: ISAKMP: encaps is 61443
*Mar 1 00:28:02.879: ISAKMP: SA life type in seconds
*Mar 1 00:28:02.879: ISAKMP: SA life duration (VPI) of 0x0 0x20
0xC4 0x9B
*Mar 1 00:28:02.879: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.883: ISAKMP (0:4): Checking IPSec proposal 9

```

*Mar 1 00:28:02.883: ISAKMP (0:4): transform 1, IPPCP LZS
*Mar 1 00:28:02.883: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.883: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.883: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.883: ISAKMP:     SA life duration (VPI) of   0x0 0x20
                                0xC4 0x9B
*Mar 1 00:28:02.883: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.883: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
  local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
  remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-3des esp-md5-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.887: IPSEC(validate_proposal_request): proposal part #2,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
  local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
  remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
  protocol= PCP, transform= comp-lzs ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.891: IPSEC(kei_proxy): head = test, map->ivrf = , kei->ivrf =
*Mar 1 00:28:02.891: IPSEC(validate_transform_proposal): no IPSEC
                        cryptomap exists for local address 172.16.142.191
*Mar 1 00:28:02.891: ISAKMP (0:4): IPsec policy invalidated proposal
*Mar 1 00:28:02.891: ISAKMP (0:4): Checking IPsec proposal 10
*Mar 1 00:28:02.891: ISAKMP: transform 1, ESP_3DES
*Mar 1 00:28:02.891: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.891: ISAKMP:     authenticator is HMAC-SHA
*Mar 1 00:28:02.891: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.891: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.891: ISAKMP:     SA life duration (VPI) of   0x0 0x20
                                0xC4 0x9B
*Mar 1 00:28:02.895: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.895: ISAKMP (0:4): Checking IPsec proposal 10
*Mar 1 00:28:02.895: ISAKMP (0:4): transform 1, IPPCP LZS
*Mar 1 00:28:02.895: ISAKMP:   attributes in transform:
*Mar 1 00:28:02.895: ISAKMP:     encaps is 61443
*Mar 1 00:28:02.895: ISAKMP:     SA life type in seconds
*Mar 1 00:28:02.895: ISAKMP:     SA life duration (VPI) of   0x0 0x20
                                0xC4 0x9B
*Mar 1 00:28:02.899: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:02.899: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.142.191, remote= 171.69.89.82,
  local_proxy= 172.16.142.191/255.255.255.255/0/0 (type=1),
  remote_proxy= 192.168.1.3/255.255.255.255/0/0 (type=1),
  protocol= ESP, transform= esp-3des esp-sha-hmac ,
  lifedur= 0s and 0kb,
  spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x400
*Mar 1 00:28:02.899: IPSEC(validate_proposal_request): proposal part #2
*Mar 1 00:28:02.923: ISAKMP (0:4): asking for 1 spis from ipsec
*Mar 1 00:28:02.923: ISAKMP (0:4): Node 1783469429, Input =
                        IKE_MSG_FROM_PEER, IKE_QM_EXCH
*Mar 1 00:28:02.923: ISAKMP (0:4): Old State = IKE_QM_READY  New State =
                        IKE_QM_SPI_STARVE
*Mar 1 00:28:02.923: IPSEC(key_engine): got a queue event...
*Mar 1 00:28:02.923: IPSEC(spi_response): getting spi 514603422 for SA
  from 172.16.142.191 to 171.69.89.82 for prot 3
*Mar 1 00:28:02.927: ISAKMP: received ke message (2/1)
*Mar 1 00:28:03.175: ISAKMP (0:4): sending packet to 171.69.89.82 my_port
                        4500 peer_port 4500 (R) QM_IDLE
*Mar 1 00:28:03.179: ISAKMP (0:4): Node 1783469429, Input =
                        IKE_MSG_FROM_IPSEC, IKE_SPI_REPLY
*Mar 1 00:28:03.179: ISAKMP (0:4): Old State = IKE_QM_SPI_STARVE

```

```

New State = IKE_QM_R_QM2
*Mar 1 00:28:03.239: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:03.247: ISAKMP: Locking peer struct 0x82C88D44, IPSEC
                                refcount 1 for for stuff_ke
*Mar 1 00:28:03.247: ISAKMP (0:4): Creating IPsec SAs
*Mar 1 00:28:03.251: inbound SA from 171.69.89.82 to 172.16.142.191
                                (f/i) 0/ 0
                                (proxy 192.168.1.3 to 172.16.142.191)
*Mar 1 00:28:03.251: has spi 0x1EAC399E and conn_id 2000 and
                                flags 400
*Mar 1 00:28:03.263: IPSEC(create_sa): sa created,
                                (sa) sa_dest= 171.69.89.82, sa_prot= 50,
                                sa_spi= 0x1CD14C06(483478534),
                                sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 2001
*Mar 1 00:28:06.675: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:06.679: ISAKMP: set new node -2064779316 to QM_IDLE
*Mar 1 00:28:06.687: ISAKMP (0:4): processing HASH payload. message
                                ID = -2064779316
*Mar 1 00:28:06.687: ISAKMP (0:4): processing SA payload. message
                                ID = -2064779316
*Mar 1 00:28:06.687: ISAKMP (0:4): Checking IPsec proposal 1
*Mar 1 00:28:06.687: ISAKMP: transform 1, ESP_AES
*Mar 1 00:28:06.687: ISAKMP: attributes in transform:
*Mar 1 00:28:06.691: ISAKMP: authenticator is HMAC-MD5
*Mar 1 00:28:06.691: ISAKMP: encaps is 61443
*Mar 1 00:28:06.691: ISAKMP: key length is 256
*Mar 1 00:28:06.691: ISAKMP: SA life type in seconds
*Mar 1 00:28:06.691: ISAKMP: SA life duration (VPI) of 0x0 0x20
0xC4 0x9B
*Mar 1 00:28:06.691: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:06.691: ISAKMP (0:4): Checking IPsec proposal 1
*Mar 1 00:28:06.691: ISAKMP (0:4): transform 1, IPPCP LZS
*Mar 1 00:28:06.691: ISAKMP: attributes in transform:
*Mar 1 00:28:06.695: ISAKMP: encaps is 61443
*Mar 1 00:28:06.695: ISAKMP: SA life type in seconds
*Mar 1 00:28:06.695: ISAKMP: SA life duration (VPI) of 0x0 0x20
0xC4 0x9B
*Mar 1 00:28:06.695: ISAKMP (0:4): atts are acceptable.
*Mar 1 00:28:06.835: IPSEC(spi_response): getting spi 3561761534 for SA
                                from 172.16.142.191 to 171.69.89.82 for prot 3
*Mar 1 00:28:06.835: ISAKMP: received ke message (2/1)
*Mar 1 00:28:07.127: ISAKMP (0:4): sending packet to 171.69.89.82
                                my_port 4500 peer_port 4500 (R) QM_IDLE
*Mar 1 00:28:07.127: ISAKMP (0:4): Node -2064779316, Input =
                                IKE_MSG_FROM_IPSEC, IKE_SPI_REPLY
*Mar 1 00:28:07.127: ISAKMP (0:4): Old State = IKE_QM_SPI_STARVE
                                New State = IKE_QM_R_QM2
*Mar 1 00:28:07.143: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:07.151: ISAKMP: Locking peer struct 0x82C88D44, IPSEC
                                refcount 2 for for stuff_ke
*Mar 1 00:28:07.151: ISAKMP (0:4): Creating IPsec SAs
*Mar 1 00:28:07.151: inbound SA from 171.69.89.82 to
                                172.16.142.191 (f/i) 0/ 0
                                (proxy 192.168.1.3 to 10.100.100.0)
*Mar 1 00:28:07.151: has spi 0xD44C2AFE and conn_id 2002
                                and flags 400
*Mar 1 00:28:07.151: lifetime of 2147483 seconds
*Mar 1 00:28:07.151: has client flags 0x10
*Mar 1 00:28:07.151: outbound SA from 172.16.142.191 to
                                171.69.89.82 (f/i) 0/ 0 (proxy 10.100.100.0

```

```
                to 192.168.1.3    ),
(sa) sa_dest= 171.69.89.82, sa_prot= 50,
    sa_spi= 0x9A12903F(2584907839),
    sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 2003
*Mar 1 00:28:15.983: ISAKMP (0:3): purging node -457362469
*Mar 1 00:28:22.863: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:22.863: ISAKMP: set new node 442126453 to QM_IDLE
*Mar 1 00:28:22.867: ISAKMP (0:4): processing HASH payload. message
                                ID = 442126453
*Mar 1 00:28:22.867: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                                spi 0, message ID = 442126453, sa = 82443410
*Mar 1 00:28:22.867: ISAKMP (0:4): deleting node 442126453 error
                                FALSE reason "informational (in) state 1"
*Mar 1 00:28:22.867: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER,
                                IKE_INFO_NOTIFY
*Mar 1 00:28:22.867: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                                New State = IKE_P1_COMPLETE

*Mar 1 00:28:28.643: ISAKMP (0:3): purging node -118562945
*Mar 1 00:28:28.651: ISAKMP (0:3): purging node 24622273
*Mar 1 00:28:28.659: ISAKMP (0:3): purging node -1276758667
*Mar 1 00:28:38.667: ISAKMP (0:3): purging SA., sa=8242A5AC,
                                delme=8242A5AC
*Mar 1 00:28:38.667: ISAKMP (0:3): purging node 452292968
*Mar 1 00:28:38.667: ISAKMP (0:3): purging node 1331016929
*Mar 1 00:28:38.667: ISAKMP (0:3): returning address 192.168.1.2 to pool
*Mar 1 00:28:38.667: ISAKMP: Unlocking IKE struct 0x827CBB44 for
                                declare_sa_dead(), count 0
*Mar 1 00:28:42.891: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:28:42.891: ISAKMP: set new node 505402511 to QM_IDLE
*Mar 1 00:28:42.895: ISAKMP (0:4): processing HASH payload. message
                                ID = 505402511
*Mar 1 00:28:42.895: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                                spi 0, message ID = 505402511, sa = 82443410
*Mar 1 00:28:42.895: ISAKMP (0:4): deleting node 505402511 error
                                FALSE reason "informational (in) state 1"
*Mar 1 00:28:42.895: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER,
                                IKE_INFO_NOTIFY
*Mar 1 00:28:42.895: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                                New State = IKE_P1_COMPLETE

*Mar 1 00:28:52.707: ISAKMP (0:4): purging node 1973520613
*Mar 1 00:28:53.255: ISAKMP (0:4): purging node 1783469429
*Mar 1 00:28:57.155: ISAKMP (0:4): purging node -2064779316
*Mar 1 00:29:02.919: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:29:02.919: ISAKMP: set new node -526976638 to QM_IDLE
*Mar 1 00:29:02.923: ISAKMP (0:4): processing HASH payload.
                                message ID = -526976638
*Mar 1 00:29:02.923: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                                spi 0, message ID = -526976638, sa = 82443410
*Mar 1 00:29:02.923: ISAKMP (0:4): deleting node -526976638 error
                                FALSE reason "informational (in) state 1"
*Mar 1 00:29:02.923: ISAKMP (0:4): Input = IKE_MSG_FROM_PEER,
                                IKE_INFO_NOTIFY
*Mar 1 00:29:02.923: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                                New State = IKE_P1_COMPLETE

*Mar 1 00:29:12.867: ISAKMP (0:4): purging node 442126453
*Mar 1 00:29:22.951: ISAKMP (0:4): received packet from 171.69.89.82
                                dport 4500 sport 4500 Global (R) QM_IDLE
*Mar 1 00:29:22.955: ISAKMP: set new node 1718060095 to QM_IDLE
```

```
*Mar 1 00:29:22.955: ISAKMP (0:4): processing HASH payload. message
                                ID = 1718060095
*Mar 1 00:29:22.955: ISAKMP (0:4): processing NOTIFY unknown protocol 1
                                spi 0, message ID = 1718060095, sa = 82443410
*Mar 1 00:29:22.955: ISAKMP (0:4): deleting node 1718060095 error
                                FALSE reason "informational (in) state 1"
*Mar 1 00:29:22.959: ISAKMP (0:4): Input = IKE_MESG_FROM_PEER,
                                IKE_INFO_NOTIFY
*Mar 1 00:29:22.959: ISAKMP (0:4): Old State = IKE_P1_COMPLETE
                                New State = IKE_P1_COMPLETE
```

[Gerelateerde informatie](#)

- [Cisco VPN-clientondersteuningspagina](#)
- [IPsec-onderhandeling/IKE-protocollen](#)
- [Technische ondersteuning en documentatie – Cisco Systems](#)