

# Identificar e Solucionar Problemas de EVPN/VxLAN na Configuração de Vários Locais

## Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Componentes Utilizados](#)

[Topologia](#)

[Verifique o plano de controle](#)

[Verifique o plano de dados](#)

[Verifique o plano de dados](#)

[Faça capturas de ELAM para verificar o ASIC, a fatia e o SrcId da porta](#)

## Introduction

Este documento descreve a abordagem para solucionar problemas de Ethernet VPN/Virtual Extensible LAN (EVPN/VxLAN) em uma configuração de vários sites.

## Prerequisites

## Requirements

A Cisco recomenda que você tenha conhecimento destes tópicos:

- Multiprotocol Label Switching (MPLS) Camada 3 VPN
- Protocolo de gateway de borda multiprotocolo (MP-BGP)
- EVPN


## Componentes Utilizados

As informações neste documento são baseadas nestas versões de software e hardware:

Todos os folhetos do site	N9K-C933C-FX2	NXOS: 10.2(3)
S1_Spine1	N9K-C9364C	NXOS: 10.2(4)
S1_Spine2	N9K-C9364C	NXOS: 9.3(5)
S1_Border Gateway1, S2_Border Gateway2, S2_Border Gateway1	N9K-C9332C	NXOS: 9.3(9)
S1_Border Gateway2	N9K-C9332C	NXOS: 10.2(4)
Servidor de Rota	N9K-C9396PX	NXOS: 9.2(2)
Host-1	N3K-C3264C-E	NXOS: 9.3(5)
Host 2 e Host 3	N3K-C3264C-E	NXOS: 9.2(2)

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. Se a rede estiver ativa, certifique-se de que você entenda o impacto potencial de qualquer comando.

# Topologia

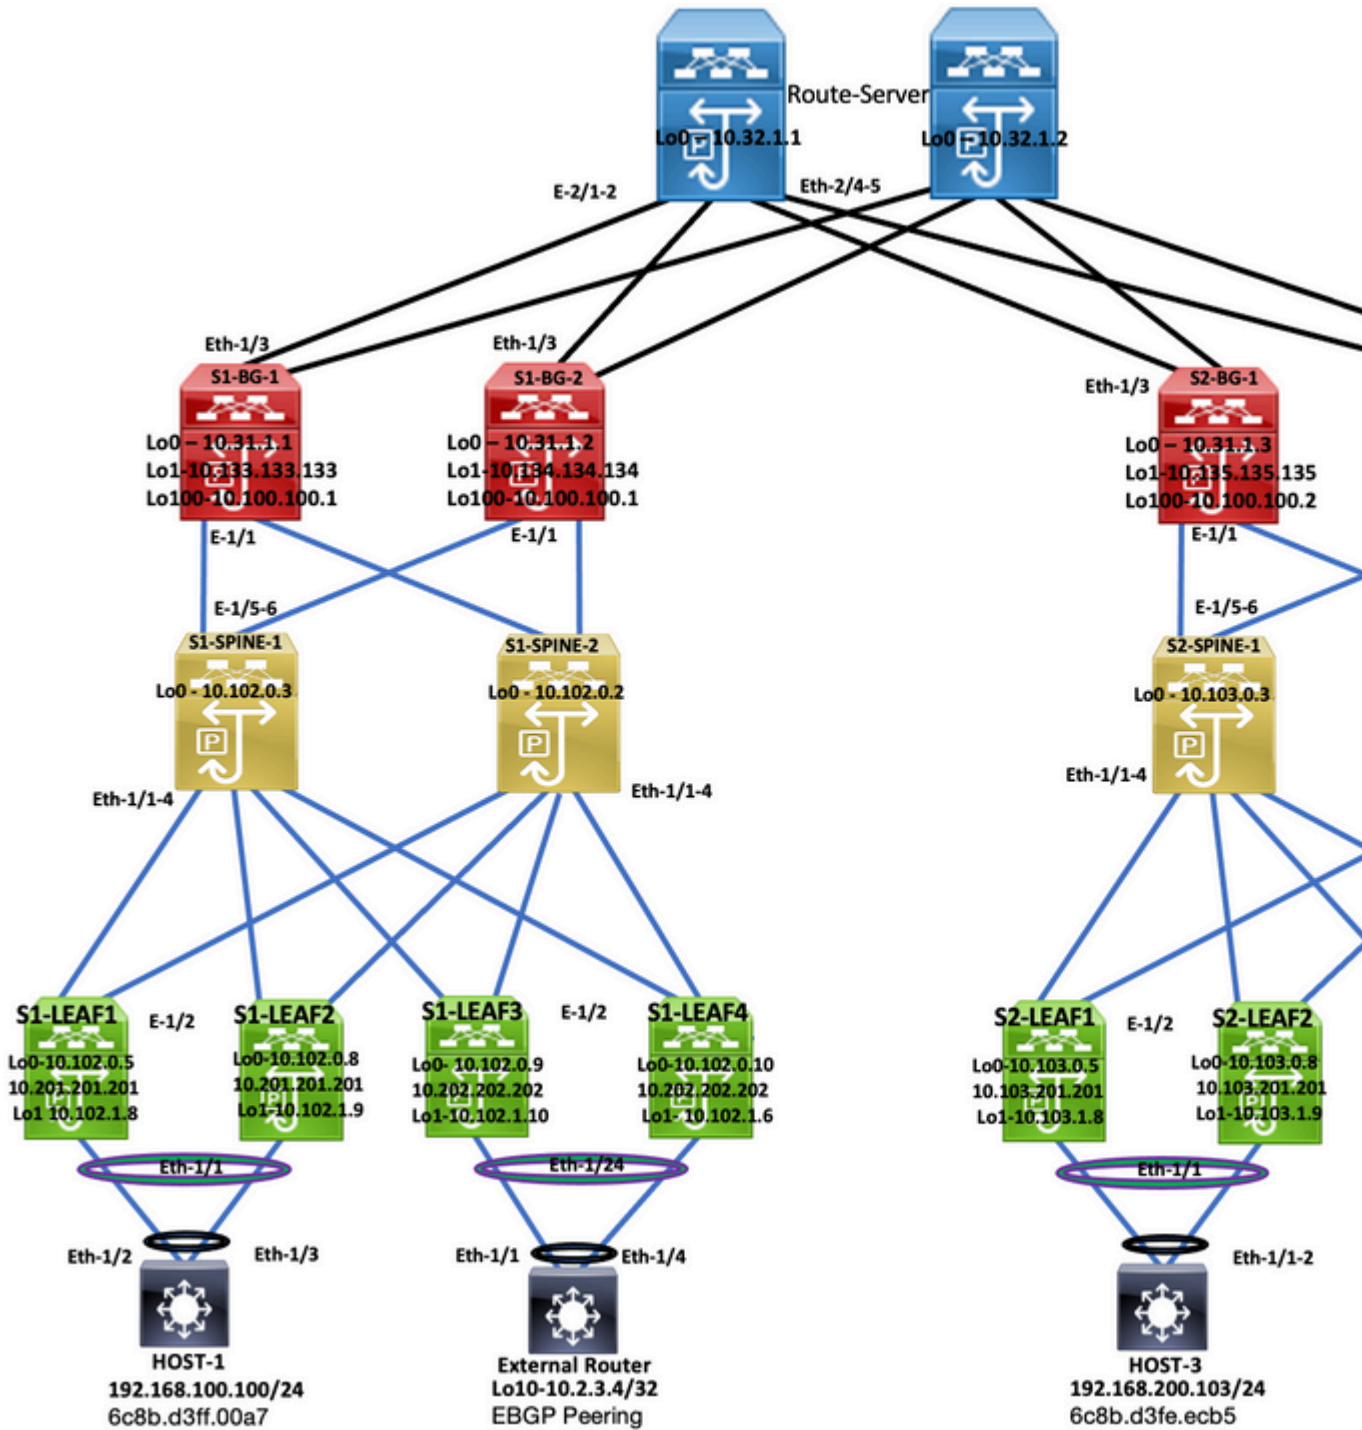

## Topologia

Este documento descreve onde o tráfego é originado do DC-2 Host-3 (192.168.200.104/24) e depois acompanha os pacotes até o DC-1 Host-2 (10.2.3.4) de destino.

## Verifique o plano de controle

Para verificar o plano de controle, insira estes comandos:

```
<#root>
HOST_3#
show ip int brief
□
```

```
10.100.100.2 100 0 300 100 65111 i
```

```
*>i[5]:[0]:[0]:[32]:[10.100.100.1]/224  
10.100.100.2 100 0 300 100 i
```

```
*>i[5]:[0]:[0]:[32]:[10.100.100.2]/224  
10.100.100.2
```

S2-Leaf2#

```
show bgp l2vpn evpn vrf vrf_2
```

BGP routing table information for VRF default, address family L2VPN EVPN  
BGP table version is 4389, Local Router ID is 10.103.0.8  
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best  
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected  
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 10.103.0.8:5 (L3VNI 4000502)					
*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.100.100.2		100	0 300 100	i
*>i[5]:[0]:[0]:[32]:[10.2.3.4]/224	10.100.100.2		100	0 300 100 65111	i
*>i[5]:[0]:[0]:[32]:[10.100.100.1]/224	10.100.100.2		100	0 300 100	i
*>i[5]:[0]:[0]:[32]:[10.100.100.2]/224	10.100.100.2		100	0 300 100	i

S2-Leaf2#

S2-leaf3#

```
show bgp l2vpn evpn vrf vrf_2
```

BGP routing table information for VRF default, address family L2VPN EVPN  
BGP table version is 4196, Local Router ID is 10.103.0.9  
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best  
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected  
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 10.103.0.9:5 (L3VNI 4000502)					
*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.100.100.2		100	0 300 100	i
*>i[5]:[0]:[0]:[32]:[10.2.3.4]/224	10.100.100.2		100	0 300 100 65111	i
*>i[5]:[0]:[0]:[32]:[10.100.100.1]/224	10.100.100.2		100	0 300 100	i
*>i[5]:[0]:[0]:[32]:[10.100.100.2]/224	10.100.100.2		100	0 300 100	i

S2-Leaf4#

S2-Leaf4#

```
show bgp l2vpn evpn vrf vrf_2
```

BGP routing table information for VRF default, address family L2VPN EVPN  
BGP table version is 4381, Local Router ID is 10.102.0.10  
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best  
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected  
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network Next Hop Metric LocPrf Weight Path  
Route Distinguisher: 10.102.0.10:5 (L3VNI 4000502)

\*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224  
10.100.100.2 100 0 300 100 i

\*>i[5]:[0]:[0]:[32]:[10.2.3.4]/224  
10.100.100.2 100 0 300 100 65111 i

\*>i[5]:[0]:[0]:[32]:[10.100.100.1]/224  
10.100.100.2 100 0 300 100 i

\*>i[5]:[0]:[0]:[32]:[10.100.100.2]/224  
10.100.100.2 100 0 300 100 i

S2-Leaf4#

S2-Leaf4#

<#root>

S2-Spine1#

show bgp l2vpn evpn

BGP routing table information for VRF default, address family L2VPN EVPN  
BGP table version is 1235, Local Router ID is 10.103.0.3  
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best  
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected  
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network Next Hop Metric LocPrf Weight Path  
Route Distinguisher: 200:4000502

\* i[5]:[0]:[0]:[24]:[192.168.100.0]/224  
10.100.100.2 100 0 300 100

\*>i 10.100.100.2 100 0 300 100 i

\* i[5]:[0]:[0]:[32]:[10.2.3.4]/224  
10.100.100.2 100 0 300 100 65111 i

\*>i 10.100.100.2 100 0 300 100 65111 i

\* i[5]:[0]:[0]:[32]:[10.100.100.1]/224  
10.100.100.2 100 0 300 100 i

\*>i 10.100.100.2 100 0 300 100 i

\* i[5]:[0]:[0]:[32]:[10.100.100.2]/224  
10.100.100.2 100 0 300 100 i

\*>i 10.100.100.2 100 0 300 100 i

<#root>

S2-BG1#

show ip int brie

```

IP Interface Status for VRF "default"(1)
Interface      IP Address      Interface Status
Lo0            10.31.1.3       protocol-up/link-up/admin-up
Lo1            10.135.135.135  protocol-up/link-up/admin-up
Lo100         10.100.100.2    protocol-up/link-up/admin-up

Eth1/1         192.168.17.12   protocol-up/link-up/admin-up
Eth1/3         10.150.152.1    protocol-up/link-up/admin-up
S2-BG1#

```

S2-BG1#

```
show ip route 10.2.3.4 vrf vrf_2
```

```

IP Route Table for VRF "vrf_2"
'*' denotes best ucast next-hop
 '**' denotes best mcast next-hop
 '[x/y]' denotes [preference/metric]
 '%<string>' in via output denotes VRF <string>

```

```
10.2.3.4/32, ubest/mbest: 1/0
```

```
*via 10.100.100.1%default, [20/0], 04:09:46, bgp-200, external, tag 300, segid: 4000502 tunnelid: 0xa64
```

S2-BG1#

S2-BG1#

```
show bgp l2vpn evpn
```

```

BGP routing table information for VRF default, address family L2VPN EVPN
BGP table version is 6206, Local Router ID is 10.31.1.3
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 100:4000502					
*>e[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.100.100.1			0 300 100	i
*>e[5]:[0]:[0]:[32]:[10.2.3.4]/224	10.100.100.1			0 300 100 65111	i
*>e[5]:[0]:[0]:[32]:[10.100.100.1]/224	10.100.100.1			0 300 100	i
*>e[5]:[0]:[0]:[32]:[10.100.100.2]/224	10.100.100.1			0 300 100	i

<#root>

S2-BG2#

```
show ip int brief
```

```
IP Interface Status for VRF "default"(1)
```

Interface	IP Address	Interface Status
Lo0	10.31.1.4	protocol-up/link-up/admin-up
Lo1	10.136.136.136	protocol-up/link-up/admin-up
Lo100	10.100.100.2	protocol-up/link-up/admin-up
Eth1/1	192.168.18.12	protocol-up/link-up/admin-up
Eth1/3	10.150.153.1	protocol-up/link-up/admin-up
S2-BG2#		
S2-BG2#		
S2-BG2#		

```
show ip route 10.2.3.4 vrf vrf_2
```

```
IP Route Table for VRF "vrf_2"
'*' denotes best ucast next-hop
 '**' denotes best mcast next-hop
 '[x/y]' denotes [preference/metric]
 '%<string>' in via output denotes VRF <string>
```

```
10.2.3.4/32, ubest/mbest: 1/0
  *via 10.100.100.1%default, [20/0], 04:15:13, bgp-200, external, tag 300, segid: 4000502 tunnelid: 0
```

```
S2-BG2#
S2-BG2#
```

```
show bgp l2vpn evpn
```

```
BGP routing table information for VRF default, address family L2VPN EVPN
BGP table version is 5455, Local Router ID is 10.31.1.4
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2
```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 100:4000502					
*>e[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.100.100.1			0 300 100	i
*>e[5]:[0]:[0]:[32]:[10.2.3.4]/224	10.100.100.1			0 300 100 65111	i
*>e[5]:[0]:[0]:[32]:[10.100.100.1]/224	10.100.100.1			0 300 100	i
*>e[5]:[0]:[0]:[32]:[10.100.100.2]/224	10.100.100.1			0 300 100	i

```
<#root>
```

```
Router_Server#
```

```
show ip int brief
```

```
IP Interface Status for VRF "default"(1)
Interface      IP Address      Interface Status
Lo0            10.32.1.1       protocol-up/link-up/admin-up
```

```

Eth2/1          10.150.150.2    protocol-up/link-up/admin-up
Eth2/2          10.150.151.2    protocol-up/link-up/admin-up
Eth2/4          10.150.152.2    protocol-up/link-up/admin-up
Eth2/5          10.150.153.2    protocol-up/link-up/admin-up
Router_Server#
Router_Server#

```

```
show ip route 10.100.100.1
```

```

IP Route Table for VRF "default"
'*' denotes best ucast next-hop
 '**' denotes best mcast next-hop
 '[x/y]' denotes [preference/metric]
 '%<string>' in via output denotes VRF <string>

```

```

10.100.100.1/32, ubest/mbest: 2/0
  *via 10.150.150.1, [20/0], 4d22h, bgp-300, external, tag 100
  *via 10.150.151.1, [20/0], 4d22h, bgp-300, external, tag 100

```

```

Router_Server#
Router_Server#
Router_Server#

```

```
show ip route 10.100.100.2
```

```

IP Route Table for VRF "default"
'*' denotes best ucast next-hop
 '**' denotes best mcast next-hop
 '[x/y]' denotes [preference/metric]
 '%<string>' in via output denotes VRF <string>

```

```

10.100.100.2/32, ubest/mbest: 2/0
  *via 10.150.152.1, [20/0], 3w5d, bgp-300, external, tag 200
  *via 10.150.153.1, [20/0], 3w5d, bgp-300, external, tag 200

```

```

Router_Server#
Router_Server#

```

```
show bgp l2vpn evpn
```

```

BGP routing table information for VRF default, address family L2VPN EVPN
BGP table version is 4574, Local Router ID is 10.32.1.1
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 200:4000100					
* e[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272	10.100.100.2	2000		0	200 i
*>e	10.100.100.2	2000		0	200 i
Route Distinguisher: 100:4000502					
*>e[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.100.100.1	2000		0	100 i
* e	10.100.100.1	2000		0	100 i
* e[5]:[0]:[0]:[32]:[10.2.3.4]/224	10.100.100.1	2000		0	100 65111 i



```

*>e          10.100.100.1          2000          0 100 65111 i

*>e[5]:[0]:[0]:[32]:[10.100.100.1]/224
          10.100.100.1          2000          0 100 i
* e          10.100.100.1          2000          0 100 i
*>e[5]:[0]:[0]:[32]:[10.100.100.2]/224
>          10.100.100.1          2000          0 100 i
* e          10.100.100.1          2000          0 100 i

```

<#root>

S1\_B2#  
S1\_B2#

show ip int brie

```

IP Interface Status for VRF "default"(1)
Interface      IP Address      Interface Status
Lo0            10.31.1.2      protocol-up/link-up/admin-up
Lo1            10.134.134.134 protocol-up/link-up/admin-up
Lo100         10.100.100.1   protocol-up/link-up/admin-up
Eth1/1        192.168.16.12  protocol-up/link-up/admin-up
Eth1/3        10.150.151.1   protocol-up/link-up/admin-up
S1_B2#
S1_B2#

```

sho ip route 192.168.100.103 vrf vrf\_2

```

IP Route Table for VRF "vrf_2"
'*' denotes best ucast next-hop
 '**' denotes best mcast next-hop
 '[x/y]' denotes [preference/metric]
 '%<string>' in via output denotes VRF <string>

```

```

192.168.100.103/32, ubest/mbest: 1/0
  *via 10.100.100.2%default, [20/0], 4d23h, bgp-100, external, tag 300, segid: 4000502 tunnelid: 0xa64

```

S1\_B2#  
S1\_B2#

show ip route 10.2.3.4 vrf vrf\_2

```

IP Route Table for VRF "vrf_2"
'*' denotes best ucast next-hop
 '**' denotes best mcast next-hop
 '[x/y]' denotes [preference/metric]
 '%<string>' in via output denotes VRF <string>

```

```

10.2.3.4/32, ubest/mbest: 1/0
  *via 10.102.1.10%default, [200/0], 05:04:19, bgp-100, internal, tag 65111, segid: 4000502 tunnelid:

```

S1\_B2#  
S1\_B2#  
S1\_B2#

show bgp l2vpn evpn

BGP routing table information for VRF default, address family L2VPN EVPN  
 BGP table version is 5449, Local Router ID is 10.31.1.2  
 Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best  
 Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected  
 Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 200:4000100					
*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.100.104]/272	10.100.100.2			0 300 200	i
*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272	10.100.100.2			0 300 200	i

<#root>

Route Distinguisher: 200:4000200					
*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.100.104]/272	10.100.100.2			0 300 200	i
*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272	10.100.100.2			0 300 200	i

Route Distinguisher: 10.102.0.9:5					
*>i[2]:[0]:[0]:[48]:[cc7f.76fa.118f]:[0]:[0.0.0.0]/216	10.202.202.202		100	0	i
*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.102.1.10		100	0	i
*>i[5]:[0]:[0]:[32]:[10.2.3.4]/224	10.102.1.10		100	0 65111	i
*>i[5]:[0]:[0]:[32]:[10.100.100.2]/224	10.102.1.10		100	0	i

Route Distinguisher: 10.102.0.10:5					
*>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216	10.202.202.202		100	0	i
*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.102.1.6		100	0	i
*>i[5]:[0]:[0]:[32]:[10.2.3.4]/224	10.102.1.6		100	0 65111	i
*>i[5]:[0]:[0]:[32]:[10.100.100.1]/224	10.102.1.6		100	0	i

Route Distinguisher: 10.31.1.2:5 (L3VNI 4000502)					
*>l[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.134.134.134		100	0	i
*>l[5]:[0]:[0]:[32]:[10.2.3.4]/224	10.134.134.134		100	0 65111	i
*>l[5]:[0]:[0]:[32]:[10.100.100.1]/224	10.134.134.134		100	0	i
*>l[5]:[0]:[0]:[32]:[10.100.100.2]/224	10.134.134.134		100	0	i

S1\_B2#

<#root>

S1-Bg1#

show ip int brie

IP Interface Status for VRF "default"(1)

Interface	IP Address	Interface Status
Lo0	10.31.1.1	protocol-up/link-up/admin-up
Lo1	10.133.133.133	protocol-up/link-up/admin-up
Lo100	10.100.100.1	protocol-up/link-up/admin-up
Eth1/1	192.168.15.12	protocol-up/link-up/admin-up
Eth1/3	10.150.150.1	protocol-up/link-up/admin-up

S1-Bg1#

S1-Bg1#

show ip route 10.100.100.2 vrf vrf\_2

IP Route Table for VRF "vrf\_2"

'\*' denotes best ucast next-hop  
'\*\*' denotes best mcast next-hop  
'[x/y]' denotes [preference/metric]  
'%<string>' in via output denotes VRF <string>

10.100.100.2/32, ubest/mbest: 1/0

\*via 10.102.1.10%default, [200/0], 4d23h, bgp-100, internal, tag 100, segid: 4000502 tunnelid: 0xa66

S1-Bg1#

S1-Bg1#

show ip route 192.168.100.103 vrf vrf\_2

IP Route Table for VRF "vrf\_2"

'\*' denotes best ucast next-hop  
'\*\*' denotes best mcast next-hop  
'[x/y]' denotes [preference/metric]  
'%<string>' in via output denotes VRF <string>

192.168.100.103/32, ubest/mbest: 1/0

\*via 10.100.100.2%default, [20/0], 4d23h, bgp-100, external, tag 300, segid: 4000502 tunnelid: 0xa66

S1-Bg1#

S1-Bg1#

show ip route 10.2.3.4 vrf vrf\_2

IP Route Table for VRF "vrf\_2"

'\*' denotes best ucast next-hop  
'\*\*' denotes best mcast next-hop  
'[x/y]' denotes [preference/metric]  
'%<string>' in via output denotes VRF <string>

10.2.3.4/32, ubest/mbest: 1/0

\*via 10.102.1.10%default, [200/0], 05:21:41, bgp-100, internal, tag 65111, segid: 4000502 tunnelid:

S1-Bg1#

S1-Bg1#

show bgp l2vpn evpn

BGP routing table information for VRF default, address family L2VPN EVPN  
BGP table version is 6654, Local Router ID is 10.31.1.1  
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best  
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected  
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 200:4000100					
*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.100.104]/272	10.100.100.2			0 300 200	i

*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272	10.100.100.2			0 300 200	i
---	--------------	--	--	-----------	---

Route Distinguisher: 200:4000200					
*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.df3b]:[32]:[192.168.200.104]/272	10.100.100.2			0 300 200	i

*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.200.103]/272	10.100.100.2			0 300 200	i
---	--------------	--	--	-----------	---

Route Distinguisher: 10.31.1.1:32867 (L2VNI 4000100)					
*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272	10.100.100.2			0 300 200	i

*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.100.102]/272	10.202.202.202		100	0	i
---	----------------	--	-----	---	---

* i	10.202.202.202		100	0	i
-----	----------------	--	-----	---	---

*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.100.100]/272	10.201.201.201		100	0	i
---	----------------	--	-----	---	---

* i	10.201.201.201		100	0	i
-----	----------------	--	-----	---	---

*>e[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.200.103]/272	10.100.100.2			0 300 200	i
---	--------------	--	--	-----------	---

*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ff09]:[32]:[192.168.200.102]/272	10.202.202.202		100	0	i
---	----------------	--	-----	---	---

* i	10.202.202.202		100	0	i
-----	----------------	--	-----	---	---

*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.200.100]/272	10.201.201.201		100	0	i
---	----------------	--	-----	---	---

* i	10.201.201.201		100	0	i
-----	----------------	--	-----	---	---

Route Distinguisher: 10.102.0.10:5					
*>i[2]:[0]:[0]:[48]:[cc7f.76c6.a673]:[0]:[0.0.0.0]/216	10.202.202.202		100	0	i

*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.102.1.6		100	0	i
---	------------	--	-----	---	---

*>i[5]:[0]:[0]:[32]:[10.2.3.4]/224	10.102.1.6		100	0 65111	i
------------------------------------	------------	--	-----	---------	---

*>i[5]:[0]:[0]:[32]:[10.100.100.1]/224	10.102.1.6		100	0	i
--	------------	--	-----	---	---

Route Distinguisher: 10.31.1.1:5 (L3VNI 4000502)

\*>l[5]:[0]:[0]:[24]:[192.168.100.0]/224

```

                10.133.133.133                100          0 i
*>l[5]:[0]:[0]:[32]:[10.2.3.4]/224
                10.133.133.133                100          0 65111 i
*>l[5]:[0]:[0]:[32]:[10.100.100.1]/224
                10.133.133.133                100          0 i
*>l[5]:[0]:[0]:[32]:[10.100.100.2]/224
                10.133.133.133                100          0 i
S1-Bg1#

```

<#root>

S1-Leaf1#

show ip int brief

```

IP Interface Status for VRF "default"(1)
Interface      IP Address      Interface Status
Lo0            10.102.0.5     protocol-up/link-up/admin-up
Lo1            10.102.1.8     protocol-up/link-up/admin-up
Eth1/2        192.168.17.12  protocol-up/link-up/admin-up
S1-Leaf1#

```

S1-Leaf1#

show bgp l2vpn evpn vrf vrf\_2

```

BGP routing table information for VRF default, address family L2VPN EVPN
BGP table version is 918, Local Router ID is 10.102.0.5
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

```

```

      Network      Next Hop      Metric      LocPrf      Weight Path
Route Distinguisher: 10.102.0.5:5 (L3VNI 4000502)
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272
                10.100.100.1                100          0 300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.200.103]/272
                10.100.100.1                100          0 300 200 i
*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224
                10.102.1.10                100          0 i
* i              10.102.1.6                  100          0 i
*>i[5]:[0]:[0]:[32]:[10.2.3.4]/224
                10.102.1.10                100          0 65111 i
* i              10.102.1.6                  100          0 65111 i

*>i[5]:[0]:[0]:[32]:[10.100.100.1]/224
                10.102.1.6                  100          0 i
*>i[5]:[0]:[0]:[32]:[10.100.100.2]/224
                10.102.1.10                100          0 i

```

S1-Leaf1#

S1-Leaf2#

show ip int brie

```

IP Interface Status for VRF "default"(1)
Interface      IP Address      Interface Status

```

```

Lo0          10.102.0.8      protocol-up/link-up/admin-up
Lo1          10.102.1.9      protocol-up/link-up/admin-up
Eth1/2       192.168.18.12    protocol-up/link-up/admin-up
S1-Leaf2#
S1-Leaf2#
S1-Leaf2#

```

```
show bgp l2vpn evpn vrf vrf_2
```

```

BGP routing table information for VRF default, address family L2VPN EVPN
BGP table version is 680, Local Router ID is 10.102.0.8
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 10.102.0.8:5 (L3VNI 4000502)					
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272	10.100.100.1		100	0 300 200	i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.200.103]/272	10.100.100.1		100	0 300 200	i
*>i[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.102.1.10	100	0		i
* i	10.102.1.6		100	0	i
* i[5]:[0]:[0]:[32]:[10.2.3.4]/224					
	10.102.1.6		100	0 65111	i
*>i	10.102.1.10		100	0 65111	i
*>i[5]:[0]:[0]:[32]:[10.100.100.1]/224	10.102.1.6		100	0	i
*>i[5]:[0]:[0]:[32]:[10.100.100.2]/224	10.102.1.10		100	0	i

```

S1-Leaf3#
S1-Leaf3#

```

```
show ip int brie
```

```

IP Interface Status for VRF "default"(1)
Interface      IP Address      Interface Status
Lo0            10.102.0.9     protocol-up/link-up/admin-up
Lo1            10.102.1.10    protocol-up/link-up/admin-up
Eth1/2         192.168.19.12  protocol-up/link-up/admin-up

```

```

S1-Leaf3#
S1-Leaf3#
S1-Leaf3#
S1-Leaf3#

```

```
show bgp l2vpn evpn vrf vrf_2
```

```

BGP routing table information for VRF default, address family L2VPN EVPN
BGP table version is 5431, Local Router ID is 10.102.0.9
Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, *-valid, >-best
Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected
Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

```

Network	Next Hop	Metric	LocPrf	Weight	Path
---------	----------	--------	--------	--------	------

```

Route Distinguisher: 10.102.0.9:5 (L3VNI 4000502)
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272
    10.100.100.1          100          0 300 200 i
* i[5]:[0]:[0]:[24]:[192.168.100.0]/224
    10.102.1.6          100          0 i
*>l          10.102.1.10        100          32768 i
* i[5]:[0]:[0]:[32]:[10.2.3.4]/224
    10.102.1.6          100          0 65111 i
*>l          10.102.1.10        100          0 65111 i
*>i[5]:[0]:[0]:[32]:[10.100.100.1]/224
    10.102.1.6          100          0 i
*>l[5]:[0]:[0]:[32]:[10.100.100.2]/224
    10.102.1.10        100          32768 i

```

S1-Leaf3#

S1\_Leaf4#

S1\_Leaf4#

show ip int brief

IP Interface Status for VRF "default"(1)

Interface	IP Address	Interface Status
Lo0	10.102.0.10	protocol-up/link-up/admin-up
Lo1	10.102.1.6	protocol-up/link-up/admin-up
Eth1/2	192.168.20.12	protocol-up/link-up/admin-up

S1\_Leaf4#  
S1\_Leaf4#  
S1\_Leaf4#

show bgp l2vpn evpn vrf vrf\_2

BGP routing table information for VRF default, address family L2VPN EVPN

BGP table version is 5118, Local Router ID is 10.102.0.10

Status: s-suppressed, x-deleted, S-stale, d-dampened, h-history, \*-valid, >-best

Path type: i-internal, e-external, c-confed, l-local, a-aggregate, r-redist, I-injected

Origin codes: i - IGP, e - EGP, ? - incomplete, | - multipath, & - backup, 2 - best2

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 10.102.0.10:5 (L3VNI 4000502)					
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.100.103]/272	10.100.100.1		100	0	300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3fe.ecb5]:[32]:[192.168.200.103]/272	10.100.100.1		100	0	300 200 i
*>i[2]:[0]:[0]:[48]:[6c8b.d3ff.00a7]:[32]:[192.168.100.100]/272	10.201.201.201		100	0	i
* i	10.201.201.201		100	0	i
* i[5]:[0]:[0]:[24]:[192.168.100.0]/224	10.102.1.10		100	0	i
*>l	10.102.1.6		100	32768	i
*>l[5]:[0]:[0]:[32]:[10.2.3.4]/224					

```

10.102.1.6                                0 65111 i

* i          10.102.1.10                    100      0 65111 i

*>l[5]:[0]:[0]:[32]:[10.100.100.1]/224
10.102.1.6                                100      32768 i
*>i[5]:[0]:[0]:[32]:[10.100.100.2]/224
10.102.1.10                               100      0 i
S1_Leaf4#

```

## Verifique o plano de dados

A verificação do plano de dados é testada em vários dispositivos para entender diferentes métodos e variantes de captura de pacotes.

Faça ping no loopback do roteador externo 100 "10.2.3.4" a partir do endereço IP origem 192.168.100.103 no Host-3.

```
<#root>
```

```
HOST_3#
```

```
HOST_3#
```

```
ping 10.2.3.4 source 192.168.100.103
```

```

PING 10.2.3.4 (10.2.3.4) from 192.168.100.103: 56 data bytes
64 bytes from 10.2.3.4: icmp_seq=0 ttl=250 time=1.153 ms
64 bytes from 10.2.3.4: icmp_seq=1 ttl=250 time=0.569 ms
64 bytes from 10.2.3.4: icmp_seq=2 ttl=250 time=0.562 ms
64 bytes from 10.2.3.4: icmp_seq=3 ttl=250 time=0.525 ms
64 bytes from 10.2.3.4: icmp_seq=4 ttl=250 time=0.527 ms
--- 10.2.3.4 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 0.525/0.667/1.153 ms
HOST_3#

```

O Ethalyzer é obtido no site 2 Leaf-1 e Leaf-2 para confirmar qual folha recebe/encaminha o tráfego para a alcançabilidade do loopback 10.2.3.4 do roteador externo.

```
<#root>
```

```
S2-Leaf1(config-monitor)#
```

```
sho clock
```

```
Warning: No NTP peer/server configured. Time may be out of sync.
```

```
07:11:37.455 UTC Tue Feb 21 2023
```

```
Time source is NTP
```

```
S2-Leaf1(config-monitor)#
```

```
S2-Leaf1(config-monitor)#
```

```
show run section monitor
```



```
show running-config | section monitor
icam monitor scale
monitor session 1
  source interface port-channel100 both
  destination interface sup-eth0
  no shut
S2-Leaf1(config-monitor)#
S2-Leaf2(config-monitor)#
S2-Leaf2(config-monitor)#

ethanalyzer local interface inband display-filter "ip.addr==10.2.3.4 && ip.addr==192.168.100.103 && icmp"
```

```
Capturing on 'ps-inb'
1385 2023-02-21 07:10:46.424195144 192.168.100.103 â†' 10.2.3.4 ICMP 102 Echo (ping) request id=0xc
1386 2023-02-21 07:10:46.424818423 10.2.3.4 â†' 192.168.100.103 ICMP 98 Echo (ping) reply id=0xc
1387 2023-02-21 07:10:46.425263621 192.168.100.103 â†' 10.2.3.4 ICMP 102 Echo (ping) request id=0xc
1388 2023-02-21 07:10:46.425486046 10.2.3.4 â†' 192.168.100.103 ICMP 98 Echo (ping) reply id=0xc
1389 2023-02-21 07:10:46.425856150 192.168.100.103 â†' 10.2.3.4 ICMP 102 Echo (ping) request id=0xc
1390 2023-02-21 07:10:46.426095692 10.2.3.4 â†' 192.168.100.103 ICMP 98 Echo (ping) reply id=0xc
1391 2023-02-21 07:10:46.426438174 192.168.100.103 â†' 10.2.3.4 ICMP 102 Echo (ping) request id=0xc
1392 2023-02-21 07:10:46.426642605 10.2.3.4 â†' 192.168.100.103 ICMP 98 Echo (ping) reply id=0xc
1393 2023-02-21 07:10:46.427004108 192.168.100.103 â†' 10.2.3.4 ICMP 102 Echo (ping) request id=0xc
1394 2023-02-21 07:10:46.427210984 10.2.3.4 â†' 192.168.100.103 ICMP 98 Echo (ping) reply id=0xc
10
S2-Leaf2(config-monitor)#
S2-Leaf2(config-monitor)#
```

```
sho clock
```

```
Warning: No NTP peer/server configured. Time may be out of sync.
07:12:31.069 UTC Tue Feb 21 2023
Time source is NTP
S2-Leaf2(config-monitor)#
```

A saída CLI confirmou que o Site 2 Leaf-2 recebe e encaminha a solicitação do Internet Control Message Protocol (ICMP) para o roteador externo 10.2.3.4.

O próximo exemplo de CLI confirma o Site 1 para verificar qual folha encaminha pacotes para o destino 10.2.3.4.

```
<#root>
```

```
S1-Leaf3(config-monitor)#
S1-Leaf3(config-monitor)#

ethanalyzer local interface inband display-filter "ip.addr==10.2.3.4 && ip.addr==192.168.100.103 && icmp"
```

```
Capturing on 'ps-inb'
253 2023-02-21 07:10:50.379741403 192.168.100.103 â†' 10.2.3.4 ICMP 98 Echo (ping) request id=0xc
254 2023-02-21 07:10:50.380357311 10.2.3.4 â†' 192.168.100.103 ICMP 102 Echo (ping) reply id=0xc
255 2023-02-21 07:10:50.380810012 192.168.100.103 â†' 10.2.3.4 ICMP 98 Echo (ping) request id=0xc
256 2023-02-21 07:10:50.381025676 10.2.3.4 â†' 192.168.100.103 ICMP 102 Echo (ping) reply id=0xc
257 2023-02-21 07:10:50.381401968 192.168.100.103 â†' 10.2.3.4 ICMP 98 Echo (ping) request id=0xc
258 2023-02-21 07:10:50.381631838 10.2.3.4 â†' 192.168.100.103 ICMP 102 Echo (ping) reply id=0xc
259 2023-02-21 07:10:50.381984272 192.168.100.103 â†' 10.2.3.4 ICMP 98 Echo (ping) request id=0xc
260 2023-02-21 07:10:50.382176820 10.2.3.4 â†' 192.168.100.103 ICMP 102 Echo (ping) reply id=0xc
```

```
261 2023-02-21 07:10:50.382549820 192.168.100.103 â†’ 10.2.3.4 ICMP 98 Echo (ping) request id=0xc
262 2023-02-21 07:10:50.382746640 10.2.3.4 â†’ 192.168.100.103 ICMP 102 Echo (ping) reply id=0x
```

```
S1-Leaf3(config-monitor)#
```

```
sho clock
```

```
Warning: No NTP peer/server configured. Time may be out of sync.
```

```
07:11:22.514 UTC Tue Feb 21 2023
```

```
Time source is NTP
```

```
S1-Leaf3(config-monitor)#
```

```
S1-Leaf3(config-monitor)#
```

```
show run section monitor
```

```
show running-config | section monitor
```

```
monitor session 1
```

```
source interface port-channel2 both
```

```
destination interface sup-eth0
```

```
no shut
```

```
S1-Leaf3(config-monitor)#
```

```
S1-Leaf3(config-monitor)#
```

```
show moni sess 1
```

```
session 1
```

```
-----
type           : local
state          : up
acl-name       : acl-name not specified
source intf    :
  rx           : Po2
  tx           : Po2
  both         : Po2
source VLANs   :
  rx           :
  tx           :
  both         :
filter VLANs   : filter not specified
source fwd drops :
destination ports : sup-eth0
source VSANs   :
  rx           :
```

```
S1-Leaf3(config-monitor)#
```

```
S1_Leaf4(config-monitor)#
```

```
ethalyzer local interface inband display-filter "ip.addr==192.168.100.103" limit-captured-frames 0
```

```
Capturing on 'ps-inb'
```

```
S1_Leaf4(config-monitor)#
```

```
S1_Leaf4(config-monitor)#
```

```
sho clock
```

```
Warning: No NTP peer/server configured. Time may be out of sync.
```

```
07:11:15.187 UTC Tue Feb 21 2023
```

```
Time source is NTP
```

```
S1_Leaf4(config-monitor)#
```

O cliente responde que enfrenta problemas de conectividade do Host-3 ao roteador externo. O cliente deseja confirmar se tudo está bem na estrutura VXLAN e precisa de confirmação de que nossa folha encaminha o tráfego para o roteador externo. As etapas para solucionar esse problema são:

1. Inicie um ping em direção ao roteador externo e confirme se o endereço IP 10.2.3.4 pode ser alcançado ou não.
2. Use as capturas do ELAM (Embedded Logic Analyzer Module) em S1-Leaf3 e S1-Leaf4 para ver se ele é acionado (com base na topologia e no fluxo de tráfego).
3. Com a captura ELAM, confirme se o pacote é encaminhado para fora da interface e aponta para o roteador externo.
4. Local 2 - Com o analisador etário, podemos ver a solicitação e a resposta do ICMP. Se não houver uma resposta, o problema está no lado remoto .
5. Se 10.2.3.4 estiver acessível a partir do Host-4 e o Host-3 tiver problemas, pode ser um problema específico do host. Verifique os erros de Lista de Controle de Acesso (ACL - Access Control List), Verificação de Redundância Cíclica (CRC - Cyclic Redundancy Check) e link de hash.

```
<#root>
```

```
HOST_3#
```

```
ping 10.2.3.4 source 192.168.100.103
```

```
PING 10.2.3.4 (10.2.3.4) from 192.168.100.103: 56 data bytes
Request 0 timed out
Request 1 timed out
Request 2 timed out
Request 3 timed out
Request 4 timed out
--- 10.2.3.4 ping statistics ---
5 packets transmitted, 0 packets received, 100.00% packet loss
HOST_3#
```

```
Host4#
```

```
ping 10.2.3.4 source 192.168.100.104
```

```
PING 10.2.3.4 (10.2.3.4) from 192.168.100.104: 56 data bytes
64 bytes from 10.2.3.4: icmp_seq=0 ttl=250 time=1.266 ms
64 bytes from 10.2.3.4: icmp_seq=1 ttl=250 time=0.62 m
64 bytes from 10.2.3.4: icmp_seq=2 ttl=250 time=0.603 ms
64 bytes from 10.2.3.4: icmp_seq=3 ttl=250 time=0.474 ms
64 bytes from 10.2.3.4: icmp_seq=4 ttl=250 time=0.457 ms
--- 10.2.3.4 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 0.457/0.684/1.266 ms
```

## Verifique o plano de dados

## Faça capturas de ELAM para verificar o ASIC, a fatia e o SrcId da porta

<#root>

```
show hardware internal tah interface
```

```
show system internal ethpm info interface
```

```
| i i src
```

<#root>

```
S1-Leaf3(TAH-elam)#
```

```
debug platform internal tah elam asic 0
```

```
S1-Leaf3(TAH-elam)#
```

```
trigger init asic 0 slice 1 in-select 7 out-select 0 use-src-id 8
```

```
Slot 1: param values: asic 0, slice 1, lu-a2d 1, in-select 7, out-select 0, src_id 8
```

```
S1-Leaf3(TAH-elam-insel7)#
```

```
set inner ipv4 src_ip 192.168.100.103
```

```
S1-Leaf3(TAH-elam-insel7)#
```

```
start
```

```
S1-Leaf3(TAH-elam-insel7)#
```

```
report
```

```
HEAVENLY ELAM REPORT SUMMARY
```

```
slot - 1, asic - 0, slice - 1
=====
Incoming Interface: Eth1/2
Src Idx : 0x5, Src BD : 2001
Outgoing Interface Info: dmod 1, dpid 52>>>>>>>>>>Pointing to Eth 1/24 towards external Router
Dst Idx : 0x601, Dst BD : 100
Packet Type: IPv4
Dst MAC address: CC:7F:76:FA:11:8F
Src MAC address: 4C:E1:75:F7:38:C7
Dst IPv4 address: 10.2.3.4
Src IPv4 address: 192.168.100.103
Ver      = 4, DSCP      = 0, Don't Fragment = 0
Proto    = 1, TTL      = 252, More Fragments = 0
Hdr len  = 20, Pkt len = 84, Checksum      = 0xb712
L4 Protocol : 1
ICMP type   : 8
ICMP code   : 0
Drop Info:
-----
LUA:
LUB:
LUC:
LUD:
Final Drops:
vntag:
vntag_valid : 0
vntag_vir   : 0
vntag_svif  : 0
```

```
S1-Leaf3(TAH-elam-insel7)#
```

```
S1_Leaf4#
```

```
show system internal ethpm info interface ethernet 1/2 | grep slice
```

```
IF_STATIC_INFO: port_name=Ethernet1/2,if_index:0x1a000200,ltl=6140,slot=0, nxos_port=4,
dmod=1,dpid=76,unit=0,queue=65535,xbar_unitbmp=0x0,ns_pid=255,slice_num=1,port_on_slice=4,src_id=8
```

```
S1_Leaf4(TAH-elam)#
```

```
debug platform internal tah elam asic 0
```

```
S1_Leaf4(TAH-elam)#
```

```
trigger init asic 0 slice 1 in-select 7 out-select 0 use-src-id 8
```

```
Slot 1: param values: asic 0, slice 1, lu-a2d 1, in-select 7, out-select 0, src_id 8
S1_Leaf4(TAH-elam-insel7)#
```

```
set inner ipv4 src_ip 192.168.100.103
```

```
S1_Leaf4(TAH-elam-insel7)#
```

```
start
```

```
S1_Leaf4(TAH-elam-insel7)#
```

```
report
```

```
ELAM not triggered yet on slot - 1, asic - 0, slice - 1  
S1_Leaf4(TAH-elam-insel7)#
```

A conclusão da saída do ELAM é que a folha encaminha o tráfego para o roteador externo, mas não há resposta do roteador externo. Portanto, verifique com a equipe externa do roteador sobre a resposta ICMP.

## Sobre esta tradução

A Cisco traduziu este documento com a ajuda de tecnologias de tradução automática e humana para oferecer conteúdo de suporte aos seus usuários no seu próprio idioma, independentemente da localização.

Observe que mesmo a melhor tradução automática não será tão precisa quanto as realizadas por um tradutor profissional.

A Cisco Systems, Inc. não se responsabiliza pela precisão destas traduções e recomenda que o documento original em inglês ([link fornecido](#)) seja sempre consultado.