

使用浮動靜態路由配置ISDN備份

目錄

[簡介](#)

[必要條件](#)

[需求](#)

[採用元件](#)

[慣例](#)

[設定](#)

[網路圖表](#)

[組態](#)

[驗證](#)

[疑難排解](#)

[疑難排解指令](#)

[故障排除輸出示例](#)

[相關資訊](#)

簡介

本文檔提供使用浮動靜態路由實施ISDN備份的示例配置，並提供此類配置的基本故障排除資訊。

有關最常見的ISDN備份實現資訊以及它們之間的比較，請參閱以下文檔：[評估備份介面、浮動靜態路由和撥號器監視DDR備份](#)。

必要條件

需求

本文件沒有特定需求。

採用元件

本檔案中的資訊是根據以下軟體和硬體版本。

- 兩台運行Cisco IOS®軟體版本12.2(3)和12.2(5)的Cisco 2500路由器

本文中的資訊是根據特定實驗室環境內的裝置所建立。文中使用到的所有裝置皆從已清除（預設）的組態來啟動。如果您在即時網路中工作，請確保在使用任何命令之前瞭解其潛在影響。

慣例

如需文件慣例的詳細資訊，請參閱[思科技術提示慣例](#)。


設定

本節提供用於設定本文中所述功能的資訊。

注意：要查詢有關本文檔中使用的命令的其他資訊，請使用[命令查詢工具](#)(僅限[註冊](#)客戶)。

網路圖表

本文檔使用下圖所示的網路設定。

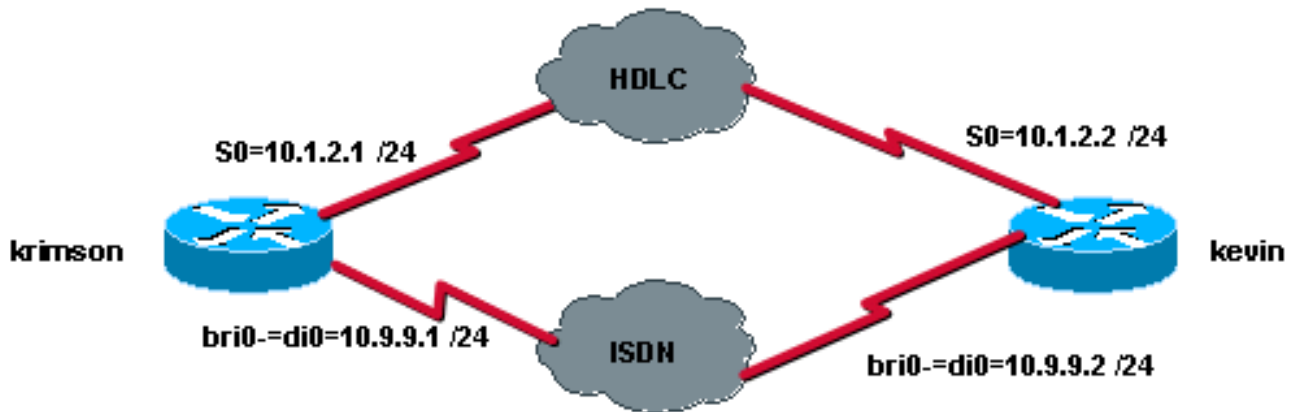

組態

本文檔使用如下所示的配置。

- [krimson \(思科2500路由器 \)](#)
- [kevin \(思科2500路由器 \)](#)

krimson (思科2500路由器)

```
krimson#show running-config
Building configuration...

!
version 12.2
service timestamps debug datetime msec
service timestamps log datetime msec
!
hostname krimson
!
username kevin password 0 <password>
!
isdn switch-type basic-net3
!
!
interface Loopback0
ip address 10.7.7.1 255.255.255.0
!
interface Serial0
ip address 10.1.2.1 255.255.255.0
!
interface BRI0
```

```
no ip address
encapsulation ppp
no ip route-cache
no ip mroute-cache
load-interval 30
dialer pool-member 1
isdn switch-type basic-net3
no fair-queue
no cdp enable
ppp authentication chap
!
interface Dialer0
ip address 10.9.9.1 255.255.255.0
encapsulation ppp
no ip route-cache
no ip mroute-cache
dialer pool 1
dialer remote-name kevin

dialer string 8114
dialer-group 1
no cdp enable
ppp authentication chap
!
ip classless
ip route 10.8.8.0 255.255.255.0 10.1.2.2
ip route 10.8.8.0 255.255.255.0 10.9.9.2 180
no ip http server
!
dialer-list 1 protocol ip permit
!
!
line con 0
exec-timeout 0 0
line aux 0
line vty 0 4
exec-timeout 0 0
password <password> login
!
end
```

kevin (思科2500路由器)

```
kevin#show running-config
Building configuration...

Current configuration : 1205 bytes
!
version 12.2
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname kevin
!
username krimson password 0 <password>
!
isdn switch-type basic-net3
!
!
!
interface Loopback0
```

```
ip address 10.8.8.1 255.255.255.0
!
interface Serial0
ip address 10.1.2.2 255.255.255.0
clockrate 2000000
!
interface Serial1
no ip address
shutdown
!
interface BRI0
no ip address
encapsulation ppp
dialer pool-member 1
isdn switch-type basic-net3
no cdp enable
ppp authentication chap
!
interface Dialer0
ip address 10.9.9.2 255.255.255.0
encapsulation ppp
dialer pool 1
dialer remote-name krimson
dialer string 8113
dialer-group 1
no cdp enable
ppp authentication chap
!
!
dialer-list 1 protocol ip permit
!
!
line con 0
exec-timeout 0 0
line aux 0
line vty 0 4
exec-timeout 0 0
password <password> login
!
end
```

驗證

本節提供的資訊可用於確認您的組態是否正常運作。

[Output Interpreter工具](#)(僅供[註冊](#)客戶使用)支援某些**show**命令，這允許您檢視**show**命令輸出的分析

。

- **show ip route** — 顯示IP路由表條目。
- **show interfaces** — 顯示路由器或訪問伺服器上配置的所有介面的統計資訊。

疑難排解

本節提供的資訊可用於對組態進行疑難排解。

[疑難排解指令](#)

[Output Interpreter工具](#)(僅供[註冊](#)客戶使用)支援某些**show**命令，這允許您檢視**show**命令輸出的分析

注意：發出debug指令之前，請先參閱[有關Debug指令的重要資訊](#)。

- **debug isdn q931** — 顯示有關本地路由器（使用者端）與網路之間的ISDN網路連線（第3層）的呼叫建立和拆除的資訊。
- **debug isdn events** — 顯示ISDN介面使用者端（路由器上）發生的ISDN事件。可以顯示的ISDN事件是Q.931事件（呼叫建立和ISDN網路連線斷開）。
- **debug dialer** — 顯示有關撥號器介面上的資料包或事件的調試資訊。
- **debug ppp negotiation** — 使**debug ppp**命令顯示PPP啟動期間傳輸的PPP資料包，其中會協商PPP選項。
- **debug ppp authentication** — 使**debug ppp**命令顯示身份驗證協定消息，包括質詢身份驗證協定(CHAP)資料包交換和口令身份驗證協定(PAP)交換。

[故障排除輸出示例](#)

在這裡，我們可以通過在遠端端的串列介面上使用**shutdown**和**no shutdown**命令來測試備份功能。這通常會導致通往相關目的網路的主要ip路由消失。

我們首先來看一下主要介面的初始狀態和ip路由表：

[呼叫端：](#)

```
krimson#show interface serial 0
Serial0 is up, line protocol is up
Hardware is HD64570
Internet address is 10.1.2.1/24
MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation HDLC, loopback not set
Keepalive set (10 sec)
Last input 00:00:07, output 00:00:07, output hang never
Last clearing of "show interface" counters never
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/256 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 1158 kilobits/sec
5 minute input rate 1000 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
92 packets input, 7599 bytes, 0 no buffer
Received 62 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
99 packets output, 8991 bytes, 0 underruns
0 output errors, 0 collisions, 12 interface resets
0 output buffer failures, 0 output buffers swapped out
4 carrier transitions
DCD=up DSR=up DTR=up RTS=up CTS=up

krimson#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
```

E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route

Gateway of last resort is 10.48.74.1 to network 0.0.0.0

10.0.0.0/8 is variably subnetted, 5 subnets, 2 masks
C 10.1.2.0/24 is directly connected, Serial0
S 10.8.8.0/24 [1/0] via 10.1.2.2

!--- The IP route for the destination network points to the primary link. C 10.9.9.0/24 is
directly connected, Dialer0 C 10.7.7.0/24 is directly connected, Loopback0 C 10.48.74.0/23 is
directly connected, Ethernet0 S* 0.0.0.0/0 [254/0] via 10.48.74.1

被叫端：

kevin#**show interface serial 0**

Serial0 is up, line protocol is up
Hardware is HD64570
Internet address is 10.1.2.2/24
MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation HDLC, loopback not set
Keepalive set (10 sec)
Last input 00:00:00, output 00:00:08, output hang never
Last clearing of "show interface" counters never
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/256 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 1158 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
106 packets input, 9432 bytes, 0 no buffer
Received 71 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
98 packets output, 8016 bytes, 0 underruns
0 output errors, 0 collisions, 4 interface resets
0 output buffer failures, 0 output buffers swapped out
1 carrier transitions
DCD=up DSR=up DTR=up RTS=up CTS=up

kevin#**show ip route**

Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route

Gateway of last resort is 10.48.74.1 to network 0.0.0.0

10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
C 10.1.2.0/24 is directly connected, Serial0
C 10.9.9.0/24 is directly connected, Dialer0
C 10.8.8.0/24 is directly connected, Loopback0
C 10.48.74.0/23 is directly connected, Ethernet0
S* 0.0.0.0/0 [254/0] via 10.48.74.1

kevin#

現在，我們可以在遠端串列介面上使用**shutdown**命令來模擬鏈路故障：

```
krimson#
*Mar 4 15:25:18.302: %LINK-3-UPDOWN: Interface Serial0, changed state to
down
*Mar 4 15:25:19.302: %LINEPROTO-5-UPDOWN: Line protocol on Interface
Serial0, changed state to down
```

我們可以看到主鏈路已斷開。

```
krimson#show interface serial 0
Serial0 is down, line protocol is down
Hardware is HD64570
Internet address is 10.1.2.1/24
MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation HDLC, loopback not set
Keepalive set (10 sec)
Last input 00:00:22, output 00:00:32, output hang never
Last clearing of "show interface" counters never
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/256 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 1158 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
108 packets input, 8526 bytes, 0 no buffer
Received 78 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
114 packets output, 9895 bytes, 0 underruns
0 output errors, 0 collisions, 12 interface resets
0 output buffer failures, 0 output buffers swapped out
5 carrier transitions
DCD=down DSR=down DTR=up RTS=up CTS=down
krimson#
```

路由表詳細資訊現在顯示浮動靜態路由已安裝在路由表中：

```
krimson#show ip route
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route

Gateway of last resort is 10.48.74.1 to network 0.0.0.0

10.0.0.0/8 is variably subnetted, 4 subnets, 2 masks
S 10.8.8.0/24 [180/0] via 10.9.9.2
C 10.9.9.0/24 is directly connected, Dialer0
C 10.7.7.0/24 is directly connected, Loopback0
C 10.48.74.0/23 is directly connected, Ethernet0
S* 0.0.0.0/0 [254/0] via 10.48.74.1
krimson#
```

在被叫路由器上，我們可以使用**shutdown**命令模擬本地串列0介面上的主鏈路故障：

```
kevin#configure terminal
```

```
Enter configuration commands, one per line. End with CNTL/Z.
```

```
kevin(config)#interface serial 0
```

```
kevin(config-if)#shutdown
```

```
*Mar 4 15:32:00.250: %LINK-5-CHANGED: Interface Serial0, changed state to administratively down
```

```
*Mar 4 15:32:01.250: %LINEPROTO-5-UPDOWN: Line protocol on Interface Serial0, changed state to down
```

```
*Mar 4 15:32:03.742: %SYS-5-CONFIG_I: Configured from console by console
```

現在我們可以看到主鏈路斷開：

```
kevin#show interface serial 0
```

```
Serial0 is administratively down, line protocol is down
```

```
Hardware is HD64570
```

```
Internet address is 10.1.2.2/24
```

```
MTU 1500 bytes, BW 1544 Kbit, DLY 20000 usec,  
reliability 255/255, txload 1/255, rxload 1/255
```

```
Encapsulation HDLC, loopback not set
```

```
Keepalive set (10 sec)
```

```
Last input 00:01:28, output 00:01:18, output hang never
```

```
Last clearing of "show interface" counters never
```

```
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
```

```
Queueing strategy: weighted fair
```

```
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
```

```
Conversations 0/1/256 (active/max active/max total)
```

```
Reserved Conversations 0/0 (allocated/max allocated)
```

```
Available Bandwidth 1158 kilobits/sec
```

```
5 minute input rate 0 bits/sec, 0 packets/sec
```

```
5 minute output rate 0 bits/sec, 0 packets/sec
```

```
114 packets input, 9895 bytes, 0 no buffer
```

```
Received 79 broadcasts, 0 runts, 0 giants, 0 throttles
```

```
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
```

```
108 packets output, 8526 bytes, 0 underruns
```

```
0 output errors, 0 collisions, 4 interface resets
```

```
0 output buffer failures, 0 output buffers swapped out
```

```
1 carrier transitions
```

```
DCD=down DSR=down DTR=up RTS=up CTS=down
```

定義為關注流量的ping流量通過備用撥號器0介面發起傳出呼叫。

```
krimson#ping 10.8.8.1
```

```
Type escape sequence to abort.
```

```
Sending 5, 100-byte ICMP Echos to 10.8.8.1, timeout is 2 seconds:
```

```
*Mar 4 15:27:39.618: BR0 DDR: rotor dialout [priority]
```

```
*Mar 4 15:27:39.622: BR0 DDR: Dialing cause ip (s=10.9.9.1, d=10.8.8.1)
```

```
*Mar 4 15:27:39.626: BR0 DDR: Attempting to dial 8114
```

```
*Mar 4 15:27:39.642: ISDN BR0: TX -> SETUP pd = 8 callref = 0x09
```

```
*Mar 4 15:27:39.646: Bearer Capability i = 0x8890
```

```
*Mar 4 15:27:39.654: Channel ID i = 0x83
```

```
*Mar 4 15:27:39.658: Called Party Number i = 0x80, '8114',
```

```
Plan:Unknown, Type:Unknown
```

```
*Mar 4 15:27:39.718: ISDN BR0: RX <- CALL_PROC pd = 8 callref = 0x89
```

```
*Mar 4 15:27:39.722: Channel ID i = 0x89
```

```
*Mar 4 15:27:39.974: ISDN BR0: RX <- CONNECT pd = 8 callref = 0x89
```

```
*Mar 4 15:27:39.990: %LINK-3-UPDOWN: Interface BRI0:1, changed state to up
```

```
*Mar 4 15:27:39.998: %DIALER-6-BIND: Interface BR0:1 bound to profile Di0
```

```
*Mar 4 15:27:40.010: BR0:1 PPP: Treating connection as a callout
```



```

*Mar 4 15:27:40.010: BR0:1 PPP: Phase is ESTABLISHING, Active Open [0 sess, 0 load]
*Mar 4 15:27:40.014: BR0:1 LCP: O !!!CONFREQ [Closed] id 19 len 15
*Mar 4 15:27:40.018: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:27:40.022: BR0:1 LCP: MagicNumber 0x12D0A490 (0x050612D0A490)
*Mar 4 15:27:40.030: ISDN BR0: TX -> CONNECT_ACK pd = 8 callref = 0x09
*Mar 4 15:27:40.054: BR0:1 LCP: I CONFREQ [REQsent] id 9 len 15
*Mar 4 15:27:40.058: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:27:40.062: BR0:1 LCP: MagicNumber 0x12D6B638 (0x050612D6B638)
*Mar 4 15:27:40.066: BR0:1 LCP: O CONFACK [REQsent] id 9 len 15
*Mar 4 15:27:40.066: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:27:40.070: BR0:1 LCP: MagicNumber 0x12D6B638 (0x050612D6B638)
*Mar 4 15:27:40.074: BR0:1 LCP: I CONFACK [ACKsent] id 19 len 15
*Mar 4 15:27:40.078: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:27:40.082: BR0:1 LCP: MagicNumber 0x12D0A490 (0x050612D0A490)
*Mar 4 15:27:40.082: BR0:1 LCP: State is Open
*Mar 4 15:27:40.086: BR0:1 PPP: Phase is AUTHENTICATING, by both [0 sess, 0 load]
*Mar 4 !
Suc15:27:40.090: BR0:1 CHAP: O CHALLENGE id 7 len 28 from "krimson"
*Mar 4 15:27:40.106: BR0:1 CHAP: I CHALLENGE id 7 len 26 from "kevin"
*Mar 4 15:27:40.110: BR0:1 CHAP: O RESPONSE id 7 len 28 from "krimson"
*Mar 4 15:27:40.138: BR0:1 CHAP: I SUCCESS id 7 len 4
*Mar 4 15:27:40.150: BR0:1 CHAP: I RESPONSE id 7 len 26 from "kevin"
*Mar 4 15:27:40.158: BR0:1 CHAP: O SUCCESS id 7 len 4
*Mar 4 15:27:40.162: BR0:1 PPP: Phase is UP [0 sess, 0 load]
*Mar 4 15:27:40.166: BR0:1 IPCP: O CONFREQ [Not negotiated] id 2 len 10
*Mar 4 15:27:40.170: BR0:1 IPCP: Address 10.9.9.1 (0x03060A090901)
*Mar 4 15:27:40.186: BR0:1 IPCP: I CONFREQ [REQsent] id 2 len 10
*Mar 4 15:27:40.190: BR0:1 IPCP: Address 10.9.9.2 (0x03060A090902)
*Mar 4 15:27:40.190: BR0:1 IPCP: O CONFACK [REQsent] id 2 len 10
*Mar 4 15:27:40.194: BR0:1 IPCP: Address 10.9.9.2 (0x03060A090902)
*Mar 4 15:27:40.202: BR0:1 IPCP: I CONFACK [ACKsent] id 2 len 10
*Mar 4 15:27:40.206: BR0:1 IPCP: Address 10.9.9.1 (0x03060A090901)
*Mar 4 15:27:40.206: BR0:1 IPCP: State is Open
*Mar 4 15:27:40.214: BR0:1 DDR: dialer protocol up
*Mar 4 15:27:40.218: Di0 IPCP: Install route to 10.9.9.2
*Mar 4 15:27:41.162: %LINEPROTO-5-UPDOWN: Line protocol on Interface BRI0:1,
changed state to upcess rate is 80 percent (4/5), round-trip min/avg/max =
36/47/76 ms
krimson#

```

同時，在被呼叫端運行的debug會顯示同一呼叫的以下輸出：

```

kevin#
*Mar 4 15:34:21.698: ISDN BR0: RX <- SETUP pd = 8 callref = 0x07
*Mar 4 15:34:21.706: Bearer Capability i = 0x8890
*Mar 4 15:34:21.714: Channel ID i = 0x89
*Mar 4 15:34:21.718: Calling Party Number i = 0xA1, '8113',
Plan:ISDN, Type:National
*Mar 4 15:34:21.734: Called Party Number i = 0xC1, '8114',
Plan:ISDN, Type:Subscriber(local)
*Mar 4 15:34:21.762: ISDN BR0: Event: Received a DATA call from 8113 on B1
at 64 Kb/s
*Mar 4 15:34:21.762: ISDN BR0: Event: Accepting the call id 0xC
*Mar 4 15:34:21.766: BR0:1: interface must be fifo queue, force fifo
*Mar 4 15:34:21.774: %DIALER-6-BIND: Interface BR0:1 bound to profile Di0
*Mar 4 15:34:21.786: %LINK-3-UPDOWN: Interface BRI0:1, changed state to up
*Mar 4 15:34:21.798: BR0:1 PPP: Treating connection as a callin
*Mar 4 15:34:21.802: BR0:1 PPP: Phase is ESTABLISHING, Passive Open [0 sess,
0 load]
*Mar 4 15:34:21.806: BR0:1 LCP: State is Listen
*Mar 4 15:34:21.818: ISDN BR0: TX -> CALL_PROC pd = 8 callref = 0x87
*Mar 4 15:34:21.826: Channel ID i = 0x89
*Mar 4 15:34:21.854: ISDN BR0: TX -> CONNECT pd = 8 callref = 0x87

```

```

*Mar 4 15:34:21.918: ISDN BR0: RX <- CONNECT_ACK pd = 8 callref = 0x07
*Mar 4 15:34:21.926: Channel ID i = 0x89
*Mar 4 15:34:21.978: BR0:1 LCP: I CONFREQ [Listen] id 19 len 15
*Mar 4 15:34:21.982: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:34:21.986: BR0:1 LCP: MagicNumber 0x12D0A490 (0x050612D0A490)
*Mar 4 15:34:21.990: BR0:1 LCP: O CONFREQ [Listen] id 9 len 15
*Mar 4 15:34:21.994: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:34:21.994: BR0:1 LCP: MagicNumber 0x12D6B638 (0x050612D6B638)
*Mar 4 15:34:21.998: BR0:1 LCP: O CONFACK [Listen] id 19 len 15
*Mar 4 15:34:22.002: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:34:22.006: BR0:1 LCP: MagicNumber 0x12D0A490 (0x050612D0A490)
*Mar 4 15:34:22.030: BR0:1 LCP: I CONFACK [ACKsent] id 9 len 15
*Mar 4 15:34:22.034: BR0:1 LCP: AuthProto CHAP (0x0305C22305)
*Mar 4 15:34:22.034: BR0:1 LCP: MagicNumber 0x12D6B638 (0x050612D6B638)
*Mar 4 15:34:22.038: BR0:1 LCP: State is Open
*Mar 4 15:34:22.042: BR0:1 PPP: Phase is AUTHENTICATING, by both [0 sess, 0
load]
*Mar 4 15:34:22.046: BR0:1 CHAP: O CHALLENGE id 7 len 26 from "kevin"
*Mar 4 15:34:22.050: BR0:1 CHAP: I CHALLENGE id 7 len 28 from "krimson"
*Mar 4 15:34:22.054: BR0:1 CHAP: Waiting for peer to authenticate first
*Mar 4 15:34:22.070: BR0:1 CHAP: I RESPONSE id 7 len 28 from "krimson"
*Mar 4 15:34:22.078: BR0:1 CHAP: O SUCCESS id 7 len 4
*Mar 4 15:34:22.082: BR0:1 CHAP: Processing saved Challenge, id 7
*Mar 4 15:34:22.090: BR0:1 CHAP: O RESPONSE id 7 len 26 from "kevin"
*Mar 4 15:34:22.114: BR0:1 CHAP: I SUCCESS id 7 len 4
*Mar 4 15:34:22.118: BR0:1 PPP: Phase is UP [0 sess, 0 load]
*Mar 4 15:34:22.122: BR0:1 IPCP: O CONFREQ [Not negotiated] id 2 len 10
*Mar 4 15:34:22.126: BR0:1 IPCP: Address 10.9.9.2 (0x03060A090902)
*Mar 4 15:34:22.130: BR0:1 IPCP: I CONFREQ [REQsent] id 2 len 10
*Mar 4 15:34:22.134: BR0:1 IPCP: Address 10.9.9.1 (0x03060A090901)
*Mar 4 15:34:22.138: BR0:1 IPCP: O CONFACK [REQsent] id 2 len 10
*Mar 4 15:34:22.142: BR0:1 IPCP: Address 10.9.9.1 (0x03060A090901)
*Mar 4 15:34:22.226: BR0:1 IPCP: I CONFACK [ACKsent] id 2 len 10
*Mar 4 15:34:22.230: BR0:1 IPCP: Address 10.9.9.2 (0x03060A090902)
*Mar 4 15:34:22.230: BR0:1 IPCP: State is Open
*Mar 4 15:34:22.242: BR0:1 DDR: dialer protocol up
*Mar 4 15:34:22.250: Di0 IPCP: Install route to 10.9.9.1
*Mar 4 15:34:23.114: %LINEPROTO-5-UPDOWN: Line protocol on Interface BRI0:1,
changed state to up
*Mar 4 15:34:27.794: %ISDN-6-CONNECT: Interface BRI0:1 is now connected to
8113 krimson

```

備份後的狀態為「up」：

```

krimson#show interface dialer 0
Dialer0 is up, line protocol is up (spoofing)
Hardware is Unknown
Internet address is 10.9.9.1/24
MTU 1500 bytes, BW 56 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
DTR is pulsed for 1 seconds on reset
Interface is bound to BR0:1
Last input never, output never, output hang never
Last clearing of "show interface" counters 00:13:26
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/16 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 42 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec

```

```
36 packets input, 2160 bytes
36 packets output, 2160 bytes
Bound to:
BRI0:1 is up, line protocol is up
Hardware is BRI
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
Keepalive set (10 sec)
Time to interface disconnect: idle 00:01:33
Interface is bound to Di0 (Encapsulation PPP)
LCP Open
Open: IPCP
Last input 00:00:26, output 00:00:01, output hang never
Last clearing of "show interface" counters never
Queueing strategy: fifo
Output queue 0/40, 0 drops; input queue 0/75, 0 drops
30 second input rate 0 bits/sec, 0 packets/sec
30 second output rate 0 bits/sec, 0 packets/sec
126 packets input, 3664 bytes, 0 no buffer
Received 0 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
131 packets output, 3777 bytes, 0 underruns
0 output errors, 0 collisions, 15 interface resets
0 output buffer failures, 0 output buffers swapped out
28 carrier transitions
```

krimson#show ip route

```
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
```

```
Gateway of last resort is 10.48.74.1 to network 0.0.0.0
```

```
10.0.0.0/8 is variably subnetted, 5 subnets, 3 masks
C 10.9.9.2/32 is directly connected, Dialer0
S 10.8.8.0/24 [180/0] via 10.9.9.2
C 10.9.9.0/24 is directly connected, Dialer0
C 10.7.7.0/24 is directly connected, Loopback0
C 10.48.74.0/23 is directly connected, Ethernet0
S* 0.0.0.0/0 [254/0] via 10.48.74.1
```

在被叫端：

備份後的狀態為「up」。

kevin#show interface dialer 0

```
Dialer0 is up, line protocol is up (spoofing)
Hardware is Unknown
Internet address is 10.9.9.2/24
MTU 1500 bytes, BW 56 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
DTR is pulsed for 1 seconds on reset
Interface is bound to BR0:1
Last input never, output never, output hang never
Last clearing of "show interface" counters 00:16:18
```

```
Input queue: 0/75/0/0 (size/max/drops/flushes); Total output drops: 0
Queueing strategy: weighted fair
Output queue: 0/1000/64/0 (size/max total/threshold/drops)
Conversations 0/1/16 (active/max active/max total)
Reserved Conversations 0/0 (allocated/max allocated)
Available Bandwidth 42 kilobits/sec
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
40 packets input, 2224 bytes
40 packets output, 2224 bytes
Bound to:
BRI0:1 is up, line protocol is up
Hardware is BRI
MTU 1500 bytes, BW 64 Kbit, DLY 20000 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation PPP, loopback not set
Keepalive set (10 sec)
Time to interface disconnect: idle 00:01:11
Interface is bound to Di0 (Encapsulation PPP)
LCP Open
Open: IPCP
Last input 00:00:48, output 00:00:00, output hang never
Last clearing of "show interface" counters never
Queueing strategy: fifo
Output queue 0/40, 0 drops; input queue 0/75, 0 drops
5 minute input rate 0 bits/sec, 0 packets/sec
5 minute output rate 0 bits/sec, 0 packets/sec
136 packets input, 3857 bytes, 0 no buffer
Received 0 broadcasts, 0 runts, 0 giants, 0 throttles
0 input errors, 0 CRC, 0 frame, 0 overrun, 0 ignored, 0 abort
131 packets output, 3744 bytes, 0 underruns
0 output errors, 0 collisions, 12 interface resets
0 output buffer failures, 0 output buffers swapped out
35 carrier transitions
```

kevin#**show ip route**

```
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter
area
* - candidate default, U - per-user static route, o - ODR
P - periodic downloaded static route
```

Gateway of last resort is 10.48.74.1 to network 0.0.0.0

```
10.0.0.0/8 is variably subnetted, 4 subnets, 3 masks
C 10.9.9.0/24 is directly connected, Dialer0
C 10.8.8.0/24 is directly connected, Loopback0
C 10.9.9.1/32 is directly connected, Dialer0
C 10.48.74.0/23 is directly connected, Ethernet0
S* 0.0.0.0/0 [254/0] via 10.48.74.1
```

在這裡，我們通過在遠端串列介面上使用**no shutdown**命令來模擬主鏈路的恢復：

krimson#

```
*Mar 4 15:28:58.726: %LINK-3-UPDOWN: Interface Serial0, changed state to up
*Mar 4 15:28:59.730: %LINEPROTO-5-UPDOWN: Line protocol on Interface
Serial0, changed state to up
```

備份在空閒超時後斷開。

```
krimson#show isdn active
```

```
-----  
ISDN ACTIVE CALLS  
-----
```

```
Call Calling Called Remote Seconds Seconds Seconds Charges  
Type Number Name Used Left Idle  
Units/Currency  
-----
```

```
Out 8114 kevin 120 1 118 0  
-----
```

```
krimson#
```

```
*Mar 4 15:29:41.738: BR0:1 DDR: idle timeout  
*Mar 4 15:29:41.742: BR0 DDR: has total 0 call(s), dial_out 0, dial_in 0  
*Mar 4 15:29:41.746: BR0:1 PPP: Treating connection as a callout  
*Mar 4 15:29:41.750: %DIALER-6-UNBIND: Interface BR0:1 unbound from profile  
Di0  
*Mar 4 15:29:41.754: BR0:1 DDR: disconnecting call  
*Mar 4 15:29:41.758: %ISDN-6-DISCONNECT: Interface BRI0:1 disconnected from  
8114 kevin, call lasted 121 seconds  
*Mar 4 15:29:41.774: ISDN BR0: TX -> DISCONNECT pd = 8 callref = 0x09  
*Mar 4 15:29:41.782: Cause i = 0x8090 - Normal call clearing  
*Mar 4 15:29:41.790: Di0 IPCP: Remove route to 10.9.9.2  
*Mar 4 15:29:41.862: ISDN BR0: RX <- RELEASE pd = 8 callref = 0x89  
*Mar 4 15:29:41.886: %LINK-3-UPDOWN: Interface BRI0:1, changed state to down  
*Mar 4 15:29:41.894: BR0:1 IPCP: State is Closed  
*Mar 4 15:29:41.894: BR0:1 PPP: Phase is TERMINATING [0 sess, 0 load]  
*Mar 4 15:29:41.898: BR0:1 LCP: State is Closed  
*Mar 4 15:29:41.898: BR0:1 PPP: Phase is DOWN [0 sess, 0 load]  
*Mar 4 15:29:41.902: BR0:1 DDR: disconnecting call  
*Mar 4 15:29:41.910: ISDN BR0: TX -> RELEASE_COMP pd = 8 callref = 0x09  
*Mar 4 15:29:42.886: %LINEPROTO-5-UPDOWN: Line protocol on Interface BRI0:1,  
changed state to down
```

初始狀態現在已恢復。

```
krimson#show ip route
```

```
Codes: C - connected, S - static, I - IGRP, R - RIP, M - mobile, B - BGP  
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
E1 - OSPF external type 1, E2 - OSPF external type 2, E - EGP  
i - IS-IS, L1 - IS-IS level-1, L2 - IS-IS level-2, ia - IS-IS inter  
area  
* - candidate default, U - per-user static route, o - ODR  
P - periodic downloaded static route
```

```
Gateway of last resort is 10.48.74.1 to network 0.0.0.0
```

```
10.0.0.0/8 is variably subnetted, 5 subnets, 2 masks  
C 10.1.2.0/24 is directly connected, Serial0  
S 10.8.8.0/24 [1/0] via 10.1.2.2  
C 10.9.9.0/24 is directly connected, Dialer0  
C 10.7.7.0/24 is directly connected, Loopback0  
C 10.48.74.0/23 is directly connected, Ethernet0  
S* 0.0.0.0/0 [254/0] via 10.48.74.1
```

[相關資訊](#)

- [撥號技術支援頁](#)
- [技術支援 - Cisco Systems](#)