

使用Xauth終止多個Cisco安全PIX防火牆介面上的IPSec隧道

目錄

[簡介](#)

[開始之前](#)

[慣例](#)

[必要條件](#)

[採用元件](#)

[設定](#)

[網路圖表](#)

[組態](#)

[驗證](#)

[疑難排解](#)

[集線器PIX調試](#)

[內部路由器調試](#)

[VPN客戶端日誌](#)

[相關資訊](#)

簡介

本文檔說明具有以下元素的IPSec配置：應用於PIX上多個介面的加密對映；vpn使用者端的延伸驗證(xauth)；將私有IP地址從池動態分配到VPN客戶端；以及nat 0 access-list命令功能，此功能允許LAN上的主機與遠端使用者使用私有IP地址，同時仍然從PIX獲取網路地址轉換(NAT)地址以訪問不受信任的網路。

此配置具有以下目標。

- 根據TACACS+資料庫對遠端使用者進行身份驗證。
- 為遠端使用者動態分配私有IP地址。
- 加密從遠端使用者到中心PIX的流量。
- 加密從集線器PIX到LAN的流量。

注意：建立此文檔時，在xauth質詢期間錯誤登入身份驗證、授權和記帳(AAA)伺服器將刪除正在建立的安全關聯(SA)。

開始之前

慣例

如需文件慣例的詳細資訊，請參閱[思科技術提示慣例](#)。

必要條件

本文件沒有特定先決條件。

採用元件

此配置是使用下面的軟體和硬體版本開發和測試的。

- Cisco IOS[®]軟體版本12.2.8.T或更新版本
- Cisco PIX IOS版本6.1(1)
- Cisco VPN使用者端3.5

本文中的資訊是根據特定實驗室環境內的裝置所建立。文中使用到的所有裝置皆從已清除 (預設) 的組態來啟動。如果您在即時網路中工作，請確保在使用任何命令之前瞭解其潛在影響。


設定

本節提供用於設定本文件中所述功能的資訊。

注意：要查詢有關本文檔中使用的命令的其他資訊，請使用[命令查詢工具](#)([僅限註冊客戶](#))。

網路圖表

本文檔使用下圖所示的網路設定。

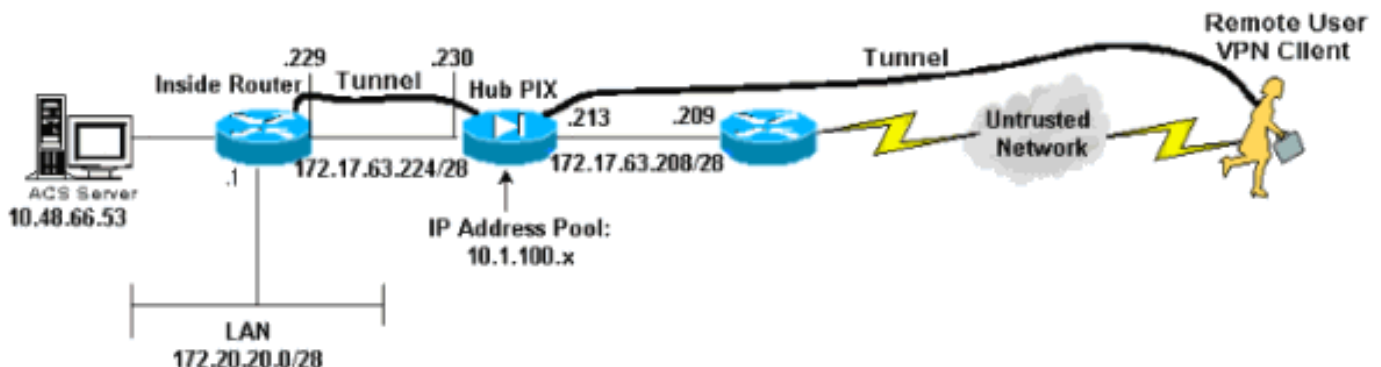

組態

本文檔使用如下所示的配置。

- [中心PIX配置](#)
- [內部路由器配置](#)
- [VPN客戶端配置](#)

中心PIX配置

```
PIX Version 6.1(1)
nameif ethernet0 outside security0
nameif ethernet1 inside security100
nameif ethernet2 intf2 security10
nameif ethernet3 intf3 security15
enable password OnTrBUG1Tp0edmkr encrypted
```

```
passwd 2KFQnbNIdI.2KYOU encrypted
hostname HubPix
fixup protocol ftp 21
fixup protocol http 80
fixup protocol h323 1720
fixup protocol rsh 514
fixup protocol rtsp 554
fixup protocol smtp 25
fixup protocol sqlnet 1521
fixup protocol sip 5060
fixup protocol skinny 2000
names
access-list nonat permit ip 172.20.20.0 255.255.255.0
10.1.100.0 255.255.255.0
access-list 125 permit ip 10.1.100.0 255.255.255.0
172.20.20.0 255.255.255.0
pager lines 24
logging console debugging
interface ethernet0 auto
interface ethernet1 auto
interface ethernet2 auto shutdown
interface ethernet3 auto shutdown
mtu outside 1500
mtu inside 1500
mtu intf2 1500
mtu intf3 1500
ip address outside 172.17.63.213 255.255.255.240
ip address inside 172.17.63.230 255.255.255.240
ip address intf2 127.0.0.1 255.255.255.255
ip address intf3 127.0.0.1 25(B5.255.255.255
ip audit info action alarm
ip audit attack action alarm
ip local pool mypool 10.1.100.1-10.1.100.254
no failover
failover timeout 0:00:00
failover poll 15
failover ip address outside 0.0.0.0
failover ip address inside 0.0.0.0
failover ip address intf2 0.0.0.0
failover ip address intf3 0.0.0.0
pdm history enable
arp timeout 14400
global (outside) 1 172.17.63.210
nat (inside) 0 access-list nonat
nat (inside) 1 172.20.20.0 255.255.255.0 0 0
route outside 0.0.0.0 0.0.0.0 172.17.63.209 1
route inside 10.48.66.53 255.255.255.255 172.17.63.229 1
route inside 172.20.20.0 255.255.255.0 172.17.63.229 1
timeout xlate 3:00:00
timeout conn 1:00:00 half-closed 0:10:00 udp 0:02:00 rpc
0:10:00
h323 0:05:00 sip 0:30:00 sip_media 0:02:00
timeout uauth 0:05:00 absolute
aaa-server TACACS+ protocol tacacs+
aaa-server RADIUS protocol radius
aaa-server partner protocol tacacs+
aaa-server partner (inside) host 10.48.66.53 cisco123
timeout 5
no snmp-server location
no snmp-server contact
snmp-server community public
no snmp-server enable traps
floodguard enable
sysopt ipsec pl-compatible
```

```
no sysopt route dnat
crypto ipsec transform-set myset esp-des esp-md5-hmac
crypto dynamic-map dynmap 10 set transform-set myset
crypto map internal 10 ipsec-isakmp
crypto map internal 10 match address 125
crypto map internal 10 set peer 172.17.63.229
crypto map internal 10 set transform-set myset
crypto map internal interface inside
crypto map dyn-map 10 ipsec-isakmp dynamic dynmap
crypto map dyn-map client authentication partner
crypto map dyn-map interface outside
isakmp enable outside
isakmp enable inside
isakmp key ***** address 172.17.63.229 netmask
255.255.255.255
isakmp key ***** address 0.0.0.0 netmask 0.0.0.0
isakmp identity address
isakmp policy 10 authentication pre-share
isakmp policy 10 encryption des
isakmp policy 10 hash md5
isakmp policy 10 group 2
isakmp policy 10 lifetime 86400
vpngroup vpn3000 idle-time 1800
vpngroup vpn3000 password *****
vpngroup vpn3 address-pool mypool
vpngroup vpn3 dns-server 172.20.20.2
vpngroup vpn3 wins-server 172.20.20.2
vpngroup vpn3 default-domain cisco.com
vpngroup vpn3 idle-time 1800
telnet timeout 5
ssh timeout 5
terminal width 80
Cryptochecksum:fcd6d79f6a662b82e5f450ed833f34e6
: end
[OK]
```

内部路由器配置

```
version 12.2
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname inside
!
enable password ww
!
ip subnet-zero
ip cef
!
!
!
ip audit notify log
ip audit po max-events 100
!
!--- Create an Internet Security Association and Key
Management Protocol (ISAKMP) !--- policy for Phase 1
negotiations for the VPN 3.x Clients. crypto isakmp
policy 10
hash md5
authentication pre-share
group 2
!--- Specify the pre-shared key for the LAN-to-LAN
```


```
tunnel. crypto isakmp key ciscotac address 172.17.63.230
!
!
!--- Create the Phase 2 Policy for actual data
encryption. crypto ipsec transform-set tacset esp-des
esp-md5-hmac
!
!--- Create the actual crypto map. crypto map tacmap 25
ipsec-isakmp
  set peer 172.17.63.230
  set transform-set tacset
  match address 105
!
!
!
!
!
!
!
!
!
!
controller ISA 6/1
!
!
!
!
interface Serial2/0
  no ip address
  shutdown
  serial restart_delay 0
!
interface Serial2/1
  no ip address
  shutdown
  serial restart_delay 0
!
interface Serial2/2
  no ip address
  shutdown
  serial restart_delay 0
!
interface Serial2/3
  no ip address
  shutdown
  serial restart_delay 0
!
interface FastEthernet3/0
  ip address 10.48.66.46 255.255.254.0
  duplex half
!
!--- Apply the crypto map on the outside interface.
interface FastEthernet3/1 ip address 172.17.63.229
255.255.255.240
  duplex half
  crypto map tacmap
!
interface FastEthernet5/0
  ip address 172.20.20.20 255.255.255.0
  duplex half
!
ip classless
ip route 0.0.0.0 0.0.0.0 172.17.63.230
no ip http server
ip pim bidir-enable
```

```
!  
!  
access-list 105 permit ip 172.20.20.0 0.0.0.255  
10.1.100.0 0.0.0.255  
!  
!  
call rsvp-sync  
!  
!  
mgcp profile default  
!  
dial-peer cor custom  
!  
!  
!  
!  
gatekeeper  
  shutdown  
!  
!  
line con 0  
line aux 0  
line vty 0 4  
  login  
!  
!  
end
```

VPN客戶端配置

以下步驟描述了VPN客戶端的配置。

1. 登入到VPN客戶端後，按兩下工作列中的黃色掛鎖，並通過選擇**Connect**登入。

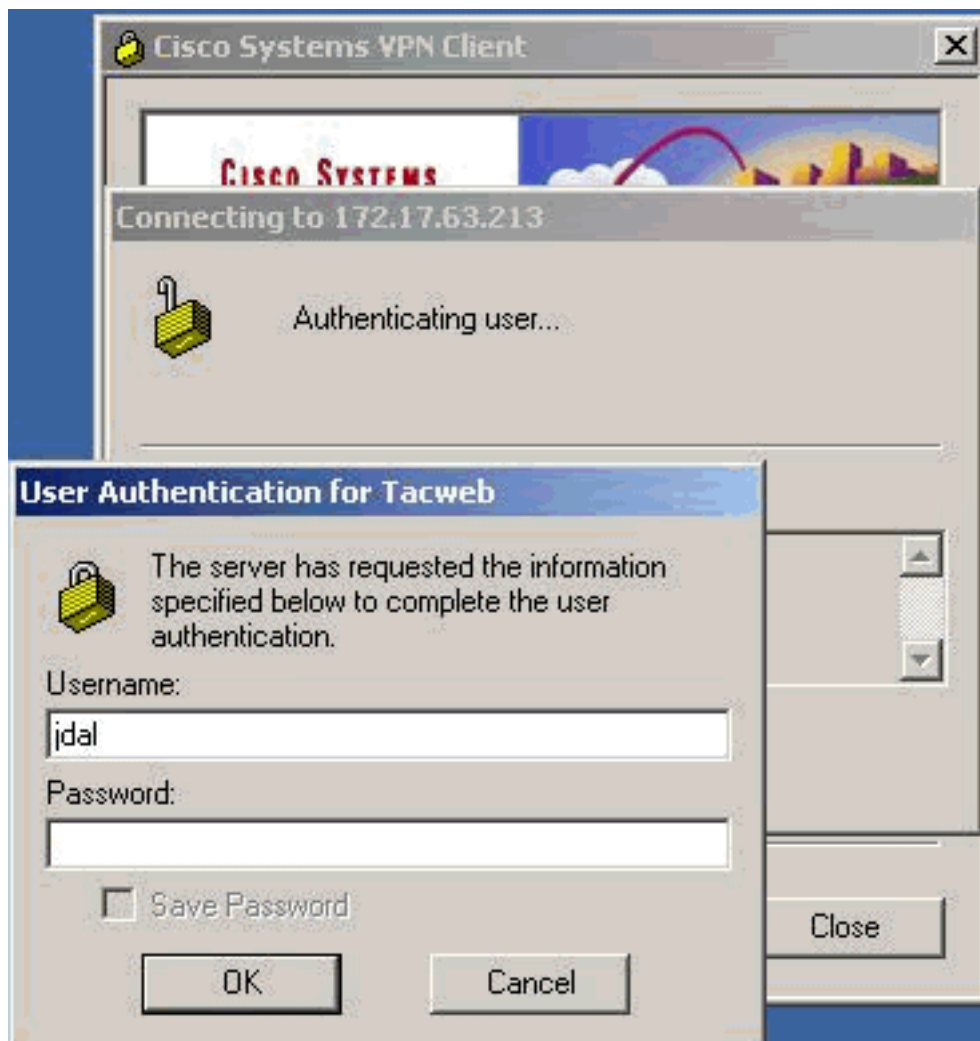

2. 要檢視連線統計資訊，請在建立隧道時按兩下黃色掛鎖，並出現以下螢幕。

Cisco Systems VPN Client Connection Status

General Statistics

Bytes in: 240 Bytes out: 32814
Packets decrypted: 4 Packets encrypted: 221
Packets bypassed: 79 Packets discarded: 2

Secured routes:

Network	Subnet Mask	Bytes	Src Port	Ds
🔑 0.0.0.0	0.0.0.0	21042	*	
🔑 172.17.63.213	255.255.255.255	0	*	

Local LAN routes:

Network	Subnet Mask	Src Port	Dst Port	Pr
---------	-------------	----------	----------	----

Time connected: 00:05:02

OK

Notifications...

Reset

Disconnect

3. 選擇VPN客戶端配置資訊的常規頁籤。

Cisco Systems VPN Client Connection Status

General | Statistics

Client IP address: 10.1.100.1
Server IP address: 172.17.63.213
Encryption: 56-bit DES
Authentication: HMAC-MD5
Transparent Tunneling: Inactive
Tunnel Port: 0
Compression: None
Local LAN access: Disabled
Personal Firewall: None
Firewall Policy: None

Note: Stateful Firewall (Always On) status is not represented above. To view this status, right click on the system tray icon. If checked, this functionality is enabled.

Time connected: 00:04.26

OK

Notifications...

Reset

Disconnect

Remote Party Identity and Addressing

ID Type: IP Subnet
Subnet: 172.20.20.0
Mask: 255.255.255.0
Port: all

Connect Using Secure Gateway Tunnel - Checked

Type: IP Address
Address: 172.17.63.213

My Identity:

Preshared Key

Authentication (Phase I -- Proposal 1)

Authentication Method: Preshared Key
Encryption Algorithm: DES
Hash Algorithm: MD5
SALife: Unspecified
Key Group: Diffie-Hellmen 1

Key Exchange (PhaseII -- Proposal 1)

SALife: Unspecified
Encapsulation Protocol: ESP
Encryption Algorithm: DES

Hash Algorithm: MD5
Encapsulation: Tunnel

驗證

本節提供的資訊可用於確認您的組態是否正常運作。

[輸出直譯器工具](#)(僅供註冊客戶使用)支援某些show命令，此工具可讓您檢視show命令輸出的分析。

show命令可以在PIX和路由器上運行。

- **show crypto isakmp sa** — 顯示第1階段安全關聯。
- **show crypto ipsec sa** — 顯示第1階段安全關聯和代理、封裝、加密、解封和解密資訊。
- **show crypto engine connections active** — (僅限路由器) 顯示當前連線以及有關加密和解密資料包的資訊

疑難排解

本節提供的資訊可用於對組態進行疑難排解。

嘗試以下任何debug指令之前，請先參閱[有關Debug指令的重要資訊](#)。有關詳細資訊，請參見以下調試輸出。

- [集線器PIX調試](#)
- [內部路由器調試](#)
- [VPN客戶端日誌](#)

必須在兩個對等體上清除安全關聯。PIX命令在配置模式下執行。

- **clear crypto isakmp sa** -(PIX)清除第1階段安全關聯。
- **clear crypto ipsec sa** -(PIX)清除第2階段安全關聯。
- **clear crypto isakmp** — (路由器) 清除第1階段安全關聯。
- **clear crypto sa** — (路由器) 清除第2階段安全關聯。

以下調試必須在兩個IPSec對等體上運行。

- **debug crypto isakmp** — (路由器和PIX) 顯示第1階段的錯誤。
- **debug crypto ipsec** — (路由器和PIX) 顯示第2階段的錯誤。
- **debug crypto engine** — (僅限路由器) 顯示來自加密引擎的資訊。

集線器PIX調試

```
HubPix(config)#
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
VPN Peer: ISAKMP: Added new peer: ip:30.30.30.2 Total VPN Peers:1
VPN Peer: ISAKMP: Peer ip:30.30.30.2 Ref cnt incremented to:1
    Total VPN Peers:1
OAK_AG exchange
ISAKMP (0): processing SA payload. message ID = 0

ISAKMP (0): Checking ISAKMP transform 1 against priority 10 policy
ISAKMP:      encryption 3DES-CBC
```

```
ISAKMP:      hash SHA
ISAKMP:      default group 2
ISAKMP:      extended auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of  0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 2 against priority 10 policy
ISAKMP:      encryption 3DES-CBC
ISAKMP:      hash MD5
ISAKMP:      default group 2
ISAKMP:      extended auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of  0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 3 against priority 10 policy
ISAKMP:      encryption 3DES-CBC
ISAKMP:      hash SHA
ISAKMP:      default group 2
ISAKMP:      auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of  0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 4 against priority 10 policy
ISAKMP:      encryption 3DES-CBC
ISAKMP:      hash MD5
ISAKMP:      default group 2
ISAKMP:      auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of  0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 5 against priority 10 policy
ISAKMP:      encryption DES-CBC
ISAKMP:      hash SHA
ISAKMP:      default group 2
ISAKMP:      extended auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of  0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 6 against priority 10 policy
ISAKMP:      encryption DES-CBC
ISAKMP:      hash MD5
ISAKMP:      default group 2
ISAKMP:      extended auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of  0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are acceptable. Next payload is 3
ISAKMP (0): processing KE payload. message ID = 0

ISAKMP (0): processing NONCE payload. message ID = 0

ISAKMP (0): processing ID payload. message ID = 0
ISAKMP (0): processing vendor id payload

ISAKMP (0): processing vendor id payload

ISAKMP (0): remote peer supports dead peer detection

ISAKMP (0): processing vendor id payload

ISAKMP (0): speaking to a Unity client

ISAKMP: Created a peer node for 30.30.30.2
ISAKMP (0): ID payload
            next-payload : 10
```

```
type      : 1
protocol  : 17
port      : 500
length    : 8
ISAKMP (0): Total payload length: 12
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
OAK_AG exchange
ISAKMP (0): processing HASH payload. message ID = 0
ISAKMP (0): processing NOTIFY payload 24578 protocol 1
spi 0, message ID = 0
ISAKMP (0): processing notify INITIAL_CONTACT
IPSEC(key_engine): got a queue event...
IPSEC(key_engine_delete_sas): rec'd delete notify from ISAKMP
IPSEC(key_engine_delete_sas): delete all SAs shared with 30.30.30.2

ISAKMP (0): SA has been authenticated
return status is IKMP_NO_ERROR
ISAKMP/xauth: request attribute XAUTH_TYPE
ISAKMP/xauth: request attribute XAUTH_USER_NAME
ISAKMP/xauth: request attribute XAUTH_USER_PASSWORD
ISAKMP (0:0): initiating peer config to 30.30.30.2.
ID = 1990788923 (0x76a9073b)
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
ISAKMP_TRANSACTION exchange
ISAKMP (0:0): processing transaction payload from 30.30.30.2. message ID = 76
ISAKMP: Config payload CFG_REPLY
return status is IKMP_ERR_NO_RETRANS
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
ISAKMP (0:0): phase 2 packet is a duplicate of a previous packet.
ISAKMP (0:0): initiating peer config to 30.30.30.2. ID = 167380747 (0x9fa070b)
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
ISAKMP_TRANSACTION exchange
ISAKMP (0:0): processing transaction payload from 30.30.30.2. message ID = 60
ISAKMP: Config payload CFG_ACK
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
ISAKMP_TRANSACTION exchange
ISAKMP (0:0): processing transaction payload from 30.30.30.2. message ID = 0
ISAKMP: Config payload CFG_REQUEST
ISAKMP (0:0): checking request:
ISAKMP: attribute IP4_ADDRESS (1)
ISAKMP: attribute IP4_NETMASK (2)
ISAKMP: attribute IP4_DNS (3)
ISAKMP: attribute IP4_NBNS (4)
ISAKMP: attribute ADDRESS_EXPIRY (5)
Unsupported Attr: 5
ISAKMP: attribute APPLICATION_VERSION (7)
Unsupported Attr: 7
ISAKMP: attribute UNKNOWN (28672)
Unsupported Attr: 28672
ISAKMP: attribute UNKNOWN (28673)
Unsupported Attr: 28673
ISAKMP: attribute UNKNOWN (28674)
ISAKMP: attribute UNKNOWN (28676)
ISAKMP: attribute UNKNOWN (28679)
Unsupported Attr: 28679
ISAKMP: attribute UNKNOWN (28680)
Unsupported Attr: 28680
ISAKMP: attribute UNKNOWN (28677)
Unsupported Attr: 28677
ISAKMP (0:0): responding to peer config from 30.30.30.2. ID = 2994966739
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
```

```
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_IDLE
ISAKMP (0): processing SA payload. message ID = 2019793958

ISAKMP : Checking IPsec proposal 1

ISAKMP: transform 1, ESP_3DES
ISAKMP:  attributes in transform:
ISAKMP:    authenticator is HMAC-MD5
ISAKMP:    encaps is 1
ISAKMP:    SA life type in seconds
ISAKMP:    SA life duration (VPI) of  0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal
    (prot 3, trans 3, hmac_alg 1) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP (0): skipping next ANDED proposal (1)
ISAKMP : Checking IPsec proposal 2

ISAKMP: transform 1, ESP_3DES
ISAKMP:  attributes in transform:
ISAKMP:    authenticator is HMAC-SHA
ISAKMP:    encaps is 1
ISAKMP:    SA life type in seconds
ISAKMP:    SA life duration (VPI) of  0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal
    (prot 3, trans 3, hmac_alg 2) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP (0): skipping next ANDED proposal (2)
ISAKMP : Checking IPsec proposal 3

ISAKMP: transform 1, ESP_3DES
ISAKMP:  attributes in transform:
ISAKMP:    authenticator is HMAC-MD5
ISAKMP:    encaps is 1
ISAKMP:    SA life type in seconds
ISAKMP:    SA life duration (VPI) of  0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal
    (prot 3, trans 3, hmac_alg 1) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP : Checking IPsec proposal 4

ISAKMP: transform 1, ESP_3DES
ISAKMP:  attributes in transform:
ISAKMP:    authenticator is HMAC-SHA
ISAKMP:    encaps is 1
ISAKMP:    SA life type in seconds
ISAKMP:    SA life duration (VPI) of  0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal
    (prot 3, trans 3, hmac_alg 2) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP : Checking IPsec proposal 5

ISAKMP: transform 1, ESP_DES
ISAKMP:  attributes in transform:
ISAKMP:    authenticator is HMAC-MD5
ISAKMP:    encaps is 1
ISAKMP:    SA life type in seconds
ISAKMP:    SA life duration (VPI) of  0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are acceptable.
```

```
ISAKMP (0): bad SPI size of 2 octets!
ISAKMP : Checking IPsec proposal 6

ISAKMP: transform 1, ESP_DES
ISAKMP:  attributes in transform:
ISAKMP:    authenticator is HMAC-SHA
ISAKMP:    encaps is 1
ISAKMP:    SA life type in seconds
ISAKMP:    SA life duration (VPI) of  0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal
    (prot 3, trans 2, hmac_alg 2) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP (0): skipping next ANDED proposal (6)
ISAKMP : Checking IPsec proposal 7

ISAKMP: transform 1, ESP_DES
ISAKMP:  attributes in transform:
ISAKMP:    authenticator is HMAC-MD5
ISAKMP:    encaps is 1
ISAKMP:    SA life type in seconds
ISAKMP:    SA life duration (VPI) of  0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are acceptable.
IPSEC(validate_proposal_request): proposal part #1,
    (key eng. msg.) dest= 172.17.63.213, src= 30.30.30.2,
    dest_proxy= 172.17.63.213/255.255.255.255/0/0 (type=1),
    src_proxy= 10.1.100.1/255.255.255.255/0/0 (type=1),
    protocol= ESP, transform= esp-des esp-md5-hmac ,
    lifedur= 0s and 0kb,
    spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4

ISAKMP (0): processing NONCE payload. message ID = 2019793958

ISAKMP (0): processing ID payload. message ID = 2019793958
ISAKMP (0): ID_IPv4_ADDR src 10.1.100.1 prot 0 port 0
ISAKMP (0): processing ID payload. message ID = 2019793958
ISAKMP (0): ID_IPv4_ADDR dst 172.17.63.213 prot 0 port 0
IPSEC(key_engine): got a queue event...
IPSEC(spi_response): getting spi 0x91e92b8(152998584) for SA
    from 30.30.30.2 to 172.17.63.213 for prot 3

return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_IDLE
ISAKMP (0): processing SA payload. message ID = 3584084796

ISAKMP : Checking IPsec proposal 1

ISAKMP: transform 1, ESP_3DES
ISAKMP:  attributes in transform:
ISAKMP:    authenticator is HMAC-MD5
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_AUTH_AWAITmap_alloc_entry: allocating entry 6
map_alloc_entry: allocating entry 5

ISAKMP (0): Creating IPsec SAs
    inbound SA from 30.30.30.2 to 172.17.63.213
    (proxy 10.1.100.1 to 172.17.63.213)
    has spi 152998584 and conn_id 6 and flags 4
    lifetime of 2147483 seconds
```

```
    outbound SA from 172.17.63.213 to 30.30.30.2
    (proxy 172.17.63.213 to 10.1.100.1)
    has spi 2121955223 and conn_id 5 and flags 4
    lifetime of 2147483 seconds
IPSEC(key_engine): got a queue event...
IPSEC(initialize_sas): ,
  (key eng. msg.) dest= 172.17.63.213, src= 30.30.30.2,
  dest_proxy= 172.17.63.213/0.0.0.0/0/0 (type=1),
  src_proxy= 10.1.100.1/0.0.0.0/0/0 (type=1),
  protocol= ESP, transform= esp-des esp-md5-hmac ,
  lifedur= 2147483s and 0kb,
  spi= 0x91e92b8(152998584), conn_id= 6, keysize= 0, flags= 0x4
IPSEC(initialize_sas): ,
  (key eng. msg.) src= 172.17.63.213, dest= 30.30.30.2,
  src_proxy= 172.17.63.213/0.0.0.0/0/0 (type=1),
  dest_proxy= 10.1.100.1/0.0.0.0/0/0 (type=1),
  protocol= ESP, transform= esp-des esp-md5-hmac ,
  lifedur= 2147483s and 0kb,
  spi= 0x7e7a7797(2121955223), conn_id= 5, keysize= 0, flags= 0x4

VPN Peer: IPSEC: Peer ip:30.30.30.2 Ref cnt incremented to:2
  Total VPN Peers:1
VPN Peer: IPSEC: Peer ip:30.30.30.2 Ref cnt incremented to:3
  Total VPN Peers:1
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_AUTH_AWAITmap_alloc_entry: allocating entry 4
map_alloc_entry: allocating entry 3

ISAKMP (0): Creating IPsec SAs
  inbound SA from 30.30.30.2 to 172.17.63.213
  (proxy 10.1.100.1 to 0.0.0.0)
  has spi 3202697335 and conn_id 4 and flags 4
  lifetime of 2147483 seconds
  outbound SA from 172.17.63.213 to 30.30.30.2
  (proxy 0.0.0.0 to 10.1.100.1)
  has spi 771522089 and conn_id 3 and flags 4
  lifetime of 2147483 seconds
IPSEC(key_engine): got a queue event...
IPSEC(initialize_sas): ,
  (key eng. msg.) dest= 172.17.63.213, src= 30.30.30.2,
  dest_proxy= 0.0.0.0/0.0.0.0/0/0 (type=4),
  src_proxy= 10.1.100.1/0.0.0.0/0/0 (type=1),
  protocol= ESP, transform= esp-des esp-md5-hmac ,
  lifedur= 2147483s and 0kb,
  spi= 0xbec54877(3202697335), conn_id= 4, keysize= 0, flags= 0x4
IPSEC(initialize_sas): ,
  (key eng. msg.) src= 172.17.63.213, dest= 30.30.30.2,
  src_proxy= 0.0.0.0/0.0.0.0/0/0 (type=4),
  dest_proxy= 10.1.100.1/0.0.0.0/0/0 (type=1),
  protocol= ESP, transform= esp-des esp-md5-hmac ,
  lifedur= 2147483s and 0kb,
  spi= 0x2dfc7e29(771522089), conn_id= 3, keysize= 0, flags= 0x4

VPN Peer: IPSEC: Peer ip:30.30.30.2 Ref cnt incremented to:4
  Total VPN Peers:1
VPN Peer: IPSEC: Peer ip:30.30.30.2 Ref cnt incremented to:5
  Total VPN Peers:1
return status is IKMP_NO_ERROR
VPN Peer: ISAKMP: Added new peer: ip:172.17.63.229 Total VPN Peers:2
VPN Peer: ISAKMP: Peer ip:172.17.63.229 Ref cnt incremented to:1
  Total VPN Peers:2
```

```
ISAKMP (0): beginning Main Mode exchange

crypto_isakmp_process_block: src 172.17.63.229, dest 172.17.63.230
OAK_MM exchange
ISAKMP (0): processing SA payload. message ID = 0

ISAKMP (0): Checking ISAKMP transform 1 against priority 10 policy
ISAKMP:      encryption DES-CBC
ISAKMP:      hash MD5
ISAKMP:      default group 2
ISAKMP:      auth pre-share
ISAKMP (0): atts are acceptable. Next payload is 0
ISAKMP (0): SA is doing pre-shared key authentication using
      id type ID_IPV4_ADDR
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 172.17.63.229, dest 172.17.63.230
OAK_MM exchange
ISAKMP (0): processing KE payload. message ID = 0

ISAKMP (0): processing NONCE payload. message ID = 0

ISAKMP (0): processing vendor id payload

ISAKMP (0): processing vendor id payload

ISAKMP (0): remote peer supports dead peer detection

ISAKMP (0): processing vendor id payload

ISAKMP (0): speaking to another IOS box!

ISAKMP (0): processing vendor id payload

ISAKMP (0): ID payload
      next-payload : 8
      type          : 1
      protocol      : 17
      port          : 500
      length        : 8
ISAKMP (0): Total payload length: 12
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
ISAKMP (0): processing NOTIFY payload 36136 protocol 1
      spi 0, message ID = 409920160
ISAKMP (0): received DPD_R_U_THERE from peer 30.30.30.2
ISAKMP (0): sending NOTIFY message 36137 protocol 1
return status is IKMP_NO_ERR_NO_TRANS
crypto_isakmp_process_block: src 172.17.63.229, dest 172.17.63.230
OAK_MM exchange
ISAKMP (0): processing ID payload. message ID = 0
ISAKMP (0): processing HASH payload. message ID = 0
ISAKMP (0): SA has been authenticated

ISAKMP (0): beginning Quick Mode exchange, M-ID of -498320091:e24c3d25
IPSEC(key_engine): got a queue event...
IPSEC(spi_response): getting spi 0xcad23b33(3402775347) for SA
      from 172.17.63.229 to 172.17.63.230 for prot 3

return status is IKMP_NO_ERROR
ISAKMP (0): sending INITIAL_CONTACT notify
crypto_isakmp_process_block: src 172.17.63.229, dest 172.17.63.230
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_IDLE
```



```
ISAKMP (0): processing SA payload. message ID = 3796647205

ISAKMP : Checking IPSec proposal 1

ISAKMP: transform 1, ESP_DES
ISAKMP:  attributes in transform:
ISAKMP:  encaps is 1
ISAKMP:  SA life type in seconds
ISAKMP:  SA life duration (basic) of 28800
ISAKMP:  SA life type in kilobytes
ISAKMP:  SA life duration (VPI) of 0x0 0x46 0x50 0x0
ISAKMP:  authenticator is HMAC-MD5
ISAKMP (0): atts are acceptable.
IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) dest= 172.17.63.229, src= 172.17.63.230,
dest_proxy= 172.20.20.0/255.255.255.0/0/0 (type=4),
src_proxy= 10.1.100.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4

ISAKMP (0): processing NONCE payload. message ID = 3796647205

ISAKMP (0): processing ID payload. message ID = 3796647205
ISAKMP (0): processing ID payload. message ID = 3796647205
ISAKMP (0): processing NOTIFY payload 24576 protocol 3
spi 691534456, message ID = 3796647205
ISAKMP (0): processing responder lifetime
ISAKMP (0): responder lifetime of 3600smmap_alloc_entry: allocating entry 8
map_alloc_entry: allocating entry 7

ISAKMP (0): Creating IPSec SAs
inbound SA from 172.17.63.229 to 172.17.63.230
(proxy 172.20.20.0 to 10.1.100.0)
has spi 3402775347 and conn_id 8 and flags 4
lifetime of 3600 seconds
lifetime of 4608000 kilobytes
outbound SA from 172.17.63.230 to 172.17.63.229
(proxy 10.1.100.0 to 172.20.20.0)
has spi 691534456 and conn_id 7 and flags 4
lifetime of 3600 seconds
lifetime of 4608000 kilobytes
IPSEC(key_engine): got a queue event...
IPSEC(initialize_sas): ,
(key eng. msg.) dest= 172.17.63.230, src= 172.17.63.229,
dest_proxy= 10.1.100.0/255.255.255.0/0/0 (type=4),
src_proxy= 172.20.20.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0xcad23b33(3402775347), conn_id= 8, keysize= 0, flags= 0x4
IPSEC(initialize_sas): ,
(key eng. msg.) src= 172.17.63.230, dest= 172.17.63.229,
src_proxy= 10.1.100.0/255.255.255.0/0/0 (type=4),
dest_proxy= 172.20.20.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0x2937fa78(691534456), conn_id= 7, keysize= 0, flags= 0x4

VPN Peer: IPSEC: Peer ip:172.17.63.229 Ref cnt incremented to:2
Total VPN Peers:2
VPN Peer: IPSEC: Peer ip:172.17.63.229 Ref cnt incremented to:3
Total VPN Peers:2
return status is IKMP_NO_ERROR
HubPix(config)#
```

```
HubPix(config)#
crypto_isakmp_process_block: src 30.30.30.2, dest 172.17.63.213
ISAKMP (0): processing NOTIFY payload 36136 protocol 1
    spi 0, message ID = 2020571710
ISAKMP (0): received DPD_R_U_THERE from peer 30.30.30.2
ISAKMP (0): sending NOTIFY message 36137 protocol 1
return status is IKMP_NO_ERR_NO_TRANS
HubPix(config)#
```

内部路由器調試

```
inside#
01:45:06: ISAKMP (0:0): received packet from 172.17.63.230 (N) NEW SA
01:45:06: ISAKMP: local port 500, remote port 500
01:45:06: ISAKMP (0:1): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Old State = IKE_READY New State = IKE_R_MM1

01:45:06: ISAKMP (0:1): processing SA payload. message ID = 0
01:45:06: ISAKMP (0:1): found peer pre-shared key matching 172.17.63.230
01:45:06: ISAKMP (0:1): Checking ISAKMP transform 1 against priority 10 policy
01:45:06: ISAKMP: encryption DES-CBC
01:45:06: ISAKMP: hash MD5
01:45:06: ISAKMP: default group 2
01:45:06: ISAKMP: auth pre-share
01:45:06: ISAKMP (0:1): attrs are acceptable. Next payload is 0
01:45:06: CryptoEngine0: generate alg parameter
01:45:06: CryptoEngine0: CRYPTO_ISA_DH_CREATE(hw)(ipsec)
01:45:06: CRYPTO_ENGINE: Dh phase 1 status: 0
01:45:06: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PROCESS_MAIN_MODE
Old State = IKE_R_MM1 New State = IKE_R_MM1

01:45:06: ISAKMP (0:1): sending packet to 172.17.63.230 (R) MM_SA_SETUP
01:45:06: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PROCESS_COMPLETE
Old State = IKE_R_MM1 New State = IKE_R_MM2

01:45:06: ISAKMP (0:1): received packet from 172.17.63.230 (R) MM_SA_SETUP
01:45:06: ISAKMP (0:1): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
Old State = IKE_R_MM2 New State = IKE_R_MM3

01:45:06: ISAKMP (0:1): processing KE payload. message ID = 0
01:45:06: CryptoEngine0: generate alg parameter
01:45:06: CryptoEngine0: CRYPTO_ISA_DH_SHARE_SECRET(hw)(ipsec)
01:45:07: ISAKMP (0:1): processing NONCE payload. message ID = 0
01:45:07: ISAKMP (0:1): found peer pre-shared key matching 172.17.63.230
01:45:07: CryptoEngine0: create ISAKMP SKEYID for conn id 1
01:45:07: CryptoEngine0: CRYPTO_ISA_SA_CREATE(hw)(ipsec)
01:45:07: ISAKMP (0:1): SKEYID state generated
01:45:07: ISAKMP (0:1): processing vendor id payload
01:45:07: ISAKMP (0:1): vendor ID is Unity
01:45:07: ISAKMP (0:1): processing vendor id payload
01:45:07: ISAKMP (0:1): vendor ID is DPD
01:45:07: ISAKMP (0:1): processing vendor id payload
01:45:07: ISAKMP (0:1): speaking to another IOS box!
01:45:07: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PROCESS_MAIN_MODE
Old State = IKE_R_MM3 New State = IKE_R_MM3

01:45:07: ISAKMP (0:1): sending packet to 172.17.63.230 (R) MM_KEY_EXCH
01:45:07: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PROCESS_COMPLETE
Old State = IKE_R_MM3 New State = IKE_R_MM4

01:45:07: ISAKMP (0:1): received packet from 172.17.63.230 (R) MM_KEY_EXCH
01:45:07: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
01:45:07: ISAKMP (0:1): Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
```

Old State = IKE_R_MM4 New State = IKE_R_MM5

01:45:07: ISAKMP (0:1): processing ID payload. message ID = 0
01:45:07: ISAKMP (0:1): processing HASH payload. message ID = 0
01:45:07: CryptoEngine0: generate hmac context for conn id 1
01:45:07: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
01:45:07: ISAKMP (0:1): SA has been authenticated with 172.17.63.230
01:45:07: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PROCESS_MAIN_MODE
Old State = IKE_R_MM5 New State = IKE_R_MM5

01:45:07: ISAKMP (0:1): SA is doing pre-shared key authentication using
id type ID_IPV4_ADDR

01:45:07: ISAKMP (1): ID payload
next-payload : 8
type : 1
protocol : 17
port : 500
length : 8

01:45:07: ISAKMP (1): Total payload length: 12
01:45:07: CryptoEngine0: generate hmac context for conn id 1
01:45:07: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
01:45:07: CryptoEngine0: clear dh number for conn id 1
01:45:07: CryptoEngine0: CRYPTO_ISA_DH_DELETE(hw)(ipsec)
01:45:07: CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec)
01:45:07: ISAKMP (0:1): sending packet to 172.17.63.230 (R) QM_IDLE
01:45:07: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PROCESS_COMPLETE
Old State = IKE_R_MM5 New State = IKE_P1_COMPLETE

01:45:07: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PHASE1_COMPLETE
Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

01:45:08: ISAKMP (0:1): received packet from 172.17.63.230 (R) QM_IDLE
01:45:08: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
01:45:08: CryptoEngine0: generate hmac context for conn id 1
01:45:08: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
01:45:08: ISAKMP (0:1): processing HASH payload. message ID = -498320091
01:45:08: ISAKMP (0:1): processing SA payload. message ID = -498320091
01:45:08: ISAKMP (0:1): Checking IPsec proposal 1
01:45:08: ISAKMP: transform 1, ESP_DES
01:45:08: ISAKMP: attributes in transform:
01:45:08: ISAKMP: encaps is 1
01:45:08: ISAKMP: SA life type in seconds
01:45:08: ISAKMP: SA life duration (basic) of 28800
01:45:08: ISAKMP: SA life type in kilobytes
01:45:08: ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0
01:45:08: ISAKMP: authenticator is HMAC-MD5
01:45:08: validate proposal 0
01:45:08: ISAKMP (0:1): atts are acceptable.
01:45:08: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.17.63.229, remote= 172.17.63.230,
local_proxy= 172.20.20.0/255.255.255.0/0/0 (type=4),
remote_proxy= 10.1.100.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4
01:45:08: validate proposal request 0
01:45:08: ISAKMP (0:1): processing NONCE payload. message ID = -498320091
01:45:08: ISAKMP (0:1): processing ID payload. message ID = -498320091
01:45:08: ISAKMP (0:1): processing ID payload. message ID = -498320091
01:45:08: ISAKMP (0:1): processing NOTIFY INITIAL_CONTACT protocol 1
spi 0, message ID = -498320091, sa = 62EF984C
01:45:08: ISAKMP (0:1): Process initial contact,
bring down existing phase 1 and 2 SA's
01:45:08: ISAKMP (0:1): peer does not do paranoid keepalives.

```
01:45:08: ISAKMP (0:1): asking for 1 spis from ipsec
01:45:08: ISAKMP (0:1): Node -498320091,
    Input = IKE_MSG_FROM_PEER, IKE_QM_EXCH
Old State = IKE_QM_READY New State = IKE_QM_SPI_STARVE

01:45:08: IPSEC(key_engine): got a queue event...
01:45:08: IPSEC(key_engine_delete_sas): rec'd delete notify from ISAKMP
01:45:08: IPSEC(key_engine_delete_sas): delete all SAs shared
    with 172.17.63.230
01:45:08: IPSEC(key_engine): got a queue event...
01:45:08: IPSEC(spi_response): getting spi 691534456 for SA
    from 172.17.63.229 to 172.17.63.230 for prot 3
01:45:08: ISAKMP: received ke message (2/1)
01:45:08: CryptoEngine0: generate hmac context for conn id 1
01:45:08: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
01:45:08: CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec)
01:45:08: ISAKMP (0:1): sending packet to 172.17.63.230 (R) QM_IDLE
01:45:08: ISAKMP (0:1): Node -498320091,
    Input = IKE_MSG_FROM_IPSEC, IKE_SPI_REPLY
Old State = IKE_QM_SPI_STARVE New State = IKE_QM_R_QM2

01:45:09: ISAKMP (0:1): received packet from 172.17.63.230 (R) QM_IDLE
01:45:09: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
01:45:09: CryptoEngine0: generate hmac context for conn id 1
01:45:09: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
01:45:09: ipsec allocate flow 0
01:45:09: ipsec allocate flow 0
01:45:09: CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw)(ipsec)
01:45:09: CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw)(ipsec)
01:45:09: ISAKMP (0:1): Creating IPsec SAs
01:45:09:     inbound SA from 172.17.63.230 to 172.17.63.229
    (proxy 10.1.100.0 to 172.20.20.0)
01:45:09:     has spi 0x2937FA78 and conn_id 2029 and flags 4
01:45:09:     lifetime of 28800 seconds
01:45:09:     lifetime of 4608000 kilobytes
01:45:09:     outbound SA from 172.17.63.229 to 172.17.63.230
    (proxy 172.20.20.0 to 10.1.100.0)
01:45:09:     has spi -892191949 and conn_id 2030 and flags C
01:45:09:     lifetime of 28800 seconds
01:45:09:     lifetime of 4608000 kilobytes
01:45:09: ISAKMP (0:1): deleting node -498320091 error FALSE
    reason "quick mode done (await())"
01:45:09: ISAKMP (0:1): Node -498320091,
    Input = IKE_MSG_FROM_PEER, IKE_QM_EXCH
Old State = IKE_QM_R_QM2 New State = IKE_QM_PHASE2_COMPLETE

01:45:09: IPSEC(key_engine): got a queue event...
01:45:09: IPSEC(initialize_sas): ,
    (key eng. msg.) INBOUND local= 172.17.63.229, remote= 172.17.63.230,
    local_proxy= 172.20.20.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.1.100.0/255.255.255.0/0/0 (type=4),
    protocol= ESP, transform= esp-des esp-md5-hmac ,
    lifedur= 28800s and 4608000kb,
    spi= 0x2937FA78(691534456), conn_id= 2029, keysize= 0, flags= 0x4
01:45:09: IPSEC(initialize_sas): ,
    (key eng. msg.) OUTBOUND local= 172.17.63.229, remote= 172.17.63.230,
    local_proxy= 172.20.20.0/255.255.255.0/0/0 (type=4),
    remote_proxy= 10.1.100.0/255.255.255.0/0/0 (type=4),
    protocol= ESP, transform= esp-des esp-md5-hmac ,
    lifedur= 28800s and 4608000kb,
    spi= 0xCAD23B33(3402775347), conn_id= 2030, keysize= 0, flags= 0xC
01:45:09: IPSEC(create_sa): sa created,
    (sa) sa_dest= 172.17.63.229, sa_prot= 50,
```

```
sa_spi= 0x2937FA78(691534456),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2029
01:45:09: IPSEC(create_sa): sa created,
(sa) sa_dest= 172.17.63.230, sa_prot= 50,
sa_spi= 0xCAD23B33(3402775347),
sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2030
inside#
```

VPN客戶端日誌

```
1679 13:21:53.420 04/13/02 Sev=Info/6 DIALER/0x63300002
Initiating connection.

1680 13:21:53.420 04/13/02 Sev=Info/4 CM/0x63100002
Begin connection process

1681 13:21:53.430 04/13/02 Sev=Info/4 CM/0x63100004
Establish secure connection using Ethernet

1682 13:21:53.430 04/13/02 Sev=Info/4 CM/0x63100026
Attempt connection with server "172.17.63.213"

1683 13:21:53.430 04/13/02 Sev=Info/6 IKE/0x6300003B
Attempting to establish a connection with 172.17.63.213.

1684 13:21:53.470 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK AG (SA, KE, NON, ID, VID, VID, VID)
to 172.17.63.213

1685 13:21:53.671 04/13/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.17.63.213

1686 13:21:53.671 04/13/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK AG (SA, VID, VID, VID, KE, ID, NON, HASH)
from 172.17.63.213

1687 13:21:53.671 04/13/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 12F5F28C457168A9702D9FE274CC0100

1688 13:21:53.671 04/13/02 Sev=Info/5 IKE/0x63000001
Peer is a Cisco-Unity compliant peer

1689 13:21:53.671 04/13/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = AFCAD71368A1F1C96B8696FC77570100

1690 13:21:53.671 04/13/02 Sev=Info/5 IKE/0x63000001
Peer supports DPD

1691 13:21:53.671 04/13/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 4565726A4035E50EA2133A5813561EF2

1692 13:21:53.701 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK AG *(HASH, NOTIFY:STATUS_INITIAL_CONTACT)
to 172.17.63.213

1693 13:21:54.071 04/13/02 Sev=Info/4 IPSEC/0x63700014
Deleted all keys

1694 13:21:56.725 04/13/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.17.63.213

1695 13:21:56.725 04/13/02 Sev=Info/4 IKE/0x63000014
```

RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 172.17.63.213

1696 13:21:56.725 04/13/02 Sev=Info/4 CM/0x63100015
Launch xAuth application

1697 13:22:05.187 04/13/02 Sev=Info/4 CM/0x63100017
xAuth application returned

1698 13:22:05.187 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 172.17.63.213

1699 13:22:10.214 04/13/02 Sev=Info/4 IKE/0x63000056
Phase 2 exchange timed out (message id = 0x76A9073B). Retry count: 1

1700 13:22:10.214 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(Retransmission) to 172.17.63.213

1701 13:22:10.654 04/13/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.17.63.213

1702 13:22:10.654 04/13/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 172.17.63.213

1703 13:22:10.654 04/13/02 Sev=Info/4 CM/0x6310000E
Established Phase 1 SA. 1 Phase 1 SA in the system

1704 13:22:10.665 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 172.17.63.213

1705 13:22:10.675 04/13/02 Sev=Info/5 IKE/0x6300005D
Client sending a firewall request to concentrator

1706 13:22:10.675 04/13/02 Sev=Info/5 IKE/0x6300005C
Firewall Policy: Product=Cisco Integrated Client,
Capability= (Centralized Policy Push).

1707 13:22:10.675 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 172.17.63.213

1708 13:22:10.735 04/13/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.17.63.213

1709 13:22:10.735 04/13/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 172.17.63.213

1710 13:22:10.735 04/13/02 Sev=Info/5 IKE/0x63000010
MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_ADDRESS: , value = 10.1.100.1

1711 13:22:10.735 04/13/02 Sev=Info/5 IKE/0x63000010
MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_DNS(1): , value = 172.20.20.2

1712 13:22:10.735 04/13/02 Sev=Info/5 IKE/0x63000010
MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_NBNS(1) (a.k.a. WINS) : ,
value = 172.20.20.2

1713 13:22:10.735 04/13/02 Sev=Info/5 IKE/0x6300000E
MODE_CFG_REPLY: Attribute = MODECFG_UNITY_DEFDOMAIN: , value = cisco.com

1714 13:22:10.735 04/13/02 Sev=Info/4 CM/0x63100019
Mode Config data received

1715 13:22:10.755 04/13/02 Sev=Info/5 IKE/0x63000055
Received a key request from Driver for IP address 172.17.63.213,
GW IP = 172.17.63.213

1716 13:22:10.755 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH, SA, NON, ID, ID) to 172.17.63.213

1717 13:22:10.755 04/13/02 Sev=Info/5 IKE/0x63000055
Received a key request from Driver for IP address 10.10.10.255,
GW IP = 172.17.63.213

1718 13:22:10.755 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH, SA, NON, ID, ID) to 172.17.63.213

1719 13:22:11.115 04/13/02 Sev=Info/4 IPSEC/0x63700014
Deleted all keys

1720 13:22:11.616 04/13/02 Sev=Info/5 IKE/0x63000055
Received a key request from Driver for IP address 144.254.6.77,
GW IP = 172.17.63.213

1721 13:22:11.616 04/13/02 Sev=Warning/3 IKE/0xE3000002
Function initialize_qm failed with an error code
of 0x00000000(INITIATE:811)

1722 13:22:12.097 04/13/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.17.63.213

1723 13:22:12.097 04/13/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK QM *(HASH, SA, NON, ID, ID,
NOTIFY:STATUS_RESP_LIFETIME) from 172.17.63.213

1724 13:22:12.097 04/13/02 Sev=Info/5 IKE/0x63000044
RESPONDER-LIFETIME notify has value of 28800 seconds

1725 13:22:12.097 04/13/02 Sev=Info/5 IKE/0x63000045
RESPONDER-LIFETIME notify has value of 4608000 kb

1726 13:22:12.097 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH) to 172.17.63.213

1727 13:22:12.097 04/13/02 Sev=Info/5 IKE/0x63000058
Loading IPsec SA (Message ID = 0x78639C26 OUTBOUND SPI = 0x091E92B8
INBOUND SPI = 0x7E7A7797)

1728 13:22:12.097 04/13/02 Sev=Info/5 IKE/0x63000025
Loaded OUTBOUND ESP SPI: 0x091E92B8

1729 13:22:12.097 04/13/02 Sev=Info/5 IKE/0x63000026
Loaded INBOUND ESP SPI: 0x7E7A7797

1730 13:22:12.097 04/13/02 Sev=Info/4 CM/0x6310001A
One secure connection established

1731 13:22:12.117 04/13/02 Sev=Info/6 DIALER/0x63300003
Connection established.

1732 13:22:12.477 04/13/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.17.63.213

1733 13:22:12.477 04/13/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK QM *(HASH, SA, NON, ID, ID,
NOTIFY:STATUS_RESP_LIFETIME) from 172.17.63.213

1734 13:22:12.477 04/13/02 Sev=Info/5 IKE/0x63000044
RESPONDER-LIFETIME notify has value of 28800 seconds

1735 13:22:12.477 04/13/02 Sev=Info/5 IKE/0x63000045
RESPONDER-LIFETIME notify has value of 4608000 kb

1736 13:22:12.477 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH) to 172.17.63.213

1737 13:22:12.477 04/13/02 Sev=Info/5 IKE/0x63000058
Loading IPsec SA (Message ID = 0xD5A0CB3C OUTBOUND SPI = 0xBEE54877
INBOUND SPI = 0x2DFC7E29)

1738 13:22:12.477 04/13/02 Sev=Info/5 IKE/0x63000025
Loaded OUTBOUND ESP SPI: 0xBEE54877

1739 13:22:12.477 04/13/02 Sev=Info/5 IKE/0x63000026
Loaded INBOUND ESP SPI: 0x2DFC7E29

1740 13:22:12.477 04/13/02 Sev=Info/4 CM/0x63100022
Additional Phase 2 SA established.

1741 13:22:12.477 04/13/02 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

1742 13:22:12.477 04/13/02 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

1743 13:22:12.477 04/13/02 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0xb8921e09 into key list

1744 13:22:12.477 04/13/02 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

1745 13:22:12.477 04/13/02 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0x97777a7e into key list

1746 13:22:12.477 04/13/02 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0x7748e5be into key list

1747 13:22:12.477 04/13/02 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

1748 13:22:12.477 04/13/02 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0x297efc2d into key list

1749 13:22:21.229 04/13/02 Sev=Info/6 IKE/0x6300003D
Sending DPD request to 172.17.63.213, seq# = 1723178673

1750 13:22:21.229 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK INFO *(HASH, NOTIFY:DPD_REQUEST) to 172.17.63.213

1751 13:22:21.259 04/13/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.17.63.213

1752 13:22:21.259 04/13/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK INFO *(HASH, NOTIFY:DPD_ACK) from 172.17.63.213

1753 13:22:21.259 04/13/02 Sev=Info/5 IKE/0x6300003F
Received DPD ACK from 172.17.63.213, seq# received = 1723178673,
seq# expected = 1723178673

1754 13:22:31.744 04/13/02 Sev=Info/4 IPSEC/0x63700019
Activate outbound key with SPI=0x7748e5be for inbound key
with SPI=0x297efc2d

1755 13:22:46.765 04/13/02 Sev=Info/6 IKE/0x6300003D

Sending DPD request to 172.17.63.213, seq# = 1723178674

1756 13:22:46.765 04/13/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK INFO *(HASH, NOTIFY:DPD_REQUEST) to 172.17.63.213

1757 13:22:46.765 04/13/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.17.63.213

[相關資訊](#)

- [Cisco PIX防火牆軟體產品支援](#)
- [Cisco Secure PIX防火牆命令參考](#)
- [IPSec支援頁面](#)
- [IPSec簡介](#)
- [配置IPSec](#)
- [要求建議 \(RFC\)](#)
- [技術支援與文件 - Cisco Systems](#)