

# á°†ç,,iç·šè·ç”±á™·ç·šè·á°RV0xxç³»á^—VPNè·ç”

ç>®æ™

æ,·á·ä»¥ç·šè·è·ç”±á™·ä¼tæ”á±·æ,·çš,,ç¶²è·ã€ç·šè·è·ç”±á™·á·æ~á°†ä,€á·è·ç”±

ç·šè·è·ç”±á™·æœ%ã...©ç·®æ-1æ³·i¼š

1.á°†ä™áç¶²é»ç°œá¼žVPNè·ç”±á™·é€ç·šá°ç,,iç·šè·ç”±á™·(LAN-LAN)çš,,á,,è!·ä™áç¶²áÿã€,á...©á·è·ç”±á™·á°†á½·æ-¼á·€ä,€á€á·ç¶²ä,ã€,

2.á°†ä™áç¶²é»ç°œá¼žVPNè·ç”±á™·é€ç·šá°ç,,iç·šè·ç”±á™·(LAN-WAN)çš,,Internetáÿã€,è·ç”±á™·á°†á½·æ-¼ä,·á·€çš,,á·ç¶²ä,ã€,

æœ-æ-†èªæ·žá!,á½·á°†ç,,iç·šè·ç”±á™·ç·šè·á°RV0xx  
VPNè·ç”±á™·(RV082/RV042/RV042G)ã€,

## é·©ç”·è€ç½®

- RV042
- RV042G
- RV082
- RV120W

## è»ÿé«”ç%ã^æœ¬

- v4.2.2.08i¼ç”·æ-¼VPNè·ç”±á™·i¼%
- 1.0.2.6i¼é·©ç”·æ-¼RV120Wçš,,iç·šè·ç”±á™·i¼%

## é€šé·žLANáÿ (LAN-LAN)á°†RV120Wç·šè·á°VPNè·ç”±á™·

æ¥é·ÿ1.ç™»á...¥á°RV120Wçš,,è·ç”±á™·é...·ç½®á·ç”·ç”·á¼·i¼€ç,,¶á¼€é·æ”†Networking  
> LAN(Local Network)> IPv4 LANã€IPv4 LANi¼^æœ¬áœ°ç¶²è·i¼%óé·é·çá°#é-á·ÿi¼š

## IPv4 LAN (Local Network)

### Network

Host Name:

### LAN (Local Network) Configuration

IP Address:  (xxx.xxx.xxx.xxx)

Subnet Mask:  (xxx.xxx.xxx.xxx)

### DHCP

DHCP Mode:

Domain Name:

Starting IP Address:  (xxx.xxx.xxx.xxx)

Ending IP Address:  (xxx.xxx.xxx.xxx)

Primary DNS Server:  (Optional)

Secondary DNS Server:  (Optional)

Lease Time:  Hours (Range: 1 - 262800, Default: 24)

Relay Gateway:

### LAN (Local Network) Proxy

DNS Proxy:  Enable

æ¥é©ÿ2.æ>æ”è·ç”±â™·çš,,IPâœ°â❖€i¼CEä½zâ...¶è^#VPNè·ç”±â™·çš,,IPâœ°â❖€ä,❖â❖CEã€,é€™  
æ³”æ,,❖i¼šæ 1æ“šâ^†é...❖çµ|ç¶²è·çš,,â❖ç¶²i¼CEæðâ❖ç¶²â❖èf½ä,❖æ~â❖CEä,€â€â❖ç¶²ã€,

### IPv4 LAN (Local Network)

**Network**

Host Name:

**LAN (Local Network) Configuration**

IP Address:  (xxx.xxx.xxx.xxx)

Subnet Mask:  (xxx.xxx.xxx.xxx)

**DHCP**

DHCP Mode:

Domain Name:

Starting IP Address:  (xxx.xxx.xxx.xxx)

Ending IP Address:  (xxx.xxx.xxx.xxx)

Primary DNS Server:  (Optional)

Secondary DNS Server:  (Optional)

Lease Time:  Hours (Range: 1 - 262800, Default: 24)

Relay Gateway:

**LAN (Local Network) Proxy**

DNS Proxy:  Enable

æ¥é©ÿ3.â¼žDHCP Modeä, <æ<%oé◆, â-®ä, é◆, æ“#DHCPä¼°æœ◆â™™“ æ¨;â¼◆Noneã€,

### IPv4 LAN (Local Network)

**Network**

Host Name:

**LAN (Local Network) Configuration**

IP Address:  (xxx.xxx.xxx.xxx)

Subnet Mask:  (xxx.xxx.xxx.xxx)

**DHCP**

DHCP Mode:

Domain Name:

Starting IP Address:  (xxx.xxx.xxx.xxx)

Ending IP Address:  (xxx.xxx.xxx.xxx)

Primary DNS Server:  (Optional)

Secondary DNS Server:  (Optional)

Lease Time:  Hours (Range: 1 - 262800, Default: 24)

Relay Gateway:

**LAN (Local Network) Proxy**

DNS Proxy:  Enable

Step 4: Save the configuration.


Step 5: Configure the routing mode.

Networking > Routing > Routing Mode

### Routing Mode

Mode:  Gateway (NAT)  Router

Step 6: Set the routing mode to Router.

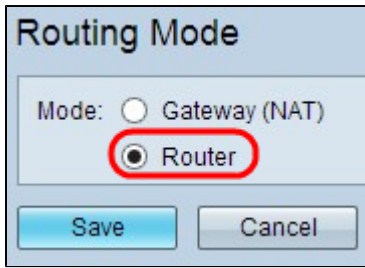

æŸé©Ÿ7.æŒ%öä, €ä, <ã€ Saveã€ä»Ÿã,,²ãè¨ãšã€,

æŸé©Ÿ8.éŒ€Žã¹™ãªªç¶²é»ç°œãªRV0XXç³»ã^—VPNè·ç"±ã™¨ çš,,æœ-ãœ°ãŸ éŒŒç·šã^°RV120V



è¨»i¼šã!,æžœæ,,ã€»ã»Ÿã¾žéŒŒç·šã^°ã...¶ã,ä,€ã€è·ç"±ã™¨ çš,,PCè¨ãª•ã...©ã€è·ç"±ã™¨ çš,,C

## éŒš€ŽWANãŸ (LAN-WAN)ãªªRV120Wç´šèã^°VPNè·ç"±ã™¨

æŸé©Ÿ1.ç™»ã...Ÿã^°RV120Wçš,,è·ç"±ã™¨é...ç½@ã¹ç¨ç¨<ã¼ã¼Œç,,¶ã¾Œé,æªªNetworking > LAN > IPv4 LANã€JPv4 LANi¼^æœ-ãœ°ç¶²è·i¼%óééçãªé-ã·Ÿi¼š

## IPv4 LAN (Local Network)

### Network

Host Name:

### LAN (Local Network) Configuration

IP Address:  (xxx.xxx.xxx.xxx)

Subnet Mask:  (xxx.xxx.xxx.xxx)

### DHCP

DHCP Mode:

Domain Name:

Starting IP Address:  (xxx.xxx.xxx.xxx)

Ending IP Address:  (xxx.xxx.xxx.xxx)

Primary DNS Server:  (Optional)

Secondary DNS Server:  (Optional)

Lease Time:  Hours (Range: 1 - 262800, Default: 24)

Relay Gateway:

### LAN (Local Network) Proxy

DNS Proxy:  Enable

æ¥é©ÿ2.æ>´æ”¹è·ç”±â™·çš,,IPâœ°â€€i¼CEä½zâ...¶è†#VPNè·ç”±â™·çš,,IPâœ°â€€ä,âœ”â€€CEä,t  
æ³”æ,,i¼šæ¹æ“šâ†é...çµ|ç¶²è·çš,,â€€ç¶²i¼CEé™â€€èf½ä,æ~ä,â€€CEçš,,â€€ç¶²ã€,

### IPv4 LAN (Local Network)

**Network**

Host Name:

**LAN (Local Network) Configuration**

IP Address:  (xxx.xxx.xxx.xxx)

Subnet Mask:  (xxx.xxx.xxx.xxx)

**DHCP**

DHCP Mode:

Domain Name:

Starting IP Address:  (xxx.xxx.xxx.xxx)

Ending IP Address:  (xxx.xxx.xxx.xxx)

Primary DNS Server:  (Optional)

Secondary DNS Server:  (Optional)

Lease Time:  Hours (Range: 1 - 262800, Default: 24)

Relay Gateway:

**LAN (Local Network) Proxy**

DNS Proxy:  Enable

æŸ©Ÿ3.æŒ%öä, €ä, <ã€€Saveã€€ä»Ÿä,,²ã~è"ã@šã€,

æŸ©Ÿ4.ã°žã¹™ãªç¶²é»ç°œã¼žRV0XXç³»ã^—VPNè·ç"±ã¹™·çš,,LANãŸ é€£ç·šã^°ç,,jç·šè·ç"±ã¹™·çš,,WA



è»i¼šç♦¾ãœ"i¼Œç¶¶æ, "çš,,PCè^†è¼"ãš©è·ç"±ã¹™" ç,é€£æ¹,i¼Œæ, "ä,♦èf½ã¾žPCè"ãã♦ä,»

## 關於此翻譯

思科已使用電腦和人工技術翻譯本文件，讓全世界的使用者能夠以自己的語言理解支援內容。請注意，即使是最佳機器翻譯，也不如專業譯者翻譯的內容準確。Cisco Systems, Inc. 對這些翻譯的準確度概不負責，並建議一律查看原始英文文件（提供連結）。