



# System Specification

---

This chapter describes the system specifications for Cisco NCS 5700 router.

- [Weight and Power Consumption, on page 1](#)
- [Environmental Specifications, on page 1](#)
- [RJ-45 Connectors, on page 2](#)
- [Management Pinouts, on page 2](#)
- [Time-of-Day Port Pinouts, on page 3](#)
- [USB Flash or MEM Port Pinouts, on page 3](#)
- [Console Port Pinouts, on page 3](#)
- [Power Supply Power Cord Specifications, on page 4](#)

## Weight and Power Consumption

For information on physical specifications and power consumption, refer to the following data sheets:

- [NCS-57B1 Fixed Chassis Data Sheet](#)
- [NCS-57C3 Fixed Chassis Data Sheet](#)
- [NCS-57C1 Fixed Chassis Data Sheet](#)
- [NCS-D2 Fixed Chassis Data Sheet](#)

## Environmental Specifications

For information on environmental specifications, see table *Environmental properties* in the following data sheets:

- [NCS-57B1 Fixed Chassis Data Sheet](#)
- [NCS-57C3 Fixed Chassis Data Sheet](#)
- [NCS-57C1 Fixed Chassis Data Sheet](#)
- [NCS-D2 Fixed Chassis Data Sheet](#)

# RJ-45 Connectors

The RJ-45 connector connects Category 3, Category 5, Category 5e, Category 6, or Category 6A foil twisted-pair or unshielded twisted-pair cable from the external network to the following module interface connectors:


- Router chassis
  - CONSOLE port
  - MGMT ETH port



**Caution** To comply with GR-1089 intrabuilding, lightning immunity requirements, you must use a foil twisted-pair (FTP) cable that is properly grounded at both ends.

The following figure shows the RJ-45 connector.

*Figure 1: RJ-45 Connector*

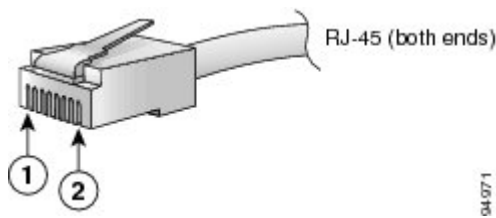

1	Pin 1	2	Pin 2
---	-------	---	-------

# Management Pinouts

The following table summarizes the Management Ethernet port pinouts.

*Table 1: Management Ethernet Port Pinouts*

Pin	Signal Name
1	TRP0+
2	TRP0-
3	TRP1+
4	TRP1-
5	TRP2+
6	TRP2-
7	TRP3+

Pin	Signal Name
8	TRP3-

## Time-of-Day Port Pinouts

The following table summarizes the ToD/1-PPS port pinouts.

*Table 2: RJ-45 ToD/1-PPS Port Pinouts*

Pin	Signal Name	Direction	Description
1	–	–	–
2	–	–	–
3	1PPS_N	Output or Input	1PPS RS422 signal
4	GND	–	–
5	GND	–	–
6	1PPS_P	Output or Input	1PPS RS422 signal
7	TOD_N	Output or Input	Time-of-Day character
8	TOD_P	Output or Input	Time-of-Day character

## USB Flash or MEM Port Pinouts

The following table summarizes the USB flash or MEM port pinouts.

*Table 3: USB Flash or MEM Port Pinouts*

Pin	Signal Name	Description
A1	Vcc	+5 VDC
A2	D-	Data -
A3	D+	Data +
A4	Gnd	Ground

## Console Port Pinouts

The following table summarizes the Console port pinouts.

Table 4: Console Port Pinouts

Pin	Signal Name	Direction	Description
1	Loop1	NA	Loopback 1
2	Loop2	NA	Loopback 2
3	TxD	Output	Console RS232 transmit
4	Gnd	NA	Ground
5	Gnd	NA	Ground
6	RxD	Input	Console RS232 receive
7	Loop2	NA	Loopback 2
8	Loop1	NA	Loopback 1

## Power Supply Power Cord Specifications

For more information on the supported power cables, see *Ordering information for power cables supported on NCS 5700* on the Cisco Network Convergence System 5700 Router Data Sheet.