

—4) ىرخأ ةرم 'e' قوف رقنلاو kernel ىلا لاقتنالا عاجرلا ،ةيلالاتلا ةشاشلا رهظتس

```
GNU GRUB version 0.97 (637K lower / 3143552K upper memory)

root (hd0,0)
kernel /vmlinuz-2.6.32-573.18.1.el6.x86_64 ro root=/dev/mapper/amp_sc→
initrd /initramfs-2.6.32-573.18.1.el6.x86_64.img

Use the ↑ and ↓ keys to select which entry is highlighted.
Press 'b' to boot, 'e' to edit the selected command in the
boot sequence, 'c' for a command-line, 'o' to open a new line
after ('O' for before) the selected line, 'd' to remove the
selected line, or escape to go back to the main menu.
```

```
GNU GRUB version 0.97 (637K lower / 3143552K upper memory)

root (hd0,0)
kernel /vmlinuz-2.6.32-573.18.1.el6.x86_64 ro root=/dev/mapper/amp_sc→
initrd /initramfs-2.6.32-573.18.1.el6.x86_64.img

Use the ↑ and ↓ keys to select which entry is highlighted.
Press 'b' to boot, 'e' to edit the selected command in the
boot sequence, 'c' for a command-line, 'o' to open a new line
after ('O' for before) the selected line, 'd' to remove the
selected line, or escape to go back to the main menu.
```

—5) ةروصلا يف حضوم وه امك ،ادبأ كلذ دعب ،ةروصلا يف حضوم وه امك "يدرفلا" صنلا فضا

```
pgruszcz_ampv2_134_105
[ Minimal BASH-like line editing is supported.  For the first word, TAB
  lists possible command completions.  Anywhere else TAB lists the possible
  completions of a device/filename.  ESC at any time cancels.  ENTER
  at any time accepts your changes.]
<_sc_root/root_lv transparent_hugepage=never single_
```

—6) GRUB شاشة في 'b' و Enter قوف رقنا (6)۔

—7) رورملا عمك مي دقتو، رورملا عمك رمأ عباتم عاجرلا، رذجال رماوا هجوم يلع ك لوصح درجمب (7)۔
ةديجال:

```
[root@fireamp /]# passwd
Changing password for user root.
New password:
Retype new password:
Sorry, passwords do not match.
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
[root@fireamp /]# _
```


—8) ةديجال رورملا تاملك ةومجم مادختساب لوخذلا ليجست لواحو VPC ليغشت دعأ (8)۔

VPC 3.0.x / AMPPC3000

اليلق فلتخت رذجال رورملا عمك نييعت ةداعا ةيلمع نإف، CentOS رادصا ريغتلا ارظن.


—1) ةطاقم ل F10 حاتفملا يلع طغضا، ةيرهاطلا ةصاخلا ةباحسلا ليغشت ةداعا ءانثأ (1)۔
يرهاطلا زاهجال ديمت ةيلمع.

—2) هباشم عيش يلع لصحتس (2)۔

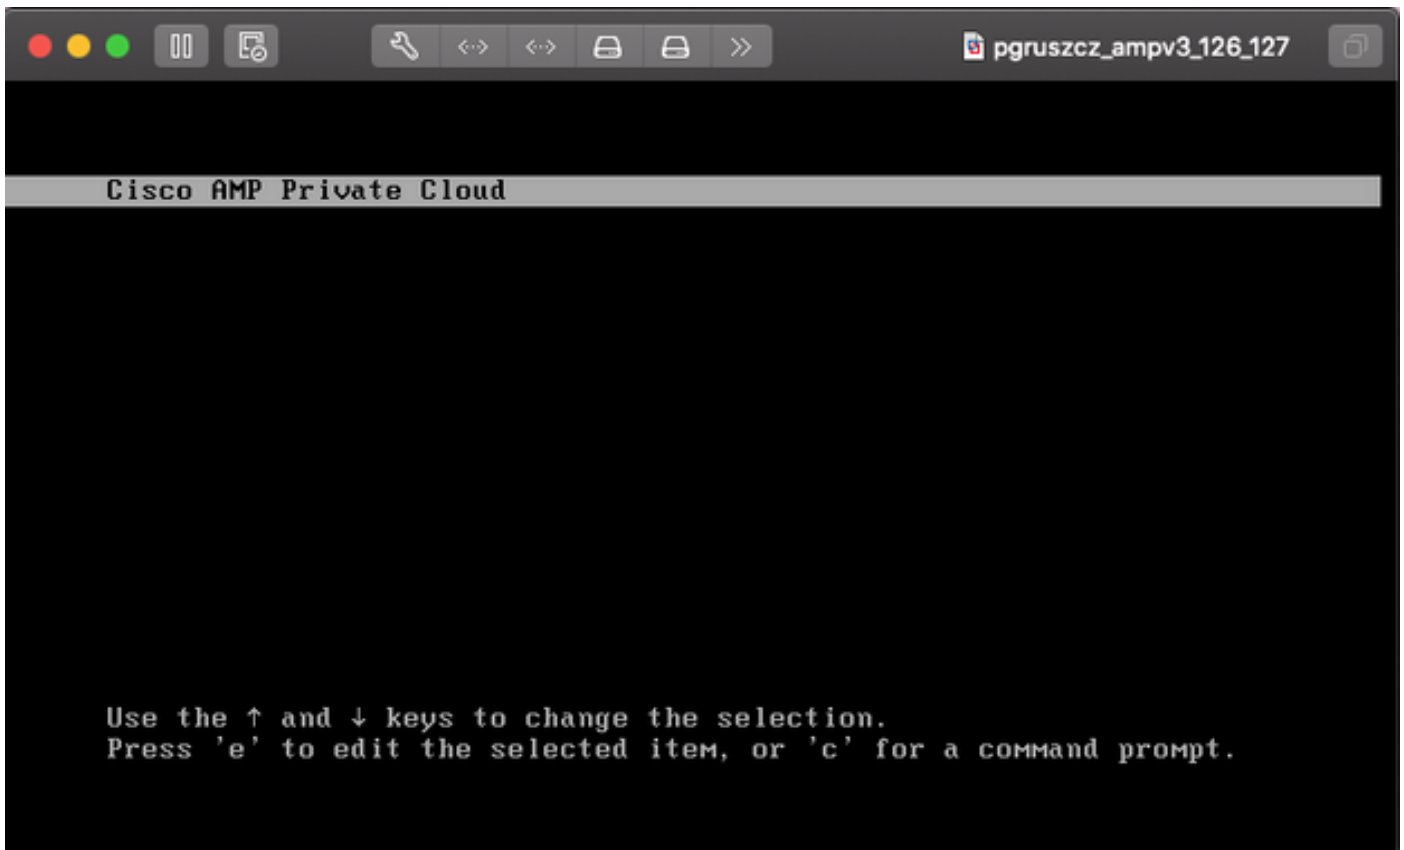

—3) 'e' قوف رقنا

—4) عجزلا رېيغتو، "fi" مسقلا ىلا لوصولل جارخال ريرمت ىچري، ةشاشلا رهظتس "أ":

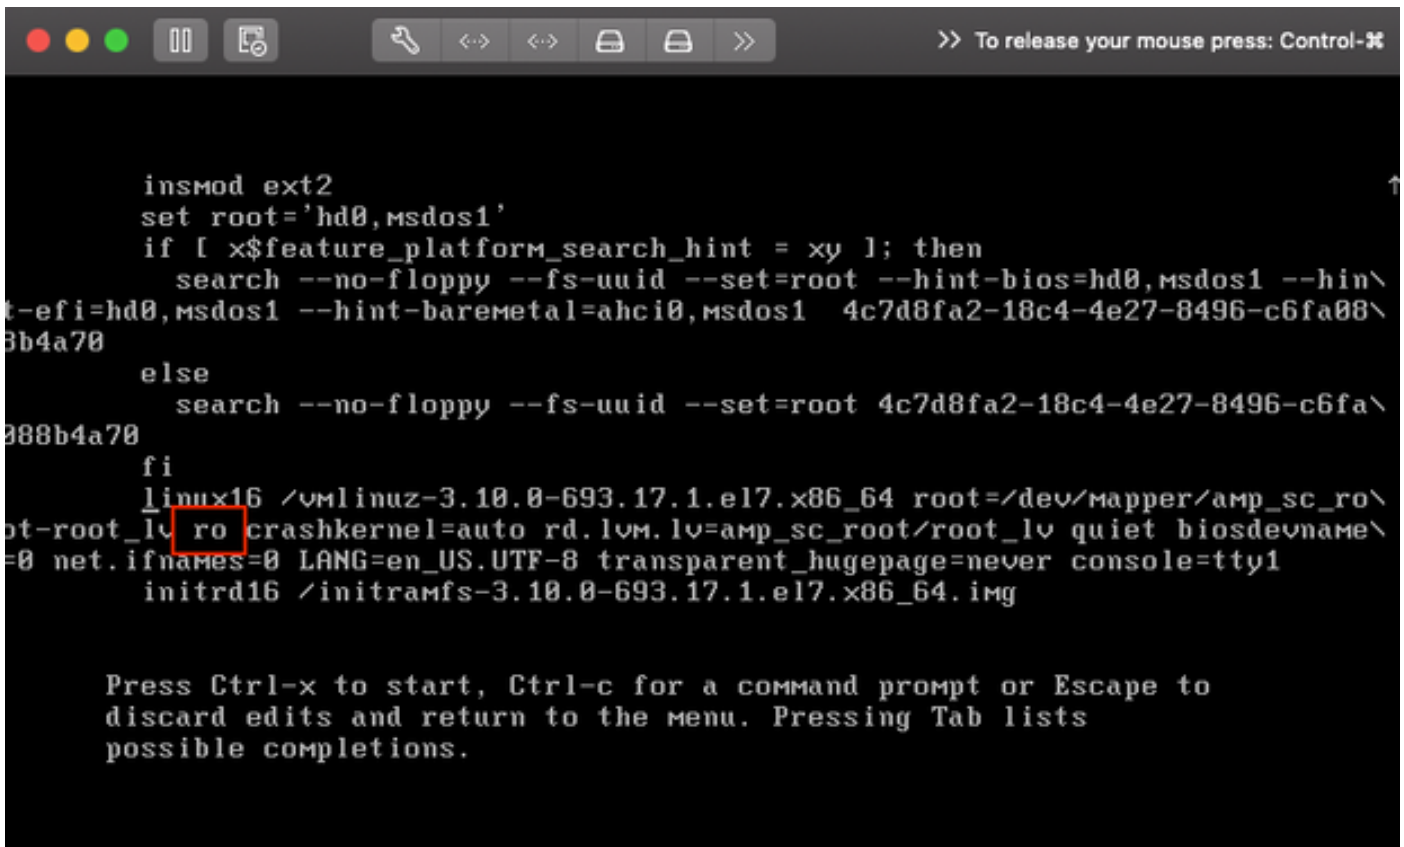

ةشاشلا رهظتس ىف حضوم وه امك "init=/sysroot/bin/sh" ضرعلا:

```
insmod ext2
set root='hd0,msdos1'
if [ x$feature_platform_search_hint = xy ]; then
    search --no-floppy --fs-uuid --set=root --hint-bios=hd0,msdos1 --hin\
t-efi=hd0,msdos1 --hint-baremetal=ahci0,msdos1 4c7d8fa2-18c4-4e27-8496-c6fa08\
8b4a70
else
    search --no-floppy --fs-uuid --set=root 4c7d8fa2-18c4-4e27-8496-c6fa\
088b4a70
fi
linux16 /vmlinuz-3.10.0-693.17.1.el7.x86_64 root=/dev/mapper/amp_sc_ro\
ot-root_lv rw init=/sysroot/bin/sh crashkernel=auto rd.lvm.lv=amp_sc_root/root\
_lv quiet biosdevname=0 net.ifnames=0 LANG=en_US.UTF-8 transparent_hugepage=ne\
ver console=tty1_
initrd16 /initramfs-3.10.0-693.17.1.el7.x86_64.img

Press Ctrl-x to start, Ctrl-c for a command prompt or Escape to
discard edits and return to the menu. Pressing Tab lists
possible completions.
```

—5) Ctrl-X لى رقنا

—6) "chroot /sysroot" رمالا ذيفنت يجرى، ةفيذق ميذقت درجمب

```
>> To release your mouse press: Control-⌘

[ 0.200677] [Firmware Bug]: CPU9: APIC id mismatch. Firmware: 9 APIC: 12
[ 0.202709] [Firmware Bug]: CPU10: APIC id mismatch. Firmware: a APIC: 14
[ 0.204589] [Firmware Bug]: CPU11: APIC id mismatch. Firmware: b APIC: 16
[ 0.206367] [Firmware Bug]: CPU12: APIC id mismatch. Firmware: c APIC: 18
[ 0.208162] [Firmware Bug]: CPU13: APIC id mismatch. Firmware: d APIC: 1a
[ 0.210267] [Firmware Bug]: CPU14: APIC id mismatch. Firmware: e APIC: 1c
[ 0.212697] [Firmware Bug]: CPU15: APIC id mismatch. Firmware: f APIC: 1e
[ 12.333099] sd 2:0:0:0: [sda] Assuming drive cache: write through
[ 12.333362] sd 2:0:2:0: [sdc] Assuming drive cache: write through
[ 12.333396] sd 2:0:3:0: [sdd] Assuming drive cache: write through
[ 12.333705] sd 2:0:1:0: [sdb] Assuming drive cache: write through
[FAILED] Failed to start Switch Root.
See 'systemctl status initrd-switch-root.service' for details.

Generating "/run/initramfs/rdsosreport.txt"

Entering emergency mode. Exit the shell to continue.
Type "journalctl" to view system logs.
You might want to save "/run/initramfs/rdsosreport.txt" to a USB stick or /boot
after mounting them and attach it to a bug report.

:/# chroot /sysroot
:/#
```

—7) ةديذجالا رورمالا ةملك رفوو، password رمالا مادختسا ي فرمتسا

```
pgruszcz_ampv3_126_127
[ 12.333099] sd 2:0:0:0: [sda] Assuming drive cache: write through
[ 12.333362] sd 2:0:2:0: [sdc] Assuming drive cache: write through
[ 12.333396] sd 2:0:3:0: [sdd] Assuming drive cache: write through
[ 12.333705] sd 2:0:1:0: [sdb] Assuming drive cache: write through
[FAILED] Failed to start Switch Root.
See 'systemctl status initrd-switch-root.service' for details.

Generating "/run/initramfs/rdsosreport.txt"

Entering emergency mode. Exit the shell to continue.
Type "journalctl" to view system logs.
You might want to save "/run/initramfs/rdsosreport.txt" to a USB stick or /boot
after mounting them and attach it to a bug report.

:/# chroot /sysroot
:/#
:/#
:/# passwd
Changing password for user root.
New password:
Retype new password:
passwd: all authentication tokens updated successfully.
:/# _
```

8) دعو لورملا ةملك مادختساب لوخدلا ليجستب مقو VPC زاهج ليجحت دعأ

ةمچرتل هذه لوج

ةللأل تاي نقتل نمة ومة مادختساب دن تسمل اذة Cisco تمةرت
ملاعلاء انء مء مء نمة دختسمل معد و تمة مء دقتل ةر شبل او
امك ةق قء نوك ت نل ةللأل ةمچرت لصف أن ةظحال مء ءرء. ةصاأل مء تءل ب
Cisco ةلخت. فرتمة مچرت مء مء دقء ةل ةل ةفارتحال ةمچرتل عم لاعل او
ىل إأمءءاد ءوچرلاب ةصوء و تامةرتل هذه ةقء نء اهءل وئس م Cisco
Systems (رفوتم طبارل) ةلصلأل ةزءل ءن إل دن تسمل