


NVIDIA H100 Tensor Core GPU

Unprecedented performance, scalability, and security for every data center.

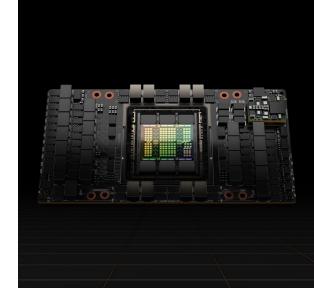

Take an order-of-magnitude leap in accelerated computing.

The NVIDIA H100 Tensor Core GPU delivers unprecedented performance, scalability, and security for every workload. With NVIDIA® NVLink® Switch System, up to 256 H100 GPUs can be connected to accelerate exascale workloads, while the dedicated Transformer Engine supports trillionparameter language models. H100 uses breakthrough innovations in the NVIDIA Hopper™ architecture to deliver industry-leading conversational Al, speeding up large language models by 30X over the previous generation.

Ready for enterprise AI?

NVIDIA H100 Tensor Core GPUs for mainstream servers come with a fiveyear software subscription, including enterprise support, to the NVIDIA AI Enterprise software suite, simplifying Al adoption with the highest performance. This ensures organizations have access to the AI frameworks and tools they need to build H100-accelerated Al workflows such as Al chatbots, recommendation engines, vision Al, and more. Access the NVIDIA AI Enterprise software subscription and related support benefits for the NVIDIA H100 here.


H100 SXM			
FP64 34 TFLOPS 26 TFLOPS FP64 Tensor Core 67 TFLOPS 51 TFLOPS FP32 67 TFLOPS 51 TFLOPS* TF32 Tensor Core 989 TFLOPS* 756 TFLOPS* BFLOAT16 Tensor Core 1,979 TFLOPS* 1,513 TFLOPS* FP16 Tensor Core 1,979 TFLOPS* 1,513 TFLOPS* FP8 Tensor Core 3,958 TFLOPS* 3,026 TFLOPS* INT8 Tensor Core 3,958 TOPS* 3,026 TOPS* GPU memory 80GB 80GB GPU memory bandwidth 3.35TB/s 2TB/s Decoders 7 NVDEC 7 JPEG 7 NVDEC 7 JPEG Max thermal design power (TDP) Up to 700W 300-350W (configurable) (configurable) (configurable) Multi-Instance GPUs Up to 7 MIGS @ 10GB each NVLink: 600GB/s PCle Gen5: 128GB/s Form factor SXM PCle dual-slot air-cooled Interconnect NVLink: 900GB/s PCle Gen5: 128GB/s Partner and NVIDIA HGX" H100 partner and NVIDIA DGX" H100 with 8 GPUs Partner and NVIDIACertified Systems with 1-8 GPUs	Specifications		
FP64 Tensor Core		H100 SXM	H100 PCle
FP32 67 TFLOPS 51 TFLOPS TF32 Tensor Core 989 TFLOPS* 756 TFLOPS* BFLOAT16 Tensor Core 1,979 TFLOPS* 1,513 TFLOPS* FP16 Tensor Core 1,979 TFLOPS* 1,513 TFLOPS* FP8 Tensor Core 3,958 TFLOPS* 3,026 TFLOPS* INT8 Tensor Core 3,958 TOPS* 3,026 TOPS* GPU memory 80GB 80GB GPU memory bandwidth 3.35TB/s 2TB/s Decoders 7 NVDEC 7 NVDEC 7 JPEG 7 JPEG Max thermal design power (TDP) Up to 700W (configurable) 300-350W (configurable) Multi-Instance GPUs Up to 7 MIGS @ 10GB each Form factor SXM PCle dual-slot air-cooled Interconnect NVLink: 900GB/s PCle Gen5: 128GB/s NVLink: 600GB/s PCle Gen5: 128GB/s Server options NVIDIA HGX™ Partner and NVIDIACertified NVIDIACertified Systems with 1-8 GPUs Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUs H100 with 8 GPUs	FP64	34 TFLOPS	26 TFLOPS
TF32 Tensor Core 989 TFLOPS* 756 TFLOPS* BFLOAT16 Tensor Core 1,979 TFLOPS* 1,513 TFLOPS* FP16 Tensor Core 3,958 TFLOPS* 3,026 TFLOPS* INT8 Tensor Core 3,958 TOPS* 3,026 TOPS* INT8 Tensor Core 3,958 TOPS* 3,026 TOPS* GPU memory 80GB 80GB GPU memory bandwidth 3.35TB/s 2TB/s Decoders 7 NVDEC 7 NVDEC 7 NVDEC 7 JPEG 7 JPEG 7 JPEG Max thermal design power (TDP) Up to 700W 300-350W (configurable) Multi-Instance GPUs Up to 7 MIGS @ 10GB each PCle dual-slot air-cooled Interconnect NVLink: 900GB/s PCle Gen5: 128GB/s NVLink: 600GB/s PCle Gen5: 128GB/s Server options NVIDIA HGX™ H100 partner and NVIDIACertified Systems with 1-8 GPUs NVIDIACertified Systems with 1-8 GPUs	FP64 Tensor Core	67 TFLOPS	51 TFLOPS
BFLOAT16 Tensor Core 1,979 TFLOPS* 1,513 TFLOPS* FP16 Tensor Core 1,979 TFLOPS* 1,513 TFLOPS* FP8 Tensor Core 3,958 TFLOPS* 3,026 TFLOPS* INT8 Tensor Core 3,958 TOPS* 3,026 TOPS* GPU memory 80GB 80GB GPU memory bandwidth 3.35TB/s 2TB/s Decoders 7 NVDEC 7 NVDEC 7 JPEG 7 JPEG 7 JPEG Max thermal design power (TDP) Up to 700W 300-350W (configurable) (configurable) (configurable) Multi-Instance GPUs Up to 7 MIGS @ 10GB each Form factor SXM PCle dual-slot air-cooled Interconnect NVLink: 900GB/s PCle Gen5: 128GB/s NVLink: 600GB/s PCle Gen5: 128GB/s Server options NVIDIA HGX" Partner and NVIDIACertified Systems with 1-8 GPUs NVIDIA DGX" H100 with 8 GPUs Systems with 1-8 GPUs	FP32	67 TFLOPS	51 TFLOPS
FP16 Tensor Core 1,979 TFLOPS* 1,513 TFLOPS* FP8 Tensor Core 3,958 TFLOPS* 3,026 TFLOPS* INT8 Tensor Core 3,958 TOPS* 3,026 TOPS* GPU memory 80GB 80GB GPU memory bandwidth 3.35TB/s 2TB/s Decoders 7 NVDEC 7 NVDEC 7 JPEG Max thermal design power (TDP) (configurable) (configurable) Multi-Instance GPUs Up to 7 MIGS @ 10GB each Form factor SXM PCIe dual-slot air-cooled Interconnect NVLink: 900GB/s PCIe Gen5: 128GB/s Server options NVIDIA HGX™ Partner and NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUs	TF32 Tensor Core	989 TFLOPS*	756 TFLOPS*
FP8 Tensor Core3,958 TFLOPS*3,026 TFLOPS*INT8 Tensor Core3,958 TOPS*3,026 TOPS*GPU memory80GB80GBGPU memory bandwidth3.35TB/s2TB/sDecoders7 NVDEC 7 JPEG7 NVDEC 7 JPEGMax thermal design power (TDP)Up to 700W (configurable)300-350W (configurable)Multi-Instance GPUsUp to 7 MIGS @ 10GB eachForm factorSXMPCIe dual-slot air-cooledInterconnectNVLink: 900GB/s PCIe Gen5: 128GB/sNVLink: 600GB/s PCIe Gen5: 128GB/sServer optionsNVIDIA HGX™ H100 partner and NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUsPartner and NVIDIA Certified Systems with 1-8 GPUs	BFLOAT16 Tensor Core	1,979 TFLOPS*	1,513 TFLOPS*
INT8 Tensor Core 3,958 TOPS* 3,026 TOPS* GPU memory 80GB 80GB 80GB 2TB/s 2TB/s Decoders 7 NVDEC 7 JPEG 7 JPEG 7 JPEG Max thermal design power (TDP) (configurable) Up to 700W (configurable) (configurable) Multi-Instance GPUs Form factor SXM PCle dual-slot air-cooled Interconnect NVLink: 900GB/s PCle Gen5: 128GB/s Server options NVIDIA HGX™ Partner and NVIDIACertified NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUs	FP16 Tensor Core	1,979 TFLOPS*	1,513 TFLOPS*
GPU memory bandwidth 3.35TB/s 2TB/s Decoders 7 NVDEC 7 NVDEC 7 JPEG Max thermal design power (TDP) (configurable) (configurable) Multi-Instance GPUs Up to 7 MIGS @ 10GB each Form factor SXM PCIe dual-slot air-cooled Interconnect NVLink: 900GB/s PCIe Gen5: 128GB/s Gen5: 128GB/s Server options NVIDIA HGX™ Partner and NVIDIACertified NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUs ROBERT STREET NAME NOT NAME NOT NAME NOT NOT NAME NOT NOT NAME NAME NAME NAME NAME NAME NAME NAME	FP8 Tensor Core	3,958 TFLOPS*	3,026 TFLOPS*
GPU memory bandwidth3.35TB/s2TB/sDecoders7 NVDEC 7 JPEG7 NVDEC 7 JPEGMax thermal design power (TDP)Up to 700W (configurable)300-350W (configurable)Multi-Instance GPUsUp to 7 MIGS @ 10GB eachForm factorSXMPCIe dual-slot air-cooledInterconnectNVLink: 900GB/s PCIe Gen5: 128GB/sNVLink: 600GB/s PCIe Gen5: 128GB/sServer optionsNVIDIA HGX™ H100 partner and NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUsPartner and NVIDIACertified Systems with 1-8 GPUs	INT8 Tensor Core	3,958 TOPS*	3,026 TOPS*
Decoders7 NVDEC 7 JPEG7 NVDEC 7 JPEGMax thermal design power (TDP)Up to 700W (configurable)300-350W (configurable)Multi-Instance GPUsUp to 7 MIGS @ 10GB eachForm factorSXMPCle dual-slot air-cooledInterconnectNVLink: 900GB/s PCle Gen5: 128GB/sNVLink: 600GB/s PCle Gen5: 128GB/sServer optionsNVIDIA HGX™ H100 partner and NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUsPartner and NVIDIA DGX™ H100 with 8 GPUs	GPU memory	80GB	80GB
TypeG 7 ypeG Max thermal design power (TDP) Up to 700W (configurable) (configurable) Multi-Instance GPUs Up to 7 MIGS @ 10GB each Form factor SXM PCle dual-slot air-cooled Interconnect NVLink: 900GB/s PCle Gen5: 128GB/s Gen5: 128GB/s Server options NVIDIA HGX™ Partner and NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUs H100 with 8 GPUs	GPU memory bandwidth	3.35TB/s	2TB/s
power (TDP)(configurable)(configurable)Multi-Instance GPUsUp to 7 MIGS @ 10GB eachForm factorSXMPCle dual-slot air-cooledInterconnectNVLink: 900GB/s PCle Gen5: 128GB/sNVLink: 600GB/s PCle Gen5: 128GB/sServer optionsNVIDIA HGX™ H100 partner and NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUsPartner and NVIDIACertified Systems with 1-8 GPUs	Decoders		
Form factor SXM PCle dual-slot air-cooled NVLink: 900GB/s PCle Gen5: 128GB/s Server options NVIDIA HGX™ H100 partner and NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUs Partner and NVIDIACERTIFIED Systems with 1-8 GPUs		•	
Interconnect NVLink: 900GB/s PCle Gen5: 128GB/s NVIDIA HGX™ H100 partner and NVIDIACertified NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUs NVLink: 600GB/s PCle Gen5: 128GB/s Partner and NVIDIACertified Systems with 1-8 GPUs	Multi-Instance GPUs	Up to 7 MIGS @ 10GB each	
Gen5: 128GB/s Server options NVIDIA HGX™ H100 partner and NVIDIACertified NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUs Gen5: 128GB/s Partner and NVIDIACertified Systems with 1-8 GPUs	Form factor	SXM	PCIe dual-slot air-cooled
H100 partner and NVIDIACertified NVIDIACertified Systems with 1-8 GPUs Systems™ with 4 or 8 GPUs NVIDIA DGX™ H100 with 8 GPUs	Interconnect	•	·
NVIDIA AI Enterprise Add-on Included	Server options	H100 partner and NVIDIACertified Systems™ with 4 or 8 GPUs NVIDIA DGX™	NVIDIACertified
	NVIDIA AI Enterprise	Add-on	Included


^{*} Shown with sparsity. Specifications 1/2 lower without sparsity.


Securely accelerate workloads from enterprise to exascale.

NVIDIA H100 GPUs feature fourth-generation Tensor Cores and the Transformer Engine with FP8 precision, further extending NVIDIA's market-leading AI leadership with up to 9X faster training and an incredible 30X inference speedup on large language models. For high-performance computing (HPC) applications, H100 triples the floating-point operations per second (FLOPS) of FP64 and adds dynamic programming (DPX) instructions to deliver up to 7X higher performance. With second-generation Multi-Instance GPU (MIG), built-in NVIDIA confidential computing, and NVIDIA NVLink Switch System, H100 securely accelerates all workloads for every data center from enterprise to exascale.

Technology Breakthroughs

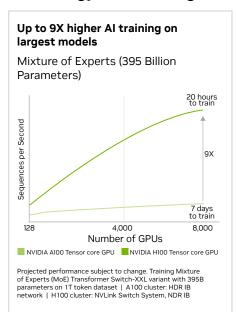

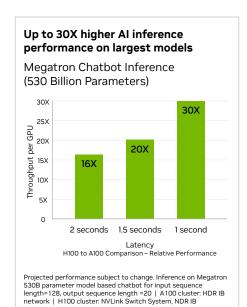

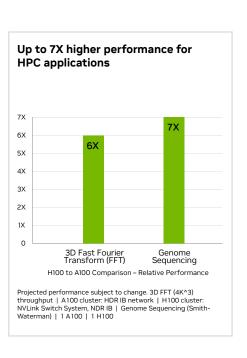

Explore the technology breakthroughs of NVIDIA Hopper.



NVIDIA H100 Tensor Core GPU

Built with 80 billion transistors using a cutting-edge TSMC

4N process custom tailored for NVIDIA's accelerated compute needs, H100 is the world's most advanced chip ever built. It features major advances to accelerate AI, HPC, memory bandwidth, interconnect, and communication at data center scale.



Transformer Engine

The Transformer Engine uses software and Hopper Tensor Core technology designed to

accelerate training for models built from the world's most important AI model building block, the transformer. Hopper Tensor Cores can apply mixed FP8 and FP16 precisions to dramatically accelerate AI calculations for transformers.



NVLink Switch System

The NVLink Switch System enables the scaling of multi-GPU input/output (IO) across

multiple servers at 900 gigabytes per second (GB/s) bidirectional per GPU, over 7X the bandwidth of PCIe Gen5. The system supports clusters of up to 256 H100s and delivers 9X higher bandwidth than InfiniBand HDR on the NVIDIA Ampere architecture.



NVIDIA Confidential Computing

NVIDIA Confidential Computing is a built-in security feature

of Hopper that makes NVIDIA H100 the world's first accelerator with confidential computing capabilities. Users can protect the confidentiality and integrity of their data and applications in use while accessing the unsurpassed acceleration of H100 GPUs.



Second-Generation Multi-Instance GPU (MIG)

The Hopper architecture's second-generation MIG alti-tenant, multi-user

supports multi-tenant, multi-user configurations in virtualized environments, securely partitioning the GPU into isolated, right-size instances to maximize quality of service (QoS) for 7X more secured tenants.



DPX Instructions

Hopper's DPX instructions accelerate dynamic programming algorithms by

40X compared to CPUs and 7X compared to NVIDIA Ampere architecture GPUs. This leads to dramatically faster times in disease diagnosis, real-time routing optimizations, and graph analytics.

The convergence of GPU and SmartNIC.


NVIDIA H100 CNX combines the power of the NVIDIA H100 with the advanced networking capabilities of the NVIDIA ConnectX®-7 smart network interface card (SmartNIC) in a single, unique platform. This convergence delivers unparalleled performance for GPU-powered IO-intensive workloads, such as distributed Al training in the enterprise data center and 5G processing at the edge. Learn more about NVIDIA H100 CNX.

Accelerate every workload, everywhere.

The NVIDIA H100 is an integral part of the NVIDIA data center platform. Built for Al, HPC, and data analytics, the platform accelerates over 3,000 applications, and is available everywhere from data center to edge, delivering both dramatic performance gains and cost-saving opportunities.

Deploy H100 with the NVIDIA AI platform.

NVIDIA AI is the end-to-end open platform for production AI built on NVIDIA H100 GPUs. It includes NVIDIA accelerated computing infrastructure, a software stack for infrastructure optimization and AI development and deployment, and application workflows to speed time to market. Experience NVIDIA AI and NVIDIA H100 on NVIDIA LaunchPad through free hands-on labs.

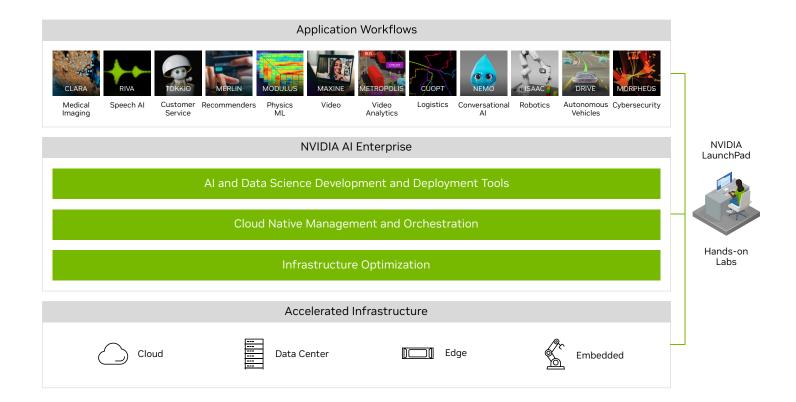

Ready to Get Started?

To learn more about the NVIDIA H100 Tensor Core GPU, visit: www.nvidia.com/h100



Partner

Logo

