

Konfiguration von TrustSec SXP zwischen ISE und ASAv

Inhalt

[Einführung](#)

[Voraussetzungen](#)

[Anforderungen](#)

[Verwendete Komponenten](#)

[Netzwerkdiagramm](#)

[IP-Adressen](#)

[Erstkonfiguration](#)

[ISE-Netzwerkgerät](#)

[Registrierung der ASA als Netzwerkgerät](#)

[OOB-PAC \(Protected Access Credential\) erstellen und herunterladen](#)

[ASDM AAA-Serverkonfiguration](#)

[AAA-Servergruppe erstellen](#)

[Server zur Servergruppe hinzufügen](#)

[PAC aus ISE herunterladen importieren](#)

[Daten der Refresh-Umgebung](#)

[Überprüfung](#)

[ISE-Live-Protokolle](#)

[ISE-Sicherheitsgruppen](#)

[ASDM PAC](#)

[ASDM-Umgebungsdaten und Sicherheitsgruppen](#)

[ASDM SXP-Konfiguration](#)

[SXP aktivieren](#)

[Standard-SXP-Quell-IP-Adresse und Standard-SXP-Kennwort festlegen](#)

[SXP-Peer hinzufügen](#)

[ISE SXP-Konfiguration](#)

[Globale SXP-Kennworteinstellung](#)

[SXP-Gerät hinzufügen](#)

[SXP-Verifizierung](#)

[ISE SXP-Verifizierung](#)

[ISE-SXP-Zuordnungen](#)

[ASDM SXP-Verifizierung](#)

[ASDM hat SXP-IP-zu-SGT-Zuordnungen gelernt](#)

[Paketerfassung für ISE](#)

Einführung

In diesem Dokument wird beschrieben, wie eine SXP-Verbindung (Security Group Exchange Protocol) zwischen ISE (Identity Services Engine) und einer ASAv (Virtual Adaptive Security

Appliance) konfiguriert wird.

SXP ist das SGT (Security Group Tag) Exchange Protocol, das von TrustSec verwendet wird, um IP-to-SGT-Zuordnungen an TrustSec-Geräte weiterzugeben. SXP wurde entwickelt, um Netzwerken, die Geräte von Drittanbietern oder ältere Cisco Geräte ohne Unterstützung für Inline-Tagging von SGT enthalten, TrustSec-Funktionen zu ermöglichen. SXP ist ein Peering-Protokoll, ein Gerät fungiert als Lautsprecher, das andere als Listener. Der SXP-Lautsprecher ist für das Senden der IP-SGT-Bindungen verantwortlich, und der Listener ist für das Sammeln dieser Bindungen verantwortlich. Die SXP-Verbindung verwendet den TCP-Port 64999 als zugrunde liegendes Transportprotokoll und MD5 für Nachrichtenintegrität/Authentizität.

SXP wurde als IETF-Entwurf unter dem folgenden Link veröffentlicht:

<https://datatracker.ietf.org/doc/draft-smith-kandula-sxp/>

Voraussetzungen

Anforderungen

TrustSec-Kompatibilitätsmatrix:

<http://www.cisco.com/c/en/us/solutions/enterprise-networks/trustsec/solution-overview-listing.html>


Verwendete Komponenten

ISE 2.3

ASAv 9.8.1

ASDM 7.8.1.150

Netzwerkdiagramm

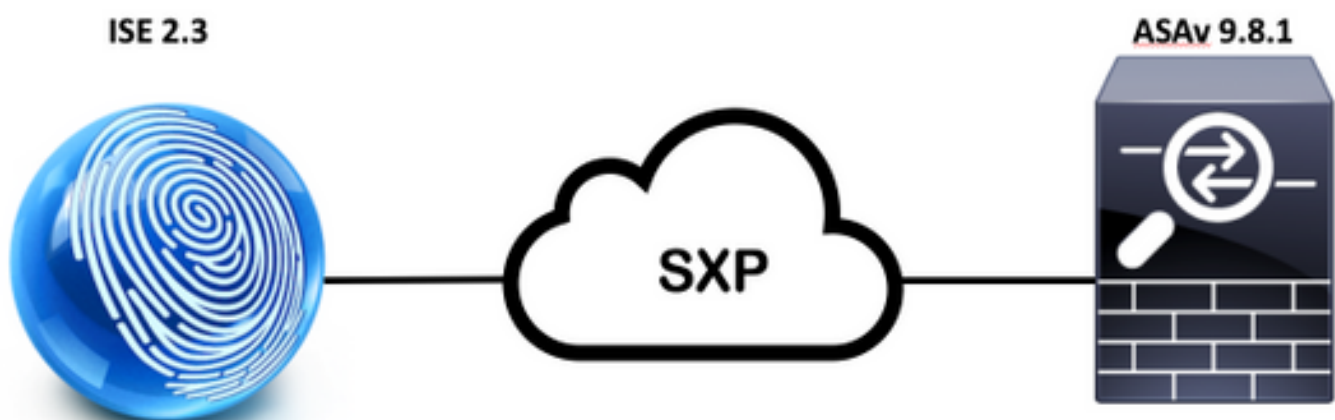

IP-Adressen

ISE: 14.36.143.223

ASAv: 14.36.143.30 Uhr

Erstkonfiguration

ISE-Netzwerkgerät

Registrierung der ASA als Netzwerkgerät

WorkCenter > TrustSec > Components > Network Devices > Add

Network Devices List > **New Network Device**

Network Devices

* Name

Description

IP Address /

RADIUS Authentication Settings

RADIUS UDP Settings

Protocol **RADIUS**

* Shared Secret

CoA Port

Advanced TrustSec Settings

▼ **Device Authentication Settings**

Use Device ID for TrustSec

Identification

Device Id

* Password

▼ **TrustSec Notifications and Updates**

* Download environment data every

* Download peer authorization policy every

* Reauthentication every ⓘ

* Download SGACL lists every

Other TrustSec devices to trust this device

Send configuration changes to device Using CoA CLI (SSH)

Ssh Key

OOB-PAC (Protected Access Credential) erstellen und herunterladen

▼ **Out Of Band (OOB) TrustSec PAC**

Issue Date

Expiration Date

Issued By

Generate PAC

The Identity field specifies the username or machine name presented as the "inner username" by the EAP-FAST protocol. If the Identity string entered here does not match that username, authentication will fail.

* Identity


* Encryption Key

* PAC Time to Live

Expiration Date 29 Jan 2018 22:47:42 GMT

Opening ASAv.pac

You have chosen to open:

 **ASAv.pac**
which is: **Binary File**
from: **https://14.36.143.223**

Would you like to save this file?

ASDM AAA-Serverkonfiguration

AAA-Servergruppe erstellen

Configuration > Firewall > Identity by TrustSec > Server Group Setup > **Manage..**

Server Group Setup


Server Group Name:

AAA-Servergruppen > Hinzufügen

AAA Server Groups							Add
Server Group	Protocol	Accounting Mode	Reactivation Mode	Dead Time	Max Failed Attempts	Realm Id	
LOCAL	LOCAL						Edit
							Delete

- AAA-Servergruppe: <Gruppenname>
- Dynamische Autorisierung aktivieren

AAA Server Group:

Protocol: 

Realm-id:

Accounting Mode: Simultaneous Single

Reactivation Mode: Depletion Timed

Dead Time: minutes

Max Failed Attempts:

Enable interim accounting update

Update Interval: Hours


Enable Active Directory Agent mode

ISE Policy Enforcement

Enable dynamic authorization

Dynamic Authorization Port:

Use authorization only mode (no common password configuration required)

VPN3K Compatibility Option 

Specify whether a downloadable ACL received from RADIUS should be merged with a Cisco AV-Pair ACL.

Do not merge

Place the downloadable ACL after Cisco AV-Pair ACL

Place the downloadable ACL before Cisco AV-Pair ACL

Server zur Servergruppe hinzufügen

Server in der ausgewählten Gruppe > Hinzufügen

Servers in the Selected Group		
Server Name or IP Address	Interface	Timeout

Add

Edit

Delete

Move Up

Move Down


Test

- Servername oder IP-Adresse: <ISE-IP-Adresse>
- Server-Authentifizierungsport: 1812
- Server-Buchhaltungsport: 1813
- Serverschlüssel: Cisco
- Allgemeines Kennwort: Cisco

Server Group:	14.36.143.223
Interface Name:	outside
Server Name or IP Address:	14.36.143.223
Timeout:	10 seconds
RADIUS Parameters	
Server Authentication Port:	1812
Server Accounting Port:	1813
Retry Interval:	10 seconds
Server Secret Key:	••••••••
Common Password:	••••••••
ACL Netmask Convert:	Standard
Microsoft CHAPv2 Capable:	<input checked="" type="checkbox"/>
SDI Messages	
Message Table	


PAC aus ISE heruntergeladen importieren

Konfiguration > Firewall > Identität nach TrustSec > Server Group Setup > PAC importieren..

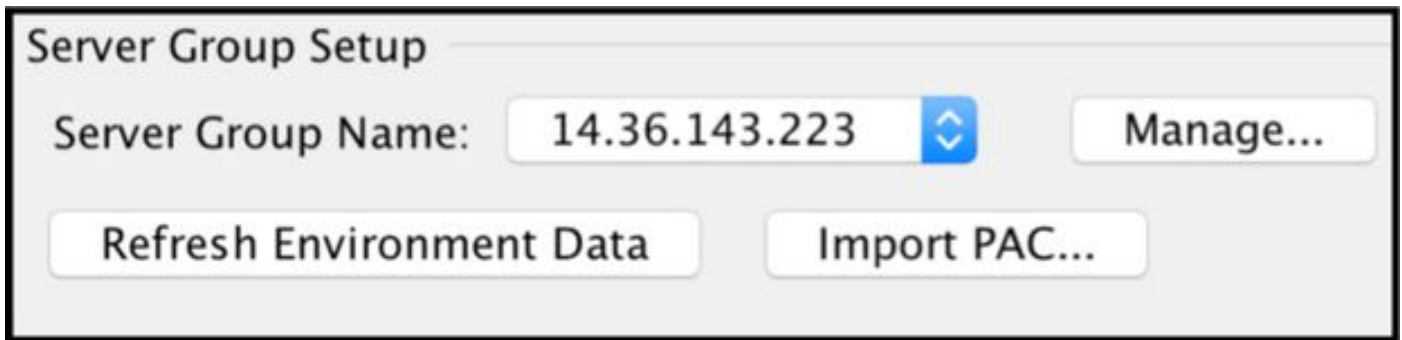


The screenshot shows the 'Server Group Setup' window. At the top, the title is 'Server Group Setup'. Below it, there is a label 'Server Group Name:' followed by a text input field containing '14.36.143.223' and a blue dropdown arrow button. To the right of this is a 'Manage...' button. Below these are two buttons: 'Refresh Environment Data' and 'Import PAC...'.

- Kennwort: Cisco

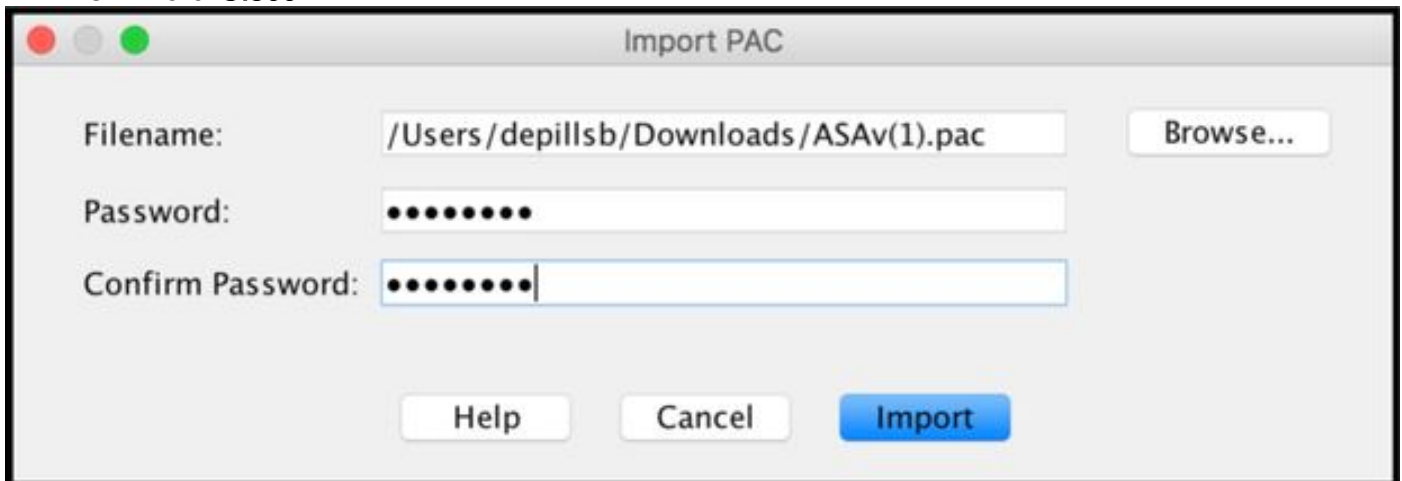

The screenshot shows the 'Import PAC' dialog box. It has a title bar with 'Import PAC' and standard window controls. The main area contains three input fields: 'Filename:' with the path '/Users/depillsb/Downloads/ASAv(1).pac' and a 'Browse...' button; 'Password:' with a masked field of ten dots; and 'Confirm Password:' with a masked field of ten dots. At the bottom, there are three buttons: 'Help', 'Cancel', and 'Import'.

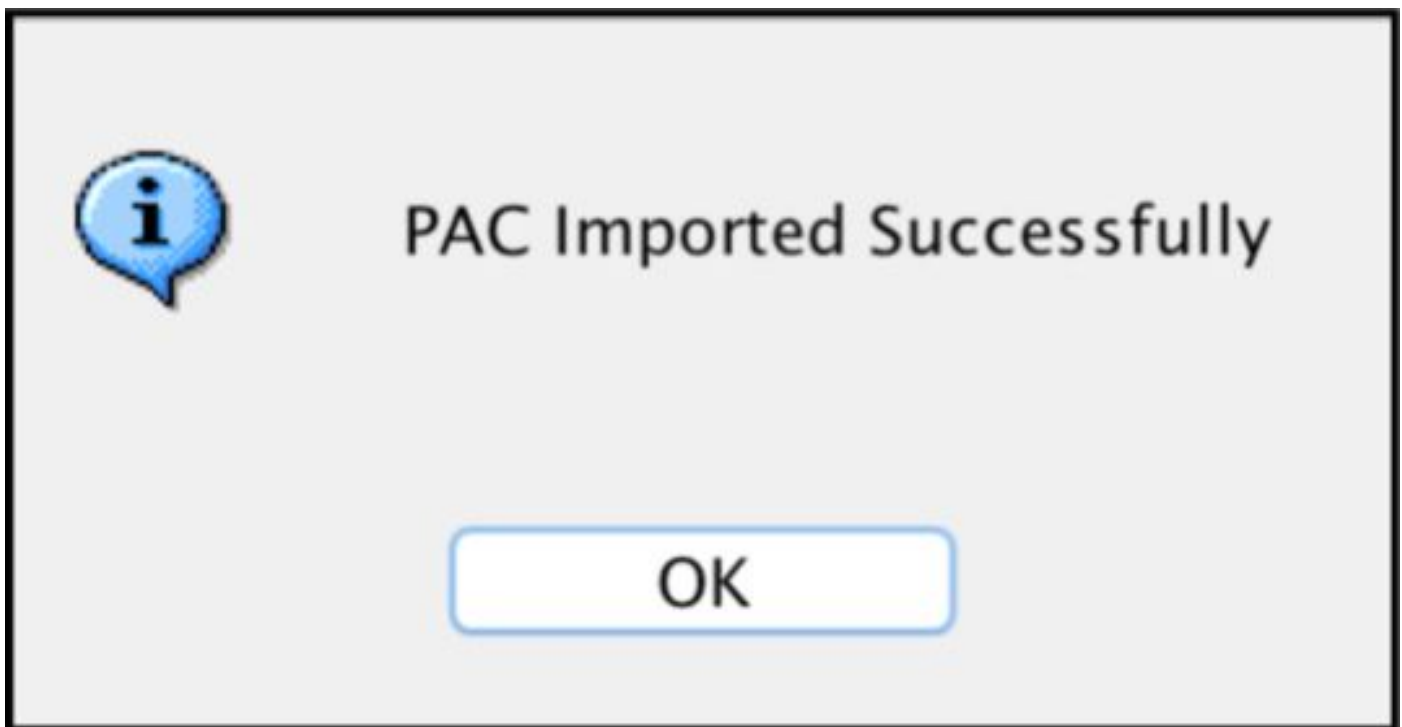

Daten der Refresh-Umgebung

Konfiguration > Firewall > Identität nach TrustSec > Servergruppeneinrichtung > Umgebungsdaten aktualisieren

Server Group Setup

Server Group Name: 

Überprüfung

ISE-Live-Protokolle

Betrieb > RADIUS > Live Logs

		ASAv	#CTSREQUEST#	
		ASAv	#CTSREQUEST#	NetworkDeviceAuthorization >> NDAC

Authentication Details

Source Timestamp	2017-07-30 00:05:53.432
Received Timestamp	2017-07-30 00:05:53.433
Policy Server	ISE23
Event	5233 TrustSec Data Download Succeeded
Username	#CTSREQUEST#
Network Device	ASAv
Device Type	All Device Types
Location	All Locations
NAS IPv4 Address	14.36.143.30
NAS Port Type	Virtual
Security Group	TrustSec_Devices
Response Time	33 milliseconds

CiscoAVPair

```
cts-environment-data=ASAv,  
cts-environment-version=1,  
cts-device-capability=env-data-fragment,  
cts-pac-opaque=****,  
coa-push=true
```

Result

State	ReauthSession:0e248dff2i7TiOfK10NeCx1yRhjPAO8_ssZ9U9VVy/o3dFT_tk
Class	CACS:0e248dff2i7TiOfK10NeCx1yRhjPAO8_ssZ9U9VVy/o3dFT_tk:ISE23/290687604/9
cisco-av-pair	cts:server-list=CTSServerList1-0001
cisco-av-pair	cts:security-group-tag=0002-02
cisco-av-pair	cts:environment-data-expiry=86400
cisco-av-pair	cts:security-group-table=0001-18

CiscoAVPair

cts-security-group-table=0001,
cts-pac-opaque=****,
coa-push=true

Result

State	ReauthSession:0e248fdcf4PVaU72zvhHwsT3F4qpdgq4rMsifPkqEcQiG4O_YZw
Class	CACS:0e248fdcf4PVaU72zvhHwsT3F4qpdgq4rMsifPkqEcQiG4O_YZw:ISE23/290687604/10
cisco-av-pair	cts:security-group-table=0001-18
cisco-av-pair	cts:security-group-info=0-0-00-Unknown
cisco-av-pair	cts:security-group-info=ffff-1-00-ANY
cisco-av-pair	cts:security-group-info=9-0-00-Auditors
cisco-av-pair	cts:security-group-info=f-0-00-BYOD
cisco-av-pair	cts:security-group-info=5-0-00-Contractors
cisco-av-pair	cts:security-group-info=8-0-00-Developers
cisco-av-pair	cts:security-group-info=c-0-00-Development_Servers
cisco-av-pair	cts:security-group-info=4-0-00-Employees
cisco-av-pair	cts:security-group-info=6-2-00-Guests
cisco-av-pair	cts:security-group-info=3-0-00-Network_Services
cisco-av-pair	cts:security-group-info=e-0-00-PCI_Servers
cisco-av-pair	cts:security-group-info=a-0-00-Point_of_Sale_Systems
cisco-av-pair	cts:security-group-info=b-0-00-Production_Servers
cisco-av-pair	cts:security-group-info=7-0-00-Production_Users
cisco-av-pair	cts:security-group-info=ff-0-00-Quarantined_Systems
cisco-av-pair	cts:security-group-info=d-0-00-Test_Servers
cisco-av-pair	cts:security-group-info=2-2-00-TrustSec_Devices
cisco-av-pair	cts:security-group-info=10-0-00-Tester

















ISE-Sicherheitsgruppen

Work Center > TrustSec > Components > **Security Groups**

Security Groups

For Policy Export go to [Administration > System > Backup & Restore > Policy Export Page](#)

 Edit  Add  Import  Export ▾  Trash ▾  Push

<input type="checkbox"/>	Icon	Name ↓↑	SGT (Dec / Hex)	Description
<input type="checkbox"/>		Auditors	9/0009	Auditor Security Group
<input type="checkbox"/>		BYOD	15/000F	BYOD Security Group
<input type="checkbox"/>		Contractors	5/0005	Contractor Security Group
<input type="checkbox"/>		Developers	8/0008	Developer Security Group
<input type="checkbox"/>		Development_Servers	12/000C	Development Servers Security Group
<input type="checkbox"/>		Employees	4/0004	Employee Security Group
<input type="checkbox"/>		Guests	6/0006	Guest Security Group
<input type="checkbox"/>		Network_Services	3/0003	Network Services Security Group
<input type="checkbox"/>		PCI_Servers	14/000E	PCI Servers Security Group
<input type="checkbox"/>		Point_of_Sale_Systems	10/000A	Point of Sale Security Group
<input type="checkbox"/>		Production_Servers	11/000B	Production Servers Security Group
<input type="checkbox"/>		Production_Users	7/0007	Production User Security Group
<input type="checkbox"/>		Quarantined_Systems	255/00FF	Quarantine Security Group
<input type="checkbox"/>		Tester	16/0010	
<input type="checkbox"/>		Test_Servers	13/000D	Test Servers Security Group
<input type="checkbox"/>		TrustSec_Devices	2/0002	TrustSec Devices Security Group

ASDM PAC

Überwachung > Eigenschaften > Identität nach TrustSec > PAC

PAC Information:

Valid until: **Jan 30 2018 05:46:44**
AID: 6f5719523570b8d229f23073404e2d37
I-ID: ASAv
A-ID-Info: ISE 2.2p1
PAC-type: Cisco Trustsec

PAC Opaque:

```
000200b000030001000400106f5719523570b8d229f23073404e2d3700060094000301
00359249c4dd61484890f29bbe81859edb00000013597a55c100093a803f883e4ddafa
d162ae02fac03da08f9424cb323fa8aaeae44c6d6d7db3659516132f71b25aa5be3f38
9b76fdbbc1216d1d14e689ebb36d7344a5166247e950bbf62a370ea8fc941fa1d6c4ce5
9f438e787052db75a4e45ff2f0ab8488dfdd887a02119cc0c4174fc234f33d9ee9f9d4
dad759e9c8
```

ASDM-Umgebungsdaten und Sicherheitsgruppen

Überwachung > Eigenschaften > Identität nach TrustSec > Umgebungsdaten

Environment Data:

Status: Active
Last download attempt: Successful
Environment Data Lifetime: 86400 secs
Last update time: 21:07:01 UTC Jul 29 2017
Env-data expires in: 0:21:39:07 (dd:hr:mm:sec)
Env-data refreshes in: 0:21:29:07 (dd:hr:mm:sec)

Security Group Table:

Valid until: 21:07:01 UTC Jul 30 2017
Total entries: 18

Name	Tag	Type
ANY	65535	unicast
Auditors	9	unicast
BYOD	15	unicast
Contractors	5	unicast
Developers	8	unicast
Development_Servers	12	unicast
Employees	4	unicast
Guests	6	unicast
Network_Services	3	unicast
PCI_Servers	14	unicast
Point_of_Sale_Systems	10	unicast
Production_Servers	11	unicast
Production_Users	7	unicast
Quarantined_Systems	255	unicast
Test_Servers	13	unicast
Tester	16	unicast
TrustSec_Devices	2	unicast
Unknown	0	unicast

ASDM SXP-Konfiguration

SXP aktivieren

Konfiguration > Firewall > Identität nach TrustSec > SGT Exchange Protocol (SXP) aktivieren

Enable SGT Exchange Protocol (SXP)

Standard-SXP-Quell-IP-Adresse und Standard-SXP-Kennwort festlegen

Konfiguration > Firewall > Identität nach TrustSec > Verbindungspersonal

Default Source:

Default Password:

Confirm Password:

SXP-Peer hinzufügen

Konfiguration > Firewall > Identity by TrustSec > Connection Peers > Add

Connection Peers

Filter: Peer IP Address Filter Clear

Peer IP Address	Source IP Address	Password	Mode	Role
-----------------	-------------------	----------	------	------

Add Edit Delete

- Peer-IP-Adresse: <ISE-IP-Adresse>

Peer IP Address:

Password:

Mode:

Role:

ISE SXP-Konfiguration

Globale SXP-Kennworteinstellung

WorkCenter > TrustSec > Einstellungen > **SXP-Einstellungen**

- Globales Kennwort: **Cisco**

SXP Settings

- Publish SXP bindings on PxGrid
- Add radius mappings into SXP IP SGT mapping table

Global Password

Global Password

This global password will be overridden by the device specific password

SXP-Gerät hinzufügen

WorkCenter > TrustSec > SXP > SXP Devices > **Add**

▼ Add Single Device

Input fields marked with an asterisk (*) are required.

name

IP Address *

Peer Role *

Connected PSNs *

SXP Domain *

Status *

Password Type *

Password

Version *

► Advanced Settings

SXP-Verifizierung

ISE SXP-Verifizierung

WorkCenter > TrustSec > SXP > **SXP Devices**

SXP Devices

0 Selected Rows/Page / 1 Total Rows

<input type="checkbox"/>	Name	IP Address	Status	Peer Role	Pass...	Negoti...	SX...	Connected To	Duration [d...	SXP Domain
<input type="checkbox"/>	ASAv	14.36.143.30	ON	LISTENER	DEFAULT	V3	V4	ISE23	00:00:00:02	default

ISE-SXP-Zuordnungen

WorkCenter > TrustSec > SXP > **Alle SXP-Zuordnungen**

IP Address	SGT	Learned From	Learned By	SXP Domain	PSNs Involved
10.122.158.253/32	Guests (6/0006)	14.36.143.223	Local	default	ISE23
10.122.160.93/32	Guests (6/0006)	14.36.143.223	Local	default	ISE23
10.122.165.49/32	Employees (4/0004)	14.36.143.223	Local	default	ISE23
10.122.165.58/32	Guests (6/0006)	14.36.143.223	Local	default	ISE23
14.0.69.220/32	Guests (6/0006)	14.36.143.223	Local	default	ISE23
14.36.143.99/32	Employees (4/0004)	14.36.143.223	Local	default	ISE23
14.36.143.105/32	TrustSec_Devices (2/0002)	14.36.143.223	Local	default	ISE23
14.36.147.70/32	Employees (4/0004)	14.36.143.223	Local	default	ISE23
172.18.250.123/32	Employees (4/0004)	14.36.143.223	Local	default	ISE23
192.168.1.0/24	Contractors (5/0005)	14.36.143.223	Local	default	ISE23

ASDM SXP-Verifizierung

Überwachung > Eigenschaften > Identität nach TrustSec > SXP-Verbindungen

SGT Exchange Protocol (SXP) Connections:

```

SXP: Enabled
Highest version: 3
Default password: Set
Default local IP: 14.36.143.30
Reconcile period: 120 secs
Retry open period: 120 secs
Retry open timer: Not Running
Total number of SXP connections: 1
Total number of SXP connections shown: 1
  
```

Peer Connection Status:

Filter: Peer IP Address

Peer	Source	Status	Version	Role	Instance #	Password	Reconcile Timer	Delete Hold-down Timer	Last Changed
14.36.143.223	14.36.143.30	On	3	Listener	1	Default	Not Running	Not Running	0:00:22:56 (dd:hr:mm:se)

ASDM hat SXP-IP-zu-SGT-Zuordnungen gelernt

Überwachung > Eigenschaften > Identität nach TrustSec > IP-Zuordnungen

Security Group IP Mapping Table:

Total number of Security Group IP Mappings: 10

Total number of Security Group IP Mappings shown: 10

Filter:

TAG



Tag	Name	IP Address
4	Employees	14.36.143.99
6	Guests	10.122.158.253
6	Guests	10.122.160.93
4	Employees	14.36.147.70
2	TrustSec_Devices	14.36.143.105
4	Employees	172.18.250.123
4	Employees	10.122.165.49
6	Guests	14.0.69.220
6	Guests	10.122.165.58
5	Contractors	192.168.1.0/24

Paketerfassung für ISE

2060	0.000000	14.36.143.223	14.36.143.30	TCP	86	25982	→	64999	[SYN]	Seq=0	Win=29200	Len=0	MD5	MSS=1460	SACK_PERM=1	WS=1
2061	0.000782	14.36.143.30	14.36.143.223	TCP	78	64999	→	25982	[SYN, ACK]	Seq=0	Ack=1	Win=32768	Len=0	MSS=1460	MD5	
2062	0.000039	14.36.143.223	14.36.143.30	TCP	74	25982	→	64999	[ACK]	Seq=1	Ack=1	Win=29200	Len=0	MD5		
2074	0.039078	14.36.143.223	14.36.143.30	SMPP	102				SMPP Bind_receiver							
2075	0.000522	14.36.143.30	14.36.143.223	TCP	74	64999	→	25982	[ACK]	Seq=1	Ack=29	Win=32768	Len=0	MD5		
2076	0.000212	14.36.143.30	14.36.143.223	SMPP	90				SMPP Bind_transmitter							
2077	0.000024	14.36.143.223	14.36.143.30	TCP	74	25982	→	64999	[ACK]	Seq=29	Ack=17	Win=29200	Len=0	MD5		
2085	0.008444	14.36.143.223	14.36.143.30	SMPP	311				SMPP Query_sm							
2086	0.000529	14.36.143.30	14.36.143.223	TCP	74	64999	→	25982	[ACK]	Seq=17	Ack=266	Win=32768	Len=0	MD5		