

Configure FTD Interfaces in Inline-Pair Mode

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Components Used](#)

[Related Products](#)

[Background Information](#)

[Configure Inline Pair Interface on FTD](#)

[Network Diagram](#)

[Verify](#)

[Verify FTD Inline Pair Interface Operation](#)

[Basic Theory](#)

[Verification 1. With the Use of Packet-Tracer](#)

[Verification 2. Send TCP SYN/ACK Packets Through Inline Pair](#)

[Verification 3. Firewall Engine Debug For Allowed Traffic](#)

[Verification 4. Verify Link-State Propagation](#)

[Verification 5. Configure Static NAT](#)

[Block Packet on Inline Pair Interface Mode](#)

[Configure Inline Pair Mode With Tap](#)

[Verify FTD Inline Pair With Tap Interface Operation](#)

[Inline Pair and Etherchannel](#)

[Etherchannel terminated on FTD](#)

[Etherchannel through the FTD](#)

[Troubleshoot](#)

[Comparison: Inline Pair vs Inline Pair with Tap](#)

[Summary](#)

[Related Information](#)

Introduction

This document describes the configuration, verification, and operation of an Inline Pair Interface on a Firepower Threat Defense (FTD) appliance.

Prerequisites

Requirements

There are not specific requirements for this document.

Components Used

The information in this document is based on these software and hardware versions:

- Firepower 4150 FTD (code 6.1.0.x and 6.3.x)
- Firepower Management Center (FMC) (code 6.1.0.x and 6.3.x)

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, ensure that you understand the potential impact of any command.

Related Products

This document can also be used with these hardware and software versions:


- ASA5506-X, ASA5506W-X, ASA5506H-X, ASA5508-X, ASA5516-X
- ASA5512-X, ASA5515-X, ASA5525-X, ASA5545-X, ASA5555-X
- FPR2100, FPR4100, FPR9300
- VMware (ESXi), Amazon Web Services (AWS), Kernel-based Virtual Machine (KVM)
- FTD software code 6.2.x and later

Background Information

FTD is a unified software image that consists of 2 main engines:


- LINA engine
- Snort engine

This figure shows how the 2 engines interact:

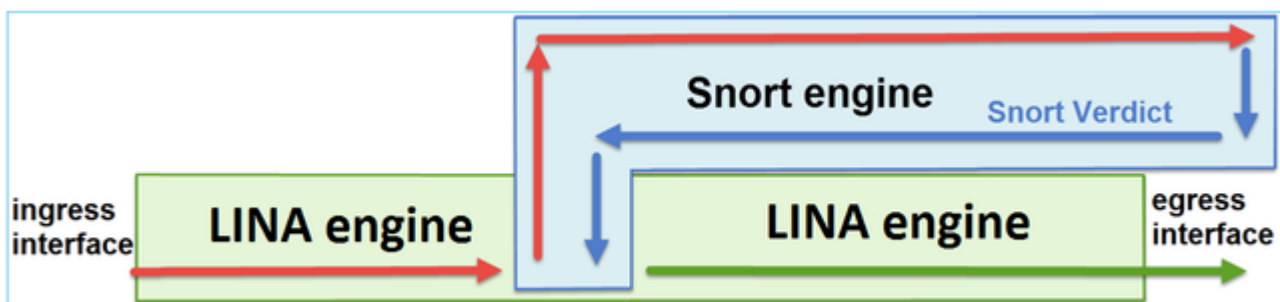

- A packet enters the ingress interface and it is handled by the LINA engine
- If it is required by the FTD policy the packet is inspected by the Snort engine
- The Snort engine returns a verdict for the packet
- The LINA engine drops or forwards the packet based on Snort's verdict

FTD provides two Deployment modes and six Interface modes as shown in image:

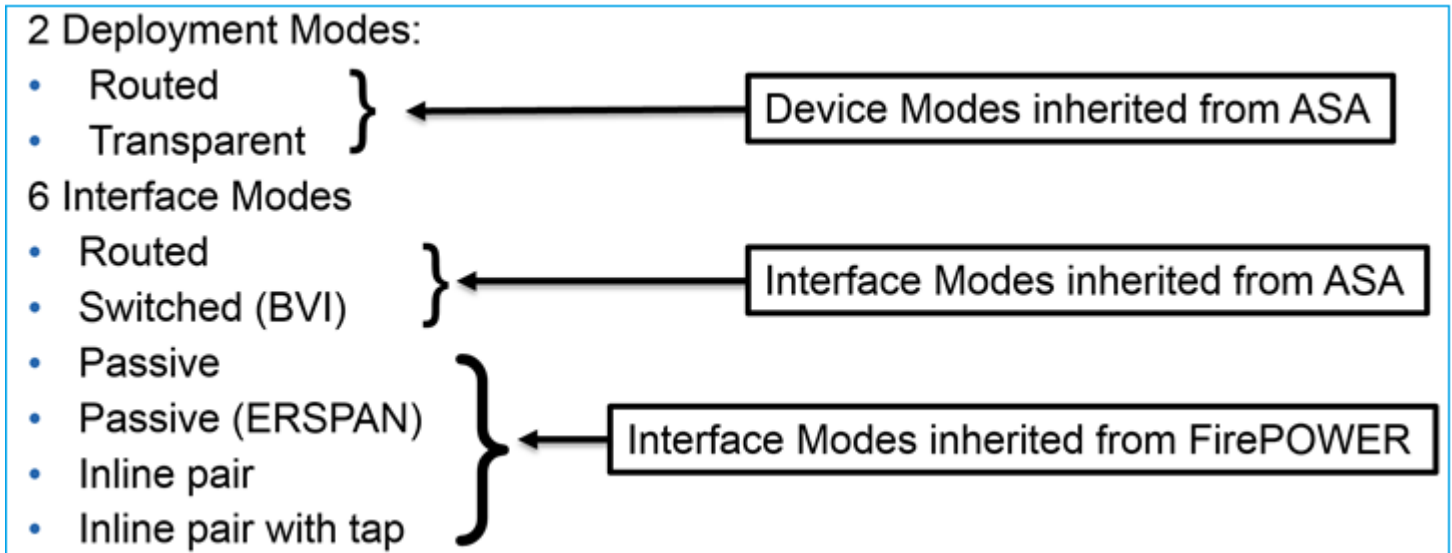


Note: You can mix interface modes on a single FTD appliance.

Here is a high level overview of the various FTD deployment and interface modes:

FTD interface mode	FTD Deployment mode	Description	Traffic can be dropped
Routed	Routed	Full LINA-engine and Snort-engine checks	Yes
Switched	Transparent	Full LINA-engine and Snort-engine checks	Yes
Inline Pair	Routed or Transparent	Partial LINA-engine and full Snort-engine checks	Yes
Inline Pair with Tap	Routed or Transparent	Partial LINA-engine and full Snort-engine checks	No
Passive	Routed or Transparent	Partial LINA-engine and full Snort-engine checks	No
Passive (ERSPAN)	Routed	Partial LINA-engine and full Snort-engine checks	No

Configure Inline Pair Interface on FTD

Network Diagram

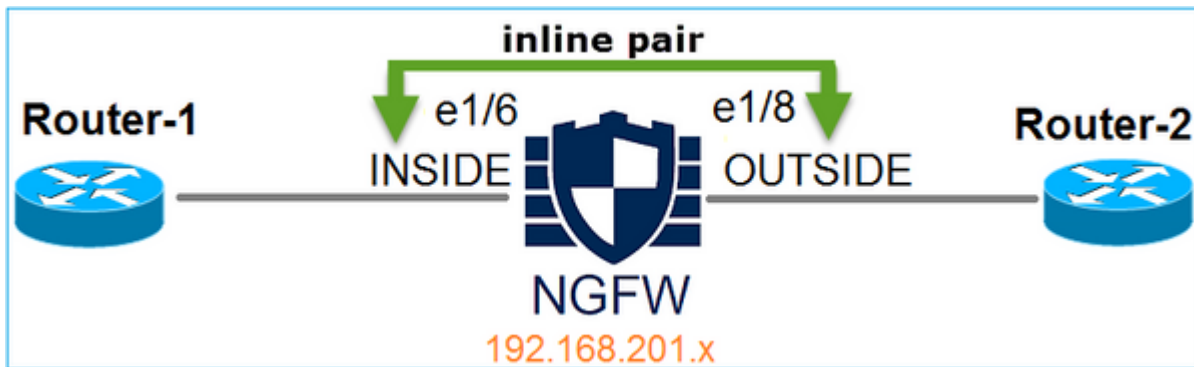

Requirement

Configure physical interfaces e1/6 and e1/8 in Inline Pair Mode as per these requirements:

Interface	e1/6	e1/8
Name	INSIDE	OUTSIDE
Security Zone	INSIDE_ZONE	OUTSIDE_ZONE
Inline Set name	Inline-Pair-1	
Inline Set MTU	1500	
FailSafe	Enabled	
Propagate Link State	Enabled	

Solution

Step 1. In order to configure to the individual interfaces, Navigate to **Devices > Device Management**, select the appropriate device and select **Edit** as shown in the image.

The screenshot shows the Cisco Firepower Management Center interface. The 'Devices' tab is selected, and the 'Device Management' sub-tab is active. The interface displays a table of devices. The following table represents the data shown in the screenshot:

Name	Group	Model	License Type
<ul style="list-style-type: none"> Ungrouped (9) <ul style="list-style-type: none"> FTD4100 <ul style="list-style-type: none"> 10.62.148.89 - Cisco Firepower 4150 Threat Defense 		Cisco Firepower 4150	Base, Threat, Malw...

Next, Specify **Name** and Tick **Enabled** for the interface as shown in the image.

Edit Physical Interface

Mode: ▼

Name: Enabled Management Only

Security Zone: ▼

Description:

General | IPv4 | IPv6 | Advanced | Hardware Configuration

MTU: (64 - 9188)

Interface ID:

Note: The Name is the the nameif of the interface.

Similarly for interface Ethernet1/8. The final result is as shown in the image.

Overview | Analysis | Policies | **Devices** | Objects | AMP Deploy

Device Management | NAT | VPN | QoS | Platform Settings

FTD4100


Cisco Firepower 4150 Threat Defense

Devices | Routing | **Interfaces** | Inline Sets | DHCP


...	Interface	Logical Name	Type	Security Zo...	MAC Address (Active/...	I
	Ethernet1/6	INSIDE	Physical			
	Ethernet1/7	diagnostic	Physical			
	Ethernet1/8	OUTSIDE	Physical			

Step 2. Configure the Inline Pair.

Navigate to **Inline Sets** > **Add Inline Set** as shown in the image.

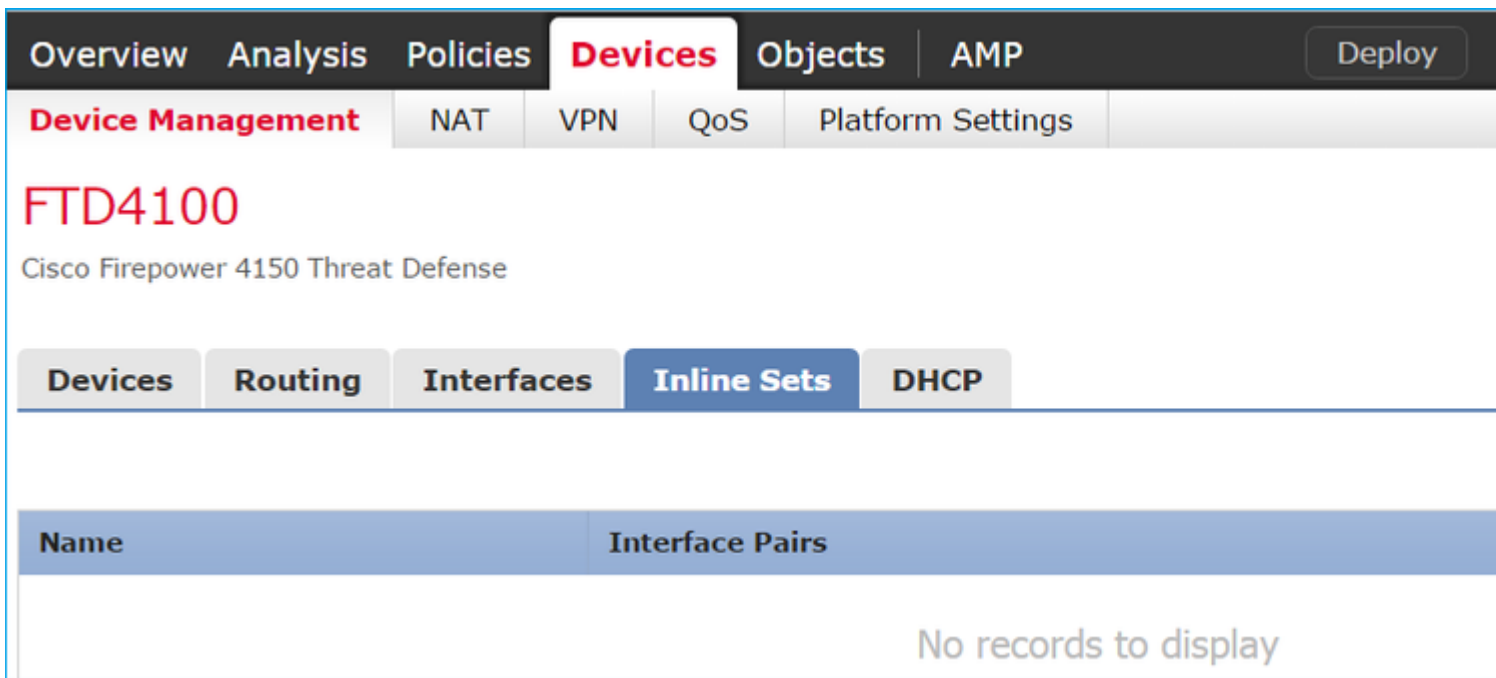


Step 3. Configure the General settings as per the requirements as shown in the image.

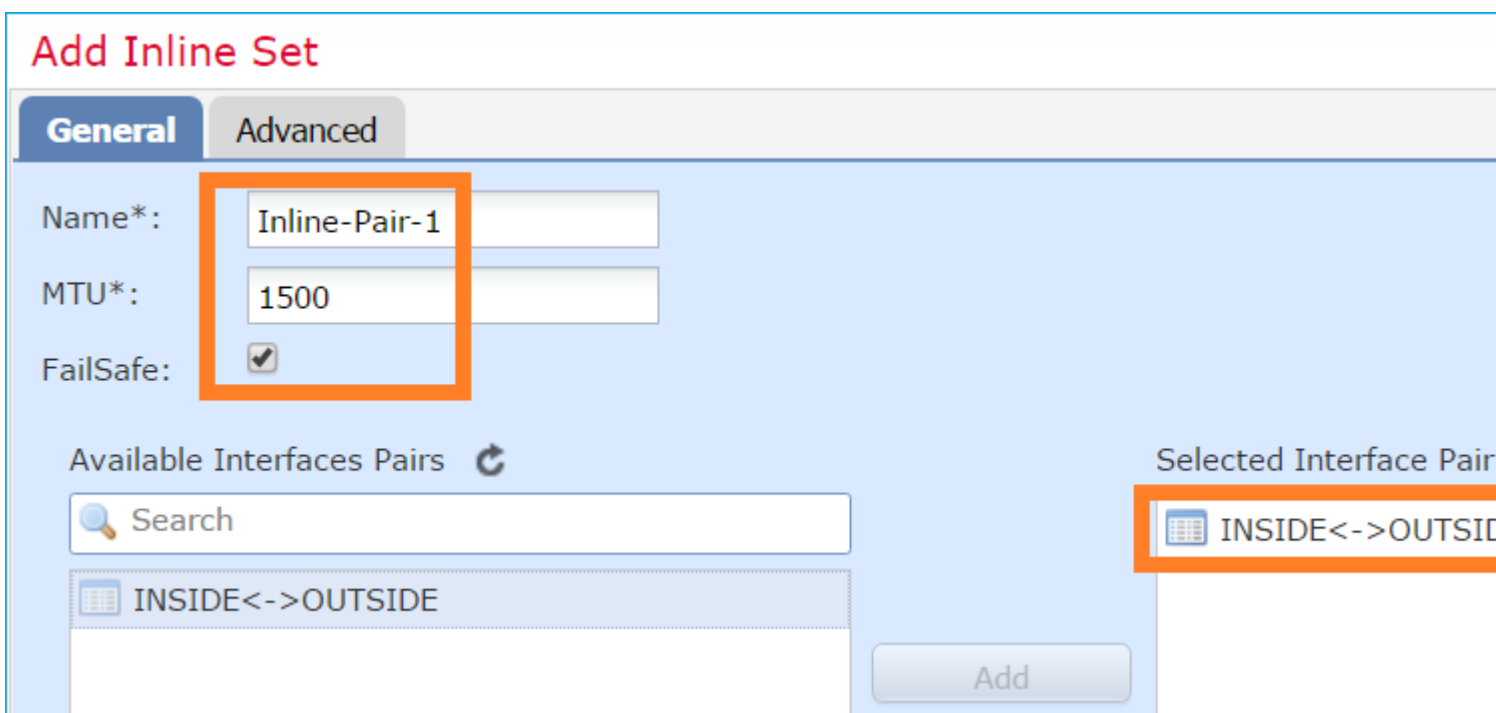

Note: Failsafe allows the traffic to pass through the inline pair uninspected in case the interface buffers are full (typically seen when the device is overloaded or the Snort engine is overloaded). The interface buffer size is dynamically allocated.

Step 4. Enable **Propagate Link State** option in the Advanced Settings as shown in the image.

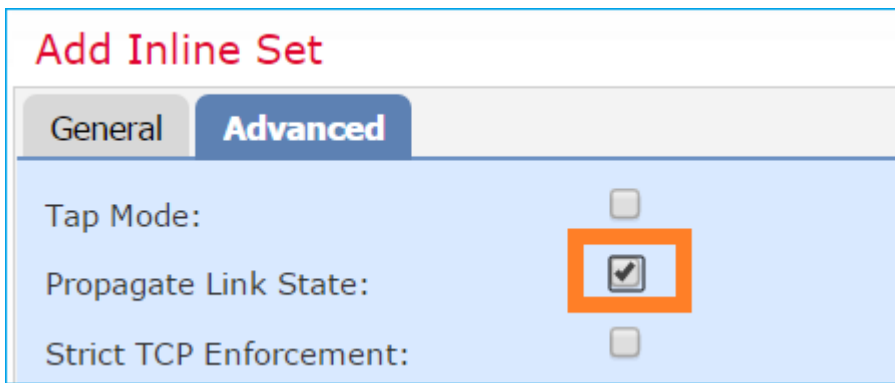

Link state propagation automatically brings down the second interface in the inline interface pair when one of the interfaces in the inline set goes down.

Step 5. **Save** the changes and **Deploy**.

Verify

Use this section in order to confirm that your configuration works properly.

Verify the Inline Pair configuration from the FTD CLI.

Solution

Log in to FTD CLI and verify the Inline Pair configuration:

```
> show inline-set

Inline-set Inline-Pair-1
  Mtu is 1500 bytes
  Failsafe mode is on/activated
  Failsecure mode is off
  Tap mode is off
  Propagate-link-state option is on
  hardware-bypass mode is disabled
  Interface-Pair[1]:
    Interface: Ethernet1/6 "INSIDE"
      Current-Status: UP
    Interface: Ethernet1/8 "OUTSIDE"
      Current-Status: UP
  Bridge Group ID: 509
>
```

Note: The Bridge Group ID is a value different than 0. If Tap Mode is on then it is 0

Interface and name information:

```
<#root>
```

>

show nameif

Interface	Name	Security
Ethernet1/6	INSIDE	0
Ethernet1/7	diagnostic	0
Ethernet1/8	OUTSIDE	0

>

Verify the interface status:

<#root>

> show interface ip brief

Interface	IP-Address	OK?	Method	Status	Protocol
Internal-Data0/0	unassigned	YES	unset	up	up
Internal-Data0/1	unassigned	YES	unset	up	up
Internal-Data0/2	169.254.1.1	YES	unset	up	up
Ethernet1/6	unassigned	YES	unset	up	up
Ethernet1/7	unassigned	YES	unset	up	up
Ethernet1/8	unassigned	YES	unset	up	up

Verify physical interface information:

<#root>

>

show interface e1/6

Interface Ethernet1/6 "INSIDE", is up, line protocol is up

Hardware is EtherSVI, BW 1000 Mbps, DLY 1000 usec
MAC address 5897.bdb9.770e, MTU 1500

IPS Interface-Mode: inline, Inline-Set: Inline-Pair-1

IP address unassigned
Traffic Statistics for "INSIDE":
468 packets input, 47627 bytes


```
12 packets output, 4750 bytes
1 packets dropped
1 minute input rate 0 pkts/sec, 200 bytes/sec
1 minute output rate 0 pkts/sec, 7 bytes/sec
1 minute drop rate, 0 pkts/sec
5 minute input rate 0 pkts/sec, 96 bytes/sec
5 minute output rate 0 pkts/sec, 8 bytes/sec
5 minute drop rate, 0 pkts/sec
>
```

```
show interface e1/8
```

```
Interface Ethernet1/8 "OUTSIDE", is up, line protocol is up
```

```
Hardware is EtherSVI, BW 1000 Mbps, DLY 1000 usec
MAC address 5897.bdb9.774d, MTU 1500
```

```
IPS Interface-Mode: inline, Inline-Set: Inline-Pair-1
```

```
IP address unassigned
Traffic Statistics for "OUTSIDE":
12 packets input, 4486 bytes
470 packets output, 54089 bytes
0 packets dropped
1 minute input rate 0 pkts/sec, 7 bytes/sec
1 minute output rate 0 pkts/sec, 212 bytes/sec
1 minute drop rate, 0 pkts/sec
5 minute input rate 0 pkts/sec, 7 bytes/sec
5 minute output rate 0 pkts/sec, 106 bytes/sec
5 minute drop rate, 0 pkts/sec
>
```

Verify FTD Inline Pair Interface Operation


This section covers these verification checks in order to verify the Inline Pair operation:

- Verification 1. With the use of packet-tracer
- Verification 2. Enable capture with trace and send a TCP synchronize/acknowledge (SYN/ACK) packet through the Inline Pair
- Verification 3. Monitor FTD traffic with the use of firewall engine debug
- Verification 4. Verify the Link-State Propagation functionality
- Verification 5. Configure Static Network Address Translation (NAT)

Solution

Architectural overview

When 2 FTD interfaces operate in Inline-pair mode a packet is handled as shown in the image.

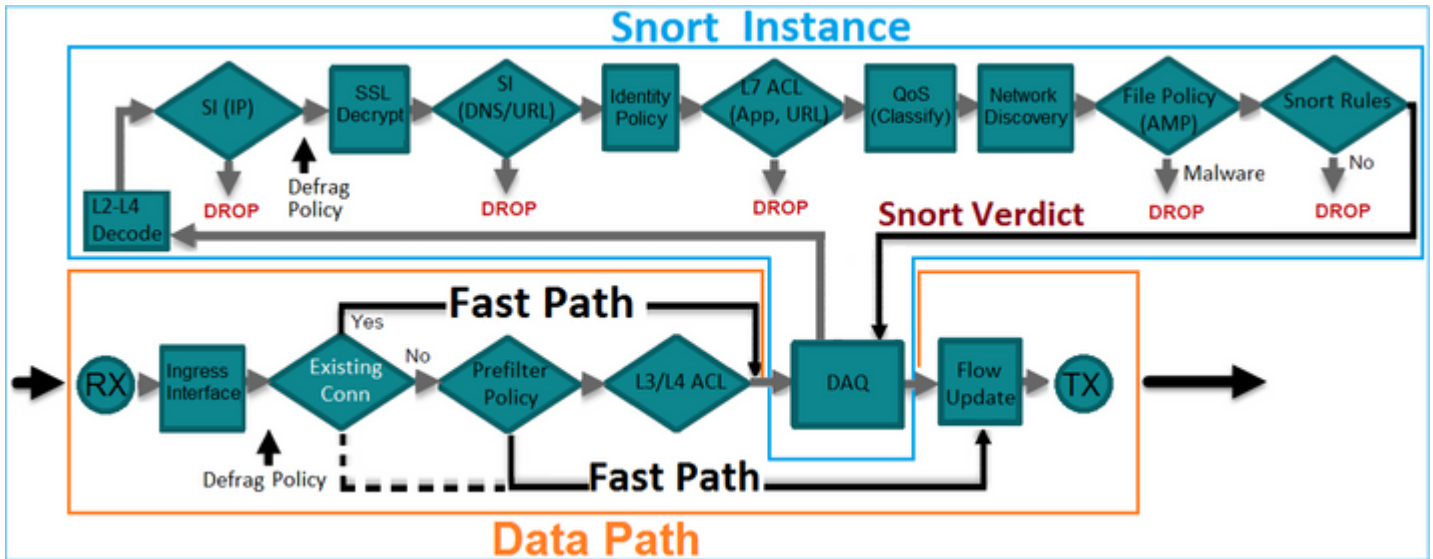


Note: Only physical interfaces can be members of an Inline pair set

Basic Theory

- When you configure an Inline Pair 2 Physical interfaces are internally bridged
- Very similar to classic inline Intrusion Prevention System (IPS)
- Available in Routed or Transparent Deployment modes
- Most of the LINA engine features (NAT, Routing etc) are not available for flows which go through an Inline Pair
- Transit traffic can be dropped
- A few LINA engine checks are applied along with full Snort engine checks

The last point can be visualized as shown in the image:

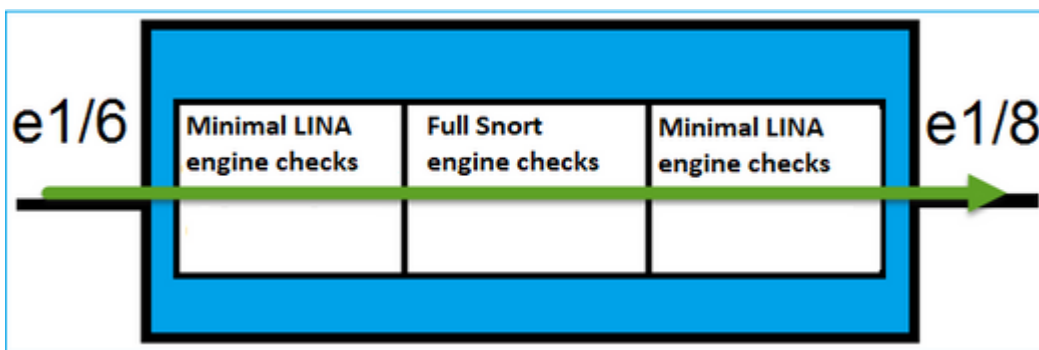

Verification 1. With the Use of Packet-Tracer

The packet-tracer output which emulates a packet that traverses the inline pair with the important points highlighted:

```
<#root>
```

```
>
```

```
packet-tracer input INSIDE tcp 192.168.201.50 1111 192.168.202.50 80
```

Phase: 1
Type: ACCESS-LIST
Subtype:
Result: ALLOW
Config:
Implicit Rule
Additional Information:
MAC Access list

Phase: 2

Type: NGIPS-MODE

Subtype: ngips-mode
Result: ALLOW
Config:
Additional Information:

The flow ingressed an interface configured for NGIPS mode and NGIPS services is be applied

Phase: 3

Type: ACCESS-LIST

Subtype: log
Result: ALLOW
Config:
access-group CSM_FW_ACL_ global
access-list CSM_FW_ACL_ advanced permit ip any any rule-id 268438528
access-list CSM_FW_ACL_ remark rule-id 268438528: ACCESS POLICY: FTD4100 - Default/1
access-list CSM_FW_ACL_ remark rule-id 268438528: L4 RULE: DEFAULT ACTION RULE

Additional Information:

This packet is sent to snort for additional processing where a verdict is reached

Phase: 4

Type: NGIPS-EGRESS-INTERFACE-LOOKUP

Subtype: Resolve Egress Interface
Result: ALLOW
Config:

Additional Information:

Ingress interface INSIDE is in NGIPS inline mode.

Egress interface OUTSIDE is determined by inline-set configuration

Phase: 5

Type: FLOW-CREATION

Subtype:

Result: ALLOW

Config:

Additional Information:

New flow created with id 106, packet dispatched to next module

Result:

input-interface: INSIDE

input-status: up

input-line-status: up

Action: allow

>

Verification 2. Send TCP SYN/ACK Packets Through Inline Pair

You can generate TCP SYN/ACK packets with the use of a packet crafting utility like Scapy. This syntax generates 3 packets with SYN/ACK flags enabled:

```
<#root>
```

```
root@KALI:~#
```

```
scapy
```

```
INFO: Can't import python gnuplot wrapper . Won't be able to plot.
```

```
WARNING: No route found for IPv6 destination :: (no default route?)
```

```
Welcome to Scapy (2.2.0)
```

```
>>>
```

```
conf.iface='eth0'
```

```
>>>
```

```
packet = IP(dst="192.168.201.60")/TCP(flags="SA",dport=80)
```

```
>>>
```

```
syn_ack=[]
```

```
>>>
```

```
for i in range(0,3): # Send 3 packets
```

```
...
```

```
syn_ack.extend(packet)

...
>>>

send(syn_ack)
```

Enable this capture on FTD CLI and send a few TCP SYN/ACK packets:

```
<#root>

>
capture CAPI interface INSIDE trace match ip host 192.168.201.60 any

>
capture CAPO interface OUTSIDE match ip host 192.168.201.60 any

>
```

After you send the packets through the FTD you can see a connection that was created:

```
<#root>

>
show conn detail

1 in use, 34 most used
Flags: A - awaiting responder ACK to SYN, a - awaiting initiator ACK to SYN,

b - TCP state-bypass or nailed,

C - CTIQBE media, c - cluster centralized,
D - DNS, d - dump, E - outside back connection, e - semi-distributed,
F - initiator FIN, f - responder FIN,
G - group, g - MGCP, H - H.323, h - H.225.0, I - initiator data,
i - incomplete, J - GTP, j - GTP data, K - GTP t3-response
k - Skinny media, M - SMTP data, m - SIP media,

N - inspected by Snort

, n - GUP
O - responder data, P - inside back connection,
q - SQL*Net data, R - initiator acknowledged FIN,
R - UDP SUNRPC, r - responder acknowledged FIN,
T - SIP, t - SIP transient, U - up,
V - VPN orphan, v - M3UA W - WAAS,
w - secondary domain backup,
X - inspected by service module,
x - per session, Y - director stub flow, y - backup stub flow,
Z - Scansafe redirection, z - forwarding stub flow
```

```
TCP Inline-Pair-1:OUTSIDE(OUTSIDE): 192.168.201.60/80 Inline-Pair-1:INSIDE(INSIDE): 192.168.201.50/20,
```

```
flags b N
```

```
, idle 13s, uptime 13s, timeout 1h0m, bytes 0
```

```
>
```

Note: b flag - A classic ASA would drop an unsolicited SYN/ACK packet unless TCP state-bypass was enabled. An FTD interface in Inline Pair mode handles a TCP connection in a TCP state-bypass mode and does not drop TCP packets that donâ€™t belong to the connections that already exist.

Note: N flag - The packet is inspected by the FTD Snort engine.

The captures prove this, since you can see the 3 packets that traverse the FTD:

```
<#root>
```

```
>
```

```
show capture CAPI
```

```
3 packets captured
```

```
1: 15:27:54.327146      192.168.201.50.20 > 192.168.201.60.80:
```

```
S
```

```
0:0(0)
```

```
ack
```

```
0 win 8192
```

```
2: 15:27:54.330000      192.168.201.50.20 > 192.168.201.60.80:
```

```
S
```

```
0:0(0)
```

```
ack
```

```
0 win 8192
```

```
3: 15:27:54.332517      192.168.201.50.20 > 192.168.201.60.80:
```

```
S
```

```
0:0(0)
```

```
ack
```

```
0 win 8192
```

```
3 packets shown
```

```
>
```

3 packets exits the FTD device:

```
<#root>
```

```
>
```

```
show capture CAPO
```

```
3 packets captured
```

```
1: 15:27:54.327299      192.168.201.50.20 > 192.168.201.60.80:
```

```
S
```

```
0:0(0)
```

```
ack
```

```
0 win 8192
```

```
2: 15:27:54.330030      192.168.201.50.20 > 192.168.201.60.80:
```

```
S
```

```
0:0(0)
```

```
ack
```

```
0 win 8192
```

```
3: 15:27:54.332548      192.168.201.50.20 > 192.168.201.60.80:
```

```
S
```

```
0:0(0)
```

```
ack
```

```
0 win 8192
```

```
3 packets shown
```

```
>
```

With the Trace of the first capture packet reveals some additional information like the Snort engine verdict:

```
<#root>
```

```
>
```

```
show capture CAPI packet-number 1 trace
```

```
3 packets captured
```

```
1: 15:27:54.327146      192.168.201.50.20 > 192.168.201.60.80:
```

```
S
```

0:0(0)

ack

0 win 8192

Phase: 1

Type: CAPTURE

Subtype:

Result: ALLOW

Config:

Additional Information:

MAC Access list

Phase: 2

Type: ACCESS-LIST

Subtype:

Result: ALLOW

Config:

Implicit Rule

Additional Information:

MAC Access list

Phase: 3

Type: NGIPS-MODE

Subtype: ngips-mode

Result: ALLOW

Config:

Additional Information:

The flow ingressed an interface configured for NGIPS mode and NGIPS services is applied

Phase: 4

Type: ACCESS-LIST

Subtype: log

Result: ALLOW

Config:

access-group CSM_FW_ACL_ global

access-list CSM_FW_ACL_ advanced permit ip any any rule-id 268438528

access-list CSM_FW_ACL_ remark rule-id 268438528: ACCESS POLICY: FTD4100 - Default/1

access-list CSM_FW_ACL_ remark rule-id 268438528: L4 RULE: DEFAULT ACTION RULE

Additional Information:

This packet is sent to snort for additional processing where a verdict is reached

Phase: 5

Type: NGIPS-EGRESS-INTERFACE-LOOKUP

Subtype: Resolve Egress Interface

Result: ALLOW

Config:

Additional Information:

Ingress interface INSIDE is in NGIPS inline mode.

Egress interface OUTSIDE is determined by inline-set configuration

Phase: 6

Type: FLOW-CREATION

Subtype:

Result: ALLOW

Config:

Additional Information:

New flow created with id 282, packet dispatched to next module

Phase: 7
Type: EXTERNAL-INSPECT

Subtype:
Result: ALLOW
Config:
Additional Information:

Application: 'SNORT Inspect'

Phase: 8
Type: SNORT

Subtype:

Result: ALLOW

Config:

Additional Information:
Snort Verdict: (pass-packet) allow this packet

Phase: 9
Type: CAPTURE
Subtype:
Result: ALLOW
Config:
Additional Information:
MAC Access list

Result:
input-interface: OUTSIDE
input-status: up
input-line-status: up
Action: allow

1 packet shown
>

With the Trace of the second captured packet shows that the packet matches a current connection so it bypasses the ACL check, but still is inspected by the Snort engine:

<#root>

>

show capture CAPI packet-number 2 trace

3 packets captured

2: 15:27:54.330000 192.168.201.50.20 > 192.168.201.60.80:

S

0:0(0)

ack

0 win 8192

Phase: 1

Type: CAPTURE

Subtype:

Result: ALLOW

Config:

Additional Information:

MAC Access list

Phase: 2

Type: ACCESS-LIST

Subtype:

Result: ALLOW

Config:

Implicit Rule

Additional Information:

MAC Access list

Phase: 3

Type: FLOW-LOOKUP

Subtype:ing

Result: ALLOW

Config:

Additional Information:

Found flow with id 282, using current flow

Phase: 4

Type: EXTERNAL-INSPECT

Subtype:

Result: ALLOW

Config:

Additional Information:

Application: 'SNORT Inspect'

Phase: 5

Type: SNORT

Subtype:

Result: ALLOW

Config:

Additional Information:

Snort Verdict: (pass-packet) allow this packet

Phase: 6

Type: CAPTURE

Subtype:

Result: ALLOW

Config:

Additional Information:

MAC Access list

```

Result:
input-interface: OUTSIDE
input-status: up
input-line-status: up
Action: allow

```


```

1 packet shown
>

```

Verification 3. Firewall Engine Debug For Allowed Traffic

Firewall engine debug runs against specific components of the FTD Snort Engine like the Access Control Policy as shown in the image:

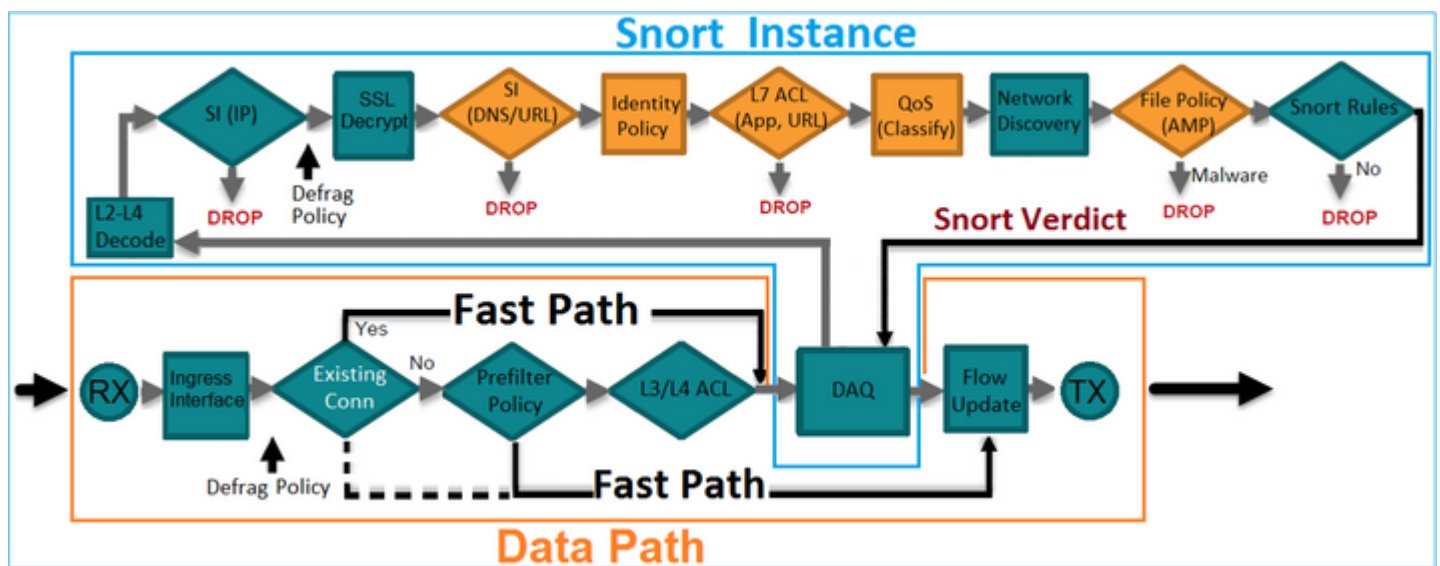

When you send the TCP SYN/ACK packets through Inline Pair you can see in the debug output:

```

<#root>
>
system support firewall-engine-debug

```

Please specify an IP protocol:

```
tcp
```

Please specify a client IP address:

Please specify a client port:

Please specify a server IP address:

```
192.168.201.60
```

Please specify a server port:

```
80
```

Monitoring firewall engine debug messages

```
192.168.201.60-80 > 192.168.201.50-20 6 AS 4 I 12 New session
```

```
192.168.201.60-80 > 192.168.201.50-20 6 AS 4 I 12 using HW or preset rule order 3, id 268438528 action A
```

```
192.168.201.60-80 > 192.168.201.50-20 6 AS 4 I 12 allow action
```

```
192.168.201.60-80 > 192.168.201.50-20 6 AS 4 I 12 Deleting session
```

Verification 4. Verify Link-State Propagation

Enable buffer log on FTD and shutdown the switchport connected to e1/6 interface. On FTD CLI you must see that both interfaces went down:

```
<#root>
```

```
>
```

```
show interface ip brief
```

Interface	IP-Address	OK?	Method	Status	Protocol
Internal-Data0/0	unassigned	YES	unset	up	up
Internal-Data0/1	unassigned	YES	unset	up	up
Internal-Data0/2	169.254.1.1	YES	unset	up	up
Ethernet1/6	unassigned	YES	unset	down	down
Ethernet1/7	unassigned	YES	unset	up	up
Ethernet1/8	unassigned	YES	unset	administratively down	up

```
>
```

The FTD logs show:

```
<#root>
```

```
>
```

```
show log
```

Jan 03 2017 15:53:19: %ASA-4-411002:

Line protocol on Interface Ethernet1/6, changed state to down

Jan 03 2017 15:53:19: %ASA-4-411004:

Interface OUTSIDE, changed state to administratively down

Jan 03 2017 15:53:19: %ASA-4-411004:

Interface Ethernet1/8, changed state to administratively down

Jan 03 2017 15:53:19: %ASA-4-812005:

Link-State-Propagation activated on inline-pair due to failure of interface Ethernet1/6(INSIDE) bringing

>

The inline-set status shows the state of the 2 interface members:

<#root>

>

show inline-set

Inline-set Inline-Pair-1

Mtu is 1500 bytes

Failsafe mode is on/activated

Failsecure mode is off

Tap mode is off

Propagate-link-state option is on

hardware-bypass mode is disabled

Interface-Pair[1]:

Interface: Ethernet1/6 "INSIDE"

Current-Status: Down(Propagate-Link-State-Activated)

Interface: Ethernet1/8 "OUTSIDE"

Current-Status: Down(Down-By-Propagate-Link-State)

Bridge Group ID: 509

>

Note the difference in the status of the 2 interfaces:

```
<#root>
```

```
>
```

```
show interface e1/6
```

```
Interface Ethernet1/6 "INSIDE", is down, line protocol is down
```

```
Hardware is EtherSVI, BW 1000 Mbps, DLY 1000 usec
```

```
MAC address 5897.bdb9.770e, MTU 1500
```

```
IPS Interface-Mode: inline, Inline-Set: Inline-Pair-1
```

```
Propagate-Link-State-Activated
```

```
IP address unassigned
```

```
Traffic Statistics for "INSIDE":
```

```
3393 packets input, 234923 bytes
```

```
120 packets output, 49174 bytes
```

```
1 packets dropped
```

```
1 minute input rate 0 pkts/sec, 0 bytes/sec
```

```
1 minute output rate 0 pkts/sec, 0 bytes/sec
```

```
1 minute drop rate, 0 pkts/sec
```

```
5 minute input rate 0 pkts/sec, 6 bytes/sec
```

```
5 minute output rate 0 pkts/sec, 3 bytes/sec
```

```
5 minute drop rate, 0 pkts/sec
```

```
>
```

And for the Ethernet1/8 interface:

```
<#root>
```

```
>
```

```
show interface e1/8
```

```
Interface Ethernet1/8 "OUTSIDE", is administratively down, line protocol is up
```

```
Hardware is EtherSVI, BW 1000 Mbps, DLY 1000 usec
```

```
MAC address 5897.bdb9.774d, MTU 1500
```

```
IPS Interface-Mode: inline, Inline-Set: Inline-Pair-1
```

```
Down-By-Propagate-Link-State
```

```
IP address unassigned
```

```
Traffic Statistics for "OUTSIDE":
```

```
120 packets input, 46664 bytes
```

```
3391 packets output, 298455 bytes
```

```
0 packets dropped
1 minute input rate 0 pkts/sec, 0 bytes/sec
1 minute output rate 0 pkts/sec, 0 bytes/sec
1 minute drop rate, 0 pkts/sec
5 minute input rate 0 pkts/sec, 3 bytes/sec
5 minute output rate 0 pkts/sec, 8 bytes/sec
5 minute drop rate, 0 pkts/sec
>
```

After you re-enable the switchport the FTD logs show:

```
<#root>
```

```
>
```

```
show log
```

```
...
```

```
Jan 03 2017 15:59:35: %ASA-4-411001:
```

```
Line protocol on Interface Ethernet1/6, changed state to up
```

```
Jan 03 2017 15:59:35: %ASA-4-411003:
```

```
Interface Ethernet1/8, changed state to administratively up
```

```
Jan 03 2017 15:59:35: %ASA-4-411003:
```

```
Interface OUTSIDE, changed state to administratively up
```

```
Jan 03 2017 15:59:35: %ASA-4-812006:
```

```
Link-State-Propagation de-activated on inline-pair due to recovery of interface Ethernet1/6(INSIDE) brin
```

```
>
```

Verification 5. Configure Static NAT

Solution

NAT is not supported for interfaces that operates in inline, inline tap or passive modes:

<https://www.cisco.com/c/en/us/td/docs/security/firepower/601/configuration/guide/fpmc-config-guide-v601/Network Address Translation NAT for Threat Defense.html>

Block Packet on Inline Pair Interface Mode

Create a Block rule, send traffic through the FTD Inline Pair and observe the behavior as shown in the image.

Rules													
Security Intelligence													
HTTP Responses													
Advanced													
Filter by Device													
+ Add Category													
+ Add Rule													
Search													
#	Name	S... Z...	D... Z...	Source Networks	D... N...	V...	U...	A...	S...	D...	U...	I... A...	Action
▼ Mandatory - FTD4100 (1-1)													
1	Rule 1	any	any	192.168.201.0/24	any	any	any	any	any	any	any	any	Blo
▼ Default - FTD4100 (-)													
There are no rules in this section. Add Rule or Add Category													
Default Action													
Intrusion Prevention: Balanced Security a													

Solution

Enable capture with trace and send the SYN/ACK packets through the FTD Inline Pair. The traffic is blocked:

```
<#root>
>
show capture
capture CAPI type raw-data trace interface INSIDE
[Capturing - 210 bytes]
  match ip host 192.168.201.60 any
capture CAPO type raw-data interface OUTSIDE
[Capturing - 0 bytes]
  match ip host 192.168.201.60 any
```

With the trace, a packet reveals:

```
<#root>
>
show capture CAPI packet-number 1 trace

3 packets captured

  1: 16:12:55.785085
192.168.201.50.20 > 192.168.201.60.80: S 0:0(0) ack 0 win 8192

Phase: 1
Type: CAPTURE
```


Subtype:
Result: ALLOW
Config:
Additional Information:
MAC Access list

Phase: 2
Type: ACCESS-LIST
Subtype:
Result: ALLOW
Config:
Implicit Rule
Additional Information:
MAC Access list

Phase: 3

Type: NGIPS-MODE

Subtype: ngips-mode

Result: ALLOW
Config:

Additional Information:

The flow ingresses an interface configured for NGIPS mode and NGIPS services is applied

Phase: 4

Type: ACCESS-LIST

Subtype: log

Result: DROP

Config:
access-group CSM_FW_ACL_ global
access-list CSM_FW_ACL_ advanced deny ip 192.168.201.0 255.255.255.0 any rule-id 268441600 event-log fl
access-list CSM_FW_ACL_ remark rule-id 268441600: ACCESS POLICY: FTD4100 - Mandatory/1
access-list CSM_FW_ACL_ remark rule-id 268441600: L4 RULE: Rule 1

Additional Information:

Result:
input-interface: INSIDE
input-status: up

input-line-status: up

Action: drop

Drop-reason: (acl-drop) Flow is denied by configured rule

1 packet shown


In this trace, it can be seen that the packet was dropped by the FTD LINA engine and was not forwarded to the FTD Snort engine.

Configure Inline Pair Mode With Tap

Enable Tap mode on the Inline Pair.

Solution

Navigate to **Devices > Device Management > Inline Sets > Edit Inline Set > Advanced** and enable **Tap Mode** as shown in the image.

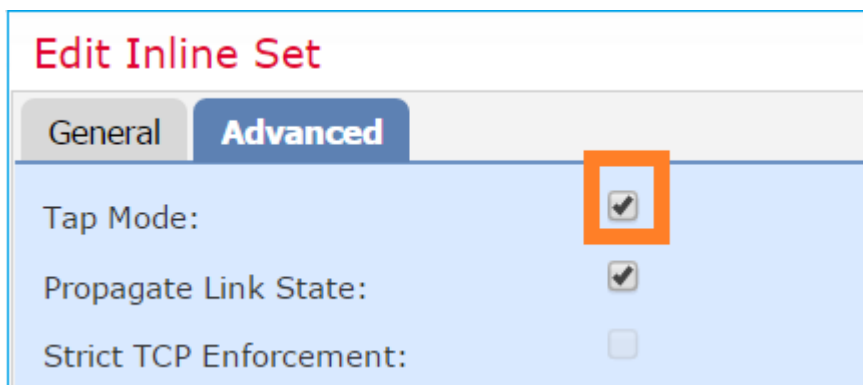

Verification

```
<#root>
```

```
>
```

```
show inline-set
```

```
Inline-set Inline-Pair-1
Mtu is 1500 bytes
Failsafe mode is on/activated
```

Failsecure mode is off

Tap mode is on

```
Propagate-link-state option is on
hardware-bypass mode is disabled
Interface-Pair[1]:
  Interface: Ethernet1/6 "INSIDE"
    Current-Status: UP
  Interface: Ethernet1/8 "OUTSIDE"
    Current-Status: UP
  Bridge Group ID: 0
```


>

Verify FTD Inline Pair With Tap Interface Operation

Basic theory

- When you configure an Inline Pair with Tap 2, physical interfaces are internally bridged
- It is available in Routed or Transparent Deployment modes
- Most of LINA engine features (NAT, Routing etc) are not available for flows which go through the Inline Pair
- Actual traffic cannot be dropped
- A few LINA engine checks are applied along with full Snort engine checks to a copy of the actual traffic

The last point is as shown in the image:

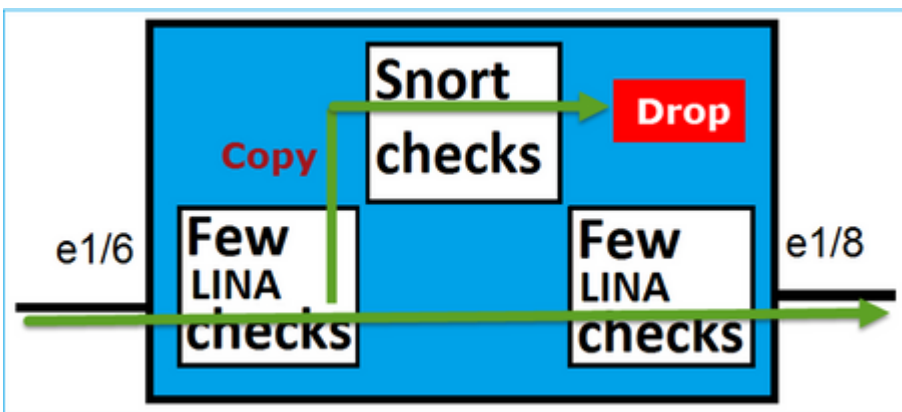

Inline Pair with Tap Mode does not drop the transit traffic. With the trace of a packet it confirms this:

```
<#root>
```

>

```
show capture CAPI packet-number 2 trace
```

3 packets captured

2: 13:34:30.685084 192.168.201.50.20 > 192.168.201.60.80: S 0:0(0) win 8192
Phase: 1
Type: CAPTURE
Subtype:
Result: ALLOW
Config:
Additional Information:
MAC Access list

Phase: 2
Type: ACCESS-LIST
Subtype:
Result: ALLOW
Config:
Implicit Rule
Additional Information:
MAC Access list

Phase: 3
Type: NGIPS-MODE
Subtype: ngips-mode

Result: ALLOW
Config:
Additional Information:

The flow ingressed an interface configured for NGIPS mode and NGIPS services is applied

Phase: 4
Type: ACCESS-LIST
Subtype: log
Result: WOULD HAVE DROPPED

Config:
access-group CSM_FW_ACL_ global
access-list CSM_FW_ACL_ advanced deny ip 192.168.201.0 255.255.255.0 any rule-id 268441600 event-log fl
access-list CSM_FW_ACL_ remark rule-id 268441600: ACCESS POLICY: FTD4100 - Mandatory/1
access-list CSM_FW_ACL_ remark rule-id 268441600: L4 RULE: Rule 1
Additional Information:

Result:
input-interface: INSIDE
input-status: up
input-line-status: up

Action: Access-list would have dropped, but packet forwarded due to inline-tap


1 packet shown
>

Inline Pair and Etherchannel

You can configure inline pair with etherchannel in 2 ways:

1. Etherchannel terminated on FTD
2. Etherchannel goes through the FTD (requires FXOS code 2.3.1.3 and later)

Etherchannel terminated on FTD

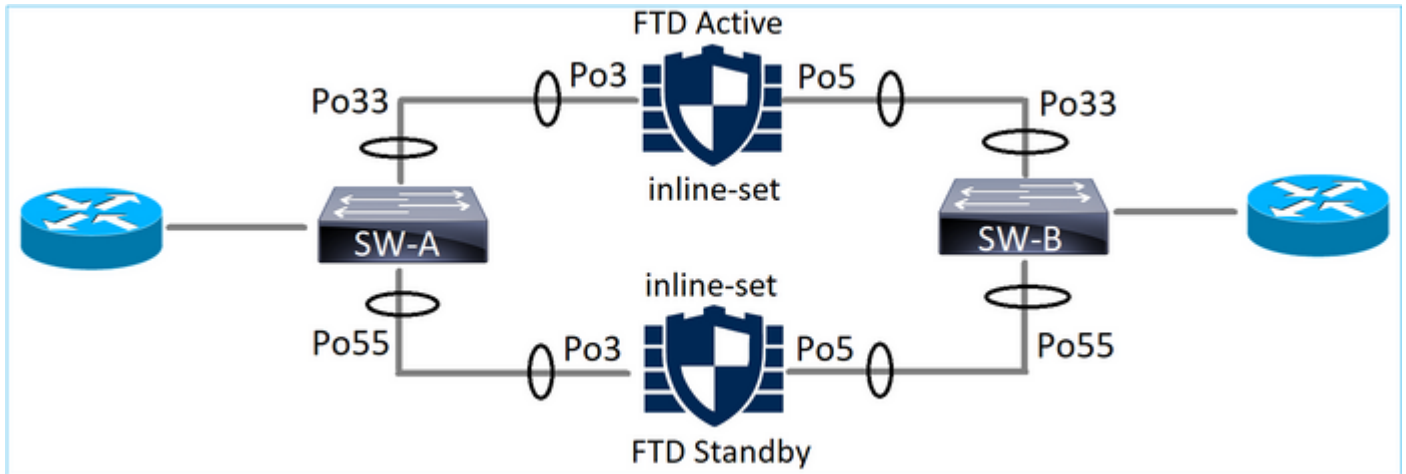

Etherchannels on SW-A:

```
<#root>
```

```
SW-A#
```

```
show etherchannel summary | i Po33|Po55
```

```
33    Po33(SU)      LACP    Gi3/11(P)
35    Po35(SU)      LACP    Gi2/33(P)
```

Etherchannels on SW-B:

```
<#root>
```

```
SW-B#
```

```
show etherchannel summary | i Po33|Po55
```

```
33    Po33(SU)      LACP    Gi1/0/3(P)
55    Po55(SU)      LACP    Gi1/0/4(P)
```

The traffic is forwarded through the Active FTD based on MAC address learning:

```
<#root>
```

```
SW-B#
```

```
show mac address-table address 0017.dfd6.ec00
```

```
Mac Address Table
```

```
-----
```

Vlan	Mac Address	Type	Ports
----	-----	-----	-----
201	0017.dfd6.ec00	DYNAMIC	

Po33

Total Mac Addresses for this criterion: 1

The inline-set on FTD:

```
<#root>
```

```
FTD#
```

```
show inline-set
```

```
Inline-set SET1
```

```
Mtu is 1500 bytes
Fail-open for snort down is on
Fail-open for snort busy is off
Tap mode is off
Propagate-link-state option is off
hardware-bypass mode is disabled
```


```
Interface-Pair[1]:
```

```
Interface: Port-channel3 "INSIDE"
Current-Status: UP
Interface: Port-channel5 "OUTSIDE"
Current-Status: UP
```

```
Bridge Group ID: 775
```

Note: In case of an FTD failover event the traffic outage depends mainly on the time it takes on the switches to learn the MAC address of the remote peer.

Etherchannel through the FTD

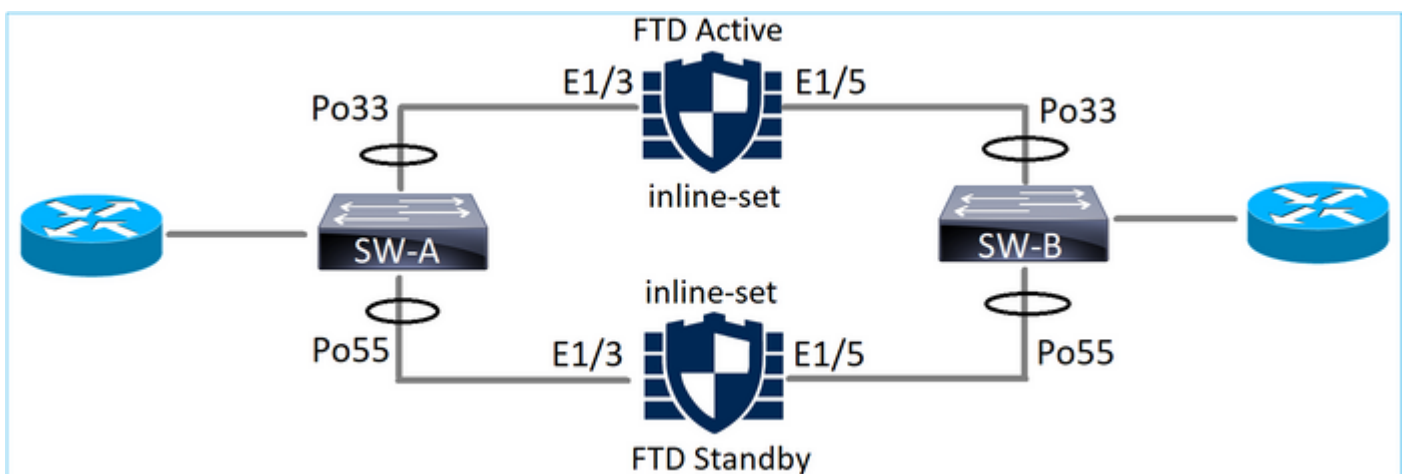

Etherchannels on SW-A:

<#root>

SW-A#

```
show etherchannel summary | i Po33|Po55
```

```
33    Po33(SU)      LACP    Gi3/11(P)
55    Po55(SD)      LACP    Gi3/7
```

(I)

The LACP packets through the Standby FTD are blocked:

<#root>

FTD#

```
capture ASP type asp-drop fo-standby
```

FTD#

```
show capture ASP | i 0180.c200.0002
```

```
29: 15:28:32.658123      a0f8.4991.ba03 0180.c200.0002 0x8809 Length: 124
70: 15:28:47.248262      f0f7.556a.11e2 0180.c200.0002 0x8809 Length: 124
```

Etherchannels on SW-B:

<#root>

SW-B#

```
show etherchannel summary | i Po33|Po55
```

```
33    Po33(SU)      LACP    Gi1/0/3(P)
55    Po55(SD)      LACP    Gi1/0/4
```

(s)

The traffic is forwarded through the Active FTD based on MAC address learning:

<#root>

SW-B#

```
show mac address-table address 0017.dfd6.ec00
```

Mac Address Table

```
-----  
Vlan    Mac Address      Type      Ports  
----    -  
201     0017.dfd6.ec00   DYNAMIC
```

Po33

Total Mac Addresses for this criterion: 1

The inline-set on FTD:

<#root>

FTD#

show inline-set

```
Inline-set SET1  
Mtu is 1500 bytes  
Fail-open for snort down is on  
Fail-open for snort busy is off  
Tap mode is off  
Propagate-link-state option is off  
hardware-bypass mode is disabled
```

Interface-Pair[1]:

Interface: Ethernet1/3 "INSIDE"

Current-Status: UP

Interface: Ethernet1/5 "OUTSIDE"

Current-Status: UP

Bridge Group ID: 519

Caution: In this scenario in case of an FTD failover event the convergence time mainly depends on the Etherchannel LACP negotiation and on the time it takes the outage can be quite longer. In case the Etherchannel mode is ON (no LACP) then the convergence time depends on MAC address learning.

Troubleshoot

There is currently no specific information available for this configuration.

Comparison: Inline Pair vs Inline Pair with Tap

	Inline pair	Inline pair with Tap
show inline-set	<pre>> show inline-set Inline-set Inline-Pair-1 Mtu is 1500 bytes Failsafe mode is on/activated Failsecure mode is off Tap mode is off Propagate-link-state option is on hardware-bypass mode is disabled Interface-Pair[1]: Interface: Ethernet1/6 "INSIDE" Current-Status: UP Interface: Ethernet1/8 "OUTSIDE" Current-Status: UP Bridge Group ID: 509 ></pre>	<pre>> show inline-set Inline-set Inline-Pair-1 Mtu is 1500 bytes Failsafe mode is on/activated Failsecure mode is off Tap mode is on Propagate-link-state option is on hardware-bypass mode is disabled Interface-Pair[1]: Interface: Ethernet1/6 "INSIDE" Current-Status: UP Interface: Ethernet1/8 "OUTSIDE" Current-Status: UP Bridge Group ID: 0 ></pre>
show interface	<pre>> show interface e1/6 Interface Ethernet1/6 "INSIDE", is up, line protocol is up Hardware is EtherSVI, BW 1000 Mbps, DLY 1000 usec MAC address 5897.bdb9.770e, MTU 1500 IPS Interface-Mode: inline, Inline-Set: Inline-Pair-1 IP address unassigned Traffic Statistics for "INSIDE": 3957 packets input, 264913 bytes 144 packets output, 58664 bytes 4 packets dropped 1 minute input rate 0 pkts/sec, 26 bytes/sec 1 minute output rate 0 pkts/sec, 7 bytes/sec 1 minute drop rate, 0 pkts/sec 5 minute input rate 0 pkts/sec, 28 bytes/sec 5 minute output rate 0 pkts/sec, 9 bytes/sec 5 minute drop rate, 0 pkts/sec > show interface e1/8 Interface Ethernet1/8 "OUTSIDE", is up, line protocol is up</pre>	<pre>> show interface e1/6 Interface Ethernet1/6 "INSIDE", is up, line protocol is up Hardware is EtherSVI, BW 1000 Mbps, DLY 1000 usec MAC address 5897.bdb9.770e, MTU 1500 IPS Interface-Mode: inline-tap, Inline- Set: Inline-Pair-1 IP address unassigned Traffic Statistics for "INSIDE": 24 packets input, 1378 bytes 0 packets output, 0 bytes 24 packets dropped 1 minute input rate 0 pkts/sec, 0 bytes/sec 1 minute output rate 0 pkts/sec, 0 bytes/sec 1 minute drop rate, 0 pkts/sec 5 minute input rate 0 pkts/sec, 0 bytes/sec 5 minute output rate 0 pkts/sec, 0 bytes/sec 5 minute drop rate, 0 pkts/sec > show interface e1/8 Interface Ethernet1/8 "OUTSIDE", is up, line protocol is up</pre>

	<p>Hardware is EtherSVI, BW 1000 Mbps, DLY 1000 usec MAC address 5897.bdb9.774d, MTU 1500 IPS Interface-Mode: inline, Inline-Set: Inline-Pair-1 IP address unassigned Traffic Statistics for "OUTSIDE": 144 packets input, 55634 bytes 3954 packets output, 339987 bytes 0 packets dropped 1 minute input rate 0 pkts/sec, 7 bytes/sec 1 minute output rate 0 pkts/sec, 37 bytes/sec 1 minute drop rate, 0 pkts/sec 5 minute input rate 0 pkts/sec, 8 bytes/sec 5 minute output rate 0 pkts/sec, 39 bytes/sec 5 minute drop rate, 0 pkts/sec ></p>	<p>Hardware is EtherSVI, BW 1000 Mbps, DLY 1000 usec MAC address 5897.bdb9.774d, MTU 1500 IPS Interface-Mode: inline-tap, Inline-Set: Inline-Pair-1 IP address unassigned Traffic Statistics for "OUTSIDE": 1 packets input, 441 bytes 0 packets output, 0 bytes 1 packets dropped 1 minute input rate 0 pkts/sec, 0 bytes/sec 1 minute output rate 0 pkts/sec, 0 bytes/sec 1 minute drop rate, 0 pkts/sec 5 minute input rate 0 pkts/sec, 0 bytes/sec 5 minute output rate 0 pkts/sec, 0 bytes/sec 5 minute drop rate, 0 pkts/sec ></p>
<p>To Handle Packet with Block rule</p>	<p>> show capture CAPI packet-number 1 trace 3 packets captured 1: 16:12:55.785085 192.168.201.50.20 > 192.168.201.60.80: S 0:0(0) ack 0 win 8192 Phase: 1 Type: CAPTURE Subtype: Result: ALLOW Config: Additional Information: MAC Access list Phase: 2 Type: ACCESS-LIST Subtype: Result: ALLOW Config: Implicit Rule Additional Information: MAC Access list Phase: 3 Type: NGIPS-MODE Subtype: ngips-mode Result: ALLOW Config: Additional Information:</p>	<p>> show capture CAPI packet-number 1 trace 3 packets captured 1: 16:56:02.631437 192.168.201.50.20 > 192.168.201.60.80: S 0:0(0) win 8192 Phase: 1 Type: CAPTURE Subtype: Result: ALLOW Config: Additional Information: MAC Access list Phase: 2 Type: ACCESS-LIST Subtype: Result: ALLOW Config: Implicit Rule Additional Information: MAC Access list Phase: 3 Type: NGIPS-MODE Subtype: ngips-mode Result: ALLOW Config: Additional Information:</p>

	<p>The flow ingresses an interface configured for NGIPS mode and NGIPS services is applied</p> <p>Phase: 4 Type: ACCESS-LIST Subtype: log Result: DROP Config: access-group CSM_FW_ACL_ global access-list CSM_FW_ACL_ advanced deny ip 192.168.201.0 255.255.255.0 any rule-id 268441600 event-log flow-start access-list CSM_FW_ACL_ remark rule-id 268441600: ACCESS POLICY: FTD4100 - Mandatory/1 access-list CSM_FW_ACL_ remark rule-id 268441600: L4 RULE: Rule 1 Additional Information:</p> <p>Result: input-interface: INSIDE input-status: up input-line-status: up Action: drop Drop-reason: (acl-drop) Flow is denied by configured rule</p> <p>1 packet shown ></p>	<p>The flow ingresses an interface configured for NGIPS mode and NGIPS services is applied</p> <p>Phase: 4 Type: ACCESS-LIST Subtype: log Result: WOULD HAVE DROPPED Config: access-group CSM_FW_ACL_ global access-list CSM_FW_ACL_ advanced deny ip 192.168.201.0 255.255.255.0 any rule-id 268441600 event-log flow-start access-list CSM_FW_ACL_ remark rule-id 268441600: ACCESS POLICY: FTD4100 - Mandatory/1 access-list CSM_FW_ACL_ remark rule-id 268441600: L4 RULE: Rule 1 Additional Information:</p> <p>Result: input-interface: INSIDE input-status: up input-line-status: up Action: Access-list would have dropped, but packet forwarded due to inline-tap</p> <p>1 packet shown ></p>
--	--	---

Summary

- When you use Inline Pair mode, the packet goes mainly through the FTD Snort engine
- TCP connections are handled in a TCP state-bypass mode
- From an FTD LINA engine point of view, an ACL policy is applied
- When Inline Pair Mode is in use, packets can be blocked since they are processed inline
- When Tap Mode is enabled, a copy of the packet is inspected and dropped internally while the actual traffic goes through FTD unmodified

Related Information

- [Cisco Firepower NGFW](#)
- [Technical Support & Documentation - Cisco Systems](#)