



## **IP Routing: BFD Configuration Guide, Cisco IOS XE 17 (Cisco ASR 920 Series)**

**First Published:** 2019-11-14

**Last Modified:** 2023-03-31

### **Americas Headquarters**

Cisco Systems, Inc.  
170 West Tasman Drive  
San Jose, CA 95134-1706  
USA  
<http://www.cisco.com>  
Tel: 408 526-4000  
800 553-NETS (6387)  
Fax: 408 527-0883

THE SPECIFICATIONS AND INFORMATION REGARDING THE PRODUCTS IN THIS MANUAL ARE SUBJECT TO CHANGE WITHOUT NOTICE. ALL STATEMENTS, INFORMATION, AND RECOMMENDATIONS IN THIS MANUAL ARE BELIEVED TO BE ACCURATE BUT ARE PRESENTED WITHOUT WARRANTY OF ANY KIND, EXPRESS OR IMPLIED. USERS MUST TAKE FULL RESPONSIBILITY FOR THEIR APPLICATION OF ANY PRODUCTS.

THE SOFTWARE LICENSE AND LIMITED WARRANTY FOR THE ACCOMPANYING PRODUCT ARE SET FORTH IN THE INFORMATION PACKET THAT SHIPPED WITH THE PRODUCT AND ARE INCORPORATED HEREIN BY THIS REFERENCE. IF YOU ARE UNABLE TO LOCATE THE SOFTWARE LICENSE OR LIMITED WARRANTY, CONTACT YOUR CISCO REPRESENTATIVE FOR A COPY.

The Cisco implementation of TCP header compression is an adaptation of a program developed by the University of California, Berkeley (UCB) as part of UCB's public domain version of the UNIX operating system. All rights reserved. Copyright © 1981, Regents of the University of California.

NOTWITHSTANDING ANY OTHER WARRANTY HEREIN, ALL DOCUMENT FILES AND SOFTWARE OF THESE SUPPLIERS ARE PROVIDED "AS IS" WITH ALL FAULTS. CISCO AND THE ABOVE-NAMED SUPPLIERS DISCLAIM ALL WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING, WITHOUT LIMITATION, THOSE OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE AND NON-INFRINGEMENT OR ARISING FROM A COURSE OF DEALING, USAGE, OR TRADE PRACTICE.

IN NO EVENT SHALL CISCO OR ITS SUPPLIERS BE LIABLE FOR ANY INDIRECT, SPECIAL, CONSEQUENTIAL, OR INCIDENTAL DAMAGES, INCLUDING, WITHOUT LIMITATION, LOST PROFITS OR LOSS OR DAMAGE TO DATA ARISING OUT OF THE USE OR INABILITY TO USE THIS MANUAL, EVEN IF CISCO OR ITS SUPPLIERS HAVE BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

Any Internet Protocol (IP) addresses and phone numbers used in this document are not intended to be actual addresses and phone numbers. Any examples, command display output, network topology diagrams, and other figures included in the document are shown for illustrative purposes only. Any use of actual IP addresses or phone numbers in illustrative content is unintentional and coincidental.

All printed copies and duplicate soft copies of this document are considered uncontrolled. See the current online version for the latest version.

Cisco has more than 200 offices worldwide. Addresses and phone numbers are listed on the Cisco website at [www.cisco.com/go/offices](http://www.cisco.com/go/offices).

Cisco and the Cisco logo are trademarks or registered trademarks of Cisco and/or its affiliates in the U.S. and other countries. To view a list of Cisco trademarks, go to this URL: <https://www.cisco.com/c/en/us/about/legal/trademarks.html>. Third-party trademarks mentioned are the property of their respective owners. The use of the word partner does not imply a partnership relationship between Cisco and any other company. (1721R)

© 2023 Cisco Systems, Inc. All rights reserved.



## CONTENTS

---

### CHAPTER 1

---

#### **Feature History 1**

---

### CHAPTER 2

#### **Bidirectional Forwarding Detection 3**

Prerequisites for Bidirectional Forwarding Detection 3

Restrictions for Bidirectional Forwarding Detection 3

Information About Bidirectional Forwarding Detection 4

BFD Operation 4

Neighbor Relationships 4

BFD Detection of Failures 5

BFD Version Interoperability 6

BFD Process on the RP 6

BFD Support for Nonstop Forwarding with Stateful Switchover 6

BFD Support for Stateful Switchover 7

BFD Support for Static Routing 7

BFD on Multiple Hops 8

Benefits of Using BFD for Failure Detection 9

How to Configure Bidirectional Forwarding Detection 9

Configuring BFD Session Parameters on the Interface 9

Configuring BFD Support for Static Routing 11

Creating and Configuring BFD Templates 14

Configuring a Single-Hop Template 14

Configuring a Multihop Template 15

Configuring a BFD Map 16

Configuration Examples for Bidirectional Forwarding Detection 17

Example: Configuring BFD in an EIGRP Network with Echo Mode Enabled by Default 17

Example: Configuring BFD in an OSPF Network 21

Example: Configuring BFD in a BGP Network	25
Example: Configuring BFD in an IS-IS Network	27
Example: Configuring BFD in an HSRP Network	29
Example: Configuring BFD Support for Static Routing	30
BFD Dampening	31
Restriction	32
Configuring BFD Dampening	32
Examples for BFD Dampening	33
Micro BFD	35
Features of Micro BFD	35
Functions of Micro BFD	35
Restrictions for Micro BFD	35
Steps to Configure Micro BFD on Layer 3 Port Channel	36
Configure Port-Channel	36
Verify Port Channel	37
Configure Micro BFD on Port Channel	37
Verify Micro BFD Session	39
<hr/>	
<b>CHAPTER 3</b>	<b>Static Route Support for BFD over IPv6 41</b>
Restrictions for Static Route for BFD over IPv6	41
Information About Static Route Support for BFD over IPv6	41
BFDv6 Associated Mode	41
BFDv6 Unassociated Mode	42
How to Configure Bidirectional Forwarding Detection for IPv6	42
Specifying a Static BFDv6 Neighbor	42
Associating an IPv6 Static Route with a BFDv6 Neighbor	43
Configuration Examples for Static Route Support for BFD over IPv6	44
Example: Specifying an IPv6 Static BFDv6 Neighbor	44
Example: Associating an IPv6 Static Route with a BFDv6 Neighbor	44
<hr/>	
<b>CHAPTER 4</b>	<b>BFD on IP Unnumbered Interfaces 45</b>
Information about BFD on IP Unnumbered Interfaces	45
Prerequisites for BFD on IP Unnumbered Interfaces	45
Restrictions for BFD on IP Unnumbered Interfaces	46

Configuring BFD on IP Unnumbered Interfaces	46
Verifying BFD on IP Unnumbered Interface Configuration	49
Example: Configuration of BFD on IP Unnumbered Interfaces	50
Additional References	55
Feature Information for BFD on IP Unnumbered Interfaces	56

---

**CHAPTER 5**
**IS-IS Client for BFD 57**

Prerequisites for IS-IS Client for BFD	57
Restrictions for IS-IS Client for BFD	57
Information About IS-IS Client for BFD	57
IS-IS BFD Topology	57
IS-IS BFD Session Creation	58
IS-IS BFD IPv6 Session Deletion	58
How to Configure ISIS IPv6 Client for BFD	58
Configuring IS-IS IPv6 Client Support for BFD on an Interface	58
Configuring IS-IS IPv6 Client Support for BFD on All Interfaces	59
Configuration Examples for ISIS IPv6 Client for BFD	61
Example: IS-IS IPv6 Client Support for BFD on a Single Interface	61
Example: IS-IS IPv6 Client Support for BFD on All Interfaces	61

---

**CHAPTER 6**
**BFD IPv6 Encapsulation Support 63**

Prerequisites for BFD IPv6 Encapsulation Support	63
Restrictions for BFD IPv6 Encapsulation Support	63
Information About BFD IPv6 Encapsulation Support	64
Overview of the BFDv6 Protocol	64
BFDv6 Registration	64
BFDv6 Global and Link-Local Addresses	64
BFD for IPv4 and IPv6 on the Same Interface	65
How to Configure BFD IPv6 Encapsulation Support	65
Configuring BFD Session Parameters on the Interface	65
Configuration Examples for BFD IPv6 Encapsulation Support	67
Example: Configuring BFD Session Parameters on the Interface	67

---

**CHAPTER 7**
**Configuring BFD Debug Enhancement 69**

Prerequisites for BFD Debug Enhancement	69
Restrictions for BFD Debug Enhancement	69
Information About BFD Debug Enhancement	69
Overview of BFD Debug Enhancement	69
BFD Debug Enhancement - Event Tracer subsystem	70
BFD Debug Enhancement - Event Log Architecture	70
How to Configure BFD Debug Enhancement	70
Configuring BFD Debug Enhancement	70
Configuration Examples for BFD Debug Enhancement	72
Example: Configuring BFD Debug Enhancement	72

---

**CHAPTER 8****Bidirectional Forwarding Detection Configuration of Deterministic Hardware Offload 75**

Information About BFD Deterministic Hardware Offload	76
Configuring BFD Deterministic Hardware Offload	77
Example for Configuring BFD Deterministic Hardware Offload	78
Related Documents	78
Standards	78



## CHAPTER 1

# Feature History

---

Feature	Description
<b>Cisco IOS XE Amsterdam 17.3.1</b>	
<a href="#">BFD Dampening</a>	<p>Bidirectional Forwarding Detection (BFD) is a detection protocol that is designed to provide fast forwarding path failure detection for encapsulations, topologies, and routing protocols. BFD provides a consistent failure detection method. BFD detects forwarding path failures at a uniform rate, rather than the variable rates for different routing protocol.</p> <p>BFD detects forwarding path failures at a uniform rate, rather than the variable rates for different routing protocol.</p> <p>This feature is supported on the RSP2 module.</p>







## CHAPTER 2

# Bidirectional Forwarding Detection

This document describes how to enable the Bidirectional Forwarding Detection (BFD) protocol. BFD is a detection protocol that is designed to provide fast forwarding path failure detection times for all media types, encapsulations, topologies, and routing protocols. It includes a description of how to configure multihop BFD sessions.

BFD provides a consistent failure detection method for network administrators, in addition to fast forwarding path failure detection. Because the network administrator can use BFD to detect forwarding path failures at a uniform rate, rather than the variable rates for different routing protocol hello mechanisms, network profiling and planning will be easier, and reconvergence time will be consistent and predictable.

- [Prerequisites for Bidirectional Forwarding Detection, on page 3](#)
- [Restrictions for Bidirectional Forwarding Detection, on page 3](#)
- [Information About Bidirectional Forwarding Detection, on page 4](#)
- [How to Configure Bidirectional Forwarding Detection, on page 9](#)
- [Configuration Examples for Bidirectional Forwarding Detection, on page 17](#)
- [BFD Dampening, on page 31](#)
- [Micro BFD, on page 35](#)

## Prerequisites for Bidirectional Forwarding Detection

- Cisco Express Forwarding and IP routing must be enabled on all participating routers

## Restrictions for Bidirectional Forwarding Detection

- Minimum value supported on **bfd interval** command is 50ms.
- On RSP3, hardware supports BFD intervals of 3ms, 6ms, 9ms, 20ms, 50ms, 100ms, 200ms and 1000ms. If a user tries to configure unsupported values, it takes the lower supported value( in ms) by default. This is applicable to BFD hardware offloaded sessions.

**Example:** If a user tries to configure 150ms interval, the hardware BFD is programmed with 100ms timer

- BFD templates must be used to configure 3.3ms BFD. For more information, see [Creating and Configuring BFD Templates, on page 14](#).

- Moving from echo to non-echo and non-echo to echo multiple times without any delay between each iteration may cause a few BFD sessions to flap. So multiple times echo to non-echo/non-echo to echo transition is not recommended and if this scenario is required then it should be done with a delay of at least 20 seconds at each step.
- The loopback packets are not prioritized for BFD echo sessions. Apply QoS policy to increase the priority of the packets.
- BFD packets for both, echo and non-echo sessions are not subjected to the Egress QoS. These packets are sent in the high-priority queue.
- BFD flaps on enabling internal loopback and traffic looped back with line rate as both the traffic passes through the HPCT queue.
- When 300 plus scaled BFD sessions are configured with 1 second BFD timers, few sessions may take time to come up or some times sessions do not come up. This is an expected behavior on the router when the peer node is Cisco ASR 920.
- BFD with authentication is supported only in software. Hardware offload is not supported for BFD with authentication.
- The minimum timer value supported for the BFD software session is 200 ms.
- BFD over IPv4 unicast GRE tunnel is not supported.

## Information About Bidirectional Forwarding Detection

### BFD Operation

BFD provides a low-overhead, short-duration method of detecting failures in the forwarding path between two adjacent routers, including the interfaces, data links, and forwarding planes.


BFD is a detection protocol that is enabled at the interface and protocol levels. Cisco supports BFD asynchronous mode, which depends on the sending of BFD control packets between two systems to activate and maintain BFD neighbor sessions between routers. Therefore, in order for a BFD session to be created, BFD must be configured on both systems (or BFD peers). Once BFD has been enabled on the interfaces and at the router level for the appropriate protocols (NHRP and the routing protocol on overlay), a BFD session is created, BFD timers are negotiated, and the BFD peers will begin to send BFD control packets to each other at the negotiated interval.

### Neighbor Relationships

BFD provides fast BFD peer failure detection times independently of all media types, encapsulations, topologies, and routing protocols BGP, EIGRP, IS-IS, and OSPF. By sending rapid failure detection notices to the routing protocols in the local router to initiate the routing table recalculation process, BFD contributes to greatly reduced overall network convergence time. The figure below shows a simple network with two routers running OSPF and BFD. When OSPF discovers a neighbor (1) it sends a request to the local BFD process to initiate a BFD neighbor session with the OSPF neighbor router (2). The BFD neighbor session with the OSPF neighbor router is established (3).



The figure below shows what happens when a failure occurs in the network (1). The BFD neighbor session with the OSPF neighbor router is torn down (2). BFD notifies the local OSPF process that the BFD neighbor is no longer reachable (3). The local OSPF process tears down the OSPF neighbor relationship (4). If an alternative path is available, the routers will immediately start converging on it.

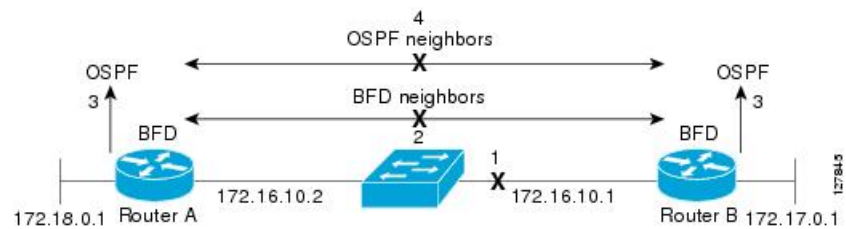

A routing protocol needs to register with BFD for every neighbor it acquires. Once a neighbor is registered, BFD initiates a session with the neighbor if a session does not already exist.

OSPF registers with BFD when:

- A neighbor finite state machine (FSM) transitions to full state.
- Both OSPF BFD and BFD are enabled.

On broadcast interfaces, OSPF establishes a BFD session only with the designated router (DR) and backup designated router (BDR), but not between any two routers in DROTHER state.



**Note** A single BFD session notifies all protocols. For example, if OSPF and PIM neighbors exist, then a single BFD session notifies both the protocols.

## BFD Detection of Failures

Once a BFD session has been established and timer negotiations are complete, BFD peers send BFD control packets that act in the same manner as an IGP hello protocol to detect liveness, except at a more accelerated rate. The following information should be noted:

- BFD is a forwarding path failure detection protocol. BFD detects a failure, but the routing protocol must take action to bypass a failed peer.
- Typically, BFD can be used at any protocol layer. However, the Cisco implementation of BFD for Cisco IOS Releases 12.0(31)S, and 12.4(4)T supports only Layer 3 clients, in particular, the BGP, EIGRP, IS-IS, and OSPF routing protocols. For Cisco IOS Release 12.2(33)SRC, BFD is supported for static routing.
- The Cisco implementation of BFD for Cisco IOS Release 12.2(18)SXE also supports only Layer 3 clients and the EIGRP, IS-IS, and OSPF routing protocols. It does not support the BGP routing protocol.

## BFD Version Interoperability

Cisco IOS Release 12.4(9)T supports BFD Version 1 as well as BFD Version 0.

Cisco IOS Release 12.2EY and Cisco IOS Release 15.S support BFD Version 1 and BFD Version 0.

All BFD sessions come up as Version 1 by default and will be interoperable with Version 0. The system automatically performs BFD version detection, and BFD sessions between neighbors will run in the highest common BFD version between neighbors. For example, if one BFD neighbor is running BFD Version 0 and the other BFD neighbor is running Version 1, the session will run BFD Version 0. The output from the **show bfd neighbors [details]** command will verify which BFD version a BFD neighbor is running.



---

**Note** RSP3 supports only Version 1 and do not support BFD version interoperability.

---

See the Example Configuring BFD in an EIGRP Network with Echo Mode Enabled by Default for an example of BFD version detection.

## BFD Process on the RP

### Client Interaction

The BFD process on the RP will handle the interaction with clients, which create and delete BFD sessions.

### Session Management for the BFD Process on the RP

The BFD RP process will primarily own all BFD sessions on the router. It will pass the session creation and deletion requests to the BFD processes on all LCs. BFD LC sessions will have no knowledge of sessions being added or deleted by the clients. Only the BFD RP process will send session addition and deletion commands to the BFD LC process.

### Session Database Management

The BFD RP process will maintain a database of all the BFD sessions on the router. This database will contain only the minimum required information.

### Process EXEC Commands

The BFD RP process services the BFD **show** commands.

## BFD Support for Nonstop Forwarding with Stateful Switchover

Typically, when a networking device restarts, all routing peers of that device detect that the device went down and then came back up. This transition results in a routing flap, which could spread across multiple routing domains. Routing flaps caused by routing restarts create routing instabilities, which are detrimental to the overall network performance. Nonstop forwarding (NSF) helps to suppress routing flaps in devices that are enabled with stateful switchover (SSO), thereby reducing network instability.

NSF allows for the forwarding of data packets to continue along known routes while the routing protocol information is being restored after a switchover. With NSF, peer networking devices do not experience routing flaps. Data traffic is forwarded through intelligent line cards or dual forwarding processors while the standby RP assumes control from the failed active RP during a switchover. The ability of line cards and forwarding

processors to remain up through a switchover and to be kept current with the Forwarding Information Base (FIB) on the active RP is key to NSF operation.

In devices that support dual RPs, SSO establishes one of the RPs as the active processor; the other RP is designated as the standby processor, and then synchronizes information between them. A switchover from the active to the standby processor occurs when the active RP fails, when it is removed from the networking device, or when it is manually taken down for maintenance.

In Cisco IOS Release 12.2(33)SRC, BFD sessions are placed in an “Admin Down” state during a planned switchover. The BFD configuration is synched from the active to standby processor, and all BFD clients re-register with the BFD process on the standby processor.

In Cisco IOS Release 12.2(33)SB, BFD is not SSO-aware, and it is not supported with NSF/SSO. These features should not be used together. Enabling BFD along with NSF/SSO causes the nonstop forwarding capability to break during failover because BFD adjacencies are not maintained and the routing clients are forced to mark down adjacencies and reconverge.

## BFD Support for Stateful Switchover

The BFD protocol provides short-duration detection of failures in the path between adjacent forwarding engines. In network deployments that use dual RP routers or switches (to provide redundancy), the routers have a graceful restart mechanism that protects the forwarding state during a switchover between the active RP and the standby RP.

The dual RPs have variable switchover times that depend on the ability of the hardware to detect a communication failure. When BFD is running on the RP, some platforms are not able to detect a switchover before the BFD protocol times out; these platforms are referred to as slow switchover platforms.

### Stateful BFD on the Standby RP

To ensure a successful switchover to the standby RP, the BFD protocol uses checkpoint messages to send session information from the active RP Cisco IOS instance to the standby RP Cisco IOS instance. The session information includes local and remote discriminators, adjacent router timer information, BFD setup information, and session-specific information such as the type of session and the session version. In addition, the BFD protocol sends session creation and deletion checkpoint messages to create or delete a session on the standby RP.

The BFD sessions on the standby RP do not receive or send packets and do not process expired timers. These sessions wait for a switchover to occur and then send packets for any active sessions so that sessions do not time out on adjacent routers.

When the BFD protocol on the standby RP is notified of a switchover it changes its state to active, registers itself with Cisco Express Forwarding so that it can receive packets, and then sends packets for any elements that have expired.

BFD also uses checkpoint messages to ensure that sessions created by clients on the active RP are maintained during a switchover. When a switchover occurs, BFD starts an SSO reclaim timer. Clients must reclaim their sessions within the duration specified by the reclaim timer or else the session is deleted.

Timer values are different based on the number of BFD sessions and the platform.

## BFD Support for Static Routing

Unlike dynamic routing protocols, such as OSPF and BGP, static routing has no method of peer discovery. Therefore, when BFD is configured, the reachability of the gateway is completely dependent on the state of the BFD session to the specified neighbor. Unless the BFD session is up, the gateway for the static route is

considered unreachable, and therefore the affected routes will not be installed in the appropriate Routing Information Base (RIB).

For a BFD session to be successfully established, BFD must be configured on the interface on the peer and there must be a BFD client registered on the peer for the address of the BFD neighbor. When an interface is used by dynamic routing protocols, the latter requirement is usually met by configuring the routing protocol instances on each neighbor for BFD. When an interface is used exclusively for static routing, this requirement must be met by configuring static routes on the peers.

If a BFD configuration is removed from the remote peer while the BFD session is in the up state, the updated state of the BFD session is not signaled to IPv4 static. This will cause the static route to remain in the RIB. The only workaround is to remove the IPv4 static BFD neighbor configuration so that the static route no longer tracks BFD session state. Also, if you change the encapsulation type on a serial interface to one that is unsupported by BFD, BFD will be in a down state on that interface. The workaround is to shut down the interface, change to a supported encapsulation type, and then reconfigure BFD.

A single BFD session can be used by an IPv4 static client to track the reachability of next hops through a specific interface. You can assign a BFD group for a set of BFD-tracked static routes. Each group must have one active static BFD configuration, one or more passive BFD configurations, and the corresponding static routes to be BFD-tracked. Nongroup entries are BFD-tracked static routes for which a BFD group is not assigned. A BFD group must accommodate static BFD configurations that can be part of different VRFs. Effectively, the passive static BFD configurations need not be in the same VRF as that of the active configuration.

For each BFD group, there can be only one active static BFD session. You can configure the active BFD session by adding a static BFD configuration and a corresponding static route that uses the BFD configuration. The BFD session in a group is created only when there is an active static BFD configuration and the static route that uses the static BFD configuration. When the active static BFD configuration or the active static route is removed from a BFD group, all the passive static routes are withdrawn from the RIB. Effectively, all the passive static routes are inactive until an active static BFD configuration and a static route to be tracked by the active BFD session are configured in the group.

Similarly, for each BFD group, there can be one or more passive static BFD configurations and their corresponding static routes to be BFD-tracked. Passive static session routes take effect only when the active BFD session state is reachable. Though the active BFD session state of the group is reachable, the passive static route is added to the RIB only if the corresponding interface state is up. When a passive BFD session is removed from a group, it will not affect the active BFD session if one existed, or the BFD group reachability status.

## BFD on Multiple Hops

on arbitrary paths, which might span multiple network hops. The BFD Multihop feature provides subsecond forwarding failure detection for a destination more than one hop, and up to 255 hops, away.

A BFD multihop session is set up between a unique source-destination address pair provided by the client. A session can be set up between two endpoints that have IP connectivity.

You must configure the **bfd-template** and **bfd map** commands to create a multihop template and associate it with one or more maps of destinations and associated BFD timers. You can enable authentication and configure a key chain for BFD multihop sessions.

Multi-hop BFD over IPv6 is supported in software mode only.

## Benefits of Using BFD for Failure Detection

When you deploy any feature, it is important to consider all the alternatives and be aware of any trade-offs being made.

The closest alternative to BFD in conventional EIGRP, IS-IS, and OSPF deployments is the use of modified failure detection mechanisms for EIGRP, IS-IS, and OSPF routing protocols.

If you set EIGRP hello and hold timers to their absolute minimums, the failure detection rate for EIGRP falls to within a one- to two-second range.

If you use fast hellos for either IS-IS or OSPF, these Interior Gateway Protocol (IGP) protocols reduce their failure detection mechanisms to a minimum of one second.

There are several advantages to implementing BFD over reduced timer mechanisms for routing protocols:

- BFD on the CPU operates under interrupt like CEF switched traffic. EIGRP, IS-IS and OSPF protocol hellos are handled in the process switching path. This provides BFD greater scalability and reliability over protocol hellos.
- Although reducing the EIGRP, IS-IS, and OSPF timers can result in minimum detection timer of one to two seconds, BFD can provide failure detection in less than one second.
- Because BFD is not tied to any particular routing protocol, it can be used as a generic and consistent failure detection mechanism for EIGRP, IS-IS, and OSPF.
- Because some parts of BFD can be distributed to the data plane, it can be less CPU-intensive than the reduced EIGRP, IS-IS, and OSPF timers, which exist wholly at the control plane.

## How to Configure Bidirectional Forwarding Detection

### Configuring BFD Session Parameters on the Interface

The steps in this procedure show how to configure BFD on the interface by setting the baseline BFD session parameters on an interface. Repeat the steps in this procedure for each interface over which you want to run BFD sessions to BFD neighbors.



---

**Note** RSP3 Module eysupports only the following BFD interval timers:  
3.3ms, 6.6ms, 10ms, 20ms, 50ms, 100ms, 200ms ,999ms. It is recommended that peer should also configure the same timer values.

---

#### Procedure

**Step 1** enable

**Example:**

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2** **configure terminal**

**Example:**

```
Device# configure terminal
```

Enters global configuration mode.

**Step 3** **bfd-template single-hop** *template-name*

**Example:**

```
Router(config)# bfd-template single-hop bfdtemplate1
```

Creates a single-hop BFD template and enters BFD configuration mode.

**Step 4** **interval min-tx** *milliseconds* **min-rx** *milliseconds* **multiplier** *multiplier-value*

**Example:**

```
Router(bfd-config)# interval min-tx 120 min-rx 100 multiplier 3
```

Configures the transmit and receive intervals between BFD packets, and specifies the number of consecutive BFD control packets that must be missed before BFD declares that a peer is unavailable.

**Step 5** **interface** *type number*

**Example:**

```
Device(config)# interface FastEthernet 6/0
```

Enters interface configuration mode.

**Step 6** **interface gigabitethernet** *number*

**Example:**

```
Device(config)# interface gigabitethernet 0/0/0
```

Specifies the Gigabit Ethernet interface and enters interface configuration mode.

**Step 7** Perform one of the following steps:

- **ip address** *ipv4-address mask*
- **ipv6 address** *ipv6-address/mask*

**Example:**

Configuring an IPv4 address for the interface:

```
Device(config-if)# ip address 10.201.201.1 255.255.255.0
```

Configuring an IPv6 address for the interface:

```
Device(config-if)# ipv6 address 2001:DB8::/32
```

Configures an IP address for the interface.



**Step 8**     **bfd template** *template name*

Enables the BFD template.

**Step 9**     **end**

**Example:**

```
Device(config-if)# end
```

Exits interface configuration mode and returns to privileged EXEC mode.

---

## Configuring BFD Support for Static Routing

Perform this task to configure BFD support for static routing. Repeat the steps in this procedure on each BFD neighbor. For more information, see the "Example: Configuring BFD Support for Static Routing" section.

### Procedure

---

**Step 1**     **enable**

**Example:**

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2**     **configure terminal**

**Example:**

```
Device# configure terminal
```

Enters global configuration mode.

**Step 3**     **bfd-template single-hop** *template-name*

**Example:**

```
Router(config)# bfd-template single-hop bfdtemplate1
```

Creates a single-hop BFD template and enters BFD configuration mode.

**Step 4**     **interval min-tx** *milliseconds* **min-rx** *milliseconds* **multiplier** *multiplier-value*

**Example:**

```
Router(bfd-config)# interval min-tx 120 min-rx 100 multiplier 3
```

Configures the transmit and receive intervals between BFD packets, and specifies the number of consecutive BFD control packets that must be missed before BFD declares that a peer is unavailable.

**Step 5** **interface** *type number*

**Example:**

```
Device(config)# interface GigabitEthernet 0/0/0
```

Configures an interface and enters interface configuration mode.

**Step 6** Perform one of the following steps:

- **ip address** *ipv4-address mask*
- **ipv6 address** *ipv6-address/mask*

**Example:**

Configuring an IPv4 address for the interface:

```
Device(config-if)# ip address 10.201.201.1 255.255.255.0
```

Configuring an IPv6 address for the interface:

```
Device(config-if)# ipv6 address 2001:db8:1:1::1/32
```

Configures an IP address for the interface.

**Step 7** **bfd template** *template name*

Enables the BFD template.

**Step 8** **bfd interval** *milliseconds* **min\_rx** *milliseconds* **multiplier** *interval-multiplier*

**Example:**

```
Device(config-if)# bfd interval 500 min_rx 500 multiplier 5
```

Enables BFD on the interface.

The BFD interval configuration is removed when the subinterface on which it is configured is removed.

The BFD interval configuration is not removed when:

- an IPv4 address is removed from an interface
- an IPv6 address is removed from an interface
- IPv6 is disabled from an interface
- an interface is shutdown
- IPv4 CEF is disabled globally or locally on an interface
- IPv6 CEF is disabled globally or locally on an interface

**Step 9** **exit**

**Example:**

```
Device(config-if)# exit
```

Exits interface configuration mode and returns to global configuration mode.

**Step 10** Perform one of the following steps:

- **ip route static bfd** *interface-type interface-number ip-address* [**group** *group-name* [**passive**]]
- **ipv6 route static bfd** *interface-type interface-number ip-address* [**unaassociated**]

**Example:**

```
Device(config)# ip route static bfd GigabitEthernet 0/0/0 10.1.1.1 group group1 passive
Device(config)# ipv6 route static bfd TenGigabitEthernet 0/0/7 10:1:1::2
```

Specifies a static route BFD neighbor.

- The *interface-type*, *interface-number*, and *ip-address* arguments are required because BFD support exists only for directly connected neighbors.

**Step 11** Perform one of the following steps:

- **ip route** [**vrf** *vrf-name*] *prefix mask* {*ip-address* | *interface-type interface-number* [*ip-address*]} [**dhcp**] [*distance*] [**name** *next-hop-name*] [**permanent** | **track** *number*] [**tag** *tag*]
- **ipv6 route** [**vrf** *vrf-name*] *ipv6 prefix/mask* {*ipv6-address* | *interface-type interface-number* [*ipv6-address*]} [**name** *next-hop-name*] [**track** *number*] [**tag** *tag*]

**Example:**

```
Device(config)# ip route 10.0.0.1 255.0.0.0
```

```
Device(config)# ipv6 route 10:1:1::/64 TenGigabitEthernet0/0/7 10:1:1::2
```

Specifies a static route BFD neighbor.

**Step 12** **exit**

**Example:**

```
Device(config)# exit
```

Exits global configuration mode and returns to privileged EXEC mode.

**Step 13** Perform one of the following steps:

- **show ip static route**
- **show ipv6 static**

**Example:**

```
Device# show ipv6 static
```

(Optional) Displays static route database information.

**Step 14** Perform one of the following steps:

- **show ip static route bfd**
- **show ipv6 static bfd**

**Example:**

```
Device # show ipv6 static bfd
```

(Optional) Displays information about the static BFD configuration from the configured BFD groups and nongroup entries.

**Step 15** **exit**

**Example:**

```
Device# exit
```

Exits privileged EXEC mode and returns to user EXEC mode.

## Creating and Configuring BFD Templates

You can configure a single-hop template to specify a set of BFD interval values. BFD interval values specified as part of the BFD template are not specific to a single interface. You can configure a multihop template to associate these values with one or more maps of destinations and associated BFD timers. You can enable authentication and configure a key chain for BFD multihop sessions.

### Configuring a Single-Hop Template

Perform this task to create a BFD single-hop template and configure BFD interval timers.



**Note** Cisco IOS Release 15.0(1)S introduced the concept of BFD templates that allow BFD interval timers to be configured independently of an interface. BFD templates are required to provide support for the BFD Control Channel over VCCV-Support for ATM Pseudowires feature.

#### Procedure

##### Step 1

**enable**

**Example:**

```
Router> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

##### Step 2

**configure terminal**

**Example:**

```
Router# configure terminal
```

Enters global configuration mode.

##### Step 3

**bfd-template single-hop** *template-name*

**Example:**

```
Router(config)# bfd-template single-hop bfdtemplate1
```

Creates a single-hop BFD template and enters BFD configuration mode.

##### Step 4

**interval min-tx** *milliseconds* **min-rx** *milliseconds* **multiplier** *multiplier-value*

**Example:**

```
Router(bfd-config)# interval min-tx 120 min-rx 100 multiplier 3
```

Configures the transmit and receive intervals between BFD packets, and specifies the number of consecutive BFD control packets that must be missed before BFD declares that a peer is unavailable.

**Step 5** **end****Example:**

```
Router(bfd-config)# end
```

Exits BFD configuration mode and returns the router to privileged EXEC mode.

## Configuring a Multihop Template

Perform this task to create a BFD multihop template and configure BFD interval timers, authentication, and key chain.



**Note** Cisco IOS Release 15.1(3)S and later releases support BFD on multiple network hops. After you have configured interval timers and authentication in a template, you can configure a map to associate the template with unique source-destination address pairs for multihop BFD sessions.



**Note** See “Xconnect as a Client of BFD” for information on configuring xconnect as a client of BFD and detecting failure with the **monitor peer bfd** command.

### Procedure

**Step 1** **enable****Example:**

```
Router> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2** **configure terminal****Example:**

```
Router# configure terminal
```

Enters global configuration mode.

**Step 3** **bfd-template multi-hop** *template-name*

**Example:**

```
Router(config)# bfd-template multi-hop mh-templatel
```

Creates a BFD multihop BFD template and enters BFD configuration mode.

**Step 4** **interval** *min-tx milliseconds min-rx milliseconds multiplier multiplier-value*

**Example:**

```
Router(bfd-config)# interval min-tx 120 min-rx 100 multiplier 3
```

Configures the transmit and receive intervals between BFD packets, and specifies the number of consecutive BFD control packets that must be missed before BFD declares that a peer is unavailable.

**Step 5** **authentication** *authentication-type keychain keychain-name*

**Example:**

```
Router(bfd-config)# authentication keyed-sha-1 keychain bfd-multihop
```

Configures authentication for the multihop template and specifies the authentication type.

**Step 6** **end**

**Example:**

```
Router(bfd-config)# end
```

Exits BFD configuration mode and returns the router to privileged EXEC mode.

## Configuring a BFD Map

Perform this task to configure a BFD map that associates the interval timers and authentication configured in a template with unique source-destination address pairs for multihop BFD sessions.

**Before you begin**

You must configure a BFD multihop template before you associate it with a map.

**Procedure**

**Step 1** **enable**

**Example:**

```
Router> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2** **configure terminal**

**Example:**

```
Router# configure terminal
```

Enters global configuration mode.

**Step 3** **bfd map ipv4 vrf** *vrf-name destination length source-address length template-name*

**Example:**

```
Router(config)# bfd map ipv4 vrf vpn1 192.168.0.0/24 192.168.42.5/32 mh-templatel
```

Configures a BFD map and associates it with the template.

**Step 4** Perform one of the following steps:

- **bfd map ipv4** *destination length source-address length template-name*
- **bfd map ipv4 vrf** *vrf-name destination length vrf vrfname source-address length template-name*

**Example:**

```
Router(config)# bfd map ipv4 192.168.0.0/24 192.168.42.5/32 mh-templatel
```

```
Router(config)# bfd map ipv4 vrf vpn1 192.168.0.0/24 vrf vpn2 192.168.42.5/32 BFD_RPW_MH
```

Configures a BFD map and associates it with the template.

Mention the VRF name for the source-address as well, if source address is part of a VRF.

**Step 5** **end**

**Example:**

```
Router(config)# end
```

Exits BFD configuration mode and returns the router to privileged EXEC mode.

## Configuration Examples for Bidirectional Forwarding Detection

### Example: Configuring BFD in an EIGRP Network with Echo Mode Enabled by Default

In the following example, the EIGRP network contains RouterA, RouterB, and RouterC. The Gigabit Ethernet interface 0/0/1 on RouterA is connected to the same network as Gigabit Ethernet interface 0/0/1 on Router B. The Gigabit Ethernet interface 0/0/1 on RouterB is connected to the same network as Gigabit Ethernet interface 0/0/1 on RouterC.

RouterA and RouterB are running BFD Version 1, which supports echo mode, and RouterC is running BFD Version 0, which does not support echo mode. The BFD sessions between RouterC and its BFD neighbors are said to be running echo mode with asymmetry because echo mode will run on the forwarding path for RouterA and RouterB, and their echo packets will return along the same path for BFD sessions and failure detections, while their BFD neighbor RouterC runs BFD Version 0 and uses BFD control packets for BFD sessions and failure detections.

The example, starting in global configuration mode, shows the configuration of BFD.

### Configuration for RouterA

```
interface GigabitEthernet0/0/0
  no shutdown
  ip address 10.4.9.14 255.255.255.0
  duplex auto
  speed auto
!
interface GigabitEthernet0/0/1
  ip address 172.16.1.1 255.255.255.0
  bfd interval 50 min_rx 50 multiplier 3
  no shutdown
  duplex auto
  speed auto
!
router eigrp 11
  network 172.16.0.0
  bfd all-interfaces
  auto-summary
!
```

### Configuration for RouterB

```
!
interface GigabitEthernet0/0/0
  no shutdown
  ip address 10.4.9.34 255.255.255.0
  duplex auto
  speed auto
!
interface GigabitEthernet0/0/1
  ip address 172.16.1.2 255.255.255.0
  bfd interval 50 min_rx 50 multiplier 3
  no shutdown
  duplex auto
  speed auto
!
router eigrp 11
  network 172.16.0.0
  bfd all-interfaces
  auto-summary
!
```

### Configuration for RouterC

```
!
!
interface GigabitEthernet0/0/0
  no shutdown
  ip address 10.4.9.51 255.255.255.0
  duplex auto
  speed auto
!
interface GigabitEthernet0/0/1
  ip address 172.16.1.3 255.255.255.0
  bfd interval 50 min_rx 50 multiplier 3
  no shutdown
  duplex auto
```



```

speed auto
!
router eigrp 11
 network 172.16.0.0
 bfd all-interfaces
 auto-summary
!

```

The output from the **show bfd neighbors details** command from RouterA verifies that BFD sessions have been created among all three routers and that EIGRP is registered for BFD support. The first group of output shows that RouterC with the IP address 172.16.1.3 runs BFD Version 0 and therefore does not use the echo mode. The second group of output shows that RouterB with the IP address 172.16.1.2 does run BFD Version 1, and the 50 millisecond BFD interval parameter had been adopted. The relevant command output is shown in bold in the output.

```
RouterA# show bfd neighbors details
```

```
OurAddr
```

```
NeighAddr
```

```

LD/RD RH/RS Holdown(mult) State Int
172.16.1.1 172.16.1.3
5/3 1(RH) 150 (3 ) Up Gig0/0/1

```

```
Session state is UP and not using echo function.
```

```

Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 50000, MinRxInt: 50000, Multiplier: 3
Received MinRxInt: 50000, Received Multiplier: 3
Holdown (hits): 150(0), Hello (hits): 50(1364284)
Rx Count: 1351813, Rx Interval (ms) min/max/avg: 28/64/49 last: 4 ms ago
Tx Count: 1364289, Tx Interval (ms) min/max/avg: 40/68/49 last: 32 ms ago
Registered protocols: EIGRP
Uptime: 18:42:45

```

```
Last packet: Version: 0
```

```

- Diagnostic: 0
I Hear You bit: 1 - Demand bit: 0
Poll bit: 0 - Final bit: 0
Multiplier: 3 - Length: 24
My Discr.: 3 - Your Discr.: 5
Min tx interval: 50000 - Min rx interval: 50000
Min Echo interval: 0

```

```
OurAddr
```

```
NeighAddr
```

```

LD/RD RH/RS Holdown(mult) State Int
172.16.1.1 172.16.1.2
6/1 Up 0 (3 ) Up Gig0/0/1

```

```
Session state is UP and using echo function with 50 ms interval.
```

```

Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 1000000, MinRxInt: 1000000, Multiplier: 3
Received MinRxInt: 1000000, Received Multiplier: 3
Holdown (hits): 3000(0), Hello (hits): 1000(317)
Rx Count: 305, Rx Interval (ms) min/max/avg: 1/1016/887 last: 448 ms ago
Tx Count: 319, Tx Interval (ms) min/max/avg: 1/1008/880 last: 532 ms ago
Registered protocols: EIGRP
Uptime: 00:04:30

```

```
Last packet: Version: 1
```

```

- Diagnostic: 0
State bit: Up - Demand bit: 0
Poll bit: 0 - Final bit: 0
Multiplier: 3 - Length: 24
My Discr.: 1 - Your Discr.: 6

```

## Example: Configuring BFD in an EIGRP Network with Echo Mode Enabled by Default

```

Min tx interval: 1000000    - Min rx interval: 1000000
Min Echo interval: 50000

```

The output from the **show bfd neighbors details** command on Router B verifies that BFD sessions have been created and that EIGRP is registered for BFD support. As previously noted, RouterA runs BFD Version 1, therefore echo mode is running, and RouterC runs BFD Version 0, so echo mode does not run. The relevant command output is shown in bold in the output.

```
RouterB# show bfd neighbors details
```

```

OurAddr      NeighAddr
      LD/RD  RH/RS  Holdown(mult)  State  Int
172.16.1.2   172.16.1.1
      1/6    Up      0 (3)  Up      Gig0/0/1
Session state is UP and using echo function with 50 ms interval.
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 1000000, MinRxInt: 1000000, Multiplier: 3
Received MinRxInt: 1000000, Received Multiplier: 3
Holdown (hits): 3000(0), Hello (hits): 1000(337)
Rx Count: 341, Rx Interval (ms) min/max/avg: 1/1008/882 last: 364 ms ago
Tx Count: 339, Tx Interval (ms) min/max/avg: 1/1016/886 last: 632 ms ago
Registered protocols: EIGRP
Uptime: 00:05:00
Last packet: Version: 1
  - Diagnostic: 0
    State bit: Up      - Demand bit: 0
    Poll bit: 0        - Final bit: 0
    Multiplier: 3      - Length: 24
    My Discr.: 6       - Your Discr.: 1
    Min tx interval: 1000000    - Min rx interval: 1000000
    Min Echo interval: 50000

OurAddr      NeighAddr
      LD/RD  RH/RS  Holdown(mult)  State  Int
172.16.1.2   172.16.1.3
      3/6    1(RH)  118 (3)  Up      Gig0/0/1
Session state is UP and not using echo function.
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 50000, MinRxInt: 50000, Multiplier: 3
Received MinRxInt: 50000, Received Multiplier: 3
Holdown (hits): 150(0), Hello (hits): 50(5735)
Rx Count: 5731, Rx Interval (ms) min/max/avg: 32/72/49 last: 32 ms ago
Tx Count: 5740, Tx Interval (ms) min/max/avg: 40/64/50 last: 44 ms ago
Registered protocols: EIGRP
Uptime: 00:04:45
Last packet: Version: 0
  - Diagnostic: 0
    I Hear You bit: 1  - Demand bit: 0
    Poll bit: 0        - Final bit: 0
    Multiplier: 3      - Length: 24
    My Discr.: 6       - Your Discr.: 3
    Min tx interval: 50000    - Min rx interval: 50000
    Min Echo interval: 0

```

When Gigabit ethernet interface 0/0/1 on RouterB fails, BFD will no longer detect Router B as a BFD neighbor for RouterA or for RouterC. In this example, Gigabit Ethernet interface 0/0/1 has been administratively shut down on RouterB.

The following output from the **show bfd neighbors** command on RouterA now shows only one BFD neighbor for RouterA in the EIGRP network. The relevant command output is shown in bold in the output.

```

RouterA# show bfd neighbors
OurAddr      NeighAddr

      LD/RD  RH/RS  Holdown(mult)  State      Int
172.16.1.1   172.16.1.3

      5/3    1(RH)   134 (3 )    Up         Gig0/0/1

```

The following output from the **show bfd neighbors** command on RouterC also now shows only one BFD neighbor for RouterC in the EIGRP network. The relevant command output is shown in bold in the output.

```

RouterC# show bfd neighbors

OurAddr      NeighAddr

      LD/RD RH  Holdown(mult)  State      Int
172.16.1.3   172.16.1.1

      3/5  1  114 (3 )      Up         Gig0/0/1

```

## Example: Configuring BFD in an OSPF Network

In the following example, the simple OSPF network consists of Router A and Router B. Gigabit Ethernet interface 0/0/1 on Router A is connected to the same network as Gigabit Ethernet interface 0/0/1 in Router B. The example, starting in global configuration mode, shows the configuration of BFD. For both Routers A and B, BFD is configured globally for all interfaces associated with the OSPF process.

### Configuration for Router A

```

!
interface GigabitEthernet 0/0/1
 ip address 172.16.10.1 255.255.255.0
 bfd interval 50 min_rx 50 multiplier 3
!
interface GigabitEthernet 0/0/0
 ip address 172.17.0.1 255.255.255.0
!
router ospf 123
 log-adjacency-changes detail
 network 172.16.10.0 0.0.0.255 area 0
 network 172.17.10.0 0.0.0.255 area 0
 bfd all-interfaces

```

### Configuration for Router B

```

!
interface GigabitEthernet 0/0/1
 ip address 172.16.10.2 255.255.255.0
 bfd interval 50 min_rx 50 multiplier 3
!
interface GigabitEthernet 0/0/0
 ip address 172.18.0.1 255.255.255.0
!
router ospf 123
 log-adjacency-changes detail
 network 172.16.10.0 0.0.0.255 area 0

```

## Example: Configuring BFD in an OSPF Network

```
network 172.18.10.0 0.0.0.255 area 0
bfd all-interfaces
```

The output from the **show bfd neighbors details** command verifies that a BFD session has been created and that OSPF is registered for BFD support. The relevant command output is shown in bold in the output.

**Router A**

```
RouterA# show bfd neighbors details
OurAddr      NeighAddr    LD/RD RH  Holdown(mult)  State      Int
172.16.10.1  172.16.10.2  1/2 1    532 (3 )      Up         Gig0/0/0
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 200000, MinRxInt: 200000, Multiplier: 5
Received MinRxInt: 1000, Received Multiplier: 3
Holdown (hits): 600(22), Hello (hits): 200(84453)
Rx Count: 49824, Rx Interval (ms) min/max/avg: 208/440/332 last: 68 ms ago
Tx Count: 84488, Tx Interval (ms) min/max/avg: 152/248/196 last: 192 ms ago
Registered protocols: OSPF
```

```
Uptime: 02:18:49
```

```
Last packet: Version: 0
```

```
- Diagnostic: 0
I Hear You bit: 1      - Demand bit: 0
Poll bit: 0           - Final bit: 0
Multiplier: 3         - Length: 24
My Discr.: 2          - Your Discr.: 1
Min tx interval: 50000 - Min rx interval: 1000
Min Echo interval: 0
```

The output from the **show bfd neighbors details** command from Router B verifies that a BFD session has been created:

**Router B**

```
Router> show bfd neighbors details
Cleanup timer hits: 0
OurAddr      NeighAddr    LD/RD RH  Holdown(mult)  State      Int
172.16.10.2  172.16.10.1  8/1 1    1000 (5 )      Up         Gig0/0/0
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 50000, MinRxInt: 1000, Multiplier: 3
Received MinRxInt: 200000, Received Multiplier: 5
Holdown (hits): 1000(0), Hello (hits): 200(5995)
Rx Count: 10126, Rx Interval (ms) min/max/avg: 152/248/196 last: 0 ms ago
Tx Count: 5998, Tx Interval (ms) min/max/avg: 204/440/332 last: 12 ms ago
Last packet: Version: 0      - Diagnostic: 0
                  I Hear You bit: 1      - Demand bit: 0
                  Poll bit: 0           - Final bit: 0
                  Multiplier: 5         - Length: 24
                  My Discr.: 1          - Your Discr.: 8
                  Min tx interval: 200000 - Min rx interval: 200000
                  Min Echo interval: 0
Uptime: 00:33:13
SSO Cleanup Timer called: 0
SSO Cleanup Action Taken: 0
Pseudo pre-emptive process count: 239103 min/max/avg: 8/16/8 last: 0 ms ago
IPC Tx Failure Count: 0
IPC Rx Failure Count: 0
Total Adjs Found: 1
```

The output of the **show ip ospf** command verifies that BFD has been enabled for OSPF. The relevant command output is shown in bold in the output.

### Router A

```
RouterA# show ip ospf

Routing Process "ospf 123" with ID 172.16.10.1
Supports only single TOS(TOS0) routes
Supports opaque LSA
Supports Link-local Signaling (LLS)
Initial SPF schedule delay 5000 msecs
Minimum hold time between two consecutive SPF's 10000 msecs
Maximum wait time between two consecutive SPF's 10000 msecs
Incremental-SPF disabled
Minimum LSA interval 5 secs
Minimum LSA arrival 1000 msecs
LSA group pacing timer 240 secs
Interface flood pacing timer 33 msecs
Retransmission pacing timer 66 msecs
Number of external LSA 0. Checksum Sum 0x000000
Number of opaque AS LSA 0. Checksum Sum 0x000000
Number of DCbitless external and opaque AS LSA 0
Number of DoNotAge external and opaque AS LSA 0
Number of areas in this router is 1. 1 normal 0 stub 0 nssa
External flood list length 0
BFD is enabled

Area BACKBONE(0)
Number of interfaces in this area is 2 (1 loopback)
Area has no authentication
SPF algorithm last executed 00:00:08.828 ago
SPF algorithm executed 9 times
Area ranges are
Number of LSA 3. Checksum Sum 0x028417
Number of opaque link LSA 0. Checksum Sum 0x000000
Number of DCbitless LSA 0
Number of indication LSA 0
Number of DoNotAge LSA 0
Flood list length 0
```

### Router B

```
RouterB# show ip ospf

Routing Process "ospf 123" with ID 172.18.0.1
Supports only single TOS(TOS0) routes
Supports opaque LSA
Supports Link-local Signaling (LLS)
Supports area transit capability
Initial SPF schedule delay 5000 msecs
Minimum hold time between two consecutive SPF's 10000 msecs
Maximum wait time between two consecutive SPF's 10000 msecs
Incremental-SPF disabled
Minimum LSA interval 5 secs
Minimum LSA arrival 1000 msecs
LSA group pacing timer 240 secs
Interface flood pacing timer 33 msecs
Retransmission pacing timer 66 msecs
Number of external LSA 0. Checksum Sum 0x0
```

```

Number of opaque AS LSA 0. Checksum Sum 0x0
Number of DCbitless external and opaque AS LSA 0
Number of DoNotAge external and opaque AS LSA 0
Number of areas in this router is 1. 1 normal 0 stub 0 nssa
Number of areas transit capable is 0
External flood list length 0
BFD is enabled

```

```

Area BACKBONE(0)
Number of interfaces in this area is 2 (1 loopback)
Area has no authentication
SPF algorithm last executed 02:07:30.932 ago
SPF algorithm executed 7 times
Area ranges are
Number of LSA 3. Checksum Sum 0x28417
Number of opaque link LSA 0. Checksum Sum 0x0
Number of DCbitless LSA 0
Number of indication LSA 0
Number of DoNotAge LSA 0
Flood list length 0

```

The output of the **show ip ospf interface** command verifies that BFD has been enabled for OSPF on the interfaces connecting Router A and Router B. The relevant command output is shown in bold in the output.

### Router A

```
RouterA# show ip ospf interface GigabitEthernet 0/0/1
```

```

GigabitEthernet0/0/1 is up, line protocol is up
Internet Address 172.16.10.1/24, Area 0
Process ID 123, Router ID 172.16.10.1, Network Type BROADCAST, Cost: 1
Transmit Delay is 1 sec, State BDR, Priority 1, BFD enabled
Designated Router (ID) 172.18.0.1, Interface address 172.16.10.2
Backup Designated router (ID) 172.16.10.1, Interface address 172.16.10.1
Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  oob-resync timeout 40
  Hello due in 00:00:03
Supports Link-local Signaling (LLS)
Index 1/1, flood queue length 0
Next 0x0(0)/0x0(0)
Last flood scan length is 1, maximum is 1
Last flood scan time is 0 msec, maximum is 0 msec
Neighbor Count is 1, Adjacent neighbor count is 1
  Adjacent with neighbor 172.18.0.1 (Designated Router)
Suppress hello for 0 neighbor(s)

```

### Router B

```
RouterB# show ip ospf interface Gigabit Ethernet 0/0/0
```

```

GigabitEthernet0/0/1 is up, line protocol is up
Internet Address 172.18.0.1/24, Area 0
Process ID 123, Router ID 172.18.0.1, Network Type BROADCAST, Cost: 1
Transmit Delay is 1 sec, State DR, Priority 1, BFD enabled
Designated Router (ID) 172.18.0.1, Interface address 172.18.0.1
No backup designated router on this network
Timer intervals configured, Hello 10, Dead 40, Wait 40, Retransmit 5
  oob-resync timeout 40
  Hello due in 00:00:01
Supports Link-local Signaling (LLS)
Index 1/1, flood queue length 0
Next 0x0(0)/0x0(0)

```

```

Last flood scan length is 0, maximum is 0
Last flood scan time is 0 msec, maximum is 0 msec
Neighbor Count is 0, Adjacent neighbor count is 0
Suppress hello for 0 neighbor(s)

```

## Example: Configuring BFD in a BGP Network

In the following example, the simple BGP network consists of Router A and Router B. The Gigabit Ethernet interface 0/0/1 on Router A is connected to the same network as Gigabit Ethernet interface 0/0/1 in Router B. The example, starting in global configuration mode, shows the configuration of BFD.

### Configuration for Router A

```

!
interface GigabitEthernet 0/0/1
 ip address 172.16.10.1 255.255.255.0
 bfd interval 50 min_rx 50 multiplier 3
!
interface GigabitEthernet 0/0/0
 ip address 172.17.0.1 255.255.255.0
!
!
router bgp 40000
 bgp log-neighbor-changes
 neighbor 172.16.10.2 remote-as 45000
 neighbor 172.16.10.2 fall-over bfd
!
 address-family ipv4
 neighbor 172.16.10.2 activate
 no auto-summary
 no synchronization
 network 172.18.0.0 mask 255.255.255.0
 exit-address-family
!

```

### Configuration for Router B

```

!
interface GigabitEthernet 0/0/1
 ip address 172.16.10.2 255.255.255.0
 bfd interval 50 min_rx 50 multiplier 3
!
interface GigabitEthernet 0/0/0
 ip address 172.18.0.1 255.255.255.0
!
!
router bgp 45000
 bgp log-neighbor-changes
 neighbor 172.16.10.1 remote-as 40000
 neighbor 172.16.10.1 fall-over bfd
!
 address-family ipv4
 neighbor 172.16.10.1 activate
 no auto-summary
 no synchronization
 network 172.17.0.0 mask 255.255.255.0
 exit-address-family
!

```

The output from the **show bfd neighbors details** command from Router A verifies that a BFD session has been created and that BGP is registered for BFD support. The relevant command output is shown in bold in the output.

### Router A

```
RouterA# show bfd neighbors details
```

```
OurAddr      NeighAddr    LD/RD RH  Holdown(mult)  State    Int
172.16.10.1  172.16.10.2  1/8 1    332 (3 )      Up       Gig0/0/1
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 200000, MinRxInt: 200000, Multiplier: 5
Received MinRxInt: 1000, Received Multiplier: 3
Holdown (hits): 600(0), Hello (hits): 200(15491)
Rx Count: 9160, Rx Interval (ms) min/max/avg: 200/440/332 last: 268 ms ago
Tx Count: 15494, Tx Interval (ms) min/max/avg: 152/248/197 last: 32 ms ago
Registered protocols: BGP
Uptime: 00:50:45
Last packet: Version: 0          - Diagnostic: 0
              I Hear You bit: 1   - Demand bit: 0
              Poll bit: 0         - Final bit: 0
              Multiplier: 3       - Length: 24
              My Discr.: 8        - Your Discr.: 1
              Min tx interval: 50000 - Min rx interval: 1000
              Min Echo interval: 0
```

The output from the **show bfd neighbors details** command on Router B verifies that a BFD session has been created:

### Router B

```
Router> show bfd neighbors details
```

```
Cleanup timer hits: 0
OurAddr      NeighAddr    LD/RD RH  Holdown(mult)  State    Int
172.16.10.2  172.16.10.1  8/1 1    1000 (5 )      Up       Gig0/0/0
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 50000, MinRxInt: 1000, Multiplier: 3
Received MinRxInt: 200000, Received Multiplier: 5
Holdown (hits): 1000(0), Hello (hits): 200(5995)
Rx Count: 10126, Rx Interval (ms) min/max/avg: 152/248/196 last: 0 ms ago
Tx Count: 5998, Tx Interval (ms) min/max/avg: 204/440/332 last: 12 ms ago
Last packet: Version: 0          - Diagnostic: 0
              I Hear You bit: 1   - Demand bit: 0
              Poll bit: 0         - Final bit: 0
              Multiplier: 5       - Length: 24
              My Discr.: 1        - Your Discr.: 8
              Min tx interval: 200000 - Min rx interval: 200000
              Min Echo interval: 0
Uptime: 00:33:13
SSO Cleanup Timer called: 0
SSO Cleanup Action Taken: 0
Pseudo pre-emptive process count: 239103 min/max/avg: 8/16/8 last: 0 ms ago
IPC Tx Failure Count: 0
IPC Rx Failure Count: 0
Total Adjs Found: 1
```

The output of the **show ip bgp neighbors** command verifies that BFD has been enabled for the BGP neighbors:



### Router A

```
RouterA# show ip bgp neighbors
BGP neighbor is 172.16.10.2, remote AS 45000, external link
  Using BFD to detect fast fallover
.
.
.
```

### Router B

```
RouterB# show ip bgp neighbors
BGP neighbor is 172.16.10.1, remote AS 40000, external link
  Using BFD to detect fast fallover
.
.
.
```

## Example: Configuring BFD in an IS-IS Network

The Cisco IOS XE implementation of IS-IS conforms to the specifications detailed in [RFC 6213](#). The IS-IS router advertises its BFD-enabled interfaces by including type-length-value (TLV) in the IS-IS Hello (IIH) PDU. The BFD-enabled TLV includes the topologies and protocols that it supports along with the appropriate Multi-Topology Identifier (MTID) or Network Layer Protocol Identifier (NLPID) pairs. Note that when the router sends an IIH to a non-BFD-enabled interface, it omits the TLV.

In the following example, the simple IS-IS network consists of Router A and Router B. The Gigabit Ethernet interface 0/0/0 on Router A is connected to the same network as Gigabit Ethernet interface 0/0/0 for Router B. The example, starting in global configuration mode, shows the configuration of BFD.

### Configuration for Router A

```
!
interface GigabitEthernet 0/0/0
 ip address 209.165.200.226 255.255.255.224
 ip router isis
  bfd interval 50 min_rx 50 multiplier 3
!
router isis
 net 49.0001.1720.1600.1001.00
 bfd all-interfaces
!
```

### Configuration for Router B

```
!
interface GigabitEthernet 0/0/0
 ip address 209.165.200.227 255.255.255.224
 ip router isis
  bfd interval 50 min_rx 50 multiplier 3
!
router isis
 net 49.0000.0000.0002.00
 bfd all-interfaces
!
```

**Router A**

The output from the **show bfd neighbors detail** command from Router A verifies that a BFD session has been created and that IS-IS is registered for BFD support:

```
RouterA# show bfd neighbors detail

OurAddr           NeighAddr           LD/RD RH Holddown(mult) State      Int
209.165.200.226   209.165.200.227     1/8 1 536 (3 )      Up        Gig0/0/0
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 200000, MinRxInt: 200000, Multiplier: 5
Received MinRxInt: 1000, Received Multiplier: 3
Holddown (hits): 600(0), Hello (hits): 200(23543)
Rx Count: 13877, Rx Interval (ms) min/max/avg: 200/448/335 last: 64 ms ago
Tx Count: 23546, Tx Interval (ms) min/max/avg: 152/248/196 last: 32 ms ago
Registered protocols: ISIS
Uptime: 01:17:09
Last packet: Version: 0           - Diagnostic: 0
              I Hear You bit: 1     - Demand bit: 0
              Poll bit: 0          - Final bit: 0
              Multiplier: 3         - Length: 24
              My Discr.: 8          - Your Discr.: 1
              Min tx interval: 50000 - Min rx interval: 1000
              Min Echo interval: 0
```

**Router B**

The output from the **show bfd neighbors detail** command from the line card on Router B verifies that a BFD session has been created:

```
Router> show bfd neighbors detail
Cleanup timer hits: 0
OurAddr           NeighAddr           LD/RD RH Holddown(mult) State      Int
209.165.200.227   209.165.200.226     8/1 1 1000 (5 )     Up        Gig0/0/0
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 50000, MinRxInt: 1000, Multiplier: 3
Received MinRxInt: 200000, Received Multiplier: 5
Holddown (hits): 1000(0), Hello (hits): 200(5995)
Rx Count: 10126, Rx Interval (ms) min/max/avg: 152/248/196 last: 0 ms ago
Tx Count: 5998, Tx Interval (ms) min/max/avg: 204/440/332 last: 12 ms ago
Last packet: Version: 0           - Diagnostic: 0
              I Hear You bit: 1     - Demand bit: 0
              Poll bit: 0          - Final bit: 0
              Multiplier: 5         - Length: 24
              My Discr.: 1          - Your Discr.: 8
              Min tx interval: 200000 - Min rx interval: 200000
              Min Echo interval: 0
Uptime: 00:33:13
SSO Cleanup Timer called: 0
SSO Cleanup Action Taken: 0
Pseudo pre-emptive process count: 239103 min/max/avg: 8/16/8 last: 0 ms ago
IPC Tx Failure Count: 0
IPC Rx Failure Count: 0
Total Adjs Found: 1
```

## Router B

The output from the **show isis neighbors detail** command from the line card on Router B shows the TLV field in the IS-IS Hello (IIH) PDU through which IS-IS responds to a BFD-detected forwarding plane failure. See [Intermediate System-to-Intermediate System \(IS-IS\) TLVs](#) for more information on TLV.

```
Router> show isis neighbors detail
PE1 L1 interface GigabitEthernet 0/0/0 209.165.200.226 UP 20 04
Area Address(es): 49
SNPA: e8ed.f3b8.d115
State Changed: 00:03:17
Format: Phase V
Remote TID: 0
Local TID: 0
Interface name: GigabitEthernet 0/0/0
Neighbor Circuit Id: 4
Remote BFD Support:TLV (MTID:0, IPV4) -----Remote BFD TLV's received from neighbor
peer
BFD enabled: (MTID:0, ipv4) -----BFD TLV's sent from Router B port
Adj sync: Full
```

## Example: Configuring BFD in an HSRP Network

In the following example, the HSRP network consists of Router A and Router B. The Gigabit Ethernet interface 2/0 on Router A is connected to the same network as Gigabit Ethernet interface 2/0 on Router B. The example, starting in global configuration mode, shows the configuration of BFD.



**Note** In the following example, the **standby bfd** and the **standby bfd all-interfaces** commands are not displayed. HSRP support for BFD peering is enabled by default when BFD is configured on the router or interface using the **bfd interval** command. The **standby bfd** and **standby bfd all-interfaces** commands are needed only if BFD has been manually disabled on a router or interface.

### Router A

```
interface GigabitEthernet0/0/1
no shutdown
ip address 10.0.0.1 255.0.0.0
bfd interval 200 min_rx 200 multiplier 3
standby 1 ip 10.0.0.11
standby 1 preempt
standby 1 priority 110

standby 2 ip 10.0.0.12
standby 2 preempt
standby 2 priority 110
```

### Router B

```
interface GigabitEthernet0/0/1
ip address 10.1.0.22 255.255.0.0
no shutdown
bfd interval 200 min_rx 200 multiplier 3
standby 1 ip 10.0.0.11
standby 1 preempt
standby 1 priority 90
```

```
standby 2 ip 10.0.0.12
standby 2 preempt
standby 2 priority 80
```

The output from the **show standby neighbors** command verifies that a BFD session has been created:

```
RouterA#show standby neighbors

HSRP neighbors on GigabitEthernet0/0/0
 10.1.0.22
   No active groups
   Standby groups: 1
   BFD enabled !
RouterB# show standby neighbors

HSRP neighbors on GigabitEthernet0/0/1
 10.0.0.2
   Active groups: 1
   No standby groups
   BFD enabled !
```

## Example: Configuring BFD Support for Static Routing

In the following example, the network consists of Device A and Device B. Serial interface 2/0 on Device A is connected to the same network as serial interface 2/0 on Device B. In order for the BFD session to come up, Device B must be configured.

### Device A

```
configure terminal
interface Serial 2/0
ip address 10.201.201.1 255.255.255.0
bfd interval 500 min_rx 500 multiplier 5
ip route static bfd Serial 2/0 10.201.201.2
ip route 10.0.0.0 255.0.0.0 Serial 2/0 10.201.201.2
```

### Device B

```
configure terminal
interface Serial 2/0
ip address 10.201.201.2 255.255.255.0
bfd interval 500 min_rx 500 multiplier 5
ip route static bfd Serial 2/0 10.201.201.1
ip route 10.1.1.1 255.255.255.255 Serial 2/0 10.201.201.1
```

Note that the static route on Device B exists solely to enable the BFD session between 10.201.201.1 and 10.201.201.2. If there is no useful static route that needs to be configured, select a prefix that will not affect packet forwarding, for example, the address of a locally configured loopback interface.

In the following example, there is an active static BFD configuration to reach 209.165.200.225 through Gigabit Ethernet interface 0/0/0 in the BFD group testgroup. As soon as the static route is configured that is tracked by the configured static BFD, a single hop BFD session is initiated to 209.165.200.225 through Ethernet interface 0/0. The prefix 10.0.0.0/8 is added to the RIB if a BFD session is successfully established.

```
configure terminal
ip route static bfd GigabitEthernet 0/0/0 209.165.200.225 group testgroup
ip route 10.0.0.0 255.255.255.224 Ethernet 0/0 209.165.200.225
```

In the following example, a BFD session to 209.165.200.226 through Ethernet interface 0/0.1001 is marked to use the group testgroup. That is, this configuration is a passive static BFD. Though there are static routes to be tracked by the second static BFD configuration, a BFD session is not triggered for 209.165.200.226 through Gigabit Ethernet interface 0/0/0. The existence of the prefixes 10.1.1.1/8 and 10.2.2.2/8 is controlled by the active static BFD session (Gigabit Ethernet interface 0/0/0 209.165.200.225).

```
configure terminal
ip route static bfd GigabitEthernet 0/0/0 209.165.200.225 group testgroup
ip route 10.0.0.0 255.255.255.224 GigabitEthernet 0/0/0 209.165.200.225
ip route static bfd Ethernet 0/0.1001 209.165.200.226 group testgroup passive
ip route 10.1.1.1 255.255.255.224 GigabitEthernet 0/0/0 209.165.200.226
ip route 10.2.2.2 255.255.255.224 GigabitEthernet 0/0/0 209.165.200.226
```

## BFD Dampening

**Table 1: Feature History**

Feature Name	Release	Description
BFD Dampening	Cisco IOS XE Amsterdam 17.3.1	<p>Bidirectional Forwarding Detection (BFD) is a detection protocol that is designed to provide fast forwarding path failure detection for encapsulations, topologies, and routing protocols. BFD provides a consistent failure detection method.</p> <p>BFD detects forwarding path failures at a uniform rate, rather than the variable rates for different routing protocol.</p> <p>This feature is supported on the RSP2 module.</p>

The BFD Dampening feature introduces a configurable exponential delay mechanism. This mechanism is designed to suppress the excessive effect of remote node reachability events flapping with BFD. The BFD Dampening feature allows the network operator to automatically dampen a given BFD session to prevent excessive notification to BFD clients, thus preventing unnecessary instability in the network. Dampening the notification to a BFD client suppresses BFD notification until the time the session under monitoring stops flapping and becomes stable.

Configuring the BFD Dampening feature, especially on a high-speed interface with routing clients, improves convergence time and stability throughout the network. (For routing client: minimize route recomputation, prefix flushing and learning due to stop or restart of routing protocol, translating in turn into reduced utilization of system processing resources by other devices in the network).

When reachability to the node under monitoring is flapping, penalty is assigned to that session. Penalty is gradually increased as long as the session state is not stable. Penalty is suppressed when next hop reachability becomes stable (during less flapping). There are different configuration parameters that are introduced in addressing this requirement namely Suppress Threshold, Half-Life period, Reuse Threshold and maximum suppress time.

BFD session dampening can be applied to all types of BFD sessions including IPv4 or IPv6 single-hop or multihop and so on. BFD session dampening is configured through bfd-template CLI at global level.

## Restriction

- BFD Dampening is not supported on BFD multihop client and Micro BFD.
- BFD Dampening with down monitoring, does not work for multihop sessions.

## Configuring BFD Dampening

### Procedure

---

- Step 1** enable
- Example:**  
 Router> enable  
 Enables privileged EXEC mode.
- Enter your password if prompted.
- Step 2** configure terminal
- Example:**  
 Router# configure terminal  
 Enters global configuration mode.
- Step 3** bfd-template multi-hop *template-name*
- Example:**  
 Router(config)# bfd-template multi-hop doctemplate  
 Creates a Bidirectional Forwarding Detection (BFD) template and enters BFD configuration mode.
- Step 4** interval min-tx *milliseconds* min-rx *milliseconds* multiplier *multiplier-value*
- Example:**  
 Router(config-bfd)# interval min-tx 120 min-rx 100 multiplier 3  
 Configures the transmit and receive intervals between BFD packets, and specifies the number of consecutive BFD control packets that must be missed before BFD declares that a peer is unavailable.
- Step 5** dampening [*half-life-period reuse-threshold suppress-threshold max-suppress-time stability-threshold down-monitoring*]
- Example:**  
 Router(config-bfd)# dampening 2 1000 3000 8  
 Router(config-bfd)# dampening 4 200 1000 10 60 down-monitoring  
 Configures a device to dampen a flapping session.
- Note** Enable *down monitoring* to implement the BFD dampening with down monitoring feature.
- Step 6** end
- Example:**

```
Router(config-bfd)# end
```

Exits BFD configuration mode and returns to privileged EXEC mode.

## Examples for BFD Dampening

### show bfd neighbor detail

Following command shows the dampening specific details if enabled for the session.

```
IPv4 Sessions
NeighAddr                    LD/RD          RH/RS          State          Int
10.0.0.2                     1/0           Up             Up             Et0/0
Session Host: Software
OurAddr: 10.0.0.1
Handle: 1
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 1000000, MinRxInt: 1000000, Multiplier: 3
Received MinRxInt: 0, Received Multiplier: 0
Holddown (hits): 0(0), Hello (hits): 1000(0)
Rx Count: 0, Rx Interval (ms) min/max/avg: 0/0/0 last: 1257099 ms ago
Tx Count: 0, Tx Interval (ms) min/max/avg: 0/0/0 last: 1257099 ms ago
Elapsed time watermarks: 0 0 (last: 0)
Dampening:  penalty: 0                - not dampened
              flap count: 0          - half-life: 2 sec
              reuse threshold: 2000   - suppress threshold: 3000
              max suppress time: 6 sec
Registered protocols: BGP CEF
Last packet: Version: 1              - Diagnostic: 0
              State bit: AdminDown    - Demand bit: 0
              Poll bit: 0             - Final bit: 0
              C bit: 0
              Multiplier: 0           - Length: 0
              My Discr.: 0            - Your Discr.: 0
              Min tx interval: 0      - Min rx interval: 0
              Min Echo interval: 0
```

### show bfd neighbor dampening

Following command displays the dampening information about the BFD sessions configured with BFD dampening.

```
IPv4 Multihop Sessions
NeighAddr[vrf]              LD/RD          RH/RS          State
20.0.0.1                    1/0           Up             Up
Dampening:  penalty: 0                - not dampened
              flap count: 0          - half-life: 2 sec
              reuse threshold: 2000   - suppress threshold: 3000
              max suppress time: 6 sec
```

### show bfd neighbor dampened

Following command displays the dampening information about the BFD sessions that are dampened.

```
IPv4 Sessions
```

```

NeighAddr[vrf]                LD/RD          RH/RS          State
20.0.0.1                      1/0           Down           Down
Dampening:  penalty: 4500      - dampened
              flap count: 10   - half-life: 2 sec
              reuse threshold: 2000 - suppress threshold: 3000
              max suppress time: 6 sec

```

Use detail keyword to view the entire session information.

```

IPv4 Sessions
NeighAddr                LD/RD          RH/RS          State          Int
1.1.1.2                  1/1           Up             Up             Et0/0
Session state is UP and using echo function with 50 ms interval.
Session Host: Software
OurAddr: 10.0.0.1
Handle: 1
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 1000000, MinRxInt: 1000000, Multiplier: 3
Received MinRxInt: 1000000, Received Multiplier: 3
Holddown (hits): 0(0), Hello (hits): 1000(181)
Rx Count: 259, Rx Interval (ms) min/max/avg: 1/1000/663 last: 58 ms ago
Tx Count: 297, Tx Interval (ms) min/max/avg: 1/1000/578 last: 58 ms ago
Elapsed time watermarks: 0 0 (last: 0)
Dampening: Penalty: 4999      - dampened
              Flap Count: 38   - Half Life: 2 sec
              Reuse Threshold: 1000 - Suppress Threshold: 3000
              Max suppress time: 5 sec
Registered protocols: BGP CEF
Template: damp
Uptime: 00:00:00
Last packet: Version: 1      - Diagnostic: 0
              State bit: Up   - Demand bit: 0
              Poll bit: 0     - Final bit: 0
              C bit: 0
              Multiplier: 3    - Length: 24
              My Discr.: 1    - Your Discr.: 1
              Min tx interval: 1000000 - Min rx interval: 1000000

```

### show bfd neighbor dampened (down-monitoring output)

```
Router# show bfd neigh dampened
```

```

IPv4 Sessions
NeighAddr                LD/RD          RH/RS          State          Int
1.1.1.2                  3/3           Down           Down           BD10
Dampening: Penalty: 353      - dampened(down monitoring)
              Flap Count: 3    - Half Life: 4 seconds
              Reuse Threshold: 200 - Suppress Threshold: 1000
              Max suppress time : 10 seconds
              Time to unsuppress : 4 seconds
              Stability threshold: 60 seconds
              Exponential Backoff counter: 0

```

### show bfd neighbor dampening (down-monitoring output)

```
Router# show bfd neigh dampening
```

```

IPv4 Sessions
NeighAddr                LD/RD          RH/RS          State          Int
1.1.1.2                  3/3           Up             Up             BD10
Dampening: Penalty: 1       - not dampened(down monitoring)
              Flap Count: 3    - Half Life: 4 seconds
              Reuse Threshold: 200 - Suppress Threshold: 1000

```



```
Max suppress time : 10 seconds
Time to unsuppress : 0 seconds
Stability threshold: 60 seconds
Exponential Backoff counter: 1
```

## Micro BFD

To enable fast detection of link failure in a port channel, BFD sessions are run on every member link of the port channel. The BFD session that is mapped to a member link is referred to as a micro-BFD session. The micro-BFD sessions on the member links are independent BFD sessions.

For port channels with EFPs, Micro-BFD establishes the session with the source and destination as follows:

### Features of Micro BFD

- Micro BFD is supported both in hardware offloaded and software offloaded.
- Timers supported on micro BFD hardware offloaded session are from 3.3 ms to 200 ms.
- Timers supported on micro BFD hardware offloaded session are from 3.3 milli seconds to 1000 milli seconds.
- Micro BFD software offloaded sessions supported from 200 milli seconds to 1000 milli seconds.
- Maximum tested values include 24 sessions.
- Interior gateway protocol is not necessary for the micro BFD sessions to be up between the LAG.
- The client for micro BFD sessions is port-channel.
- Micro BFD is supported on port-channel with member links from different ASICs.
- Micro BFD is supported with LACP minimum links and LACP maximum links enabled on the port-channel.
- The convergence achieved with this feature is less than 50 ms with BFD timers configured to 3.3ms with multiplier value as 3.

### Functions of Micro BFD

- Runs BFD session over each Link Aggregation Group (LAG) member link.
- Verifies link continuity for every member link.
- Makes BFD to control the LAG member link to be part of the Layer 2 load-balancing table of the LAG interface in the presence or the absence of Link Aggregation Control Protocol (LACP).
- Offloads the continuity check messages.

### Restrictions for Micro BFD

- Micro BFD supports single hop only.

- Micro BFD works only with IPv4.
- Micro BFD does not support ECHO mode.
- Maximum tested scale is 24sessions .
- Micro BFD is not supported on any of the video templates.

## Steps to Configure Micro BFD on Layer 3 Port Channel

Perform the following steps to configure micro BFD:

1. Configure port channel. See [Configure Port-Channel, on page 36](#).
2. If Micro BFD needs to be enabled on an Active/Active SDM template, enable port channel, then enable the SDM template for the port channel ID before configuring the port-channel. See [Configuring QoS Support on Port Channel Active Active](#) and [Selecting the SDM template](#).
3. Micro BFD supported on non-video template. See [Configure the SDM Template](#).
4. Configure BFD template. See [Configure Micro BFD on Port Channel, on page 37](#).
5. Configure Micro BFD over port-channel with the template configured. See [Configure Micro BFD on Port Channel, on page 37](#).

## Configure Port-Channel

### Procedure

---

- |               |  |
|---------------|--|
| <b>Step 1</b> | enable   |
|               | <b>Example:</b>  |
|               | <code>Router&gt; enable</code>                             |
|               | Enables privileged EXEC mode.                              |
|               | Enter your password if prompted.                           |
| <b>Step 2</b> | configure terminal   |
|               | <b>Example:</b>  |
|               | <code>Router# configure terminal</code>                    |
|               | Enters the global configuration mode.                      |
| <b>Step 3</b> | <b>Interface port channel</b> <i>number</i>                |
|               | <b>Example:</b>  |
|               | <code>Router(config)#interface port-channel 48</code>      |
|               | Configures the port channel and enters the interface mode. |
| <b>Step 4</b> | <b>ip address</b> <i>ip-address mask</i>                   |
|               | <b>Example:</b>  |

```
Router(config-if)# ip address 10.201.201.1 255.255.255.0
```

Configures an IP address for the interface.

**Step 5**    **Interface** *interface type**interface name*

**Example:**

```
Router(config)#interface gigabitethernet 0/0/0-6
```

Specifies the ethernet interface.

**Step 6**    **channel group** *channel group number mode mode name*

**Example:**

```
Router(config)#channel group 48 mode active
```

The following types of port channel modes can be configured:

- active
- passive
- on

**Step 7**    **end**

Exits the interface range configuration mode and returns to the configuration mode.

## Verify Port Channel

Use the commands below to verify the port channel summary details:

```
Device#show etherchannel summary
Flags:  D - down          P/bndl - bundled in port-channel
        I - stand-alone s/susp - suspended
        H - Hot-standby (LACP only)
        R - Layer3       S - Layer2
        U - in use       f - failed to allocate aggregator

        M - not in use, minimum links not met
        u - unsuitable for bundling
        w - waiting to be aggregated
        d - default port

Number of channel-groups in use: 1
Number of aggregators:          1

Group  Port-channel  Protocol    Ports
-----+-----+-----+-----
10     Po10 (RU)         LACP       Te0/4/0 (bndl)
```

## Configure Micro BFD on Port Channel

### Procedure

**Step 1**    **enable**

**Example:**

```
Router> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2** **configure terminal****Example:**

```
Router# configure terminal
```

Enters global configuration mode.

**Step 3** **bfd-template single-hop** *MicroBFD\_template name***Example:**

```
Router(config)#bfd-template single-hop MicroBFD_template
```

Configures the BFD template and enters BFD configuration mode.

**Step 4** **interval min-tx** *milliseconds* **min-rx** *milliseconds* **multiplier** *multiplier-value***Example:**

```
Router(bfd-config)#interval min-tx 100 min-rx 100 multiplier 3
```

Configures the transmit and receive intervals between BFD packets, and specifies the number of consecutive BFD control packets that must be missed before BFD declares that a peer is unavailable.

**Step 5** **end****Example:**

```
Router(bfd-config)# end
```

Exits BFD configuration mode and returns the router to privileged EXEC mode.

**Step 6** **configure terminal****Example:**

```
Router# configure terminal
```

Enters global configuration mode.

**Step 7** **Interface port channel** *number***Example:**

```
Router(config)#interface port channel 48
```

Configures the port channel and enters the interface mode.

**Step 8** **port channel bfd destination ipv4** *ip address* **MicroBFD\_template****Example:**

```
Router(config-if)#port-channel bfd destination ipv4 48.48.48.2 MicroBFD_template
```

Configures micro BFD under the port channel.

Use the no form of the command to delete the Micro BFD session from the port channel.

### Step 9 End

Exits interface configuration mode and returns to global configuration mode.

## Verify Micro BFD Session

Use the following commands to verify that the BFD sessions established are in UP state.

```

router#show etherchannel summary
Flags: D - down          P/bndl - bundled in port-channel
       I - stand-alone  s/susp - suspended
       H - Hot-standby (LACP only)
       R - Layer3       S - Layer2
       U - in use       f - failed to allocate aggregator

       M - not in use, minimum links not met
       u - unsuitable for bundling
       w - waiting to be aggregated
       d - default port

Number of channel-groups in use: 1
Number of aggregators:          1

Group  Port-channel  Protocol    Ports
-----+-----+-----+-----
1      Po1(RU)        LACP        Gi0/3/2(bndl) Gi0/3/3(bndl)

RU - L3 port-channel UP State
SU - L2 port-channel UP state
P/bndl - Bundled
S/susp  - Suspended

router#show bfd summary
Session          Up          Down
Total            8           8           0

router#show bfd neighbors
IPv4 Sessions
NeighAddr        LD/RD        RH/RS        State        Int
209.165.202.129  8/2148073631 Up           Up           Gi0/2/0
209.165.202.138  1028/2148073764 Up           Up           Gi0/2/1
209.165.202.139  45/108      Up           Up           Gi0/2/2
209.165.202.142  48/3        Up           Up           Te0/1/0
209.165.202.156  50/5        Up           Up           BD1000

IPv6 Sessions
NeighAddr        LD/RD        RH/RS        State        Int
FE80::F278:16FF:FE85:CA91  46/1        Up           Up           Te0/1/0

Port Channel IPv4 Sessions
NeighAddr        Parent Int    LD/RD        RH/RS        State        Int
209.165.202.132  Po1          53/112      Up           Up           Gi0/3/2
209.165.202.132  Po1          54/111      Up           Up           Gi0/3/3

```

Po1

```
router#show bfd neighbors poch-ipv4
Port Channel IPv4 Sessions
NeighAddr      LD/RD RH/RS State Int      Parent Int
209.165.202.132 53/112 Up      Up   Gi0/3/2   Po1
209.165.202.132 54/111 Up      Up   Gi0/3/3   Po1
```



## CHAPTER 3

# Static Route Support for BFD over IPv6

- [Restrictions for Static Route for BFD over IPv6, on page 41](#)
- [Information About Static Route Support for BFD over IPv6, on page 41](#)
- [How to Configure Bidirectional Forwarding Detection for IPv6, on page 42](#)
- [Configuration Examples for Static Route Support for BFD over IPv6, on page 44](#)

## Restrictions for Static Route for BFD over IPv6

Multi-hop is *not* supported for static route.

## Information About Static Route Support for BFD over IPv6

Using the BFDv6 protocol to reach the static route next hop ensures that an IPv6 static route is inserted only in the IPv6 Routing Information Base (RIB) when the next-hop neighbor is reachable. Using the BFDv6 protocol also can remove the IPv6 static route from the IPv6 RIB when the next hop becomes unreachable.

A user can configure IPv6 static BFDv6 neighbors. These neighbor can operate in one of two modes: associated (which is the default) and unassociated. A neighbor can be transitioned between the two modes without interrupting the BFDv6 session associated with the neighbor.

### BFDv6 Associated Mode

In Bidirectional Forwarding Detection for IPv6 (BFDv6) associated mode, an IPv6 static route is automatically associated with an IPv6 static BFDv6 neighbor if the static route next hop exactly matches the static BFDv6 neighbor.

An IPv6 static route requests a BFDv6 session for each static BFDv6 neighbor that has one or more associated IPv6 static routes and is configured over an interface on which BFD has been configured. The state of the BFDv6 session will be used to determine whether the associated IPv6 static routes are inserted in the IPv6 RIB. For example, static routes are inserted in the IPv6 RIB only if the BFDv6 neighbor is reachable, and the static route is removed from the IPv6 RIB if the BFDv6 neighbor subsequently becomes unreachable.

BFDv6 associated mode requires you to configure a BFD neighbor and static route on both the device on which the BFD-monitored static route is required and on the neighboring device.

## BFDv6 Unassociated Mode

An IPv6 static BFD neighbor may be configured as unassociated. In this mode, the neighbor is not associated with static routes, and the neighbor always requests a BFDv6 session if the interface has been configured for BFDv6.

Unassociated mode is useful in the following situations:

- Bringing up a BFDv6 session in the absence of an IPv6 static route—This case occurs when a static route is on router A, with router B as the next hop. Associated mode requires you to create both a static BFD neighbor and static route on both routers in order to bring up the BFDv6 session from B to A. Specifying the static BFD neighbor in unassociated mode on router B avoids the need to configure an unwanted static route.
- Transition to BFD monitoring of a static route—This case occurs when existing IPv6 static routes are inserted in the IPv6 RIB. Here, you want to enable BFD monitoring for these static routes without any interruption to traffic. If you configure an attached IPv6 static BFD neighbor, then the static routes will immediately be associated with the new static BFD neighbor. However, because a static BFD neighbor starts in a down state, the associated static routes are then removed from the IPv6 RIB and are reinserted when the BFDv6 session comes up. Therefore, you will see an interruption in traffic. This interruption can be avoided by configuring the static BFD neighbor as unassociated, waiting until the BFDv6 session has come up, and then reconfiguring the static BFD neighbor as associated.
- Transition from BFD monitoring of a static route—In this case, IPv6 static routes are monitored by BFD and inserted in the RIB. Here, you want to disable BFD monitoring of the static routes without interrupting traffic flow. This scenario can be achieved by first reconfiguring the static BFD neighbor as detached (thus disassociating the neighbor from the static routes) and then deconfiguring the static BFD neighbor.

## How to Configure Bidirectional Forwarding Detection for IPv6

### Specifying a Static BFDv6 Neighbor

An IPv6 static BFDv6 neighbor is specified separately from an IPv6 static route. An IPv6 static BFDv6 neighbor must be fully configured with the interface and neighbor address and must be directly attached to the local router.

#### Procedure

**Step 1**     **enable**

#### Example:

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2**     **configure terminal**



**Example:**

```
Device# configure terminal
```

Enters global configuration mode.

**Step 3** **ipv6 route static bfd** [**vrf vrf-name**] *interface-type interface-number ipv6-address* [**unassociated**]

**Example:**

```
Device(config)# ipv6 route static bfd gigabitethernet 0/0/0 2001:DB8::1
```

Specifies static route IPv6 BFDv6 neighbors.

## Associating an IPv6 Static Route with a BFDv6 Neighbor

IPv6 static routes are automatically associated with a static BFDv6 neighbor. A static neighbor is associated with a BFDv6 neighbor if the static next-hop explicitly matches the BFDv6 neighbor.

**Procedure**

**Step 1** **enable**

**Example:**

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2** **configure terminal**

**Example:**

```
Device# configure terminal
```

Enters global configuration mode.

**Step 3** **ipv6 route static bfd** [**vrf vrf-name**] *interface-type interface-number ipv6-address* [**unassociated**]

**Example:**

```
Device(config)# ipv6 route static bfd gigabitethernet 0/0/0 2001:DB8::1
```

Specifies static route BFDv6 neighbors.

**Step 4** **ipv6 route** [**vrf vrf-name**] *ipv6-prefix / prefix-length {ipv6-address | interface-type interface-number ipv6-address}* [**nexthop-vrf** [*vrf-name1* | **default**]] [*administrative-distance*] [*administrative-multicast-distance*] [**unicast** | **multicast**] [*next-hop-address*] [**tag tag**]

**Example:**

```
Device(config)# ipv6 route 2001:DB8::/64 gigabitethernet 0/0/0 2001:DB8::1
```

Establishes static IPv6 routes.

---

## Configuration Examples for Static Route Support for BFD over IPv6

### Example: Specifying an IPv6 Static BFDv6 Neighbor

The following example specifies a fully configured IPv6 static BFDv6 neighbor. The interface is GigabitEthernet 0/0/0 and the neighbor address is 2001:DB8::1.

```
Device(config)# ipv6 route static bfd gigabitethernet 0/0/0 2001:DB8::1
```

### Example: Associating an IPv6 Static Route with a BFDv6 Neighbor

In this example, the IPv6 static route 2001:DB8::/32 is associated with the BFDv6 neighbor 2001:DB8::1 over the GigabitEthernet 0/0/0 interface:

```
Device(config)# ipv6 route static bfd gigabitethernet 0/0/0 2001:DB8::1  
Device(config)# ipv6 route 2001:DB8::/32 gigabitethernet 0/0/0 2001:DB8::1
```



## CHAPTER 4

# BFD on IP Unnumbered Interfaces

This feature module describes how to enable BFD on IP unnumbered interfaces.



**Note** This feature is applicable only for Cisco ASR 900 RSP2 Module.

- [Information about BFD on IP Unnumbered Interfaces, on page 45](#)
- [Prerequisites for BFD on IP Unnumbered Interfaces, on page 45](#)
- [Restrictions for BFD on IP Unnumbered Interfaces, on page 46](#)
- [Configuring BFD on IP Unnumbered Interfaces, on page 46](#)
- [Verifying BFD on IP Unnumbered Interface Configuration, on page 49](#)
- [Example: Configuration of BFD on IP Unnumbered Interfaces, on page 50](#)
- [Additional References, on page 55](#)
- [Feature Information for BFD on IP Unnumbered Interfaces, on page 56](#)

## Information about BFD on IP Unnumbered Interfaces

Cisco ASR 900 RSP2 Module supports BFD to run on IP unnumbered interfaces, which take the IP address from the loopback address. You can use the same loopback address on multiple interfaces. Physical, BDI, and Port-channel interfaces are supported for BFD on IP unnumbered interfaces. Single hop with authentication and Segment-routing (SR) are supported with BFD on IP unnumbered interfaces.

## Prerequisites for BFD on IP Unnumbered Interfaces

- point-to-point keyword is mandatory for BFD on IP unnumbered interfaces:  
`ip unnumbered Loopback <> poll point-to-point`
- point-to-point keyword should be enabled on client protocols for ISIS and OSPF:  
`ip ospf network point-to-point`  
`isis network point-to-point`

## Restrictions for BFD on IP Unnumbered Interfaces

- BFD on IP unnumbered interface is supported only with ISIS and OSPF.
- Echo mode is not supported.
- BFD on IP unnumbered interface is not supported for IPv6.
- BFD dampening is not supported.
- MHBFD is not supported for the clients of OSPF and ISIS.

## Configuring BFD on IP Unnumbered Interfaces

### Procedure

---

**Step 1**     **enable**

**Example:**

```
Device> enable
```

Enables privileged EXEC mode.

Enter your password if prompted.

**Step 2**     **configure terminal**

**Example:**

```
router#configure terminal
```

Enters global configuration mode.

**Step 3**     **bfd-template single-hop *template-name***

**Example:**

```
Router(config)# bfd-template single-hop bfdtemplate1
```

Creates a single-hop BFD template and enters BFD configuration mode.

**Step 4**     **interval min-tx *milliseconds* min-rx *milliseconds* multiplier *multiplier-value***

**Example:**

```
Router(bfd-config)# interval min-tx 120 min-rx 100 multiplier 3
```

Configures the transmit and receive intervals between BFD packets, and specifies the number of consecutive BFD control packets that must be missed before BFD declares that a peer is unavailable.

**Step 5**     **interface loopback *instance***

**Example:**

```
router#interface loopback 0
```

Creates a loopback interface and enter the interface config mode.

**Step 6** **ip address** *address subnet mask*

**Example:**

```
router(config-if)#ip address 21.21.21.21 255.255.255.255
```

Configures an IP address for this loopback interface.

**Step 7** **ip router isis** *area-tag*

**Example:**

```
router(config-if)#ip router isis 1
```

Configures an IS-IS routing process for the IP on the configured interface and attaches an area designator to the routing process.

**Step 8** **ip ospf process id area** *area id*

**Example:**

```
router(config-if)# ip ospf 1 area 0
```

Enables OSPFv2 on an interface.

**Step 9** **interface gigabitethernet***slot/subslot/port*

**Example:**

```
router(config-if)#interface gigabitethernet0/0/3
```

Configures the interface type as gigabitethernet.

**Step 10** **ip unnumbered Loopback** *interface poll point-to-point*

**Example:**

```
router(config-if)# ip unnumbered Loopback 0 poll point-to-point
```

Enables IP unnumbered processing on the loopback interface with point-to-point host polling.

**Step 11** **no ip redirects**

**Example:**

```
router(config-if)# no ip redirects
```

Disables ICMP redirect messages.

**Step 12** **ip router isis** *process tag*

**Example:**

```
router (config-if)#ip router isis 1
```

Enable IS-IS as an IP routing protocol on the routers, and assign a tag to the process.

**Step 13** **ip ospf network** *point-to-point*

**Example:**

```
router(config-if)#ip ospf network point-to-point
```

Configures an OSPFv2 point-to-point link on the interface.

**Step 14** **ip ospf bfd**

**Example:**

```
router(config-if)#ip ospf bfd
```

Enables BFD on the OSPFv2 interface.

**Step 15** **ip ospf** *process id* **area** *area id***Example:**

```
router(config-if)# ip ospf 1 area 0
```

Enables OSPFv2 on an interface.

**Step 16** **isis network** **point-to-point****Example:**

```
router(config-if)#isis network point-to-point
```

Configures an IS-IS network into a point-to-point network.

**Step 17** **bfd template** *template name*

Enables the BFD template.

**Step 18** **bfd interval** *milliseconds* **min\_rx** *milliseconds* **multiplier** *interval-multiplier***Example:**

```
router(config-if)# bfd interval 50 min_rx 50 multiplier 3
```

Enables BFD on the interface.

**Step 19** **router ospf** *process id***Example:**

```
router(config-if)#router ospf 1
```

Enables OSPF routing protocol on the router and attaches a process ID.

**Step 20** **router-id** *router id***Example:**

```
router(config-router) router-id 209.165.201.0
```

Assigns the router ID on the OSPF router.

**Step 21** **bfd all-interfaces strict-mode****Example:**

```
router(config-router)#bfd all-interfaces strict-mode
```

Enables BFD strict-mode for OSPF on all interfaces.

**Step 22** **router isis** *area tag***Example:**

```
router(config-router)#router isis 1
```

Assigns a tag to an IS-IS process. Enters router configuration mode.

**Step 23** **net** *network entity title***Example:**

```
router(config-router)#net 49.0001.0000.0000.0000.000a.00
```

Configures the NET on the device. The NET identifies the device for IS-IS.

**Step 24**     **is-type level-2-only**

**Example:**

```
router(config-router)#is-type level-2-only
```

Defines the routing level of the IS-IS routing process as level 2.

**Step 25**     **metric-style wide**

**Example:**

```
router(config-router)#metric-style wide
```

Configures a router running IS-IS so that it generates and accepts only new-style TLVs.

**Step 26**     **log-adjacency-changes**

**Example:**

```
router(config-router)#log-adjacency-changes
```

Configures the router to send a syslog message when the state of an OSPF neighbor changes.

**Step 27**     **bfd all-interfaces**

**Example:**

```
router(config-router)#bfd all-interfaces
```

Enables BFD for all of the interfaces for which IS-IS is routing.

## Verifying BFD on IP Unnumbered Interface Configuration

To verify the BFD on IP unnumbered interface configuration, use the show commands given below:

```
Router#show bfd neighbors
IPv4 Sessions
  NeighAddr          LD/RD          RH/RS          State          Int          Int
10.0.0.1             1/3            1/3            Up             Up           Po10          Gi0/0/3
3.3.3.3             1025/1025     Up             Up             Po10
```

```
Router#show bfd neighbors detail
IPv4 Sessions
NeighAddr          LD/RD          RH/RS          State          Int
10.0.0.1          1/3            Up             Up             Gi0/0/3
Session state is UP and not using echo function.
Session Host: Hardware
OurAddr: 21.21.21.21
Handle: 1
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 50000, MinRxInt: 50000, Multiplier: 3
Received MinRxInt: 50000, Received Multiplier: 3
Holddown (hits): 0(0), Hello (hits): 50(0)
Rx Count: 4304
Tx Count: 4306
Elapsed time watermarks: 0 0 (last: 0)
Registered protocols: OSPF CEF ISIS FRR
```

```

Uptime: 00:02:41
Last packet: Version: 1      - Diagnostic: 0
State bit: Up                - Demand bit: 0
Poll bit: 0                  - Final bit: 0
C bit: 1
Multiplier: 3               - Length: 24
My Discr.: 3                 - Your Discr.: 1
Min tx interval: 50000      - Min rx interval: 50000
Min Echo interval: 0

```

## Example: Configuration of BFD on IP Unnumbered Interfaces

Configuration on router 1:

```

key chain cisco
key 1
  key-string bfd
!
segment-routing mpls
!
set-attributes
  address-family ipv4
  sr-label-preferred
  exit-address-family
!
global-block 20000 30000
!
connected-prefix-sid-map
  address-family ipv4
    21.21.21.21/32 index 2222 range 1
    22.22.22.22/32 index 2223 range 1
    23.23.23.23/32 index 2224 range 1
  exit-address-family
!
bfd-template single-hop TEST
interval min-tx 500 min-rx 500 multiplier 3
authentication md5 keychain cisco

interface Loopback0
ip address 21.21.21.21 255.255.255.255
ip router isis 1
ip ospf 1 area 0
!
interface Loopback1
ip address 22.22.22.22 255.255.255.255
ip router isis 1
ip ospf 1 area 0
!
interface Loopback2
ip address 23.23.23.23 255.255.255.255
ip router isis 1
ip ospf 1 area 0
!
interface Port-channel10
ip unnumbered Loopback1 poll point-to-point
no ip redirects
ip router isis 1
ip ospf network point-to-point
ip ospf bfd
ip ospf 1 area 0
load-interval 30
negotiation auto

```



```

mpls ip
bfd template TEST
isis network point-to-point
!
interface GigabitEthernet0/0/3
ip unnumbered Loopback0 poll point-to-point
no ip redirects
ip router isis 1
ip ospf network point-to-point
ip ospf bfd
ip ospf 1 area 0
load-interval 30
negotiation auto
mpls ip
bfd interval 50 min_rx 50 multiplier 3
isis network point-to-point
!
router ospf 1
router-id 21.21.21.21
segment-routing mpls
segment-routing prefix-sid-map advertise-local
fast-reroute per-prefix enable prefix-priority low
fast-reroute per-prefix ti-lfa area 0
  fast-reroute keep-all-paths
bfd all-interfaces strict-mode
!
router isis 1
net 49.0001.0000.0000.0000.000a.00
is-type level-2-only
metric-style wide
log-adjacency-changes
segment-routing mpls
segment-routing prefix-sid-map advertise-local
fast-reroute per-prefix level-2 all
fast-reroute ti-lfa level-2
bfd all-interfaces
!

```

#### Configuration on router 2:

```

key chain cisco
key 1
  key-string bfd
!
segment-routing mpls
!
set-attributes
  address-family ipv4
  sr-label-preferred
  exit-address-family
!
global-block 20000 30000
!
connected-prefix-sid-map
  address-family ipv4
  10.0.0.1/32 index 1111 range 1
  2.2.2.2/32 index 1112 range 1
  3.3.3.3/32 index 1113 range 1
  exit-address-family
!
interface Loopback0
ip address 10.0.0.1 255.255.255.255
ip router isis 1
ip ospf 1 area 0
!

```

## Example: Configuration of BFD on IP Unnumbered Interfaces

```

interface Loopback1
ip address 2.2.2.2 255.255.255.255
ip router isis 1
ip ospf 1 area 0
!
interface Loopback2
ip address 3.3.3.3 255.255.255.255
ip router isis 1
ip ospf 1 area 0
!
interface Port-channel10
ip unnumbered Loopback2 poll point-to-point
no ip redirects
ip router isis 1
ip ospf network point-to-point
ip ospf bfd
ip ospf 1 area 0
load-interval 30
negotiation auto
mpls ip
bfd template TEST
isis network point-to-point
!
interface GigabitEthernet0/0/0
ip unnumbered Loopback0 poll point-to-point
no ip redirects
ip router isis 1
ip ospf network point-to-point
ip ospf bfd
ip ospf 1 area 0
load-interval 30
negotiation auto
mpls ip
bfd interval 50 min_rx 50 multiplier 3
no bfd echo
isis network point-to-point
!
router ospf 1
router-id 10.0.0.1
segment-routing mpls
segment-routing prefix-sid-map advertise-local
fast-reroute per-prefix enable prefix-priority low
fast-reroute per-prefix ti-lfa area 0
  fast-reroute keep-all-paths
bfd all-interfaces strict-mode
!
router isis 1
net 49.0001.0000.0000.0000.000b.00
is-type level-2-only
metric-style wide
log-adjacency-changes
segment-routing mpls
segment-routing prefix-sid-map advertise-local
fast-reroute per-prefix level-2 all
fast-reroute ti-lfa level-2
bfd all-interfaces
!
sh bfd neighbors

IPv4 Sessions
NeighAddr                LD/RD          RH/RS    State    Int
11.11.11.11              1/2            Up        Up        Gi0/0/3
12.12.12.12              1026/1025     Up        Up        Gi0/0/4
13.13.13.13              2/1            Up        Up        BD111

```

```

21.21.21.21          3/1          Up          Up          Gi0/0/0
22.22.22.22          1025/1025      Up          Up          Po10
BGL-PEGASUS#
sh bfd neighbors detail

```

```

IPv4 Sessions
NeighAddr          LD/RD          RH/RS          State          Int
11.11.11.11        1/2            Up             Up             Gi0/0/3
Session state is UP and not using echo function.
Session Host: Hardware
OurAddr: 10.0.0.1
Handle: 3
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 50000, MinRxInt: 50000, Multiplier: 3
Received MinRxInt: 50000, Received Multiplier: 3
Holddown (hits): 0(0), Hello (hits): 50(0)
Rx Count: 2392
Tx Count: 2413
Elapsed time watermarks: 0 0 (last: 0)
Registered protocols: OSPF CEF ISIS FRR
Uptime: 00:01:46
Last packet: Version: 1          - Diagnostic: 0
              State bit: Up      - Demand bit: 0
              Poll bit: 0        - Final bit: 0
              C bit: 1
              Multiplier: 3      - Length: 24
              My Discr.: 2       - Your Discr.: 1
              Min tx interval: 50000 - Min rx interval: 50000
              Min Echo interval: 50000

```

```

IPv4 Sessions
NeighAddr          LD/RD          RH/RS          State          Int
12.12.12.12        1026/1025      Up             Up             Gi0/0/4
Session state is UP and not using echo function.
Session Host: Software
OurAddr: 2.2.2.2
Handle: 4
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 500000, MinRxInt: 500000, Multiplier: 3
Received MinRxInt: 500000, Received Multiplier: 3
Holddown (hits): 1296(0), Hello (hits): 500(331)
Rx Count: 332, Rx Interval (ms) min/max/avg: 1/504/440 last: 204 ms ago
Tx Count: 332, Tx Interval (ms) min/max/avg: 1/504/439 last: 320 ms ago
Elapsed time watermarks: 0 0 (last: 0)
Registered protocols: OSPF CEF FRR ISIS
Template: TEST
Authentication(Type/Keychain): md5/cisco
last_tx_auth_seq: 4 last_rx_auth_seq 6
Uptime: 00:02:25
Last packet: Version: 1          - Diagnostic: 0
              State bit: Up      - Demand bit: 0
              Poll bit: 0        - Final bit: 0
              C bit: 0
              Multiplier: 3      - Length: 48
              My Discr.: 1025    - Your Discr.: 1026
              Min tx interval: 500000 - Min rx interval: 500000
              Min Echo interval: 0

```

```

IPv4 Sessions
NeighAddr          LD/RD          RH/RS          State          Int
13.13.13.13        2/1            Up             Up             BD111
Session state is UP and not using echo function.
Session Host: Hardware
OurAddr: 3.3.3.3

```

## Example: Configuration of BFD on IP Unnumbered Interfaces

```

Handle: 5
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 300000, MinRxInt: 300000, Multiplier: 3
Received MinRxInt: 300000, Received Multiplier: 3
Holddown (hits): 0(0), Hello (hits): 300(0)
Rx Count: 502
Tx Count: 504
Elapsed time watermarks: 0 0 (last: 0)
Registered protocols: OSPF CEF FRR ISIS
Uptime: 00:02:22
Last packet: Version: 1           - Diagnostic: 0
              State bit: Up       - Demand bit: 0
              Poll bit: 0         - Final bit: 0
              C bit: 1
              Multiplier: 3       - Length: 24
              My Discr.: 1        - Your Discr.: 2
              Min tx interval: 300000 - Min rx interval: 300000
              Min Echo interval: 0

IPv4 Sessions
NeighAddr          LD/RD          RH/RS    State    Int
21.21.21.21        3/1             Up       Up       Gi0/0/0
Session state is UP and not using echo function.
Session Host: Hardware
OurAddr: 10.0.0.1
Handle: 1
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 50000, MinRxInt: 50000, Multiplier: 3
Received MinRxInt: 50000, Received Multiplier: 3
Holddown (hits): 0(0), Hello (hits): 50(0)
Rx Count: 4305
Tx Count: 4323
Elapsed time watermarks: 0 0 (last: 0)
Registered protocols: OSPF CEF ISIS FRR
Uptime: 00:02:59
Last packet: Version: 1           - Diagnostic: 0
              State bit: Up       - Demand bit: 0
              Poll bit: 0         - Final bit: 0
              C bit: 1
              Multiplier: 3       - Length: 24
              My Discr.: 1        - Your Discr.: 3
              Min tx interval: 50000 - Min rx interval: 50000
              Min Echo interval: 50000

IPv4 Sessions
NeighAddr          LD/RD          RH/RS    State    Int
22.22.22.22        1025/1025      Up       Up       Po10
Session state is UP and not using echo function.
Session Host: Software
OurAddr: 3.3.3.3
Handle: 2
Local Diag: 0, Demand mode: 0, Poll bit: 0
MinTxInt: 500000, MinRxInt: 500000, Multiplier: 3
Received MinRxInt: 500000, Received Multiplier: 3
Holddown (hits): 1232(0), Hello (hits): 500(393)
Rx Count: 393, Rx Interval (ms) min/max/avg: 4/504/440 last: 268 ms ago
Tx Count: 396, Tx Interval (ms) min/max/avg: 4/504/437 last: 268 ms ago
Elapsed time watermarks: 0 0 (last: 0)
Registered protocols: CEF OSPF FRR ISIS
Template: TEST
Authentication(Type/Keychain): md5/cisco
last_tx_auth_seq: 5 last_rx_auth_seq 4
Uptime: 00:02:53
Last packet: Version: 1           - Diagnostic: 0

```

```

State bit: Up           - Demand bit: 0
Poll bit: 0            - Final bit: 0
C bit: 0
Multiplier: 3         - Length: 48
My Discr.: 1025       - Your Discr.: 1025
Min tx interval: 500000 - Min rx interval: 500000
Min Echo interval: 0

```

## Additional References

### Related Documents

Related Topic	Document Title
Cisco IOS XE Command Reference	<a href="#">Cisco IOS IP Routing: Protocol-Independent Command Reference</a>

### Standards and RFCs

Standard/RFC	Title
RFC 5880	Bidirectional Forwarding Detection (BFD)

### MIBs

MB	MIBs Link
NA	To locate and download MIBs for selected platforms, Cisco IOS releases, and feature sets, use Cisco MIB Locator found at the following URL: <a href="http://www.cisco.com/go/mibs">http://www.cisco.com/go/mibs</a>

### Technical Assistance

Description	Link
<p>The Cisco Support website provides extensive online resources, including documentation and tools for troubleshooting and resolving technical issues with Cisco products and technologies.</p> <p>To receive security and technical information about your products, you can subscribe to various services, such as the Product Alert Tool (accessed from Field Notices), the Cisco Technical Services Newsletter, and Really Simple Syndication (RSS) Feeds.</p> <p>Access to most tools on the Cisco Support website requires a Cisco.com user ID and password.</p>	<a href="http://www.cisco.com/support">http://www.cisco.com/support</a>

## Feature Information for BFD on IP Unnumbered Interfaces

The following table provides release information about the feature or features described in this module. This table lists only the software release that introduced support for a given feature in a given software release train. Unless noted otherwise, subsequent releases of that software release train also support that feature.

Use Cisco Feature Navigator to find information about platform support and Cisco software image support. To access Cisco Feature Navigator, go to [www.cisco.com/go/cfn](http://www.cisco.com/go/cfn). An account on Cisco.com is not required.

**Table 2: Feature Information for BFD on IP Unnumbered Interfaces**

Feature Name	Releases	Feature Information
BFD on IP Unnumbered Interfaces	Cisco IOS XE Everest 16.5.1	<p>In Cisco IOS XE Everest 16.5.1, BFD is supported to run on IP unnumbered interfaces, which take the IP address from the loopback address. You can use the same loopback address on multiple interfaces.</p> <p>In Cisco IOS XE Everest 16.5.1, support was added for the Cisco ASR 903 router.</p>



## CHAPTER 5

# IS-IS Client for BFD

---

When Bidirectional Forwarding Detection (BFD) support is configured with Intermediate System To Intermediate System (IS-IS) as a registered protocol with BFD, IS-IS receives forwarding path detection failure messages from BFD.

- [Prerequisites for IS-IS Client for BFD, on page 57](#)
- [Restrictions for IS-IS Client for BFD, on page 57](#)
- [Information About IS-IS Client for BFD, on page 57](#)
- [How to Configure ISIS IPv6 Client for BFD, on page 58](#)
- [Configuration Examples for ISIS IPv6 Client for BFD, on page 61](#)

## Prerequisites for IS-IS Client for BFD

- IS-IS must be running on all participating devices.
- The baseline parameters for BFD sessions must be configured on the interfaces that run BFD sessions to BFD neighbors.

## Restrictions for IS-IS Client for BFD

Only one IS-IS IPv6 session is supported.

## Information About IS-IS Client for BFD

### IS-IS BFD Topology

When BFD support is configured with IS-IS as a registered protocol with BFD, IS-IS receives forwarding path detection failure messages from BFD. BFD support for IS-IS can be configured in either router address-family configuration mode or interface configuration mode. IS-IS IPv6 can run in single-topology or in Multi-Topology (MT) mode.

IS-IS BFD supports both IPv4 and IPv6 on the same adjacency for single-topology or multi-topology mode. If BFD is enabled for both IPv4 and IPv6, IS-IS sends two BFD session creation requests to BFD. For single-topology mode, the IS-IS adjacency state can only be UP if both BFD sessions are UP. If either of the

BFD sessions is DOWN, the associated IS-IS adjacency state is also DOWN. For MT mode, the IS-IS adjacency state can be UP as long as one of topologies has a BFD session in an UP state.

## IS-IS BFD Session Creation

IS-IS requests a BFD session for the interface and IP address of the neighboring device when all of the following conditions are met:

- An IS-IS adjacency entry exists.
- The Address Family Identifier (AFI) specific peer interface address is known.
- IS-IS BFD is enabled for that AFI on an interface.
- IS-IS is enabled for that AFI on the local interface.
- If the neighboring device supports RFC 6213, BFD must be enabled for the specified Multi-Topology Identifier (MTID) or Network Layer Protocol Identifier (NLPID).

## IS-IS BFD IPv6 Session Deletion

When IS-IS BFD IPv6 is disabled on an interface, IS-IS removes related BFD sessions for IPv6 from the adjacent device. When the IS-IS adjacency entry is deleted, all BFD sessions are also deleted. IS-IS requests BFD to remove each BFD session that it has requested when any of the following events occur:

- The IS-IS instance is deleted or un-configured.
- The IS-IS adjacency entry is deleted.
- IS-IS BFD is disabled on the next hop interface for an address-family.
- The neighboring device supports RFC 6213 and indicates that it no longer supports BFD for the specified MTID or NLPID.

# How to Configure ISIS IPv6 Client for BFD

## Configuring IS-IS IPv6 Client Support for BFD on an Interface

### Procedure

---

**Step 1**    **enable**

**Example:**

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.



**Step 2**    **configure terminal****Example:**

```
Device# configure terminal
```

Enters global configuration mode.

**Step 3**    **interface** *type number***Example:**

```
Device(config)# interface gigabitethernet 6/0/0
```

Enters interface configuration mode.

**Step 4**    **ipv6 address** *ipv6-address/mask***Example:**

```
Device(config-if)# ipv6 address 2001:DB8::1/32
```

Configures IPv6.

**Step 5**    **isis ipv6 bfd****Example:**

```
Device(config-if)# isis ipv6 bfd
```

Enables IPv6 BFD on a specific interface that is configured for IS-IS.

**Step 6**    **end****Example:**

```
Device(config-if)# end
```

Exits interface configuration mode and returns to privileged EXEC mode.

---

## Configuring IS-IS IPv6 Client Support for BFD on All Interfaces

### Procedure

---

**Step 1**    **enable****Example:**

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2**    **configure terminal**

**Example:**

```
Device# configure terminal
```

Enters global configuration mode.

**Step 3 router isis****Example:**

```
Device(config)# router isis
```

Enables the IS-IS routing protocol and enters router configuration mode.

**Step 4 metric-style wide****Example:**

```
Device(config-router)# metric-style wide
```

(Optional) Configures a device that is running IS-IS so that it generates and accepts only new-style type, length, value objects (TLVs).

**Step 5 address-family ipv6****Example:**

```
Device(config-router)# address-family ipv6
```

Enters address family configuration mode for configuring IS-IS routing sessions that use standard IPv6 address prefixes.

**Step 6 multi-topology****Example:**

```
Device(config-router-af)# multi-topology
```

(Optional) Enables multi-topology IS-IS for IPv6.

**Step 7 bfd all-interfaces****Example:**

```
Device(config-router-af)# bfd all-interfaces
```

Enables BFD for all interfaces participating in the routing process.

**Step 8 end****Example:**

```
Device(config-router-af)# end
```

Exits address family configuration mode and returns to privileged EXEC mode.

---

# Configuration Examples for ISIS IPv6 Client for BFD

## Example: IS-IS IPv6 Client Support for BFD on a Single Interface

```
Device> enable
Device# configure terminal
Device(config)# interface gigabitethernet 6/0/0
Device(config-if)# ipv6 address 2001:DB8::1/32
Device(config-if)# isis ipv6 bfd
Device(config-if)# end
```

```
Device> enable
Device# configure terminal
Device(config)# interface gigabitethernet 6/0
Device(config-if)# ipv6 address 2001:DB8::1/32
Device(config-if)# isis ipv6 bfd
Device(config-if)# end
```

## Example: IS-IS IPv6 Client Support for BFD on All Interfaces

```
Device> enable
Device# configure terminal
Device(config)# router isis
Device(config-router)# metric-style wide
Device(config-router)# address-family ipv6
Device(config-router-af)# multi-topology
Device(config-router-af)# bfd all-interfaces
Device(config-router-af)# end
```

The following is a sample configuration where interface 0/0/7 of Router A is connected to interface 0/4/6 of router B.

### Configuration for Router A

```
bfd-template single-hop BFDM
 interval min-tx 50 min-rx 50 multiplier 3
!
interface TenGigabitEthernet0/0/7
 ipv6 address 2001:DB8::1/32
 ipv6 router isis
 bfd template BFDM
 isis ipv6 bfd
!
router isis
 net 49.0001.1720.1600.1001.00
!
```

### Configuration on Router B

```
Router B
```

```
bfd-template single-hop BFDM
  interval min-tx 50 min-rx 50 multiplier 3
!
interface TenGigabitEthernet0/4/6
  ipv6 address 2001:DB8::1/32
  ipv6 router isis
  bfd template BFDM
  isis ipv6 bfd
!
router isis
  net 49.0000.0000.0002.00
!
!
```



## CHAPTER 6

# BFD IPv6 Encapsulation Support

---

Bidirectional Forwarding Detection for IPv6 encapsulations are described within a session information structure. These session information structures are defined by BFDv6 for the protocols supported. BFDv6 uses information from the session information structures to determine the correct encapsulation for BFDv6 packets on that session.

- [Prerequisites for BFD IPv6 Encapsulation Support, on page 63](#)
- [Restrictions for BFD IPv6 Encapsulation Support, on page 63](#)
- [Information About BFD IPv6 Encapsulation Support, on page 64](#)
- [How to Configure BFD IPv6 Encapsulation Support, on page 65](#)
- [Configuration Examples for BFD IPv6 Encapsulation Support, on page 67](#)

## Prerequisites for BFD IPv6 Encapsulation Support

- When using Bidirectional Forwarding Detection over IPv6 (BFDv6), IPv6 Cisco Express Forwarding and IPv6 unicast routing must be enabled on all participating routers.
- When you configure BFD IPv6 software sessions, you should configure the following CLI command:  
**no ipv6 nd nud igp**

If the peer is also an ASR device, the above command should be configured on the peer device too.

## Restrictions for BFD IPv6 Encapsulation Support

- BFDv6 supports only global IPv6 neighbor addresses if a global IPv6 address is configured on the interface.
- Only asynchronous mode is supported. In asynchronous mode, either BFDv6 peer can initiate a BFDv6 session.

# Information About BFD IPv6 Encapsulation Support

## Overview of the BFDv6 Protocol

This section describes the BFDv6 protocol, how it is different from BFD for IPv4, and how it works with BFD for IPv4. BFD is a detection protocol designed to provide fast forwarding path failure detection times for all media types, encapsulations, topologies, and routing protocols. In addition to fast forwarding path failure detection, BFD provides a consistent failure detection method for network administrators. BFDv6 provides IPv6 support by accommodating IPv6 addresses and provides the ability to create BFDv6 sessions.

## BFDv6 Registration

BFD clients register with BFD using a registry application program interface (API). The registry arguments include protocol type and the address and interface description block (IDB) of the route to be monitored. These APIs and arguments are all assumed by BFD to be IPv4.

BFDv6 has registries from which these arguments have been removed, and the protocol and encapsulation are described within a session information structure. These session information structures are defined by BFDv6 for the protocols supported. BFDv6 uses information from the session information structures to determine the correct encapsulation for BFDv6 packets on that session.

## BFDv6 Global and Link-Local Addresses

BFDv6 supports both global and link-local IPv6 addresses for neighbor creation. BFDv6 sessions select source addresses to match the neighbor address types (for example, global IPv6 address neighbors must be paired with global IPv6 source addresses and link-local IPv6 address neighbors must be paired with link-local IPv6 source addresses). The table below shows the address pairings that BFDv6 supports.

**Table 3: BFDv6 Address Pairings for Neighbor Creation**

Source Address	Destination Address	Status
Global	Global	Supported
Global	Link local	Not supported
Link local	Global	Not supported
Link local	Link local	Supported

Because all IPv6-enabled interfaces have a link-local address and BFDv6 selects the source address, link-local address neighbors are always paired with a link-local interface address. The link-local source address with global destination address is not supported by Cisco Express Forwarding. Therefore, a global IPv6 address must be configured on an interface before a session with a global address neighbor may be established in BFDv6. BFDv6 rejects any sessions in which the neighbor address is global and no global address is configured on the interface.



---

**Note** The behavior of a unique local address (ULA) in BFDv6 is the same as a global address.

---

## BFD for IPv4 and IPv6 on the Same Interface

BFD supports multiple IPv4 and IPv6 sessions per interface, with no restriction on the protocol of those sessions.

# How to Configure BFD IPv6 Encapsulation Support

## Configuring BFD Session Parameters on the Interface

The steps in this procedure show how to configure BFD on the interface by setting the baseline BFD session parameters on an interface. Repeat the steps in this procedure for each interface over which you want to run BFD sessions to BFD neighbors.



---

**Note** RSP3 Module eysupports only the following BFD interval timers:  
3.3ms, 6.6ms, 10ms, 20ms, 50ms, 100ms, 200ms ,999ms. It is recommended that peer should also configure the same timer values.

---

### Procedure

---

**Step 1**    **enable**

**Example:**

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

**Step 2**    **configure terminal**

**Example:**

```
Device# configure terminal
```

Enters global configuration mode.

**Step 3**    **bfd-template single-hop *template-name***

**Example:**

```
Router(config)# bfd-template single-hop bfdtemplatel
```

Creates a single-hop BFD template and enters BFD configuration mode.

**Step 4** **interval** *min-tx milliseconds min-rx milliseconds multiplier multiplier-value*

**Example:**

```
Router(bfd-config)# interval min-tx 120 min-rx 100 multiplier 3
```

Configures the transmit and receive intervals between BFD packets, and specifies the number of consecutive BFD control packets that must be missed before BFD declares that a peer is unavailable.

**Step 5** **interface** *type number*

**Example:**

```
Device(config)# interface FastEthernet 6/0
```

Enters interface configuration mode.

**Step 6** **interface gigabitethernet** *number*

**Example:**

```
Device(config)# interface gigabitethernet 0/0/0
```

Specifies the Gigabit Ethernet interface and enters interface configuration mode.

**Step 7** Perform one of the following steps:

- **ip address** *ipv4-address mask*
- **ipv6 address** *ipv6-address/mask*

**Example:**

Configuring an IPv4 address for the interface:

```
Device(config-if)# ip address 10.201.201.1 255.255.255.0
```

Configuring an IPv6 address for the interface:

```
Device(config-if)# ipv6 address 2001:DB8::/32
```

Configures an IP address for the interface.

**Step 8** **bfd template** *template name*

Enables the BFD template.

**Step 9** **end**

**Example:**

```
Device(config-if)# end
```

Exits interface configuration mode and returns to privileged EXEC mode.



# Configuration Examples for BFD IPv6 Encapsulation Support

## Example: Configuring BFD Session Parameters on the Interface

```
Device# show ipv6 ospf neighbor detail

Neighbor 172.16.3.3
  In the area 1 via interface GigabitEthernet0/0/0
  Neighbor: interface-id 3, link-local address FE80::205:5FFF:FED3:5808
  Neighbor priority is 1, State is FULL, 6 state changes
  DR is 172.16.6.6 BDR is 172.16.3.3
  Options is 0x63F813E9
  Dead timer due in 00:00:33
  Neighbor is up for 00:09:00
  Index 1/1/2, retransmission queue length 0, number of retransmission 2
  First 0x0(0)/0x0(0)/0x0(0) Next 0x0(0)/0x0(0)/0x0(0)
  Last retransmission scan length is 1, maximum is 2
  Last retransmission scan time is 0 msec, maximum is 0 msec
```

The following is a sample configuration where interface 0/0/7 of Router A is connected to interface 0/4/6 of router B.

### Configuration on Router A

```
bfd-template single-hop BFDM
interval min-tx 50 min-rx 50 multiplier 3

router ospfv3 1
router-id 2.2.2.2
!
address-family ipv6 unicast
  bfd all-interfaces
exit-address-family
!
!
interface TenGigabitEthernet0/0/7
ipv6 address 19:1:1::1/64
ospfv3 1 ipv6 area 0
bfd template BFDM
```

### Configuration on Router B

```
bfd-template single-hop BFDM
interval min-tx 50 min-rx 50 multiplier 3
!
interface TenGigabitEthernet0/4/6
ipv6 address 19:1:1::2/64
ospfv3 1 ipv6 area 0
bfd template BFDM
end
!
router ospfv3 1
router-id 3.3.3.3
!
address-family ipv6 unicast
```

**Example: Configuring BFD Session Parameters on the Interface**

```
bfd all-interfaces
exit-address-family
```



## CHAPTER 7

# Configuring BFD Debug Enhancement

The Bidirectional Forwarding Detection (BFD) Debug Enhancement feature enables logging of debugging information for critical BFD events, normal BFD events, and BFD packets. This feature enables BFD event traces and BFD event logs. This feature allows network engineers and operators to easily identify and analyze issues with BFD sessions.

- [Prerequisites for BFD Debug Enhancement, on page 69](#)
- [Restrictions for BFD Debug Enhancement, on page 69](#)
- [Information About BFD Debug Enhancement, on page 69](#)
- [How to Configure BFD Debug Enhancement, on page 70](#)
- [Configuration Examples for BFD Debug Enhancement, on page 72](#)

## Prerequisites for BFD Debug Enhancement

Bidirectional Forwarding Detection (BFD) feature must be running on the device.

## Restrictions for BFD Debug Enhancement

The Bidirectional Forwarding Detection (BFD) event trace logs cannot store more than 65536 elements in a BFD instance. Once the log elements reach this limit, new log entries replace the old log entries.

## Information About BFD Debug Enhancement

### Overview of BFD Debug Enhancement

The Bidirectional Forwarding Detection (BFD) Debug Enhancement feature enables logging of debugging information for critical BFD events, normal BFD events, and BFD packets. This feature enables BFD event traces and BFD event logs.

## BFD Debug Enhancement - Event Tracer subsystem

The Event Tracer subsystem in the BFD Debug Enhancement feature helps network engineers trace BFD events. This subsystem generates debugging information that can be extracted and analyzed. You can optionally store the traced data in a file for further analysis.

## BFD Debug Enhancement - Event Log Architecture

The Event Log Architecture in the BFD Debug Enhancement feature is classified into three types:

- BFD Critical—Logs debugging information about all critical BFD event traces, whenever the BFD session attains the DOWN state.
- BFD Event—Logs debugging information about all BFD events that can be logged using the **debug bfd event** command.
- BFD Packet—Logs debugging information about all BFD packets that can be logged using the **debug bfd packet** command.

# How to Configure BFD Debug Enhancement

## Configuring BFD Debug Enhancement

### Procedure

---

#### Step 1

**enable**

#### Example:

```
Device> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

#### Step 2

**bfd-template single-hop** *template-name*

#### Example:

```
Router(config)# bfd-template single-hop bfdtemplate1
```

Creates a single-hop BFD template and enters BFD configuration mode.

#### Step 3

**interval min-tx** *milliseconds* **min-rx** *milliseconds* **multiplier** *multiplier-value*

#### Example:

```
Router(bfd-config)# interval min-tx 120 min-rx 100 multiplier 3
```

Configures the transmit and receive intervals between BFD packets, and specifies the number of consecutive BFD control packets that must be missed before BFD declares that a peer is unavailable.

#### Step 4

**interface** *type number*

**Example:**

```
Device(config)# interface FastEthernet 6/0
```

Enters interface configuration mode.

**Step 5**     **interface gigabitethernet** *number*

**Example:**

```
Device(config)# interface gigabitethernet 0/0/0
```

Specifies the Gigabit Ethernet interface and enters interface configuration mode.

**Step 6**     **bfd template** *template name*

Enables the BFD template.

**Step 7**     **end**

**Example:**

```
Device(config-if)# end
```

Exits interface configuration mode and returns to privileged EXEC mode.

**Step 8**     **debug bfd event**

**Example:**

```
Device# debug bfd event
```

Enables debugging information for BFD events.

**Step 9**     **debug bfd packet**

**Example:**

```
Device# debug bfd packet
```

Enables debugging information for BFD packets.

**Step 10**    **monitor event-trace bfd event enable**

**Example:**

```
Device# monitor event-trace bfd event enable
```

Enables the event traces for normal BFD events.

**Step 11**    **monitor event-trace bfd event all enable**

**Example:**

```
Device# monitor event-trace bfd event all enable
```

Enables the event trace filters for normal BFD events.

**Step 12**    **monitor event-trace bfd packet enable**

**Example:**

```
Device# monitor event-trace bfd packet enable
```

Enables the event traces for BFD packet events.

**Step 13**    **monitor event-trace bfd packet all enable**

**Example:**

```
Device# monitor event-trace bfd packet all enable
```

Enables the event trace filters for BFD packet events.

#### Step 14 **show monitor event-trace bfd**

##### **Example:**

```
Device# show monitor event-trace bfd
```

Displays event trace messages for BFD events. Use the **critical**, **event**, and **packet** keywords to display event trace messages for critical BFD events, normal BFD events, and BFD packet events, respectively.

## Configuration Examples for BFD Debug Enhancement

### Example: Configuring BFD Debug Enhancement

```
Device> enable
Device# configure terminal
Device(config)# interface FastEthernet 6/0
Device(config-if)# bfd interval 50 min_rx 50 multiplier 5
Device(config-if)# end
Device# debug bfd event
Device# debug bfd packet
Device# monitor event-trace bfd event enable
Device# monitor event-trace bfd event all enable
Device# monitor event-trace bfd packet enable
Device# monitor event-trace bfd packet all enable
Device# show monitor event-trace bfd critical all
Device# show monitor event-trace bfd event all
Device# show monitor event-trace bfd packet all
```

```
Device> enable
Device# configure terminal
Device(config)# interface GigabitEthernet 0/0/0
Device(config-if)# bfd interval 50 min_rx 50 multiplier 5
Device(config-if)# end
Device# debug bfd event
Device# debug bfd packet
Device# monitor event-trace bfd event enable
Device# monitor event-trace bfd event all enable
Device# monitor event-trace bfd packet enable
Device# monitor event-trace bfd packet all enable
Device# show monitor event-trace bfd critical all
Device# show monitor event-trace bfd event all
Device# show monitor event-trace bfd packet all
```

The following is sample output from the **show monitor event-trace bfd** command for a critical BFD event:

```
Device# show monitor event-trace bfd critical latest

Oct  2 10:57:25.173: BFD-DEBUG CRITICAL: V1 FSM ld:1 handle:1
Event:DETECT TIMER EXPIRED state:UP Rx Count:123 Tx Count: 120
```

```
Control Packets Rx:[Oct2 10:57:25.173][Oct2 10:57:25.173][Oct2 10:57:25.173]
Control Packet Tx:[Oct2 10:57:26.173][Oct2 10:57:27.173][Oct2 10:57:28.173]
Echo Rx:[-][-][-]
Echo Tx:[-][-][-]
```

```
Oct 2 10:57:25.173: BFD-DEBUG CRITICAL: V1 FSM ld:1 handle:1
Event:ECHO FAILURE state:UP Rx Count:123 Tx Count: 120
Control Packet Rx:[Oct2 10:57:25.173][Oct2 10:57:25.173][Oct2 10:57:25.173]
Control Packet Tx:[Oct2 10:57:26.173][Oct2 10:57:27.173][Oct2 10:57:28.173]
Echo Rx:[Oct2 10:57:25.273][Oct2 10:57:25.373][Oct2 10:57:25.473]
Echo Tx:[Oct2 10:57:25.273][Oct2 10:57:25.373][Oct2 10:57:25.473]
```

The following is sample output from the **show monitor event-trace bfd** command for a normal BFD event:




---

**Note** Logs all events that are logged using the **debug bfd event** command.

---

```
Device# show monitor event-trace bfd event latest
```

```
*Oct 13 20:31:17.043: BFD-DEBUG Event: V1 FSM ld:1 handle:1 event:RX UP state:UP (0)
*Oct 13 20:31:16.945: BFD-DEBUG Event: V1 FSM ld:1 handle:1 event:RX INIT state:DOWN (0)
*Oct 13 20:31:16.150: BFD-DEBUG EVENT: bfd_session_created, proc:EIGRP, idb:Ethernet0/0
handle:1 act
*Oct 13 20:31:14.633: BFD-DEBUG Event: V1 FSM ld:1 handle:1 event:DETECT TIMER EXPIRED
state:ADMIN DOWN (0)
```

The following is sample output from the **show monitor event-trace bfd** command for a BFD packet event:




---

**Note** Logs all packet events that are logged using the **debug bfd packet** command.

---

```
Device# show monitor event-trace bfd packet latest
```

```
*Oct 12 05:30:46.849: BFD-DEBUG Packet: Tx IP:10.1.1.2 ld/rd:1/0
diag:7(Administratively Down) AdminDown cnt:21 (0)
```







## CHAPTER 8

# Bidirectional Forwarding Detection Configuration of Deterministic Hardware Offload

---

This chapter provides information about configuring the Bidirectional Forwarding Detection (BFD) deterministic hardware offload feature on the router.

### Prerequisites for BFD Deterministic Hardware Offload

- This feature must be deployed only after identifying a downtime.

### Restrictions for BFD Deterministic Hardware Offload

- For existing BFD sessions (before using a new configuration command) to be made deterministic, you must recreate the sessions using the **shutdown** or **no shutdown** command, or reconfigure them.
- BFD echo with uRPF is *not* supported on the router for both hardware and software based BFD sessions.
- Echo based sessions—Maximum supported in hardware is 255.
- Non-echo based sessions—Maximum supported in hardware is 511.
- For BFD over G8032, only BFD IPv4 and IPv6 Single Hop is supported. BFD Echo Mode is not supported.
- If the hardware offloaded BFD session reaches the maximum hardware limit per system, then a new BFD session with BFD interval of more than 50 msec is created as a software session. No new BFD sessions are created for less than a 50 msec BFD interval.

### Hardware offload BFD Echo Sessions on RSP3 Module

- Packets may get punted to CPU for hardware offload per sessions, when the BFD template is removed and added. This issue occurs on the RSP3 module with 1K BFD sessions using the same template. Some software BFD sessions might flap due to this issue.
- Hardware offloaded BFD echo packets are not punted to the ICMP queue, hence ICMP redirects are not generated.

**Table 4: Feature History**

Feature Name	Feature Release	Description
BFD over G8032 and Multi EFP BDI	Cisco IOS XE Bengaluru 17.4.1	Hardware limit for BFD and hardware offload are enhanced for BFD over G8032.

**Hardware offload BFD Echo Sessions on RSP2 Module ASR 920 Router for BFD over G8032**

BFD echo packet with the same source and destination IP address are punted to the ICMP queue. This generates ICMP redirects.

**Table 5: Hardware Limit for the Cisco RSP 2 module - ASR-920-24SZ-IM, Cisco ASR-920-24SZ-M and Cisco ASR-920-24TZ-M**

BFD	Hardware Offload
IP4	1023
IP6	1023

**Table 6: Hardware Limit for the Cisco RSP 2 module - ASR-920-12SZ-IM and ASR-920U-12SZ-IM for BFD over G8032**

BFD	Hardware Offload
IP4	63
IP6	63

- [Information About BFD Deterministic Hardware Offload, on page 76](#)
- [Configuring BFD Deterministic Hardware Offload, on page 77](#)
- [Example for Configuring BFD Deterministic Hardware Offload, on page 78](#)

## Information About BFD Deterministic Hardware Offload

The BFD deterministic hardware offload feature allows you to define the BFD transmission timer value. Any BFD sessions below or equal to the set value are sent to hardware. In the conventional BFD design, sessions can be hosted in hardware or software. However, sessions hosted in hardware have the advantage of running at more aggressive timers and not being impacted by CPU spikes.

Currently the determination of which session is hosted in hardware or software is done on a first come first serve basis. The sessions are hosted in hardware till the hardware limit is reached and then the sessions are either hosted in software (if supported) or rejected. In addition, after stateful switchover (SSO) or on reloading, sessions which are hosted in hardware do not necessarily remain in hardware. A similar condition applies for software sessions. The number of BFD sessions that can be supported in the hardware are also limited.

The BFD deterministic hardware offload feature allows you to select the destination of sessions to either hardware or software. This feature allows sessions hosted in hardware to remain in hardware after SSO or reload.

Using this feature you can configure a global command which defines the BFD transmission timer below or equal to the sessions are hosted in hardware.



---

**Note** On reaching hardware session limit, inactive BFD session do not come up when an active session is removed.

---



---

**Note** Starting with Cisco IOS XE Release 3.13, the global command defines the BFD transmission timer below which the sessions are hosted in hardware; those equal to or above this value are hosted in the software.

---

## Configuring BFD Deterministic Hardware Offload

To set the timer value below which the BFD sessions are offloaded to hardware, complete the following steps:

### Procedure

---

#### Step 1

enable

**Example:**

```
Router> enable
```

Enables privileged EXEC mode.

- Enter your password if prompted.

#### Step 2

configure terminal

**Example:**

```
Router# configure terminal
```

Enters global configuration mode.

#### Step 3

platform bfd-offload-timer *timervalue*

**Example:**

```
Router(config)# platform bfd-offload-timer 2000
```

Sets the timer value.

- *timervalue*—The valid range is from 200000-999000 microseconds.

**Note** There is no default value for this timer. The timer is enabled only after you specify a valid non-zero value. Starting with Cisco IOS Release 3.13, the timer value range is from 200000-999000 microseconds. For releases prior to Cisco IOS Release 3.13, the timer value range is 3300-999000 microseconds.

#### Step 4

end

**Example:**

```
Router(config)# end
```

Exits interface configuration mode and returns to privileged EXEC mode.

---

## Example for Configuring BFD Deterministic Hardware Offload

The following example shows how to set the timer value to 400 microseconds:

```
Router> enable
Router# configure terminal
Router(config)# platform bfd-offload-timer 400000
Router(config)# end
```

## Related Documents

Related Topic	Document Title
Bidirectional Forwarding Detection	<i>Cisco IOS Software Releases 12.2 SX Bidirectional Forwarding</i>

## Standards

Standard	Title
IETF Draft	Bidirectional Forwarding Detection, January 2006 ( <a href="http://www.ietf.org/internet-drafts/draft-ietf-bfd-base-03.txt">http://www.ietf.org/internet-drafts/draft-ietf-bfd-base-03.txt</a> )
IETF Draft	BFD for IPv4 and IPv6 (Single Hop), March 2005 ( <a href="http://www.ietf.org/internet-drafts/draft-ietf-bfd-v4v6-1hop-0">http://www.ietf.org/internet-drafts/draft-ietf-bfd-v4v6-1hop-0</a> )