

# Configuración de Solaris iSCSI Host a MDS/IPS-8

## Contenido

[Introducción](#)  
[Prerequisites](#)  
[Requirements](#)  
[Componentes Utilizados](#)  
[Convenciones](#)  
[Antecedentes](#)  
[Configurar](#)  
[Diagrama de la red](#)  
[Configuraciones](#)  
[Verificación](#)  
[Troubleshoot](#)  
[Procedimiento de Troubleshooting](#)  
[Información Relacionada](#)

## [Introducción](#)

Los controladores Cisco Small Computer Systems Interface over IP (iSCSI) son un componente clave de la solución iSCSI. Estos drivers iSCSI residen en el servidor, donde:

- Interceptar comandos iSCSI.
- Encapsular los comandos en paquetes IP.
- Redirija los comandos a Cisco SN 5420, Cisco SN 5428, Cisco SN 5428-2 o Cisco MDS/IPS-8.

Este documento proporciona configuraciones de ejemplo para el host iSCSI Solaris a Cisco MDS/IPS-8.

## [Prerequisites](#)

## [Requirements](#)

Asegúrese de cumplir estos requisitos antes de intentar esta configuración:

- Instale el controlador iSCSI compatible con la versión de Solaris y, a continuación, cree la configuración iSCSI en Cisco MDS 9000. Refiérase a [Cisco iSCSI Drivers \(sólo clientes registrados\)](#) para ver la versión más actual del controlador (solaris-iscsi-3.3.5.tar.Z). Se incluye un archivo README.txt en el archivo ZIP del controlador (TAR). El archivo

README.txt contiene: Información del acuerdo de licencia  
Instrucciones de instalación y configuración del controlador  
Descripción general técnica de la arquitectura del controlador

- Consulte las secciones Requisitos del sistema en [Cisco iSCSI Driver for Sun Solaris Release Notes](#) para conocer los requisitos del sistema operativo (OS) y de los parches.
- El controlador Cisco iSCSI para Sun Solaris se ejecuta solamente en las máquinas SPARC.  
El controlador no funciona con ningún otro tipo de procesador (por ejemplo, x86).

## Componentes Utilizados

La información que contiene este documento se basa en las siguientes versiones de software y hardware.

- SunOS 5.9, SPARC Ultra-4 E450

```
#uname -a
```

```
SunOS baboon 5.9 Generic sun4u sparc SUNW,Ultra-4
```

- Controlador Cisco iSCSI 3.3.3 para Solaris

```
#pkginfo -l CSCOiscsi
```

```
PKGINST: CSCOiscsi
        NAME: Cisco iSCSI device driver
CATEGORY: system
      ARCH: sparc
    VERSION: 3.3.3
  BASEDIR: /opt/CSCOiscsi
    VENDOR: Cisco Systems, Inc.
      DESC: Cisco iSCSI device driver 3.3.3
    PSTAMP: solaris-920030807170521
INSTDATE: Aug 25 2003 23:41
  HOTLINE: For contracted support, 1-800-553-2447,
            Cisco Technical Assistance Center (TAC)
    EMAIL: For online help, go to http://www.cisco.com/
  STATUS: completely installed
    FILES:      74 installed pathnames
              16 shared pathnames
              29 directories
              32 executables
            2182 blocks used (approx)
```

```
#iscsi-ls -v
```

```
iSCSI driver version: 3.3.3
```

- Cisco MDS 9216 con la versión de software 1.1.2

```
canterbury#show module
```

Mod	Ports	Module-Type	Model	Status
---	---	-----	-----	-----
1	16	1/2 Gbps FC/Supervisor	DS-X9216-K9-SUP	active *
2	8	IP Storage Module	DS-X9308-SMIP	ok
Mod	Sw	Hw	World-Wide-Name(s) (WWN)	
---	---	---	-----	-----
1	1.1(2)	1.0	20:01:00:0c:30:6c:24:40 to 20:10:00:0c:30:6c:24:40	
2	1.1(2)	0.3	20:41:00:0c:30:6c:24:40 to 20:48:00:0c:30:6c:24:40	
Mod	MAC-Address(es)		Serial-Num	
---	-----	-----	-----	-----
1	00-0b-be-f8-7f-08 to 00-0b-be-f8-7f-0c	JAB070804QK		
2	00-05-30-00-ad-e2 to 00-05-30-00-ad-ee	JAB070806SB		

```

* this terminal session

canterbury#show version

Cisco Storage Area Networking Operating System (SAN-OS) Software
TAC support: http://www.cisco.com/tac
Copyright (c) 2002-2003 by Cisco Systems, Inc. All rights reserved.
The copyright for certain works contained herein are owned by
Andiamo Systems, Inc. and/or other third parties and are used and
distributed under license.

Software
  BIOS:      version 1.0.7
  loader:    version 1.0(3a)
  kickstart: version 1.1(2)
  system:    version 1.1(2)

  BIOS compile time:      03/20/03
  kickstart image file is: bootflash:/k112
  kickstart compile time: 7/13/2003 20:00:00
  system image file is:   bootflash:/s112
  system compile time:   7/13/2003 20:00:00

Hardware
  RAM 963112 kB

  bootflash: 500736 blocks (block size 512b)
  slot0:       0 blocks (block size 512b)

  canterbury uptime is 16 days 20 hours 51 minute(s) 36 second(s)

  Last reset at 684726 usecs after Mon Aug 11 13:53:17 2003
    Reason: Reset Requested by CLI command reload
    System version: 1.1(2)

```

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

## Convenciones

Consulte [Convenciones de Consejos TécnicosCisco](#) para obtener más información sobre las convenciones del documento.

## Antecedentes

El módulo de almacenamiento IP proporciona a los hosts IP acceso a los dispositivos de almacenamiento Fibre Channel (FC). El módulo de almacenamiento IP es un DS-X9308-SMIP que proporciona ruteo iSCSI transparente. Los hosts IP que utilizan el protocolo iSCSI pueden acceder de forma transparente a los destinos iSCSI (protocolo FC [FCP]) en la red FC. El host IP envía comandos iSCSI encapsulados en unidades de datos de protocolo (PDU) iSCSI a un puerto de almacenamiento IP Cisco MDS 9000 a través de una conexión TCP/IP. Las interfaces Gigabit Ethernet (GE) que se configuran correctamente en el módulo de almacenamiento IP proporcionan conectividad. El módulo de almacenamiento IP:

- Permite crear destinos iSCSI virtuales y asignarlos a los objetivos físicos de FC disponibles en la SAN de FC
- Presenta los destinos FC a los hosts IP como si los destinos físicos estuvieran conectados

localmente a la red IP

Cada host iSCSI que requiera acceso al almacenamiento a través del módulo de almacenamiento IP debe tener instalado un controlador iSCSI compatible. El controlador iSCSI permite a un host iSCSI transportar solicitudes y respuestas iSCSI a través de una red IP con el protocolo iSCSI. Desde la perspectiva de un SO host, el driver iSCSI parece ser un controlador de transporte iSCSI similar a un controlador FC para un canal periférico en el host. Cada host IP aparece como un host FC desde la perspectiva del dispositivo de almacenamiento.

Complete estos pasos para rutear iSCSI del host IP al dispositivo de almacenamiento FC:

- Transfiera las solicitudes y respuestas iSCSI a través de una red IP entre los hosts y el módulo de almacenamiento IP.
- Utilice el módulo de almacenamiento IP para enrutar las solicitudes iSCSI y las respuestas entre hosts en una red IP y el dispositivo de almacenamiento FC (convierta iSCSI en FCP y viceversa).
- Transfiera solicitudes FCP o respuestas entre el módulo de almacenamiento IP y los dispositivos de almacenamiento FC.

El módulo de almacenamiento IP no importa los destinos FC a iSCSI de forma predeterminada. Debe configurar el mapping dinámico o estático para que el módulo de almacenamiento de IP ponga los destinos FC a disposición de los iniciadores iSCSI. Los destinos FC asignados estáticamente tienen un nombre configurado cuando ambos están configurados. Esta configuración proporciona ejemplos de asignación estática.

Cada vez que el host iSCSI se conecta al módulo de almacenamiento IP con mapping dinámico:

- Se crea un nuevo puerto FC N.
- Los nombres de nodos de todo el mundo (nWWN) y los nombres de puerto de todo el mundo (pWWN) asignados a este puerto N pueden ser diferentes.

Utilice el método de mapping estático si debe obtener los mismos nWWN y pWWN para el host iSCSI cada vez que se conecte al módulo de almacenamiento IP. Puede utilizar la asignación estática en el módulo de almacenamiento IP para acceder a matrices de almacenamiento de FC inteligentes que tengan:

- Control de acceso
- Asignación de número de unidad lógica (LUN) y configuración de enmascaramiento basada en los pWWN o nWWN del iniciador

Especifique estos elementos para controlar el acceso a cada destino iSCSI asignado estáticamente:

- Una lista de los puertos de almacenamiento IP en los que se anuncian
- Una lista de nombres de nodos iniciadores iSCSI a los que se permite el acceso

El control de acceso basado en zonas FC y el control de acceso basado en iSCSI son los dos mecanismos mediante los cuales se puede proporcionar el control de acceso para iSCSI. Puede utilizar ambos métodos simultáneamente. En esta configuración, se ha permitido la zonificación predeterminada para una red de área de almacenamiento virtual (VSAN) específica. Los módulos de almacenamiento IP utilizan listas de control de acceso basadas en nombres de nodos iSCSI y basadas en zonas FC para aplicar el control de acceso durante la detección de iSCSI y la creación de sesión iSCSI.

El iniciador iSCSI se puede definir estáticamente por dirección IP o por nombre calificado iSCSI

(IQN). Una opción **proxy-initiator** permite la creación dinámica de iniciadores iSCSI en SAN-IOS 1.3 para los switches Cisco MDS.

La detección de iSCSI se produce cuando un host iSCSI crea una sesión de detección de iSCSI y consultas para todos los destinos iSCSI. El módulo de almacenamiento IP devuelve sólo la lista de destinos iSCSI a los que las políticas de control de acceso permiten el acceso al host iSCSI.

La creación de sesión iSCSI se produce cuando un host IP inicia una sesión iSCSI. El módulo de almacenamiento IP verifica:

- Si el destino iSCSI especificado (en la solicitud de inicio de sesión) es un destino asignado estático
- Que el nombre de nodo iSCSI del host IP pueda acceder al destino

El login se rechaza si el host IP no tiene acceso.

A continuación, el módulo de almacenamiento IP:

- Crea un puerto N virtual de FC (el puerto N ya puede existir) para este host IP
- Hace una consulta de servidor de nombres de FC para el ID de canal de fibra (FCID) del pWWN de destino de FC al que accede el host IP

El módulo de almacenamiento IP utiliza el pWWN del puerto N virtual del host IP como solicitante de la consulta del servidor de nombres. Por lo tanto, el servidor de nombres realiza una consulta por zona para el pWWN y responde a la consulta. Se acepta la sesión iSCSI si el servidor de nombres devuelve el FCID. De lo contrario, se rechaza la solicitud de inicio de sesión.


## Configurar

En esta sección encontrará la información para configurar las funciones descritas en este documento.

**Nota:** Use la [Command Lookup Tool](#) (sólo [clientes registrados](#)) para obtener más información sobre los comandos utilizados en este documento.

## Diagrama de la red

En este documento, se utiliza esta configuración de red:

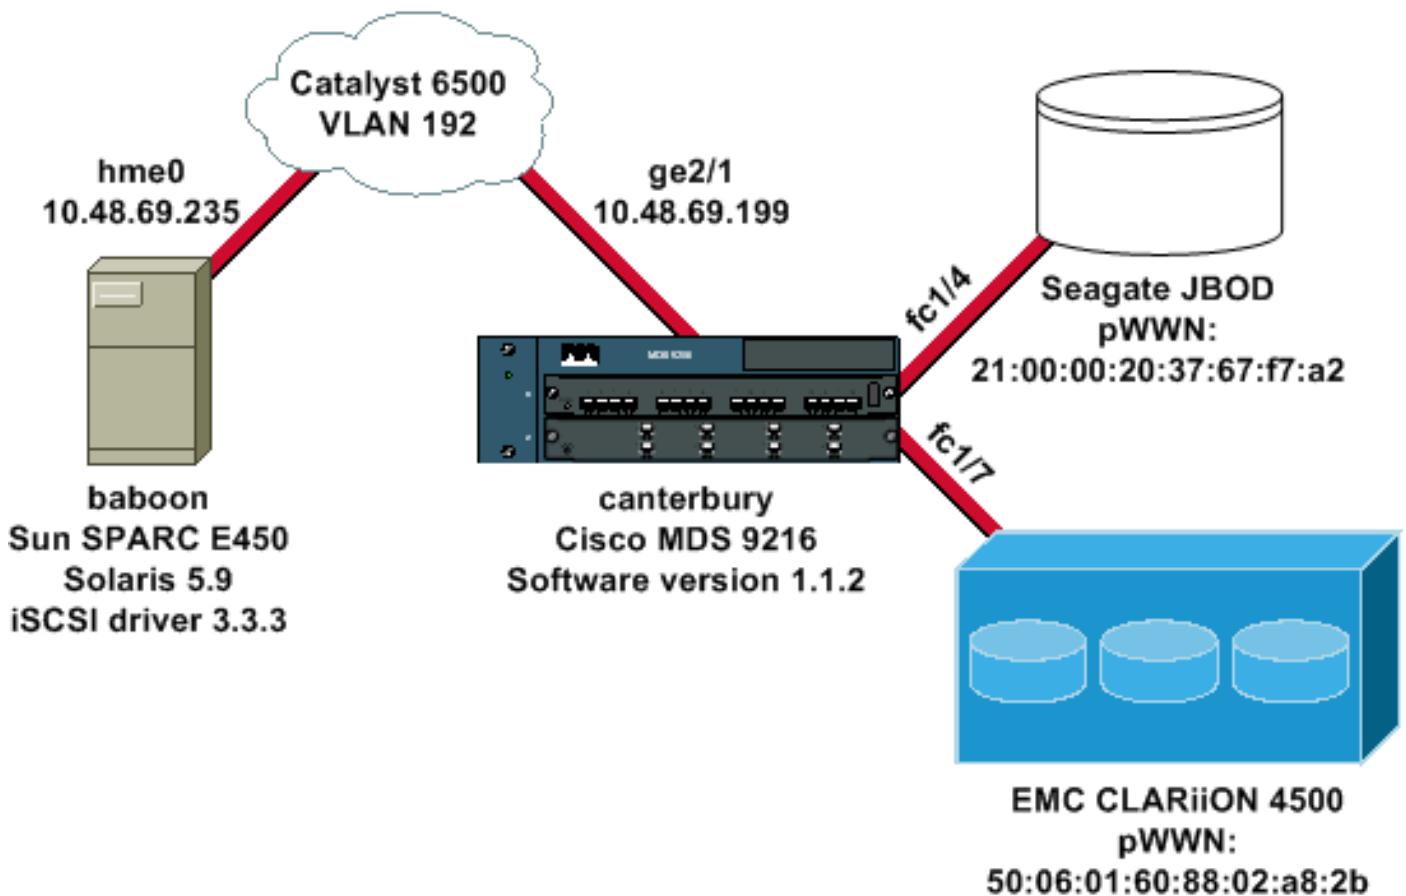

## Configuraciones

En este documento, se utilizan estas configuraciones:

- [Baboon \(SunOS 5.9, SPARC E450\)](#)
- [canterbury \(Cisco MDS 9216\)](#)

### Baboon (SunOS 5.9, SPARC E450)

Modifique estos archivos en el host Solaris:

- /etc/iscsi.conf
- /etc/iscsi.bindings
- /kernel/drv/sd.conf

Este es un ejemplo de resultado de configuración:

```
bash-2.05#cat /etc/iscsi.conf

# iSCSI configuration file - see iscsi.conf(4)

# DiscoveryAddress Settings
# -----
# Add "DiscoveryAddress=xxx" entries for each iSCSI
router instance.
# The driver will attempt to discover iSCSI targets at
that address
# and make as many targets as possible available for
use.
# 'xxx' can be an IP address or a hostname. A TCP port
number can be
# specified by appending a colon and the port number to
the address.
# All entries have to start in column one and must not
```

```

contain any
# whitespace.

#
# Example:
#
# DiscoveryAddress=scsirouter1
DiscoveryAddress=10.48.69.199
!--- Configure the IP address of the GE interface that
accepts iSCSI !--- requests from your host. # The
DiscoveryAddress Settings can take following entry. # #
1) Authentication Settings # 2) ConnectionTimeout
Settings !--- Other required driver parameters can be
changed in the iscsi.conf file. !--- Output is
suppressed. bash-2.05#cat /etc/iscsi.bindings

# iSCSI bindings, file format version 1.0.
# NOTE: this file is automatically maintained by the
iSCSI daemon.
# You should not need to edit this file under most
circumstances.
# If iSCSI targets in this file have been permanently
deleted, you
# may wish to delete the bindings for the deleted
targets.
#
# Format:
# bus      target  iSCSI
# id       id      TargetName
#
0        0      san-fc-jbod-1
0        1      clarion
0        2      clarion-lun-3-4-5
!--- The iSCSI driver discovery daemon process looks up
each discovered target !--- in the /etc/iscsi.bindings
file. !--- The corresponding iSCSI target ID is assigned
to the target if an entry exists in the file for the
target. !--- The smallest available iSCSI target ID !---
is assigned if no entry exists for the target, and an
entry is written to the /etc/iscsi.bindings file for !---
this target. !--- Note that the /etc/iscsi.bindings
file permanently contains entries !--- for all iSCSI
targets ever logged into from this host. !--- You can
manually edit the file and remove !--- entries so that
the obsolete target no longer consumes an iSCSI target
ID if a target is no longer available to a host. !---
Add an entry manually if you know the iSCSI target name
!--- in advance and want it to be assigned a particular
iSCSI target ID. !--- Stop the iSCSI driver before you
edit the /etc/iscsi.bindings !--- file. Issue the !---
/etc/init.d/iscsi start command to manually start the
iSCSI driver. !--- Issue the /etc/init.d/iscsi stop
command to manually stop the iSCSI driver.

bash-2.05#cat /kernel/drv/sd.conf

name="sd" class="scsi" class_prop="atapi"
target=0 lun=0;

name="sd" class="scsi" target=1 lun=0;
name="sd" class="scsi" target=1 lun=1;
name="sd" class="scsi" target=1 lun=2;

# Start iSCSI auto-generated configuration -- do NOT
alter or delete this line

```

```

# You may need to add additional lines to probe for
additional LUNs
# or targets. You SHOULD delete any lines that represent
iSCSI targets
# or LUNs that are not used.
name="sd" parent="iscsi" target=0 lun=0;
name="sd" parent="iscsi" target=1 lun=0;
name="sd" parent="iscsi" target=1 lun=1;
name="sd" parent="iscsi" target=1 lun=2;
name="sd" parent="iscsi" target=2 lun=3;
name="sd" parent="iscsi" target=2 lun=4;
name="sd" parent="iscsi" target=2 lun=5;
name="sd" parent="iscsi" target=2 lun=0;

# End iSCSI auto-generated configuration -- do NOT alter
or delete this line

!---- The corresponding entries for these devices must
be made in the standard device configuration files !---
if the targets that get discovered by the iSCSI driver
at any point in time !--- do not have a corresponding
entry in the standard device configuration files (for
example, /kernel/drv/sd.conf or /kernel/drv/st.conf). !-
-- Then reboot the system and issue the standard Solaris
administrative commands !--- (devfsadm, drvconfig) once
the system comes up. !--- You do not need to reboot the
system if the entries in the device configuration files
are already present. However, the standard device
configuration !--- commands (devfsadm, drvconfig, and so
on) must be issued to configure the !--- new iSCSI
devices in the system.
```

## canterbury (Cisco MDS 9216)

```

!---- Output is suppressed. vsan database vsan 777 !---
VSAN 777 has been used for iSCSI targets. !--- Output is
suppressed. vsan database vsan 777 interface fc1/4 vsan
777 interface fc1/7 !--- Output is suppressed. boot
system bootflash:/s112 boot kickstart bootflash:/k112 ip
domain-name cisco.com ip name-server 144.254.10.123 ip
default-gateway 10.48.69.129 ip routing iscsi
authentication none iscsi initiator ip-address
10.48.69.235 !--- Identifies the iSCSI initiator based
on the IP address. A virtual N port is !--- created for
each network interface card (NIC) or network interface.
vsan 777 !--- VSAN 777 has been used for iSCSI targets.
Configure the initiator IP address. !--- Targets via
VSAN 777 are accessible by iSCSI initiators. iscsi
virtual-target name san-fc-jbod-1 pWWN
21:00:00:20:37:67:f7:a2 advertise interface
GigabitEthernet2/1 initiator ip address 10.48.69.235
permit !--- Create a static iSCSI virtual target for LUN
0, 1, and 2 of CLARiON. iscsi virtual-target name
clarion pWWN 50:06:01:60:88:02:a8:2b fc-lun 0000 iscsi-
lun 0000 pWWN 50:06:01:60:88:02:a8:2b fc-lun 0001 iscsi-
lun 0001 pWWN 50:06:01:60:88:02:a8:2b fc-lun 0002 iscsi-
lun 0002 advertise interface GigabitEthernet2/1
initiator ip address 10.48.69.235 permit !--- Create a
static iSCSI virtual target for LUN 3, 4, and 5 of
CLARiON. iscsi virtual-target name clarion-lun-3-4-5
pWWN 50:06:01:60:88:02:a8:2b fc-lun 0003 iscsi-lun 0003
```

```
pWWN 50:06:01:60:88:02:a8:2b fc-lun 0004 iscsi-lun 0004
pWWN 50:06:01:60:88:02:a8:2b fc-lun 0005 iscsi-lun 0005
advertise interface GigabitEthernet2/1 initiator ip
address 10.48.69.235 permit !--- Output is suppressed.
switchname canterbury !--- Output is suppressed. zone
default-zone permit vsan 777 !--- Output is suppressed.
interface GigabitEthernet2/1 ip address 10.48.69.199
255.255.255.192 iscsi authentication none switchport mtu
2156 no shutdown !--- Output is suppressed. interface
fc1/4 no shutdown !--- Output is suppressed. interface
fc1/7 no shutdown interface mgmt0 ip address
10.48.69.156 255.255.255.192 interface iscsi2/1 no
shutdown
```

## Verificación

Use esta sección para confirmar que su configuración funciona correctamente.

[La herramienta Output Interpreter Tool \(clientes registrados solamente\) \(OIT\) soporta ciertos comandos show.](#) Utilice la OIT para ver un análisis del resultado del comando show.

- **netstat -n:** verifica las conexiones TCP en el host Solaris.
- **iscsi-ls -l:** muestra los dispositivos que están disponibles actualmente en el host Solaris.
- **show zone status :** muestra información de la zona.
- **show fcns database vsan 777:** muestra la información del nombre del servidor para una VSAN específica.
- **show flogi database vsan 777:** muestra información del servidor de inicio de sesión en fabric (FLOGI) para una VSAN específica.
- **show vsan membership:** muestra información de interfaz para diferentes VSAN.
- **show iscsi initiator detail:** muestra información del iniciador iSCSI.
- **show iscsi initiator iscsi-session detail:** muestra información detallada para la sesión del iniciador iSCSI.
- **show iscsi initiator fcp-session detail:** muestra información detallada para la sesión FCP del iniciador iSCSI.
- **show ips stats tcp interface gigabitethernet 2/1 detail:** muestra las estadísticas de TCP para una interfaz GE específica.
- **show iscsi virtual-target configured:** muestra los destinos virtuales iSCSI configurados en Cisco MDS 9000.
- **show iscsi initiator configured:** muestra iniciadores iSCSI configurados en Cisco MDS 9000.
- **show ips arp interface gigabitethernet 2/1:** muestra información del protocolo de resolución de direcciones (ARP) de almacenamiento IP para una interfaz GE específica.
- **show scsi-target devices vsan 777:** muestra los dispositivos iSCSI para una VSAN específica (para asignar LUNs FC a LUNs iSCSI).
- **show int iscsi 2/1:** muestra las interfaces iSCSI.
- **show iscsi stats iscsi 2/1** —Muestra estadísticas iSCSI.
- **show int gigabitethernet 2/1:** muestra la interfaz GE.
- **show ip route:** muestra la información de la ruta IP.

## Troubleshoot

Use esta sección para resolver problemas de configuración.

## Procedimiento de Troubleshooting

- [Salida de baboon](#)
- [Salida canterbury Cisco MDS 9216](#)
- [Salida de Fabric Manager y Device Manager](#)

### **Salida de baboon**

```
bash-2.05# /etc/init.d/iscsi stop

iSCSI is stopping.
Aug 28 09:42:08 baboon iscsimod: iSCSIs: closing
connection to target 2 at 10.48.69.199
Aug 28 09:42:08 baboon iscsimod: iSCSIs: closing
connection to target 1 at 10.48.69.199
Aug 28 09:42:08 baboon iscsimod: iSCSIs: closing
connection to target 0 at 10.48.69.199

bash-2.05# /etc/init.d/iscsi start

iSCSI is starting.

bash-2.05# netstat -n

TCP: IPv4
    Local Address          Remote Address      Swind Send-Q
Rwind Recv-Q  State
----- ----- -----
10.48.69.235.32797  10.48.69.199.3260      65535      0
49172      0  ESTABLISHED
10.48.69.235.32798  10.48.69.199.3260      9379072     0
263152      0  ESTABLISHED
10.48.69.235.32799  10.48.69.199.3260      9379072     0
263152      0  ESTABLISHED

Active UNIX domain sockets
Address  Type          Vnode          Conn          Local Addr
Remote Addr
30002d95c88 dgram        30000205828 00000000 /tmp/portal

/etc/iscsi.bindings

#
0      0      san-fc-jbod-1
0      1      clarion

bash-2.05# devfsadm

Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 0, Cmd 0x4d, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 0, Cmd 0x5e, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
```

```

Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 1, Cmd 0x00, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000600 0000000a
00000000 29000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 1, Cmd 0x4d, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 1, Cmd 0x5e, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 2, Cmd 0x00, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000600 0000000a
00000000 29000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 2, Cmd 0x4d, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 2, Cmd 0x5e, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
Aug 28 09:45:05 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 0 lun 0, Cmd 0x1c, Sense:
Aug 28 09:45:05 baboon iscsimod:      70000500 0000000a
00000000 35010300 0000

```

**bash-2.05# format output**

```

AVAILABLE DISK SELECTIONS:
 0. c0t0d0 <SUN18G cyl 7506 alt 2 hd 19 sec 248>
    /pci@1f,4000/scsi@3/sd@0,0
 1. c0t1d0 <SUN18G cyl 7506 alt 2 hd 19 sec 248>
    /pci@1f,4000/scsi@3/sd@1,0
 2. c3t0d0 <SEAGATE-ST318203FC-0004 cyl 9770 alt 2
hd 12 sec 303>
    /iscsipseudo/iscsi@0/sd@0,0
 3. c3t1d0 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
    /iscsipseudo/iscsi@0/sd@1,0
 4. c3t1d1 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
    /isccipseudo/iscsi@0/sd@1,1
 5. c3t1d2 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
    /isccipseudo/iscsi@0/sd@1,2
 6. c3t2d0 <drive not available>
    /isccipseudo/iscsi@0/sd@2,0
--- After you add the clarion-lun-3-4-5 virtual
target on the Cisco MDS 9216. /etc/iscsi.bindings

```

```

0      0      san-fc-jbod-1
0      1      clarion
0      2      clarion-lun-3-4-5

```

**bash-2.05#bash-2.05# netstat -n**

TCP: IPv4					
Local Address		Remote Address		Swind	Send-Q
Rwind	Recv-Q	State			
-	-	-	-	-	-
-	-	-	-	-	-

```

10.48.69.235.32797 10.48.69.199.3260 65535 0
49172 0 TIME_WAIT
10.48.69.235.32798 10.48.69.199.3260 9379072 0
263152 0 ESTABLISHED
10.48.69.235.32799 10.48.69.199.3260 9379072 0
263152 0 ESTABLISHED
10.48.69.235.32800 10.48.69.199.3260 65535 0
49108 0 ESTABLISHED
10.48.69.235.32801 10.48.69.199.3260 9379072 0
263152 0 ESTABLISHED

```

#### Active UNIX domain sockets

Address	Type	Vnode	Conn	Local Addr
Remote Addr				
30002d95c88	dgram	30000205828	00000000	/tmp/portal

**bash-2.05# devfsadm**

```

Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 3, Cmd 0x00, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000600 0000000a
00000000 29000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 3, Cmd 0x4d, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 3, Cmd 0x5e, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 4, Cmd 0x00, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000600 0000000a
00000000 29000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 4, Cmd 0x5e, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 5, Cmd 0x00, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000600 0000000a
00000000 29000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 5, Cmd 0x4d, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 5, Cmd 0x5e, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000

```

And the **format** output:

```

0. c0t0d0 <SUN18G cyl 7506 alt 2 hd 19 sec 248>
  /pci@1f,4000/scsi@3/sd@0,0
1. c0t1d0 <SUN18G cyl 7506 alt 2 hd 19 sec 248>
  /pci@1f,4000/scsi@3/sd@1,0
2. c3t0d0 <SEAGATE-ST318203FC-0004 cyl 9770 alt 2
hd 12 sec 303>
  /iscsipseudo/iscsi@0/sd@0,0
3. c3t1d0 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
  /isccippseudo/iscsi@0/sd@1,0
4. c3t1d1 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>

```

```

    /iscsippseudo/iscsi@0/sd@1,1
5. c3t1d2 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
    /isccippseudo/iscsi@0/sd@1,2
6. c3t2d0 <drive not available>
    /isccippseudo/iscsi@0/sd@2,0
7. c3t2d3 <DGC-RAID0-0632 cyl 10920 alt 2 hd 3
sec 128>
    /isccippseudo/iscsi@0/sd@2,3
8. c3t2d4 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
    /isccippseudo/iscsi@0/sd@2,4
9. c3t2d5 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
    /isccippseudo/iscsi@0/sd@2,5
--- Issue the iscsi-ls -v command to see iSCSI driver
version.

```

**bash-2.05# iscsi-ls -v**

```

iSCSI driver version: 3.3.3
--- Issue the iscsi-ls -l or iscsi-ls commands to see
the devices that are currently available.

```

**bash-2.05# iscsi-ls -l**

```

*****
***** TARGET NAME san-fc-jbod-1
***** TARGET ID 0:
ADDRESS = 10.48.69.199:3260, 128
STATUS = Connected 10.48.69.235:32798<-
>10.48.69.199:3260 8/28/2003 09:43:59
SESSION = ISID 00023d000001 TSID 128 PID 463
LUN 0 = DISK c3t0d0 (sd296) 'SEAGATE-ST318203FC-
0004' SERIAL# LRE80915
BLOCKS: 35566479 BLOCK SIZE: 512
*****
***** TARGET NAME clarion
***** TARGET ID 1:
ADDRESS = 10.48.69.199:3260, 128
STATUS = Connected 10.48.69.235:32799<-
>10.48.69.199:3260 8/28/2003 09:43:59
SESSION = ISID 00023d000001 TSID 128 PID 464
LUN 0 = DISK c3t1d0 (sd297) 'DGC-RAID 0-0632'
SERIAL# 008E080000CL
BLOCKS: 2097023 BLOCK SIZE: 512
LUN 1 = DISK c3t1d1 (sd298) 'DGC-RAID 0-0632'
SERIAL# 0127AB0000CL
BLOCKS: 2097023 BLOCK SIZE: 512
LUN 2 = DISK c3t1d2 (sd299) 'DGC-RAID 0-0632'
SERIAL# 02E4180000CL
BLOCKS: 2097023 BLOCK SIZE: 512
*****
***** TARGET NAME clarion-lun-3-4-5
***** TARGET ID 2:
ADDRESS = 10.48.69.199:3260, 128
STATUS = Connected 10.48.69.235:32801<-
>10.48.69.199:3260 8/28/2003 09:46:42
SESSION = ISID 00023d000001 TSID 128 PID 482
LUN 0 : SCSI Inquiry failed - Bad file number
LUN 3 = DISK c3t2d3 (sd371) 'DGC-RAID 0-0632'

```

```
SERIAL# 03E0A1E330CL
        BLOCKS: 4194047  BLOCK SIZE: 512
    LUN    4 = DISK c3t2d4 (sd372) 'DGC-RAID 0-0632'
SERIAL# 04E9A1E330CL
        BLOCKS: 2097023  BLOCK SIZE: 512
    LUN    5 = DISK c3t2d5 (sd373) 'DGC-RAID 0-0632'
SERIAL# 0594B1E330CL
        BLOCKS: 2097023  BLOCK SIZE: 512
*****
*****  
!-- Issue the iscsi-ls -c command to see detailed
statistics for currently established iSCSI sessions.

bash-2.05# iscsi-ls -c

*****
*****  
TARGET NAME san-fc-jbod-1
TARGET ID 0:
ADDRESS = 10.48.69.199:3260, 128
STATUS = Connected 10.48.69.235:32798<-
>10.48.69.199:3260 8/28/2003 09:43:59
SESSION = ISID 00023d000001 TSID 128 PID 463
InitialR2T = Yes
MaxRecvDataSegmentLength = 131072 Bytes
MaxXmitDataSegmentLength = 2048 Bytes
FirstBurstLength = 262144 Bytes
MaxBurstLength = 16776192 Bytes
LoginTimeout = 15 Seconds
AuthTimeout = 45 Seconds
ActiveTimeout = 5 Seconds
IdleTimeout = 60 Seconds
PingTimeout = 5 Seconds
HeaderDigest = None
DataDigest = None
ConnFailTimeout = Default
MultiPath = None
*****  
*****  
TARGET NAME clarion
TARGET ID 1:
ADDRESS = 10.48.69.199:3260, 128
STATUS = Connected 10.48.69.235:32799<-
>10.48.69.199:3260 8/28/2003 09:43:59
SESSION = ISID 00023d000001 TSID 128 PID 464
InitialR2T = Yes
MaxRecvDataSegmentLength = 131072 Bytes
MaxXmitDataSegmentLength = 2048 Bytes
FirstBurstLength = 262144 Bytes
MaxBurstLength = 16776192 Bytes
LoginTimeout = 15 Seconds
AuthTimeout = 45 Seconds
ActiveTimeout = 5 Seconds
IdleTimeout = 60 Seconds
PingTimeout = 5 Seconds
HeaderDigest = None
DataDigest = None
ConnFailTimeout = Default
MultiPath = None
*****  
*****  
TARGET NAME clarion-lun-3-4-5
TARGET ID 2:
ADDRESS = 10.48.69.199:3260, 128
```

```

STATUS = Connected 10.48.69.235:32801<-
>10.48.69.199:3260 8/28/2003 09:46:42
SESSION = ISID 00023d000001 TSID 128 PID 482
InitialR2T = Yes
MaxRecvDataSegmentLength = 131072 Bytes
MaxXmitDataSegmentLength = 2048 Bytes
FirstBurstLength = 262144 Bytes
MaxBurstLength = 16776192 Bytes
LoginTimeout = 15 Seconds
AuthTimeout = 45 Seconds
ActiveTimeout = 5 Seconds
IdleTimeout = 60 Seconds
PingTimeout = 5 Seconds
HeaderDigest = None
DataDigest = None
ConnFailTimeout = Default
MultiPath = None
*****
*****
```

*!--- You can see these iSCSI connections in the /var/adm/messages or dmesg:*

```

Aug 28 09:43:59 baboon iscsid[454]: [ID 702911
daemon.notice]
    version 3.3.3 ( 7-Aug-2003)
Aug 28 09:43:59 baboon iscsid[463]: [ID 702911
daemon.notice]
    iSCSI normal session to san-fc-jbod-1 established
Aug 28 09:43:59 baboon iscsid[463]: [ID 702911
daemon.notice]
    logged into target san-fc-jbod-1 -- id 0, Initiator
    sid 00023d000001, target sid 128
Aug 28 09:43:59 baboon iscsid[464]: [ID 702911
daemon.notice]
    iSCSI normal session to clarion established
Aug 28 09:43:59 baboon iscsid[464]: [ID 702911
daemon.notice]
    logged into target clarion -- id 1, Initiator sid
    00023d000001, target sid 128
Aug 28 09:45:23 baboon iscsi: [ID 318680 kern.notice]
NOTICE:
    tran_start disabled to bus 0, target 2, lun 0
Aug 28 09:46:42 baboon iscsid[482]: [ID 702911
daemon.notice]
    iSCSI normal session to clarion-lun-3-4-5
established
Aug 28 09:46:42 baboon iscsid[482]: [ID 702911
daemon.notice]
    logged into target clarion-lun-3-4-5 -- id 2,
    Initiator sid 00023d000001,
    target sid 128
```

## Salida canterbury Cisco MDS 9216

```

canterbury#show zone status

VSAN: 1 default-zone: permit distribute: active only
Interop: Off
Full Zoning Database :
    Zonesets:0 Zones:0 Aliases: 0
Active Zoning Database :
    Database Not Available
Status: Deactivation completed at Fri Aug 22 11:47:53
```

2003

```
VSAN: 777 default-zone: permit distribute: active only
Interop: Off.
Full Zoning Database :
    Zonesets:0 Zones:0 Aliases: 0
Active Zoning Database :
    Database Not Available
Status: Default zoning policy changed to permit at Mon
Aug 25 20:19:31 2003
!--- VSAN 777 has been used for this configuration, and
default-zone behavior has been !--- set to permit.
canterbury#show flogi da vsan 777
```

```
-----
INTERFACE  VSAN      FCID          PORT NAME
NODE NAME
-----
fc1/4      777      0x7000e8  21:00:00:20:37:67:f7:a2
20:00:00:20:37:67:f7:a2
fc1/7      777      0x700103  50:06:01:60:88:02:a8:2b
50:06:01:60:11:02:a8:2b
iscsi2/1   777      0x700100  21:02:00:0c:30:6c:24:42
21:01:00:0c:30:6c:24:42
```

Total number of flogi = 3.

```
canterbury#show fcns database vsan 777
```

VSAN 777:

```
-----
FCID      TYPE     PWWN          (VENDOR)
FC4-TYPE:FEATURE
-----
0x7000e8   NL      21:00:00:20:37:67:f7:a2 (Seagate)
scsi-fcp:target
0x700100   N       21:02:00:0c:30:6c:24:42 (Cisco)
scsi-fcp:init isc...w
0x700103   N       50:06:01:60:88:02:a8:2b (Clarion)
scsi-fcp:target
```

Total number of entries = 3

*!--- FCID 0X700100 is the virtual N port (HBA) for the
iSCSI host.* canterbury#show fcns database detail vsan
777

```
-----
VSAN:777  FCID:0x7000e8
-----
port-wwn (vendor)      :21:00:00:20:37:67:f7:a2 (Seagate)
node-wwn                 :20:00:00:20:37:67:f7:a2
class                   :3
node-ip-addr            :0.0.0.0
ipa                     :ff ff ff ff ff ff ff ff
fc4-types:fc4_features:scsi-fcp:target
symbolic-port-name      :
symbolic-node-name      :
port-type                :NL
port-ip-addr             :0.0.0.0
fabric-port-wwn          :20:04:00:0c:30:6c:24:40
```

```

hard-addr : 0x000000
-----
VSAN: 777 FCID:0x700100
-----
port-wwn (vendor) : 21:02:00:0c:30:6c:24:42 (Cisco)
node-wwn : 21:01:00:0c:30:6c:24:42
class : 2,3
node-ip-addr : 10.48.69.235
ipa : ff ff ff ff ff ff ff ff
fc4-types:fc4_features:scsi-fcp:init iscsi-gw
!--- Virtual N port for host. symbolic-port-name :
symbolic-node-name : 10.48.69.235 port-type :N port-ip-
addr : 0.0.0.0 fabric-port-wwn : 20:41:00:0c:30:6c:24:40
hard-addr : 0x000000 ----- VSAN:777
FCID:0x700103 ----- port-wwn (vendor)
: 50:06:01:60:88:02:a8:2b (Clarion) node-wwn
: 50:06:01:60:11:02:a8:2b class : 3 node-ip-addr : 0.0.0.0
ipa : ff ff ff ff ff ff fc4-
types:fc4_features:scsi-fcp:target symbolic-port-name :
symbolic-node-name : port-type :N port-ip-addr : 0.0.0.0
fabric-port-wwn : 20:07:00:0c:30:6c:24:40 hard-addr
: 0x000000 Total number of entries = 3 canterbury#show
vsan membership

vsan 777 interfaces:
    fc1/4    fc1/7

canterbury#show iscsi initiator

iSCSI Node name is 10.48.69.235
    iSCSI Initiator name: iqn.1987-
05.com.cisco:01.894b196796e7
    iSCSI alias name: baboon
    Node WWN is 21:01:00:0c:30:6c:24:42 (dynamic)
    Member of vsans: 777
    Number of Virtual n_ports: 1
    Virtual Port WWN is 21:02:00:0c:30:6c:24:42
(dynamic)
        Interface iSCSI 2/1, Portal group tag: 0x80
        VSAN ID 777, FCID 0x700100

canterbury#show iscsi initiator detail

iSCSI Node name is 10.48.69.235
    iSCSI Initiator name: iqn.1987-
05.com.cisco:01.894b196796e7
    iSCSI alias name: baboon
    Node WWN is 21:01:00:0c:30:6c:24:42 (dynamic)
    Member of vsans: 777
    Number of Virtual n_ports: 1

    Virtual Port WWN is 21:02:00:0c:30:6c:24:42
(dynamic)
        Interface iSCSI 2/1, Portal group tag is 0x80
        VSAN ID 777, FCID 0x700100
        2 FC sessions, 3 iSCSI sessions
        iSCSI session details
            Target: san-fc-jbod-1
            Statistics:
                PDU: Command: 24, Response: 24
                Bytes: TX: 3504, RX: 0
                Number of connection: 1
            TCP parameters
                Local 10.48.69.199:3260, Remote

```

10.48.69.235:32798  
Path MTU: 1500 bytes  
Retransmission timeout: 300 ms  
Round trip time: Smoothed 4 ms, Variance: 6  
Advertized window: Current: 256 KB, Maximum:  
257 KB, Scale: 3  
Peer receive window: Current: 9159 KB,  
Maximum: 9159 KB, Scale: 8  
Congestion window: Current: 11 KB  
Target: clarion-lun-3-4-5  
Statistics:  
PDU: Command: 73, Response: 73  
Bytes: TX: 9740, RX: 0  
Number of connection: 1  
TCP parameters  
Local 10.48.69.199:3260, Remote  
10.48.69.235:32801  
Path MTU: 1500 bytes  
Retransmission timeout: 300 ms  
Round trip time: Smoothed 7 ms, Variance: 13  
Advertized window: Current: 256 KB, Maximum:  
257 KB, Scale: 3  
Peer receive window: Current: 9159 KB,  
Maximum: 9159 KB, Scale: 8  
Congestion window: Current: 11 KB  
Target: clarion  
Statistics:  
PDU: Command: 101, Response: 101  
Bytes: TX: 14828, RX: 0  
Number of connection: 1  
TCP parameters  
Local 10.48.69.199:3260, Remote  
10.48.69.235:32799  
Path MTU: 1500 bytes  
Retransmission timeout: 300 ms  
Round trip time: Smoothed 2 ms, Variance: 1  
Advertized window: Current: 256 KB, Maximum:  
257 KB, Scale: 3  
Peer receive window: Current: 9159 KB,  
Maximum: 9159 KB, Scale: 8  
Congestion window: Current: 11 KB  
  
FCP Session details  
Target FCID: 0x7000e8 (S\_ID of this session:  
0x700100)  
pWWN: 21:00:00:20:37:67:f7:a2, nWWN:  
20:00:00:20:37:67:f7:a2  
Session state: LOGGED\_IN  
1 iSCSI sessions share this FC session  
Target: san-fc-jbod-1  
Negotiated parameters  
RcvDataFieldSize 2048 our\_RcvDataFieldSize  
2048  
MaxBurstSize 0, EMPD: FALSE  
Random Relative Offset: FALSE, Sequence-in-order: Yes  
Statistics:  
PDU: Command: 0, Response: 24  
Target FCID: 0x700103 (S\_ID of this session:  
0x700100)  
pWWN: 50:06:01:60:88:02:a8:2b, nWWN:  
50:06:01:60:11:02:a8:2b  
Session state: LOGGED\_IN  
2 iSCSI sessions share this FC session

```
Target: clarion-lun-3-4-5
Target: clarion
Negotiated parameters
    RcvDataFieldSize 1024 our_RcvDataFieldSize
2048
    MaxBurstSize 0, EMPD: FALSE
    Random Relative Offset: FALSE, Sequence-in-
order: Yes
    Statistics:
        PDU: Command: 0, Response: 174

canterbury#show iscsi initiator iscsi-session detail

iSCSI Node name is 10.48.69.235
    iSCSI Initiator name: iqn.1987-
05.com.cisco:01.894b196796e7
    iSCSI alias name: baboon
    Node WWN is 21:01:00:0c:30:6c:24:42 (dynamic)
    Member of vsans: 777
    Number of Virtual n_ports: 1

    Virtual Port WWN is 21:02:00:0c:30:6c:24:42
(dynamic)
        Interface iSCSI 2/1, Portal group tag is 0x80
        VSAN ID 777, FCID 0x700100
        2 FC sessions, 3 iSCSI sessions
        iSCSI session details
            Target: san-fc-jbod-1
            Statistics:
                PDU: Command: 24, Response: 24
                Bytes: TX: 3504, RX: 0
                Number of connection: 1
            TCP parameters
                Local 10.48.69.199:3260, Remote
10.48.69.235:32798
                Path MTU: 1500 bytes
                Retransmission timeout: 300 ms
                Round trip time: Smoothed 4 ms, Variance: 6
                Advertized window: Current: 256 KB, Maximum:
257 KB, Scale: 3
                Peer receive window: Current: 9159 KB,
Maximum: 9159 KB, Scale: 8
                Congestion window: Current: 11 KB
            Target: clarion-lun-3-4-5
            Statistics:
                PDU: Command: 73, Response: 73
                Bytes: TX: 9740, RX: 0
                Number of connection: 1
            TCP parameters
                Local 10.48.69.199:3260, Remote
10.48.69.235:32801
                Path MTU: 1500 bytes
                Retransmission timeout: 300 ms
                Round trip time: Smoothed 7 ms, Variance: 13
                Advertized window: Current: 256 KB, Maximum:
257 KB, Scale: 3
                Peer receive window: Current: 9159 KB,
Maximum: 9159 KB, Scale: 8
                Congestion window: Current: 11 KB
            Target: clarion
            Statistics:
                PDU: Command: 101, Response: 101
                Bytes: TX: 14828, RX: 0
                Number of connection: 1
```

```

TCP parameters
  Local 10.48.69.199:3260, Remote
10.48.69.235:32799
  Path MTU: 1500 bytes
  Retransmission timeout: 300 ms
  Round trip time: Smoothed 2 ms, Variance: 1
  Advertized window: Current: 256 KB, Maximum:
257 KB, Scale: 3
  Peer receive window: Current: 9159 KB,
Maximum: 9159 KB, Scale: 8
  Congestion window: Current: 11 KB

canterbury#show iscsi initiator fcp-session detail

iSCSI Node name is 10.48.69.235
  iSCSI Initiator name: iqn.1987-
05.com.cisco:01.894b196796e7
  iSCSI alias name: baboon
  Node WWN is 21:01:00:0c:30:6c:24:42 (dynamic)
  Member of vsans: 777
  Number of Virtual n_ports: 1

  Virtual Port WWN is 21:02:00:0c:30:6c:24:42
(dynamic)
    Interface iSCSI 2/1, Portal group tag is 0x80
    VSAN ID 777, FCID 0x700100
    2 FC sessions, 3 iSCSI sessions

    FCP Session details
      Target FCID: 0x7000e8 (S_ID of this session:
0x700100)
        pWWN: 21:00:00:20:37:67:f7:a2, nWWN:
20:00:00:20:37:67:f7:a2
        Session state: LOGGED_IN
        1 iSCSI sessions share this FC session
          Target: san-fc-jbod-1
        Negotiated parameters
          RcvDataFieldSize 2048 our_RcvDataFieldSize
2048
          MaxBurstSize 0, EMPD: FALSE
          Random Relative Offset: FALSE, Sequence-in-
order: Yes
        Statistics:
          PDU: Command: 0, Response: 24
        Target FCID: 0x700103 (S_ID of this session:
0x700100)
          pWWN: 50:06:01:60:88:02:a8:2b, nWWN:
50:06:01:60:11:02:a8:2b
          Session state: LOGGED_IN
          2 iSCSI sessions share this FC session
            Target: clarion-lun-3-4-5
            Target: clarion
          Negotiated parameters
            RcvDataFieldSize 1024 our_RcvDataFieldSize
2048
            MaxBurstSize 0, EMPD: FALSE
            Random Relative Offset: FALSE, Sequence-in-
order: Yes
          Statistics:
            PDU: Command: 0, Response: 174

canterbury#show ips stats tcp interface gigabitethernet
2/1 detail

```

```

TCP Statistics for port GigabitEthernet2/1
  TCP send stats
    28621 segments, 4231096 bytes
    15842 data, 12335 ack only packets
    168 control (SYN/FIN/RST), 0 probes, 210 window
  updates
    66 segments retransmitted, 63724 bytes
    66 retransmitted while on ethernet send queue,
1127 packets split
  480 delayed acks sent
  TCP receive stats
    36728 segments, 12911 data packets in sequence,
2668162 bytes in sequence
  0 predicted ack, 12050 predicted data
  0 bad checksum, 0 multi/broadcast, 0 bad offset
  0 no memory drops, 0 short segments
  48 duplicate bytes, 1 duplicate packets
  0 partial duplicate bytes, 0 partial duplicate
packets
  0 out-of-order bytes, 164 out-of-order packets
  0 packet after window, 0 bytes after window
  0 packets after close
  12621 acks, 3486850 ack bytes, 0 ack toomuch,
11652 duplicate acks
  0 ack packets left of snd_una, 6 non-4 byte
aligned packets
  8333 window updates, 0 window probe
  624 pcb hash miss, 79 no port, 0 bad SYN, 0 paws
drops
  TCP Connection Stats
    0 attempts, 231 accepts, 231 established
    227 closed, 14 drops, 0 conn drops
    0 drop in retransmit timeout, 2 drop in keepalive
timeout
    0 drop in persist drops, 0 connections drained
  TCP Miscellaneous Stats
    11761 segments timed, 12027 rtt updated
    51 retransmit timeout, 304 persist timeout
    10452 keepalive timeout, 10450 keepalive probes
  TCP SACK Stats
    0 recovery episodes, 0 data packets, 0 data bytes
    0 data packets retransmitted, 0 data bytes
retransmitted
    0 connections closed, 0 retransmit timeouts
  TCP SYN Cache Stats
    233 entries, 231 connections completed, 1 entries
timed out
    0 dropped due to overflow, 1 dropped due to RST
    0 dropped due to ICMP unreach, 0 dropped due to
bucket overflow
    0 abort due to no memory, 4 duplicate SYN, 76 no-
route SYN drop
    0 hash collisions, 0 retransmitted

  TCP Active Connections
    Local Address          Remote Address        State
Send-Q  Recv-Q
ESTABLISH 0      0          10.48.69.235:32798
          10.48.69.199:3260
ESTABLISH 0      0          10.48.69.235:32799
          10.48.69.199:3260
ESTABLISH 0      0          10.48.69.235:32800
          10.48.69.199:3260
ESTABLISH 0      0          10.48.69.235:32801

```

```

ESTABLISH 0          0
          0.0.0.0:3260      0.0.0.0:0           LISTEN
0          0

canterbury#show iscsi virtual-target configured

target: san-fc-jbod-1
  * Port WWN 21:00:00:20:37:67:f7:a2
!--- * means that you have both discovery and target
sessions. !--- You only have a discovery session if
there is no * in front of the pWWN.

Configured node
No. of advertised interface: 1
  GigabitEthernet 2/1
No. of initiators permitted: 3
  initiator iqn.1987-
05.com.cisco.02.89451e183581.mcandege-w2k1 is permitted
  initiator 10.48.69.235/32 is permitted
  initiator 10.48.69.232/32 is permitted
all initiator permit is disabled

target: clarion
  * Port WWN 50:06:01:60:88:02:a8:2b
Configured node
No. of LU mapping: 3
  iSCSI LUN: 0000, FC LUN: 0000
  iSCSI LUN: 0001, FC LUN: 0001
  iSCSI LUN: 0002, FC LUN: 0002
No. of advertised interface: 1
  GigabitEthernet 2/1
No. of initiators permitted: 1
  initiator 10.48.69.235/32 is permitted
all initiator permit is disabled

target: clarion-lun-3-4-5
  * Port WWN 50:06:01:60:88:02:a8:2b
Configured node
No. of LU mapping: 3
  iSCSI LUN: 0003, FC LUN: 0003
  iSCSI LUN: 0004, FC LUN: 0004
  iSCSI LUN: 0005, FC LUN: 0005
No. of advertised interface: 1
  GigabitEthernet 2/1
No. of initiators permitted: 1
  initiator 10.48.69.235/32 is permitted
all initiator permit is disabled

canterbury#show iscsi initiator configured

iSCSI Node name is 10.48.69.235
  Member of vsans: 777

canterbury#show ips arp interface gigabitethernet 2/1

Protocol      Address    Age (min)   Hardware Addr
Type  Interface
Internet     10.48.69.200      0       0008.e21e.c7bc
ARPA   GigabitEthernet2/1
Internet     10.48.69.206      7       0005.9ba6.95ff
ARPA   GigabitEthernet2/1
Internet     10.48.69.209      4       0009.7c60.561f
ARPA   GigabitEthernet2/1
Internet     10.48.69.226      0       0060.08f6.bcla

```

```

ARPA GigabitEthernet2/1
Internet 10.48.69.229      15    0800.209e.edab
ARPA GigabitEthernet2/1
Internet 10.48.69.233      0     0010.4200.7d5b
ARPA GigabitEthernet2/1
Internet 10.48.69.235      9     0800.20b6.6559
ARPA GigabitEthernet2/1
Internet 10.48.69.238      5     0030.6e1b.6f51
ARPA GigabitEthernet2/1
Internet 10.48.69.239      12    0030.6e1c.a00b
ARPA GigabitEthernet2/1
Internet 10.48.69.248      5     0202.3d30.45f8
ARPA GigabitEthernet2/1
Internet 10.48.69.252      1     0202.3d30.45fc
ARPA GigabitEthernet2/1
Internet 10.10.2.28        9     0202.3d0a.021c
ARPA GigabitEthernet2/1

```

```
canterbury#show scsi-target devices vsan 777
```

VSAN	FCID	PWWN	VENDOR
MODEL		REV	
777	0x7000e8	21:00:00:20:37:67:f7:a2	SEAGATE
ST318203FC		0004	
777	0x700103	50:06:01:60:88:02:a8:2b	DGC
RAID 0		0632	

```
canterbury#show scsi-target lun vsan 777
```

- ST318203FC from SEAGATE (Rev 0004)  
 FCID is 0x7000e8 in VSAN 777, PWWN is  
 21:00:00:20:37:67:f7:a2

LUN	Capacity	Status	Serial Number	Device-Id
	(MB)			
0x0	18210	Online	LRE8091500007039	C:1 A:0 T:3

20:00:00:20:37:67:f7:a2  
 - RAID from DGC (Rev 0632)  
 FCID is 0x700103 in VSAN 777, PWWN is  
 50:06:01:60:88:02:a8:2b

LUN	Capacity	Status	Serial Number	Device-Id
	(MB)			

0x0	1074	Online	f60004202091	C:1 A:0 T:3
-----	------	--------	--------------	-------------

60:06:01:60:88:02:a8:2b  
 da:05:b6:a9:b6:9d:7b:00

00:00:00:00 C:1 A:0 T:0

0x1	1074	Online	f60004202091	C:1 A:0 T:3
-----	------	--------	--------------	-------------

60:06:01:60:88:02:a8:2b  
 6a:66:0d:74:cb:33:88:6c

C:1 A:0 T:0

00:01:00:00				
0x2   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
ec:81:5b:a2:c4:43:0d:8a		C:1 A:0 T:0		
00:02:00:00				
0x3   2147       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
e0:47:b3:be:3b:00:e0:d5		C:1 A:0 T:0		
00:03:00:00				
0x4   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
00:51:5b:7f:3d:9a:7b:ce		C:1 A:0 T:0		
00:04:00:00				
0x5   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
ab:b1:ae:80:59:c0:fc:f0		C:1 A:0 T:0		
00:05:00:00				
0x6   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
ad:91:58:af:d2:fd:c7:47		C:1 A:0 T:0		
00:06:00:00				
0x7   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
b1:ef:e7:6c:44:5c:16:97		C:1 A:0 T:0		
00:07:00:00				
0x8   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
84:4f:09:60:30:1e:fc:50		C:1 A:0 T:0		
00:08:00:00				
0x9   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
aa:6d:e2:0e:ce:7a:cc:21		C:1 A:0 T:0		
00:09:00:00				
0xa   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
5b:66:67:89:6c:f2:d1:56		C:1 A:0 T:0		
00:0a:00:00				
0xb   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				
a9:32:bd:04:4a:bb:3d:9b		C:1 A:0 T:0		
00:0b:00:00				
0xc   1074       Online f60004202091	C:1 A:0 T:3			
60:06:01:60:88:02:a8:2b				

```
cd:d9:96:f7:57:3f:07:0c                                C:1 A:0 T:0
00:0c:00:00
  0xd    1074      Online  f60004202091      C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

0c:e5:ba:39:68:ca:d6:f0                                C:1 A:0 T:0
00:0d:00:00
  0xe    1074      Online  f60004202091      C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

60:6e:ee:76:98:fc:ab:97                                C:1 A:0 T:0
00:0e:00:00
  0xf    1074      Online  f60004202091      C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

8b:58:80:7b:12:fb:6b:12                                C:1 A:0 T:0
00:0f:00:00
  0x10   1074      Online  f60004202091      C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

a1:2f:6d:b0:c3:d6:c2:46                                C:1 A:0 T:0
00:10:00:00
  0x11   1074      Online  f60004202091      C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

2c:48:c4:74:25:4b:26:dd                                C:1 A:0 T:0
00:11:00:00
  0x20   5369      Online  f60004202091      C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

ba:18:6a:40:22:40:94:75                                C:1 A:0 T:0
00:20:00:00
  0x21   3221      Online  f60004202091      C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

74:d2:42:9e:31:8d:ff:86                                C:1 A:0 T:0
00:21:00:00

canterbury#show interface iscsi 2/1

iscsi2/1 is up
  Hardware is GigabitEthernet
  Port WWN is 20:41:00:0c:30:6c:24:40
  Admin port mode is ISCSI
  Port mode is ISCSI
  Speed is 1 Gbps
  iSCSI initiator is identified by name
  Number of iSCSI session: 4, Number of TCP
connection: 4
  Configured TCP parameters
    Local Port is 3260
    PMTU discover is enabled, reset timeout is 3600
sec
    Keepalive-timeout is 60 sec
    Minimum-retransmit-time is 300 ms
    Max-retransmissions 4
```

```
Sack is disabled
Maximum allowed bandwidth is 800000 kbps
Minimum available bandwidth is 800000 kbps
Estimated round trip time is 100000 usec
 5 minutes input rate 168 bits/sec, 21 bytes/sec, 0
frames/sec
 5 minutes output rate 728 bits/sec, 91 bytes/sec, 0
frames/sec
  iSCSI statistics
    Input 12209 packets, 2668348 bytes
      Command 3282 pdus, Data-out 1038 pdus, 1989664
bytes
    Output 14762 packets, 3486596 bytes
      Response 3059 pdus (with sense 77), R2T 153 pdus
      Data-in 3215 pdus, 2744116 bytes

canterbury#show iscsi stats iscsi 2/1

iscsi2/1
  5 minutes input rate 168 bits/sec, 21 bytes/sec, 0
frames/sec
  5 minutes output rate 728 bits/sec, 91 bytes/sec, 0
frames/sec
  iSCSI statistics
    12209 packets input, 2668348 bytes
      Command 3282 pdus, Data-out 1038 pdus, 1989664
bytes, 0 fragments
    output 14762 packets, 3486596 bytes
      Response 3059 pdus (with sense 77), R2T 153 pdus
      Data-in 3215 pdus, 2744116 bytes

canterbury#show interface gigabitethernet 2/1

GigabitEthernet2/1 is up
  Hardware is GigabitEthernet, address is
0005.3000.ade6
  Internet address is 10.48.69.199/26
  MTU 2156 bytes
  Port mode is IPS
  Speed is 1 Gbps
  Beacon is turned off
  Auto-Negotiation is turned on
  iSCSI authentication: NONE
  5 minutes input rate 392 bits/sec, 49 bytes/sec, 0
frames/sec
  5 minutes output rate 64 bits/sec, 8 bytes/sec, 0
frames/sec
    126128 packets input, 12476013 bytes
      2 multicast frames, 0 compressed
      0 input errors, 0 frame, 0 overrun 0 fifo
    43443 packets output, 6256174 bytes, 0 underruns
      0 output errors, 0 collisions, 0 fifo
      0 carrier errors

canterbury#show ip route

Codes: C - connected, S - static


Gateway of last resort is 10.48.69.129

C 10.48.69.192/26 is directly connected,
gigabitethernet2-1
C 10.48.69.128/26 is directly connected, mgmt0
```

## [Salida de Fabric Manager y Device Manager](#)

Esta sección proporciona un ejemplo de salida de MDS Fabric Manager 1.1(2) y Device Manager 1.1.(2).

### Diagrama de topología del Fabric Manager

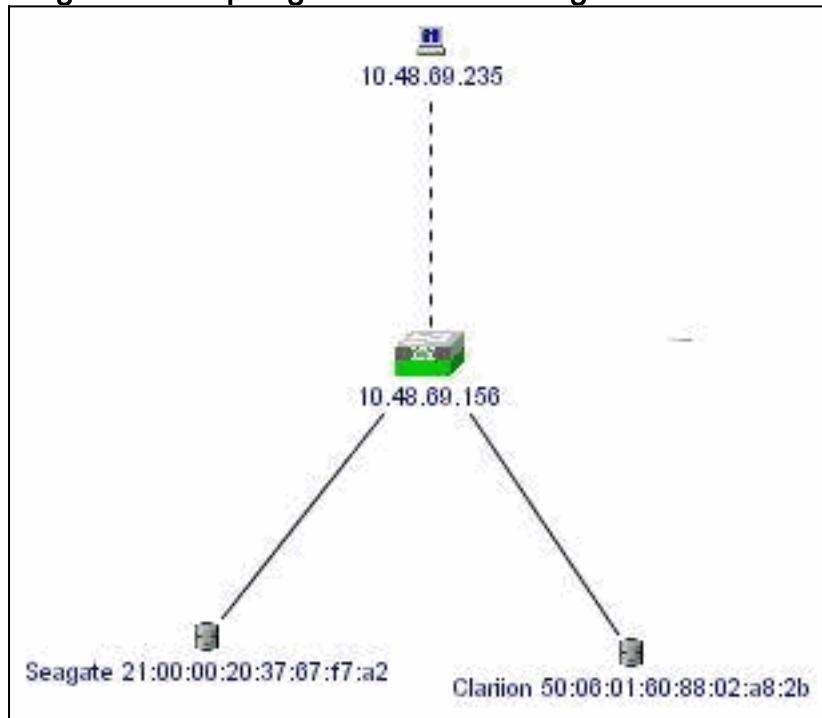

Esta es una captura de pantalla de ejemplo de la vista Administrador de dispositivos 1.1(2) en canterbury.



1. Seleccione FC > LUNs en la ventana Administrador de dispositivos para mostrar los pWWNs, IDs de LUNs y la capacidad de sus

**canterbury - LUN**

Discover | Targets | **LUNs**

VsanId, Port WWN	Id	Capacity (MB)	SerialNum
777, Seagate 21:00:00:20:37:67:17:a2	0x0	18210	LRE8091500007039HLT6
777, Clarion 50:06:01:60:88:02:a8:2b	0x0	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x1	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x2	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x3	2147	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x4	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x5	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x6	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x7	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x8	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x9	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0xa	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0xb	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0xc	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0xd	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0xe	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0xf	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x10	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x11	1074	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x20	5369	f60004202091
777, Clarion 50:06:01:60:88:02:a8:2b	0x21	3221	f60004202091

Data retrieved at 10:03:45

Refresh | Help | Close

## 2. Seleccione IP > iSCSI para mostrar las sesiones iSCSI.

**canterbury - iSCSI**

Initiators | Targets | **Sessions** | Sessions Detail | Session Statistics

Type	Direction	Initiator			Target		
		Name or IpAddress	Alias	Id	Name	Alias	Id
normal	inbound	10.48.69.235	baboon	00:02:3d:00:00:01	san-fc-jbod-1		128
normal	inbound	10.48.69.235	baboon	00:02:3d:00:00:01	clarion		128
discovery	inbound	10.48.69.235	baboon	00:02:3d:00:00:01			128
normal	inbound	10.48.69.235	baboon	00:02:3d:00:00:01	clarion-lun-3-4-5		128

4 row(s)

Connection... | Refresh | Help | Close

## Información Relacionada

- [Compatibilidad con tecnología de interfaz de sistemas informáticos pequeños sobre IP \(iSCSI\)](#)