

Verificación de MPLS en Catalyst 9000 Switches

Contenido

[Introducción](#)

[Prerequisites](#)

[Requirements](#)

[Componentes Utilizados](#)

[Antecedentes](#)

[Terminology](#)

[Configurar y verificar](#)

[Escenario 1. L3VPN con adyacencia de salto único en el núcleo MPLS](#)

[Detalles de la configuración](#)

[Verificación básica](#)

[Programación de prefijos](#)

[Programación de etiquetas VPNv4](#)

[Programación de Etiquetas LDP](#)

[Situación hipotética 2. L3VPN con ECMP entre PE y routers P](#)

[Detalles de la configuración](#)

[Validación básica](#)

[Programación de prefijos](#)

[Programación de etiquetas VPNv4](#)

[Programación de Etiquetas LDP](#)

[Resolución de problemas de escalabilidad de hardware](#)

[Registros de Sistemas de Hardware MPLS](#)

[Comandos de validación de hardware](#)

[Límite de Escala y Remediación de MPLS Label e IPv4](#)

[Comandos a recopilar para TAC](#)

[Información Relacionada](#)

Introducción

Este documento describe cómo configurar y validar la red privada virtual (VPN) de capa 3 de Multiprotocol Label Switching (MPLS) en los switches Catalyst serie 9000.

Prerequisites

Requirements

Cisco recomienda que tenga conocimiento sobre estos temas:

- IP Forwarding
- Border Gateway Protocol (BGP)

- MPLS

Componentes Utilizados

La información que contiene este documento se basa en las siguientes versiones de software y hardware.

- C9500 en Cisco IOS® XE 16.12.4
- C9300 en Cisco IOS® XE 16.12.4
- C3850 en Cisco IOS® XE 16.9.6

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. Si tiene una red en vivo, asegúrese de entender el posible impacto de cualquier comando.

Antecedentes

Las VPN de capa 3 MPLS (L3VPN) utilizan un modelo de igual a igual que utiliza BGP para distribuir información relacionada con VPN. Una VPN MPLS consta de un conjunto de sitios que están interconectados mediante una red de núcleo de proveedor MPLS. En cada sitio del cliente, uno o varios dispositivos periféricos del cliente (CE) se conectan a uno o más dispositivos periféricos (PE).

En el ruteo de Capa 3 convencional, a medida que un paquete atraviesa la red, cada switch extrae toda la información relevante para reenviar el paquete del encabezado de Capa 3. Esta información se utiliza luego como índice para una búsqueda de tabla de ruteo para determinar el salto siguiente para el paquete.

En el caso más común, el único campo relevante en el encabezado es el campo de dirección de destino, pero en algunos casos, otros campos de encabezado también podrían ser relevantes. Como resultado, el análisis del encabezado se debe hacer independientemente en cada switch a través del cual pasa el paquete. Además, también se debe realizar una búsqueda complicada de la tabla en cada switch.

En el switching de etiquetas, el análisis del encabezado de la Capa 3 se realiza sólo una vez. El encabezado de Capa 3 se mapea luego en un valor de longitud fija, no estructurado, llamado **alabel**.

Muchos encabezados diferentes pueden asignarse a la misma etiqueta, siempre y cuando esos encabezados siempre resulten en la misma opción de salto siguiente. En efecto, una etiqueta representa **una clase de equivalencia de reenvío** (FEC) es decir, un conjunto de paquetes que, por diferentes que sean, pueden ser indistinguibles por la función de reenvío.

La elección inicial de una etiqueta no debe basarse exclusivamente en el contenido del encabezado de paquete de Capa 3; por ejemplo, las decisiones de reenviar paquetes en saltos posteriores también pueden basarse en otros factores.

Una vez que se asigna una etiqueta, se agrega un encabezado de etiqueta corto en la parte frontal del paquete de Capa 3. Este encabezado se transporta a través de la red como parte del paquete. En los saltos subsiguientes a través de cada switch MPLS en la red, las etiquetas se

intercambian y las decisiones se toman mediante la búsqueda de tabla de reenvío MPLS para la etiqueta transportada en el encabezado del paquete. Por lo tanto, el encabezado del paquete no necesita ser reevaluado durante el tránsito de paquetes a través de la red. Debido a que la etiqueta es de longitud fija y no está estructurada, el proceso de búsqueda de la tabla de reenvío MPLS es sencillo y rápido.

Cada router de switching de etiquetas (LSR) de la red toma una decisión local independiente sobre el valor de etiqueta que se debe utilizar para representar una clase de equivalencia de reenvío. Esta asociación se conoce como enlace de etiquetas. Cada LSR informa a sus vecinos de las vinculaciones de etiquetas que ha hecho. Este reconocimiento de las vinculaciones de etiquetas por los switches vecinos se ve facilitado por estos protocolos:

- Protocolo de distribución de etiquetas (LDP): permite a los LSR de peer de una red MPLS intercambiar información de etiquetas para admitir el reenvío salto a salto en una red MPLS
- Protocolo de gateway fronterizo (BGP): se utiliza para admitir redes privadas virtuales (VPN) MPLS

Cuando se envía un paquete etiquetado de LSR A a LSR B, el valor de etiqueta transportado por el paquete IP es el valor de etiqueta que LSR B asignó para representar la clase de equivalencia de reenvío del paquete. Por lo tanto, el valor de la etiqueta cambia a medida que el paquete IP atraviesa la red.

Utilización de esta guía

La guía se divide en dos escenarios y al final del documento se presenta una sección de validación de la escala de hardware:

- adyacencia de un solo salto dentro del núcleo MPLS
- Adyacencias de trayectos múltiples de igual coste (ECMP) dentro del núcleo MPLS
- cómo comprobar el uso de TCAM para los problemas de escalabilidad

Cada escenario cubre la verificación de prefijos y etiquetas para cada dispositivo MPLS.

Terminology

MPLS	Conmutación de etiquetas multiprotocolo	Tecnología de reenvío de paquetes de alto rendimiento que integra el rendimiento y las capacidades de gestión del tráfico del switching de capa enlace de datos (capa 2) con la escalabilidad, flexibilidad y rendimiento del routing de capa de red (capa 3).
PE	Perímetro del proveedor (switch/router)	El dispositivo de borde de la red del proveedor que recibe prefijos IP de un cliente CE y los pasa a la nube MPLS.
CE	Perímetro del cliente (switch/router)	Dispositivo en las instalaciones del cliente que está conectado al router de borde del proveedor de una red IP/MPLS del proveedor de servicios.
LDP	Protocolo de detección de etiquetas	LDP es un protocolo que genera automáticamente e intercambia etiquetas routers. Cada router genera localmente etiquetas para sus prefijos y luego anuncia los valores de etiqueta a sus vecinos.
LSPA	Matriz de Trayectoria del Switch de Etiquetas	El conjunto de etiquetas para alcanzar un destino MPLS específico. En una L3VPN típica - puede tener una etiqueta IGP + VPN. Si hay un túnel TE, tiene una etiqueta TE + IGP + VPN. Catalyst 9000 puede soportar hasta 6 etiquetas en esta matriz de etiquetas se denomina LSPA.


ID de la pila de etiquetas	ID de la pila de etiquetas	R índice único para identificar una pila de etiquetas (unpermite compartir L
Etiqueta	Etiqueta	La etiqueta MPLS utilizada para la búsqueda. Varias etiquetas componen pila de etiquetas.
ID del prefijo	Identificador de prefijo	Catalyst 9000 crea un recurso global para cada prefijo (hay tantos ID de pr como rutas en el caso de la asignación de etiquetas por prefijo).
EM	Coincidencia exacta	Una entrada en la memoria Hash que es una coincidencia 1:1 (ruta de hos host conectado directamente).
LPM	Coincidencia de prefijo más larga	Cualquier ruta que sea /31 o más corta (/32 rutas son de tipo EM).
TCAM	Memoria direccionable por contenido ternaria	Tipo de memoria que almacena y consulta entradas con tres entradas diferentes: 0, 1 y X. Este tipo de memoria se debe utilizar en los casos en c puede haber coincidencias múltiples con la misma entrada, y el Hash resul para cada una no sería único. Esta tabla incluye un valor de máscara o "X" le permite saber si coincide o no con esta entrada.
CAM	Memoria direccionable por contenido	Término general para la memoria de hardware (Hash/TCAM).
RIB	Base de información de routing	la tabla de ruteo vista en 'show ip route'
FIB	Base de información de reenvío	tabla simplificada con prefijos agregados por las tablas RIB y ARP con un puntero a la tabla ADJ
Conexión directa	Ruta conectada directamente	Un prefijo de host conectado localmente (ARP adyacente)
Conectado de forma indirecta	Ruta conectada de forma indirecta	Una ruta que se realiza a través de un siguiente salto remoto para alcanza
ADJ	Adyacencia (tabla)	almacena la información del siguiente salto utilizada para la reescritura de paquetes
EM	Coincidencia exacta	Hosts conectados, prefijos de host indirectos /32
TCAM	Memoria direccionable por contenido ternaria	Prefijos indirectos /31 o más cortos
FED	Controlador del motor de reenvío	La capa ASIC (hardware)
FMAN-FP	Gestor de reenvío: plano de reenvío	FMAN-FP administra objetos de software que agregan, eliminan o modifica información FED
SI	Índice de la estación	Índice de la estación = información de reescritura de paquetes (RI = Índice de reescritura) e información de interfaz saliente (DI = Índice de destino)
RI	Índice de reescritura	Información de reescritura de dirección MAC para el reenvío de capa 3 a la adyacencia de salto siguiente
DI	Índice de destino	Índice que apunta a la interfaz saliente

Configurar y verificar

Escenario 1. L3VPN con adyacencia de salto único en el núcleo MPLS

Topología de referencia

A efectos de este ejemplo, los switches Catalyst 9300 funcionan como dispositivos PE, Catalyst 9500 en Stackwise Virtual funcionan como dispositivos P y Catalyst 3850 como dispositivos CE.

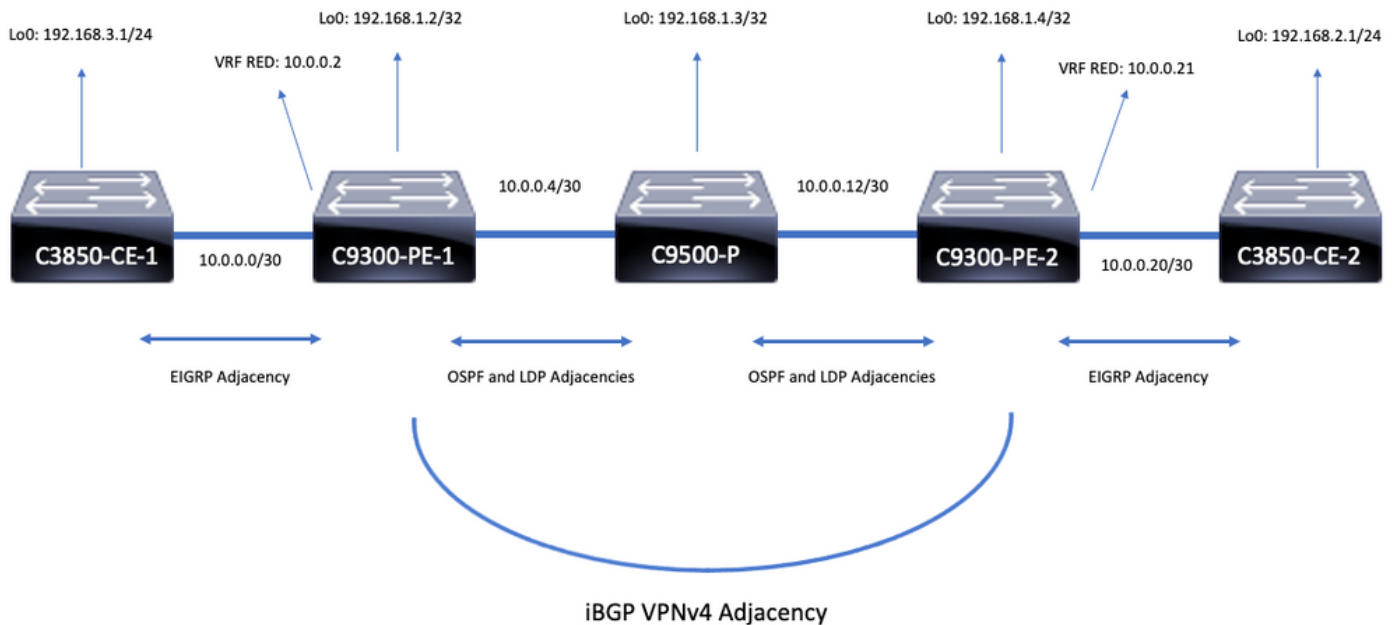

Detalles de la configuración

Configuración de C3850-CE-1

```
hostname C3850-CE-1
!
interface Loopback0
ip address 192.168.3.1 255.255.255.0
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.1 255.255.255.252
!
router eigrp 420
network 10.0.0.0 0.0.0.3
network 192.168.3.0 0.0.0.255
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.2
```

Configuración de C9300-PE-1

```
hostname C9300-PE-1
```

```

!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.2 255.255.255.255
!
interface GigabitEthernet1/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.2 255.255.255.252
!
interface GigabitEthernet1/0/2
no switchport
ip address 10.0.0.5 255.255.255.252
!
router eigrp 420
!
address-family ipv4 vrf RED
network 10.0.0.0 0.0.0.3
autonomous-system 420
exit-address-family
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.4 remote-as 69420
neighbor 192.168.1.4 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.4 activate
neighbor 192.168.1.4 send-community extended
exit-address-family
!
address-family ipv4 vrf RED
redistribute eigrp 420
exit-address-family

```

Configuración de C9500-P

```

hostname C9500-P
!
interface Loopback0
ip address 192.168.1.3 255.255.255.255
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.6 255.255.255.252
!
interface TenGigabitEthernet1/0/2
no switchport
ip address 10.0.0.13 255.255.255.252
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig

```

Configuración de C9300-CE-2

```
hostname C9300-PE-2
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.4 255.255.255.255
!
interface GigabitEthernet2/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.21 255.255.255.252
!
interface GigabitEthernet2/0/2
no switchport
ip address 10.0.0.14 255.255.255.252
!
router eigrp 400
!
address-family ipv4 vrf RED
network 10.0.0.20 0.0.0.3
autonomous-system 400
exit-address-family
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.2 remote-as 69420
neighbor 192.168.1.2 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.2 activate
neighbor 192.168.1.2 send-community extended
exit-address-family
!
address-family ipv4 vrf RED
redistribute eigrp 400
exit-address-family
```

Configuración de C3850-CE-2

```
hostname C3850-CE-2
!
interface Loopback0
ip address 192.168.2.1 255.255.255.0
!
interface TenGigabitEthernet2/0/1
no switchport
ip address 10.0.0.22 255.255.255.252
!
router eigrp 400
network 10.0.0.20 0.0.0.3
```

```
network 192.168.2.0 0.0.0.255
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.21
```

Verificación básica

Antes de la validación de la programación MPLS, hay requisitos básicos que deben validarse:

- La validación de la conectividad PE a PE está presente
- Validar la ruta conmutada de etiquetas (LSP) entre los PE
- Validar la adyacencia BGPv4 entre PEs
- Validar etiquetas VPNv4 y LDP
- Validar Tabla de Reenvío MPLS

Validar conectividad PE a PE

Puede hacer ping al loopback PE remoto y al origen desde el loopback local, pero esto no confirma que la ruta conmutada de etiquetas (LSP) MPLS sea buena, ya que las direcciones IP de loopback se anuncian en la parte inferior.

Nota: La adyacencia VPNv4 de PE a PE MP-BGP se logra a través de sus respectivas interfaces Loopback0.

```
C9300-PE-1#ping 192.168.1.4 source 192.168.1.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.1.4, timeout is 2 seconds:
Packet sent with a source address of 192.168.1.2
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms C9300-PE-1#show ip route
192.168.1.4
Routing entry for 192.168.1.4/32
Known via "ospf 420", distance 110, metric 3, type intra area
Last update from 10.0.0.10 on GigabitEthernet1/0/3, 00:55:58 ago
Routing Descriptor Blocks:
* 10.0.0.6, from 192.168.1.4, 00:55:58 ago, via GigabitEthernet1/0/2
Route metric is 3, traffic share count is 1
```

Validar el LSP

Puede utilizar un traceroute MPLS de PE a PE loopback para validar el LSP y todas las etiquetas MPLS LDP a lo largo de la trayectoria.

Nota: Este traceroute MPLS sólo impone una etiqueta, la etiqueta LDP, esto no demuestra que el tráfico del CE sea exitoso, ya que el tráfico se impone con 2 etiquetas, la etiqueta VPNv4 (interna) y la etiqueta LDP (externa).

```
C9300-PE-1#traceroute mpls ipv4 192.168.1.4/32 source 192.168.1.2
Tracing MPLS Label Switched Path to 192.168.1.4/32, timeout is 2 seconds

Codes: '.' - success, 'Q' - request not sent, '.' - timeout,
'L' - labeled output interface, 'B' - unlabeled output interface,
'D' - DS Map mismatch, 'F' - no FEC mapping, 'f' - FEC mismatch,
'M' - malformed request, 'm' - unsupported tlvs, 'N' - no label entry,
'P' - no rx intf label prot, 'p' - premature termination of LSP,
```


'R' - transit router, 'I' - unknown upstream index,
'l' - Label switched with FEC change, 'd' - see DDMAP for return code,
'X' - unknown return code, 'x' - return code 0

Type escape sequence to abort.

```
0 10.0.0.5 MRU 1500 [Labels: 17 Exp: 0]
L 1 10.0.0.6 MRU 1500 [Labels: explicit-null Exp: 0] 8 ms
! 2 10.0.0.14 2 ms
```

Si no tiene acceso al CE o a un dispositivo detrás del CE y desea demostrar que hay una imposición/disposición correcta de etiquetas VPNv4 y LDP, puede intentar hacer ping desde la interfaz de cara CE en el VRF en un PE a la otra interfaz de cara CE en el VRF en el PE remoto.

```
C9300-PE-1#ping vrf RED 10.0.0.21 source 10.0.0.2
```

Type escape sequence to abort.

```
Sending 5, 100-byte ICMP Echos to 10.0.0.21, timeout is 2 seconds:
Packet sent with a source address of 10.0.0.2
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/2 ms
```

Validar la adyacencia VPNv4 BGP entre los PE

```
C9300-PE-1#show bgp vpnv4 unicast all neighbors 192.168.1.4
```

```
BGP neighbor is 192.168.1.4, remote AS 69420, internal link
BGP version 4, remote router ID 192.168.1.4
BGP state = Established, up for 00:57:37
Last read 00:00:41, last write 00:00:41, hold time is 180, keepalive interval is 60 seconds
Neighbor sessions:
1 active, is not multisession capable (disabled)
Neighbor capabilities:
Route refresh: advertised and received(new)
Four-octets ASN Capability: advertised and received
Address family IPv4 Unicast: advertised and received
Address family VPNv4 Unicast: advertised and received
Enhanced Refresh Capability: advertised and received
Multisession Capability:
Stateful switchover support enabled: NO for session 1
Message statistics:
InQ depth is 0
OutQ depth is 0

Sent Rcvd
Opens: 1 1
Notifications: 0 0
Updates: 6 6
Keepalives: 62 63
Route Refresh: 0 0
Total: 69 70
Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds
<snip>
```

```
C9300-PE-2#show bgp vpnv4 unicast all neighbors 192.168.1.2
```

```
BGP neighbor is 192.168.1.2, remote AS 69420, internal link
BGP version 4, remote router ID 192.168.1.2
BGP state = Established, up for 01:01:00
Last read 00:00:13, last write 00:00:37, hold time is 180, keepalive interval is 60 seconds
Neighbor sessions:
1 active, is not multisession capable (disabled)
```

Neighbor capabilities:
Route refresh: advertised and received(new)
Four-octets ASN Capability: advertised and received
Address family IPv4 Unicast: advertised and received
Address family VPNv4 Unicast: advertised and received
Enhanced Refresh Capability: advertised and received
Multisession Capability:
Stateful switchover support enabled: NO for session 1
Message statistics:
InQ depth is 0
OutQ depth is 0

Sent Rcvd
Opens: 1 1
Notifications: 0 0
Updates: 6 6
Keepalives: 67 66
Route Refresh: 0 0
Total: 74 73
Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds

La adyacencia VPNv4 PE remota está activa y se ha recibido un prefijo

C9300-PE-1#**show bgp vpnv4 unicast all summary**

BGP router identifier 192.168.1.2, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 16:19:10 Jun 1 2021 UTC (01:32:00.716 ago)

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
192.168.1.4	4	69420	108	108	7	0	0	01:34:52	2

C9300-PE-2#**show bgp vpnv4 unicast all summary**

BGP router identifier 192.168.1.4, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 16:18:31 Jun 1 2021 UTC (01:37:30.404 ago)

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
192.168.1.2	4	69420	114	114	7	0	0	01:40:22	2

Verifique qué prefijos se intercambian en el VRF particular

C9300-PE-1#**show ip bgp vpnv4 vrf RED**

BGP table version is 10, local router ID is 192.168.1.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,

r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
 x best-external, a additional-path, c RIB-compressed,
 t secondary path, L long-lived-stale,
 Origin codes: i - IGP, e - EGP, ? - incomplete
 RPKI validation codes: V valid, I invalid, N Not found

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*> 10.0.0.0/30	0.0.0.0	0		32768	?
*>i 10.0.0.20/30	192.168.1.4	0	100	0	?
*> 192.168.1.0	10.0.0.1	130816		32768	?
*>i 192.168.2.0	192.168.1.4	130816	100	0	?

C9300-PE-2#show ip bgp vpnv4 vrf RED

BGP table version is 9, local router ID is 192.168.1.4
 Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
 r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
 x best-external, a additional-path, c RIB-compressed,
 t secondary path, L long-lived-stale,
 Origin codes: i - IGP, e - EGP, ? - incomplete
 RPKI validation codes: V valid, I invalid, N Not found

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*>i 10.0.0.0/30	192.168.1.2	0	100	0	?
*> 10.0.0.20/30	0.0.0.0	0		32768	?
*>i 192.168.1.0	192.168.1.2	130816	100	0	?
*> 192.168.2.0	10.0.0.22	130816		32768	?

Validar etiquetas VPNv4 y LDP:

Verifique la etiqueta VPNv4 que se utiliza para alcanzar los prefijos en el VRF

C9300-PE-1#show ip bgp vpnv4 vrf RED labels

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	0.0.0.0	20/nolabel(RED)
10.0.0.20/30	192.168.1.4	nolabel/20
192.168.1.0	10.0.0.1	21/nolabel
192.168.2.1/32	192.168.1.4	nolabel/21 <-- VPNv4 label that is imposed to reach

192.168.2.0

C9300-PE-1#show ip route vrf RED 192.168.2.1

Routing Table: RED
 Routing entry for 192.168.2.0/24
 Known via "bgp 69420", distance 200, metric 130816, type internal
 Last update from 192.168.1.4 01:31:56 ago
 Routing Descriptor Blocks:
 * 192.168.1.4 (default), from 192.168.1.4, 01:31:56 ago
 Route metric is 130816, traffic share count is 1
 AS Hops 0
 MPLS label: 21 <-- VPNv4 label that matches the previous output
 MPLS Flags: MPLS Required

C9300-PE-2#show ip bgp vpnv4 vrf RED labels

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	192.168.1.2	nolabel/20
10.0.0.20/30	0.0.0.0	20/nolabel(RED)
192.168.1.0	192.168.1.2	nolabel/21
192.168.2.0	10.0.0.22	21/nolabel <-- VPNv4 label that is advertised to reach

192.168.2.0

C9300-PE-2#show ip route vrf RED 192.168.2.1

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Last update from 10.0.0.22 on GigabitEthernet2/0/1, 01:34:42 ago

Routing Descriptor Blocks:

* 10.0.0.22, from 10.0.0.22, 01:34:42 ago, via GigabitEthernet2/0/1 <-- **CE-facing interface in the VRF**

Route metric is 130816, traffic share count is 1

Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit

Reliability 255/255, minimum MTU 1500 bytes

Loading 1/255, Hops 1

Verifique las etiquetas LDP que se utilizan

C9300-PE-1#show mpls forwarding-table 192.168.1.4

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
19	17	192.168.1.4/32	0		Gi1/0/2	10.0.0.6 <-- 17 is the LDP label imposed to reach PE at 192.168.1.4 through Gi1/0/2

C9300-PE-2#show mpls forwarding-table 192.168.1.2

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
17	16	192.168.1.2/32	0		Gi2/0/2	10.0.0.13 <-- 16 is the LDP label imposed to reach PE at 192.168.1.4 through Gi2/0/2

Validar la Tabla de Reenvío MPLS

C9300-PE-1#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0		Gi1/0/2	10.0.0.6
17	Pop Label	10.0.0.16/30	0		Gi1/0/2	10.0.0.6
18	Pop Label	10.0.0.12/30	0		Gi1/0/2	10.0.0.6
19	17	192.168.1.4/32	0		Gi1/0/2	10.0.0.6
20	No Label	10.0.0.0/30[V]	1982		aggregate/RED	
21	No Label	192.168.3.0/24[V]	\			
			0		Gi1/0/1	10.0.0.1

C9300-PE-2#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0		Gi2/0/2	10.0.0.13
	Pop Label	192.168.1.3/32	0		Gi2/0/3	10.0.0.17
17	16	192.168.1.2/32	164		Gi2/0/2	10.0.0.13
	16	192.168.1.2/32	1224		Gi2/0/3	10.0.0.17
18	Pop Label	10.0.0.4/30	0		Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.4/30	0		Gi2/0/3	10.0.0.17
20	No Label	10.0.0.20/30[V]	0		aggregate/RED	
21	No Label	192.168.2.0/24[V]	\			
			1440		Gi2/0/1	10.0.0.22

Confirme las etiquetas interna (VPNv4) y externa (LDP) utilizadas para alcanzar cada prefijo determinado en el VRF

```
C9300-PE-1#show ip cef vrf RED 192.168.2.0/24 detail
192.168.2.1/32, epoch 0, flags [rib defined all labels]
  recursive via 192.168.1.4 label 21 <-- VPNv4 label
    nexthop 10.0.0.6 GigabitEthernet1/0/2 label 17-(local:19) <-- 17 is the LDP label that is be
imposed to reach the remote PE,
19 is the local LDP label advertised to the P router
```

```
C9300-PE-2#show ip cef vrf RED 192.168.3.0/24 detail
192.168.1.1/32, epoch 0, flags [rib defined all labels]
  recursive via 192.168.1.2 label 22 <-- VPNv4 label
    nexthop 10.0.0.13 GigabitEthernet2/0/2 label 16-(local:17) <-- 16 is the LDP label that is
be imposed to reach the remote PE,
17 is the local LDP label
advertised to the P router
```

Verificar Estadísticas de Object-Manager

En escenarios ideales, no hay objetos pendientes

```
C9300-PE-1#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

```
9500-P#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

```
C9300-PE-2#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
Total-objects: 482
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

Programación de prefijos

La siguiente sección trata la programación de prefijos en los routers MPLS, C9300-PE-1, C9500-P y C9300-PE-2.

Programación de prefijos C9300-PE-1

Software Prefix Programming

```
C9300-PE-1#show ip route vrf RED 192.168.2.1
```

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "bgp 69420", distance 200, metric 130816, type internal

Last update from 192.168.1.4 20:21:40 ago

Routing Descriptor Blocks:

* **192.168.1.4** (default), from 192.168.1.4, 20:21:40 ago <-- Remote PE reachable in the global routing table

Route metric is 130816, traffic share count is 1

AS Hops 0

MPLS label: **21** <-- VPNv4 label

MPLS Flags: MPLS Required

```
C9300-PE-1#show ip route 192.168.1.4
```

Routing entry for 192.168.1.4/32

Known via "ospf 420", distance 110, metric 3, type intra area

Last update from 10.0.0.6 on GigabitEthernet1/0/2, 21:27:11 ago

Routing Descriptor Blocks:

* **10.0.0.6**, from 192.168.1.4, 21:27:11 ago, via **GigabitEthernet1/0/2** <-- Next-hop 10.0.0.6 via **Gi1/0/2 to reach**

Route metric is 3, traffic share count is 1

FMAN RP Prefix Programming

```
C9300-PE-1#show ip vrf detail
```

VRF RED (VRF Id = 2); default RD 69:69; default VPNID <-- VRF ID is important in subsequent command

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi1/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

```
C9300-PE-1#show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24 <-  
- Index value is the VRF ID from previous command
```

Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_LABEL	0x14

```
C9300-PE-1#show platform software mpls switch active r0 label index 0x14 <-- Utilize the Index  
value from previous command
```

Label OCE 0x14 -> OBJ_LABEL (0x17) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1
Label values: 0x15
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480636fb0

C9300-PE-1#show platform software mpls switch active r0 label index 0x17 <-- Utilize the OBJ_LABEL value from previous command

Label OCE 0x17 -> OBJ_ADJACENCY (0x46) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348062f858

C9300-PE-1#show platform software adjacency switch active r0 index 0x46 <-- Utilize the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 6

Adjacency id: 0x46 (70)

Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG <-- Egress interface
Encap: d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47 <-- MAC ending in DDE4 is the DMAC, MAC ending in D1D6 is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.6 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480636280

FMAN FP Prefix Programming

C9300-PE-1#show ip vrf detail

VRF RED (VRF Id = 2); default RD 69:69; default VPNID <-- VRF ID is important in subsequent command

Old CLI format, supports IPv4 only
Flags: 0xC
Interfaces:
Gi1/0/1
Address family ipv4 unicast (Table ID = 0x2):
Flags: 0x0
Export VPN route-target communities
RT:69:69
Import VPN route-target communities
RT:69:69
No import route-map
No global export route-map
No export route-map
VRF label distribution protocol: not configured
VRF label allocation mode: per-prefix

C9300-PE-1#show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24 detail <-- Index value is the VRF ID from previous command

Forwarding Table

192.168.2.0/24 -> OBJ_LABEL (0x14), urpf: 15 <-- Utilized in next command
Prefix Flags: unknown
aom id: 648, HW handle: (nil) (created)

C9300-PE-1#show platform software mpls switch active f0 label index 0x14 <-- Utilize the OBJ_LABEL value from the previous command

Label OCE 0x14 -> OBJ_LABEL (0x17) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1
Label values: 0x15
Backup flags: Pop, UHP, backup label 0x100001
aom id: 647, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software mpls switch active f0 label index 0x17 <-- Utilize the OBJ_LABEL value from the previous command

Label OCE 0x17 -> OBJ_ADJACENCY (0x46) <-- Utilized in next command

Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 664, CPP handle: 0xdeadbeef (created)

C9300-PE-1#show platform software adjacency switch active f0 index 0x46 <-- Utilize the OBJ_ADJACENCY value from the previous command

Number of adjacency objects: 6

Adjacency id: 0x46 (70)

Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG <-- Egress interface
Encap: d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47 <-- MAC ending in DDE4 is the DMAC, MAC ending in D1D6 is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.6 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 522, HW handle: (nil) (created)

FED Prefix Programming

C9300-PE-1#show platform software fed switch active ip route vrf-name RED 192.168.2.0/24

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
-----	------	-----	-------	-----	------	------	-------

---	----	---	-----	---	----	-----	-----
-----	------	-----	-------	-----	------	-------	-------

2	192.168.2.0/24		0x7feeeca12bb8	0x0	0	0	lspa0x2
---	----------------	--	----------------	-----	---	---	---------

2021/06/14 17:13:59.644 <-- HTM value significant for next command

FIB: prefix_hdl:0x5000002a, mpls_ecr_prefix_hdl:0
===== OCE chain =====

LABEL:objid:20 link_type:MPLS local_label:1048577 outlabel:(21, 0) <-- VPNv4 Label
flags:0x1:(REAL,) pdflags:0x80:(INSTALL_HW_OK,RECIR_ADJ,) adj_handle:0x5100003d <--

adj_handle and local_adj_hdl values must match

unsupported recursion:0 olbl_changed 0 local_adj:1 modify_cnt:1

bwalk_cnt:0 subwalk_cnt:1 collapsed_oce:0

AAL: id:1358954557 lbl:19 smac:0000.0000.0000 dmac:0000.0000.0000 <-- Label 19 matches the local transport label

sub_type:0 link_type:0 adj_flags:0x10 label_type:0 rewrite_type:PSH2(121)

vlan_id:0 vrf_id:0 ri:0x7feeeca9acf8, ri_id:0x46 phdl:0, ref_cnt:2 <-- ri_id and

ri_idx values must match

si:0x7feeeca6ab98, si_id:0xb6, di_id:0x5013

LABEL:objid:23 link_type:MPLS local_label:19 outlabel:(17, 0) <-- Label 19 is the local transport label, Label 17 is the LDP label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x50000034

unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:1342177332 lbl:0 smac:a0f8.4911.d1d6 dmac:d4ad.71b5.dde4 <-- Matches the next-hop information to reach 192.168.2.0/24

sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)


```
stripSeg = 0
copySeg = 0
ASIC#1:
```

```
index = 0x535f
pmap = 0x00000000 0x00000002 <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
0000 0000 0000 0010 = Port 1 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

```
C9300-PE-1#show plat soft fed switch active ifm mappings
```

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
GigabitEthernet1/0/2	0x36	1	0	1	1	0	6	7	2	2	NIF	Y

- Port 1 is the egress port, Gi1/0/2

Programación de prefijos C9500-P

```
***Software Prefix Programming***
```

```
C9500-P#show ip route 192.168.1.4
```

```
Routing entry for 192.168.1.4/32
```

```
Known via "ospf 420", distance 110, metric 2, type intra area
```

```
Last update from 10.0.0.14 on TenGigabitEthernet1/0/2, 1d21h ago
```

```
Routing Descriptor Blocks:
```

```
* 10.0.0.14, from 192.168.1.4, 1d21h ago, via TenGigabitEthernet1/0/2 <-- Next-hop to reach
192.168.1.4
```

```
Route metric is 2, traffic share count is 1
```

```
C9500-P#show ip cef 192.168.1.4 detail
```

```
192.168.1.4/32, epoch 4
```

```
dfilt local label info: global/17 [0x3]
```

```
nexthop 10.0.0.14 TenGigabitEthernet1/0/2 label explicit-null-(local:17)
```

```
***FMAN RP Prefix Programming***
```

```
C9500-P#show platform software ip switch active r0 cef prefix 192.168.1.4/32
```

```
Forwarding Table
```

Prefix/Len	Next Object	Index
192.168.1.4/32	OBJ_LABEL	0x16 <-- Value used in next command

```
C9500-P#show platform software mpls switch active r0 label index 0x16 <-- Utilize the OBJ_LABEL
value from previous command
```

```
Label OCE 0x16 -> OBJ_ADJACENCY (0x49) <-- Value used in next command
```

```
Flags: Real, Number of labels in the OCE: 1
```

```
Label values: 0
```

```
Backup flags: Pop, UHP, backup label 0x100001
```

```
OM handle: 0x34806492f0
```

```
C9500-P#show platform software adjacency switch active r0 index 0x49 <-- Utilize OBJ_ADJACENCY
```

value from previous command

Number of adjacency objects: 8

Adjacency id: 0x49 (73)

Interface: **TenGigabitEthernet1/0/2**, IF index: 66, Link Type: MCP_LINK_TAG

Encap: **70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47** <-- MAC ending in AE71 is the DMAC, MAC ending in DDD6 is the SMAC, 8847 is MPLS ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: unknown

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: **10.0.0.14** <-- Next-hop IP

IP FRR MCP_ADJ_IPFRR_NONE 0

OM handle: 0x3480647760

*****FMAN FP Prefix Programming*****

C9500-P#show platform software ip switch active f0 cef prefix 192.168.1.4/32 detail
Forwarding Table

192.168.1.4/32 -> OBJ_LABEL (0x16), urpf: 21 <-- Used in subsequent command

Prefix Flags: unknown

aom id: 567, HW handle: (nil) (created)

C9500-P#show platform software mpls switch active f0 label index 0x16 <-- Utilize the OBJ_LABEL value from previous command

Label OCE 0x16 -> OBJ_ADJACENCY (0x49) <-- Used in subsequent command

Flags: Real, Number of labels in the OCE: 1

Label values: 0

Backup flags: Pop, UHP, backup label 0x100001

aom id: 589, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software adjacency switch active f0 index 0x49 <-- Utilize the OBJ_ADJACENCY from previous command

Number of adjacency objects: 8

Adjacency id: 0x49 (73)

Interface: **TenGigabitEthernet1/0/2**, IF index: 66, Link Type: MCP_LINK_TAG

Encap: **70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47** <-- MAC ending in AE71 is the DMAC, MAC ending in DDD6 is the SMAC, 8847 is MPLS ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500

Flags: unknown

Incomplete behavior type: None

Fixup: unknown

Fixup_Flags_2: unknown

Nexthop addr: **10.0.0.14** <-- Next-hop IP

IP FRR MCP_ADJ_IPFRR_NONE 0

aom id: 535, HW handle: (nil) (created)

***** FED Prefix Programming*****

C9500-P#show platform software fed switch active ip route 192.168.1.4/32

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
modified							
---	----	---	-----	---	----	-----	-----

0 192.168.1.4/32 0x7f790c4cf0e8 0x0 0 0

2021/06/14 22:10:54.150 <-- HTM value significant for next command

FIB: prefix_hdl:0x6a000020, mpls_ecr_prefix_hdl:0

===== OCE chain =====

LABEL:objid:22 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local transport label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xb9000037

```
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3103785015 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71 <-- Matches the next-hop
information to reach 192.168.1.4/32
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f790c4cdfd8, ri_id:0x38 phdl:0x76000058, ref_cnt:1
si:0x7f790c4c22f8, si_id:0x400b, di_id:0x2 <-- di_id utilized in subsequent commands
ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x2d000027, }
=====
MPLS info: mpls_ecr_scale_prefix_adj:0, mpls_lspa_hdl:0
=====
```

```
C9500-P#show platform hardware fwd-asic abstraction print-resource-handle 0x7f790c4cf0e8 1 <--
Utilize the HTM value from previous command
```

```
Handle:0x7f790c4cf0e8 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f790c4cf2f8
Features sharing this resource:Cookie length: 12
04 01 a8 c0 00 00 00 d0 07 00 00 00
```

```
Detailed Resource Information (ASIC# 0)
```

```
-----
```

```
Number of HTM Entries: 1
```

```
Entry 0: (handle 0x7f790c4cf2f8)
```

```
Absolute Index: 126650
```

```
Time Stamp: 40
```

```
KEY - vrf:0 mtr:0 prefix:192.168.1.4 rcp_redirect_index:0x0
```

```
MASK - vrf:0 mtr:0 prefix:0.0.0.0 rcp_redirect_index:0x0
```

```
FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5
```

```
afdLabelOrDestClientId:0 SI:16395 destined_to_us:0 hw_stats_idx:1 stats_id:0
```

```
redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0
```

```
SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0
```

```
rpfValid:1 rpfLe:38 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1
```

```
rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:0
```

```
rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,
```

```
sgtCacheControl0 = 0
```

```
port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0
```

```
group_label:0x0 group_mask:0x0
```

```
=====
```

```
C9500-P#show platform hardware fed switch active fwd-asic resource asic all destination-index
range 0x2 0x2 <-- Utilize the di_id value from the previous command
```

```
ASIC#0:
```

```
index = 0x2
```

```
pmap = 0x00000000 0x00000000
```

```
cmi = 0x0
```

```
rcp_pmap = 0x0
```

```
al_rsc_cmi
```

```
CPU Map Index (CMI) [0]
```

```
ctiLo0 = 0
```

```
ctiLo1 = 0
```

```
ctiLo2 = 0
```

```
cpuQNum0 = 0
```

```
cpuQNum1 = 0
```

```
cpuQNum2 = 0
```

```
npuIndex = 0
```

```
stripSeg = 0
```

```
copySeg = 0
```

```
ASIC#1:
```

```

index = 0x2
pmap = 0x00000000 0x00000002 <-- 0x00000002 in binary is 0000 0000 0000 0000 0000 0000 0000 =
Port 1 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

```

C9500-P#**show platform software fed switch active ifm mappings**

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
TenGigabitEthernet1/0/2	0x42	1	0	1	1	0	10	1	2	2	NIF	Y <-

- **Port 1 is the egress port, TenGig1/0/2**

Programación de prefijos C9300-PE-2

*****Software Prefix Programming*****

C9300-PE-2#**show ip route vrf RED 192.168.2.1**

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Last update from 10.0.0.22 on GigabitEthernet2/0/1, 1d21h ago

Routing Descriptor Blocks:

* **10.0.0.22**, from 10.0.0.22, 1d21h ago, via GigabitEthernet2/0/1 <-- **Next-hop reachable in the**

VRF

Route metric is 130816, traffic share count is 1

Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit

Reliability 255/255, minimum MTU 1500 bytes

Loading 1/255, Hops 1

C9300-PE-2#**show ip route vrf RED 10.0.0.22**

Routing Table: RED

Routing entry for 10.0.0.20/30

Known via "connected", distance 0, metric 0 (connected, via interface)

Redistributing via eigrp 400, bgp 69420

Advertised by bgp 69420

Routing Descriptor Blocks:

* **directly connected**, via GigabitEthernet2/0/1 <-- **Next-hop directly connected**

Route metric is 0, traffic share count is 1

C9300-PE-2#**show ip cef vrf RED 192.168.2.0/24 detail**

192.168.2.0/24, epoch 0

QOS: Precedence routine (0)

dflt local label info: other/21 [0x2]

nexthop 10.0.0.22 GigabitEthernet2/0/1

*****FMAN RP Prefix Programming*****

C9300-PE-2#**show ip vrf detail**

VRF RED (**VRF Id = 2**); default RD 69:69; default VPNID <-- **VRF ID is important in subsequent**

command

Old CLI format, supports IPv4 only
Flags: 0xC
Interfaces:
 Gi2/0/1
Address family ipv4 unicast (Table ID = 0x2):
 Flags: 0x0
 Export VPN route-target communities
 RT:69:69
 Import VPN route-target communities
 RT:69:69
 No import route-map
 No global export route-map
 No export route-map
 VRF label distribution protocol: not configured
 VRF label allocation mode: per-prefix

C9300-PE-2#**show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24**
Forwarding Table

Prefix/Len	Next Object	Index
-----	-----	-----
192.168.2.0/24	OBJ_ADJACENCY	0x19

C9300-PE-2#**show platform software adjacency switch active r0 index 0x19** <-- Utilize the Index value from previous command

Number of adjacency objects: 6

Adjacency id: 0x19 (25)

 Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP
 Encap: **0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0** <-- MAC ending in C9C2 is DMAC, MAC ending in AE42 is SMAC, 0x800 is the IP ETYPE
 Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
 Flags: no-l3-inject
 Incomplete behavior type: None
 Fixup: unknown
 Fixup_Flags_2: unknown
 Nexthop addr: 10.0.0.22
 IP FRR MCP_ADJ_IPFRR_NONE 0
 OM handle: 0x348062f118

*****FMAN FP Prefix Programming*****

C9300-PE-2#**show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24**
detail

Forwarding Table

192.168.2.0/24 -> OBJ_ADJACENCY (**0x19**), urpf: 30 <-- Utilized in next command
Prefix Flags: unknown
aom id: 665, HW handle: (nil) (created)
QPPB precedence: 0

C9300-PE-2#**show platform software adjacency switch active f0 index 0x19** <-- Utilize the OBJ_ADJACENCY from previous command

Number of adjacency objects: 6

Adjacency id: 0x19 (25)

 Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP
 Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0
 Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
 Flags: no-l3-inject
 Incomplete behavior type: None
 Fixup: unknown
 Fixup_Flags_2: unknown
 Nexthop addr: 10.0.0.22

IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 659, HW handle: (nil) (created)

FED Prefix Programming

```
C9300-PE-2#show platform software fed switch active ip route vrf-name RED 192.168.2.0/24
vrf  dest                htm                flags  SGT  DGID MPLS Last-
modified
---  ----                ---                -----  ---  ----  ----  -----
-----
2    192.168.2.0/24                0x7f7fb4a25648 0x0    0    0
2021/06/14 17:04:13.460 <-- HTM value significant for next command
FIB: prefix_hdl:0x6e00002a, mpls_ecr_prefix_hdl:0
===== OCE chain =====
ADJ:objid:25 {link_type:IP ifnum:0x35, si:0x3300003e, IPv4:      10.0.0.22 }
=====
MPLS info: mpls_ecr_scale_prefix_adj:0, mpls_lspa_hdl:0

=====
```

C9300-PE-2#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f7fb4a25648 1 <-- Utilize HTM value from previous command

Handle:0x7f7fb4a25648 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f7fb4a10e58
Features sharing this resource:Cookie length: 12
01 02 a8 c0 00 00 02 d0 07 00 00 00

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7f7fb4a10e58)

Absolute Index: 66036

Time Stamp: 164911

KEY - vrf:2 mtr:0 prefix:192.168.2.0 rcp_redirect_index:0x0
MASK - vrf:0 mtr:0 prefix:0.0.0.255 rcp_redirect_index:0x0
FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5
afdLabelOrDestClientId:0 SI:182 destined_to_us:0 hw_stats_idx:1 stats_id:0
redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0
SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0
rpfValid:1 rpfLe:37 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1
rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UserRpfmatchTable:0
rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,
sgtCacheControl0 = 0
port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0
group_label:0x0 group_mask:0x0

C9300-PE-2#show platform software fed switch active ip adj

```
IPV4 Adj entries
dest          if_name          dst_mac          si_hdl          ri_hdl          pd_flags
adj_id Last-modified
-----  -----
-----  -----
10.0.0.22    GigabitEthernet2/0/1    0072.78c8.c9c2    0x7f7fb4a44048 0x7f7fb4b089d8 0x0
0x19        2021/06/14 16:59:43.447 <-- si_hdl used in next command
```

C9300-PE-2#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f7fb4a44048 1 <-- Utilize the si_hdl value from previous command

Handle:0x7f7fb4a44048 Res-Type:ASIC_RSC_SI Res-Switch-Num:255 Asic-Num:255 Feature-

ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1
priv_ri/priv_si Handle: 0x7f7fb4b089d8Hardware Indices/Handles: index0:0xb6
mtu_index/l3u_ri_index0:0x0 index1:0xb6 mtu_index/l3u_ri_index1:0x0
Features sharing this resource:66 (1)]
Cookie length: 56
00 00 00 00 00 00 00 00 25 00 00 00 00 00 00 00 00 00 00 00 08 00 00 72 78 c8 c9 c2 00 00 00 00
00 00

Detailed Resource Information (ASIC# 0)

Station Index (SI) [0xb6]
RI = 0x2b
DI = **0x5338**
stationTableGenericLabel = 0
stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0
rcpServiceId = 0
dejaVuPreCheckEn = 0
Replication Bitmap: CD

Detailed Resource Information (ASIC# 1)

Station Index (SI) [0xb6]
RI = 0x2b
DI = **0x5338**
stationTableGenericLabel = 0
stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0
rcpServiceId = 0
dejaVuPreCheckEn = 0
Replication Bitmap: LD

=====

C9300-PE-2#**show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x5338 0x5338** <-- Utilize the DI value from previous command

ASIC#0:

index = 0x5338
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

ASIC#1:

index = 0x5338
pmap = 0x00000000 **0x00000001** <-- **0x00000001 in binary is 0000 0000 0000 0000 0000 0000 0000 0001**
= Port 0 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0


```
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

```
C9300-PE-2#show platform software fed switch active ifm map
Interface          IF_ID      Inst Asic Core Port SubPort Mac  Cntx LPN  GPN  Type Active
GigabitEthernet2/0/1  0x35      1  0  1  0  0  26  6  1  97  NIF  Y  <-
- Port 0 is the egress port, Gi2/0/1
```

Programación de etiquetas VPNv4

La siguiente sección trata la programación de etiquetas VPNv4 en los routers PE MPLS, C9300-PE-1 y C9300-PE-2. El C9500 no se reenvía en la etiqueta VPNv4, por lo que no hay salida del C9500.

Programación de etiquetas VPNv4 C9300-PE-1:

Verifique el prefijo local al PE, no el prefijo remoto.

Software VPNv4 Label Programming

```
C9300-PE-1#show ip cef vrf RED 192.168.3.0/24 detail
192.168.3.0/24, epoch 0
  QOS: Precedence routine (0)
  dflt local label info: other/22 [0x2] <-- VPNv4 label associated with the local prefix
  nexthop 10.0.0.1 GigabitEthernet1/0/1
```

FMAN RP VPNv4 Label Programming

```
C9300-PE-1#show platform software mpls switch active r0 eos index 24 <-- Utilize the objid from
the FED command
```

```
EOS Choice 0x18, Number of paths: 2
  Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
  Next Object Index: 0,0x17
  OM handle: 0x3480631760
```

FMAN FP VPNv4 Label Programming

```
C9300-PE-1#show platform software mpls switch active f0 eos index 24 <-- Utilize the objid from
the FED command
```

```
EOS Choice 0x18, Number of paths: 2
  Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
  Next Object Index: 0,0x17
  aom id: 5748, CPP handle: 0xdeadbeef (created), flags: 0 <-- Utilized in subsequent command
```

```
C9300-PE-1#show platform software object-manager switch active f0 object 5748 <-- Utilize the
aom id from previous command
```

```
Object identifier: 5748
Description: EOS Choice 0x18
Status: Done, Epoch: 0, Client data: 0x63150908
```

C9300-PE-1#show platform software object-manager switch active f0 object 5748 parents <--

Utilize the aom id

Object identifier: 7

Description: Special Object adj_drop

Status: Done

Object identifier: 5746

Description: label 0x17

Status: Done

*****FED VPNv4 Label Programming*****

C9300-PE-1#show platform software fed switch active mpls forwarding label 22 detail

LENTRY:label:22 nobj:(EOS, 24) lentry_hdl:0x800000a

modify_cnt:1 backwalk_cnt:0

lspa_handle:0

AAL: id:134217738 lbl:22

eos0:[adj_hdl:0, hw_hdl:0x7fa4c4d72e08]

eos1:[adj_hdl:0x6e00003e, hw_hdl:0x7fa4c4d72c58]

deagg_vrf_id = 0 lspa_handle:0

EOS:objid:24 local_label:0 flags:0:() pdflags:0 <-- Utilized in previous commands

nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 23) modify:0 bwalk:0

LABEL:objid:23 link_type:IP local_label:22 outlabel:(1048577, 0)

flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0x6e00003e

unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:1845493822 lbl:0 smac:a0f8.4911.d1e4 dmac:0072.78c8.06e4

sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)

vlan_id:0 vrf_id:0 ri:0x7fa4c4a81af8, ri_id:0x44 phdl:0xf1000024, ref_cnt:1

si:0x7fa4c4d83da8, si_id:0x4012, di_id:0x5338

ADJ:objid:113 {link_type:IP ifnum:0x35, si:0x2000003a, IPv4: 10.0.0.1 }

Verifique la etiqueta C9300-PE-2 VPNv4:

Verifique el prefijo local al PE, no el prefijo remoto

*****Software VPNv4 Label Programming*****

C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail

192.168.2.0/24, epoch 0

QOS: Precedence routine (0)

dflt local label info: other/21 [0x2] <-- VPNv4 label associated with local prefix

nexthop 10.0.0.22 GigabitEthernet2/0/1

***** FMAN RP VPNv4 Label Programming*****

C9300-PE-2#show platform software mpls switch active r0 eos index 61 <-- Use the objid from the FED command

EOS Choice 0x3d, Number of paths: 2

Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL

Next Object Index: 0,0x3b

OM handle: 0x348063f2f8

***** FMAN FP VPNv4 Label Programming*****

C9300-PE-2#show platform software mpls switch active f0 eos index 61 <-- Use the objid from the FED command

EOS Choice 0x3d, Number of paths: 2

Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL

Next Object Index: 0,0x3b

```

aom id: 3541, CPP handle: 0xdeadbeef (created), flags: 0 <-- Utilized in subsequent command

C9300-PE-2#show platform software object-manager switch active f0 object 3541 <-- Use the aom id
from previous command
Object identifier: 3541
  Description: EOS Choice 0x3d
  Status: Done, Epoch: 0, Client data: 0x11079188

C9300-PE-2#show platform software object-manager switch active f0 object 3541 parents <-- Use
the aom id from previous command
Object identifier: 7
  Description: Special Object adj_drop
  Status: Done

Object identifier: 3540
  Description: label 0x3b
  Status: Done

*** FED VPNv4 Label Programming***
C9300-PE-2#show platform software fed switch active mpls forwarding label 21 detail
LENTRY:label:21 nobj:(EOS, 61) lentry_hdl:0x69000009
  modify_cnt:3 backwalk_cnt:0
  lsp_handle:0
  AAL: id:1761607689 lbl:21
    eos0:[adj_hdl:0, hw_hdl:0x7fe8f8a71bd8]
    eos1:[adj_hdl:0x49000040, hw_hdl:0x7fe8f8a72458]
    deagg_vrf_id = 0 lsp_handle:0
  EOS:objid:61 local_label:0 flags:0:( ) pdflags:0 <-- Utilized in previous commands
  nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 59) modify:0 bwalk:0
  LABEL:objid:59 link_type:IP local_label:21 outlabel:(1048577, 0)
    flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0x49000040
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:1224736832 lbl:0 smac:70d3.79be.ae42 dmac:0072.78c8.c9c2
      sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)
      vlan_id:0 vrf_id:0 ri:0x7fe8f8a8ab98, ri_id:0x44 phdl:0xf1000024, ref_cnt:1
      si:0x7fe8f8a6ae08, si_id:0x4006, di_id:0x5338
    ADJ:objid:25 {link_type:IP ifnum:0x35, si:0x800003e, IPv4:      10.0.0.22 }

```

Programación de Etiquetas LDP

La siguiente sección cubre la programación de etiquetas LDP en los routers MPLS, C9300-PE-1, C9500-P y C9300-PE-2.

La etiqueta LDP (exterior) es lo que la etiqueta de red MPLS conmuta los paquetes. Valide la etiqueta LDP local que se anuncia al PE remoto, no valide la etiqueta LDP remota.

Programación de etiquetas LDP C9300-PE-1:

Valide la etiqueta LDP local que se anuncia al PE remoto, no valide la etiqueta LDP remota. Verifique la etiqueta desde una perspectiva FED y luego retroceda a FMAN RP y FMAN FP.

```

***Software LDP Label Programming***
C9300-PE-1#show mpls forwarding-table
Local      Outgoing   Prefix          Bytes Label   Outgoing   Next Hop
Label      Label      or Tunnel Id   Switched      interface
16         Pop Label  192.168.1.3/32  0             Gi1/0/2     10.0.0.6
18         Pop Label  10.0.0.12/30   0             Gi1/0/2     10.0.0.6
19       17        192.168.1.4/32  0             Gi1/0/2     10.0.0.6 <-- LDP Label 19 is

```

advertised to Remote PE 192.168.1.4, validate LDP label 19

```
20      No Label    10.0.0.0/30[V]   1890          aggregate/RED
22      No Label    192.168.3.0/24[V] \
                                     1982          Gi1/0/1      10.0.0.1
```

*****FMAN RP LDP Label Programming*****

C9300-PE-1#**show platform software mpls switch active r0 label index 59**

```
Label OCE 0x3b -> OBJ_ADJACENCY (0x46)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x34805f3dc8
```

*****FMAN FP LDP Label Programming*****

C9300-PE-1#**show platform software mpls switch active f0 label index 59**

```
Label OCE 0x3b -> OBJ_ADJACENCY (0x46)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 7065, CPP handle: 0xdeadbeef (created)
```

C9300-PE-1#**show platform software object-manager switch active f0 object 7065**

```
Object identifier: 7065
Description: label 0x3b
Status: Done, Epoch: 0, Client data: 0x63152218
```

C9300-PE-1#**show platform software object-manager switch active f0 object 7065 parents**

```
Object identifier: 511
Description: adj 0x46, Flags None
Status: Done
```

*****FED LDP Label Programming*****

C9300-PE-1#**show platform software fed switch active mpls forwarding label 19 detail**

```
LENTRY:label:19 nobj:(LABEL, 59) lentry_hdl:0xef000007
  modify_cnt:7 backwalk_cnt:0
  lsp_handle:0
  AAL: id:4009754631 lbl:19
    eos0:[adj_hdl:0x91000056, hw_hdl:0x7fa4c4d6cae8]
    eos1:[adj_hdl:0x91000056, hw_hdl:0x7fa4c4d6c8e8]
    deagg_vrf_id = 0 lsp_handle:0
  LABEL:objid:59 link_type:MPLS local_label:19 outlabel:(17, 0)
    flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x91000056
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:2432696406 lbl:0 smac:a0f8.4911.d1d6 dmac:d4ad.71b5.dde4
      sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
      vlan_id:0 vrf_id:0 ri:0x7fa4c4d75fa8, ri_id:0x26 phdl:0x9f00004b, ref_cnt:1
      si:0x7fa4c4d5f6c8, si_id:0x4013, di_id:0x535f
    ADJ:objid:70 {link_type:MPLS ifnum:0x36, si:0x25000021, }
```

Programación de etiquetas LDP C9500:

Valide la etiqueta LDP local que se anuncia al PE remoto, no valide la etiqueta LDP remota.
Verifique la etiqueta desde una perspectiva FED y luego retroceda a FMAN RP y FMAN FP.

*****Software LDP Label Programming*****

C9500-P#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	explicit-n	192.168.1.2/32	23409		Tel1/0/1	10.0.0.5 <-- LDP label 16 is advertised to reach PE 192.168.1.2
17	explicit-n	192.168.1.4/32	23345		Tel1/0/2	10.0.0.14 <-- LDP label 17 is advertised to reach PE 192.168.1.4

FMAN RP LDP Label Programming

C9500-P#show platform software mpls switch active r0 label index 23 <-- Use the obj id from the FED command

Label OCE 0x17 -> OBJ_ADJACENCY (0x3f)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480645150

FMAN FP LDP Label Programming

C9500-P#show platform software mpls switch active f0 label index 23 <-- Use the obj id from the FED command

Label OCE 0x17 -> OBJ_ADJACENCY (0x3f)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 654, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software object-manager switch active f0 object 654 <-- Use the aom id from the previous command

Object identifier: 654
Description: label 0x17
Status: Done, Epoch: 0, Client data: 0x4b41c08

C9500-P#show platform software object-manager switch active f0 object 654 parents <-- Use the aom id from the previous command

Object identifier: 515
Description: adj 0x3f, Flags None
Status: Done

FED LDP Label Programming

C9500-P#show platform software fed switch active mpls forwarding label 16 detail

LENTRY:label:16 nobj:(LABEL, 23) lentry_hdl:0xec000004
modify_cnt:6 backwalk_cnt:0
lspa_handle:0
AAL: id:3959422980 lbl:16
eos0:[adj_hdl:0xc3000055, hw_hdl:0x7f28944be3c8]
eos1:[adj_hdl:0xc3000055, hw_hdl:0x7f28944be1b8]
deagg_vrf_id = 0 lspa_handle:0
LABEL:objid:23 link_type:MPLS local_label:16 outlabel:(0, 0) <-- Utilized in previous commands
flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xc3000055
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3271557205 lbl:0 smac:d4ad.71b5.dde4 dmac:a0f8.4911.d1d6
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f289449bf88, ri_id:0x44 phdl:0xe9000057, ref_cnt:1
si:0x7f2894489b58, si_id:0x4009, di_id:0x1
ADJ:objid:63 {link_type:MPLS ifnum:0x41, si:0x57000023, }

Software LDP Label Programming

C9500-P#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	explicit-n	192.168.1.2/32	23409		Te1/0/1	10.0.0.5
17	explicit-n	192.168.1.4/32	23345		Te1/0/2	10.0.0.14

*****FMAN RP LDP Label Programming*****

C9500-P#**show platform software mpls switch active r0 label index 64** <-- Use the obj id from the FED command

Label OCE 0x40 -> OBJ_ADJACENCY (0x49)
 Flags: Real, Number of labels in the OCE: 1
 Label values: 0
 Backup flags: Pop, UHP, backup label 0x100001
 OM handle: 0x3480641d08

*****FMAN FP LDP Label Programming*****

C9500-P#**show platform software mpls switch active f0 label index 64** <-- Use the obj id from the FED command

Label OCE 0x40 -> OBJ_ADJACENCY (0x49)
 Flags: Real, Number of labels in the OCE: 1
 Label values: 0
 Backup flags: Pop, UHP, backup label 0x100001
aom id: 657, CPP handle: 0xdeadbeef (created)

C9500-P#**show platform software object-manager switch active f0 object 657** <-- Use the aom id value from previous command

Object identifier: 657
 Description: label 0x40
 Status: Done, Epoch: 0, Client data: 0x4b523f8

C9500-P#**show platform software object-manager switch active f0 object 657 parents**<-- Use the aom id value from previous command

Object identifier: 535
 Description: adj 0x49, Flags None
 Status: Done

*****FED LDP Label Programming*****

C9500-P#**show platform software fed switch active mpls forwarding label 17 detail**

```

LENTRY:label:17 nobj:(LABEL, 64) lentry_hdl:0x8d000005
  modify_cnt:6 backwalk_cnt:0
  lsp_handle:0
  AAL: id:2365587461 lbl:17
    eos0:[adj_hdl:0xcc000037, hw_hdl:0x7f2894480438]
    eos1:[adj_hdl:0xcc000037, hw_hdl:0x7f2894480228]
    deagg_vrf_id = 0 lsp_handle:0
  LABEL:objid:64 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Utilized in previous
  commands
    flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xcc000037
    unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
    bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
    AAL: id:3422552119 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71
      sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
      vlan_id:0 vrf_id:0 ri:0x7f2894498008, ri_id:0x38 phdl:0x76000058, ref_cnt:1
      si:0x7f2894498478, si_id:0x400b, di_id:0x2
    ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x3d000027, }
  
```

Programación de etiquetas LDP C9300-PE-2:

Valide la etiqueta LDP local que se anuncia al PE remoto, no valide la etiqueta LDP remota.
Verifique la etiqueta desde una perspectiva FED y luego retroceda a FMAN RP y FMAN FP.

*****Software LDP Label Programming*****

C9300-PE-2#**show mpls forwarding-table**

Local	Outgoing	Prefix	Bytes	Label	Outgoing	Next Hop
Label	Label	or Tunnel Id	Switched	interface		
16	Pop Label	192.168.1.3/32	0		Gi2/0/2	10.0.0.13
17	16	192.168.1.2/32	630		Gi2/0/2	10.0.0.13 <-- LDP label 17 is advertised to Remote PE 192.168.1.2
18	Pop Label	10.0.0.4/30	0		Gi2/0/2	10.0.0.13
20	No Label	10.0.0.20/30[V]	1260		aggregate/RED	
21	No Label	192.168.2.0/24[V]	\			
			2070		Gi2/0/1	10.0.0.22

C9300-PE-2#**show platform software mpls switch active r0 label index 82 <-- Utilize the obj id value from the FED Command**

Label OCE 0x52 -> OBJ_ADJACENCY (0x46)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348063ad00

C9300-PE-2#**show platform software mpls switch active f0 label index 82 <-- Utilize the obj id value from the FED Command**

Label OCE 0x52 -> OBJ_ADJACENCY (0x46)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
aom id: 3624, CPP handle: 0xdeadbeef (created) **<-- Used in next commands**

C9300-PE-2#**show platform software object-manager switch active f0 object 3624 <-- Utilize the aom id value**

Object identifier: 3624
Description: label 0x52
Status: Done, Epoch: 0, Client data: 0x11071668

C9300-PE-2#**show platform software object-manager switch active f0 object 3624 parents <-- Utilize the aom id value**

Object identifier: 496
Description: adj 0x46, Flags None
Status: Done

C9300-PE-2#**show platform software fed switch active mpls forwarding label 17 detail**

LENTRY:label:17 nobj:(LABEL, 82) lentry_hdl:0x44000005
modify_cnt:6 backwalk_cnt:0
lspa_handle:0
AAL: id:1140850693 lbl:17
eos0:[adj_hdl:0x5f000032, hw_hdl:0x7fe8f8a52798]
eos1:[adj_hdl:0x5f000032, hw_hdl:0x7fe8f8a52588]
deagg_vrf_id = 0 lspa_handle:0
LABEL:**objid:82** link_type:MPLS local_label:17 outlabel:(16, 0) **<-- Used in previous commands**
flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x5f000032
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:1593835570 lbl:0 smac:70d3.79be.ae71 dmac:d4ad.71b5.ddd6

```


sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7fe8f8a93c78, ri_id:0x3a phdl:0x9f00004b, ref_cnt:1
si:0x7fe8f8a91188, si_id:0x4011, di_id:0x535f
ADJ:objid:70 {link_type:MPLS ifnum:0x36, si:0xaa000021, }

```

Situación hipotética 2. L3VPN con ECMP entre PE y routers P

Topología de referencia

A efectos de este ejemplo, los switches Catalyst 3850 funcionan como dispositivos CE, los switches Catalyst 9300 funcionan como dispositivos PE, Catalyst 9500 en Stackwise Virtual funciona como dispositivo P. EIGRP se ejecuta entre los dispositivos CE y PE, las adyacencias OSPF y LDP en el núcleo MPLS, con una adyacencia VPNv4 iBGP entre los dispositivos PE. Dentro del núcleo MPLS, hay ECMP entre los dispositivos PE y P.

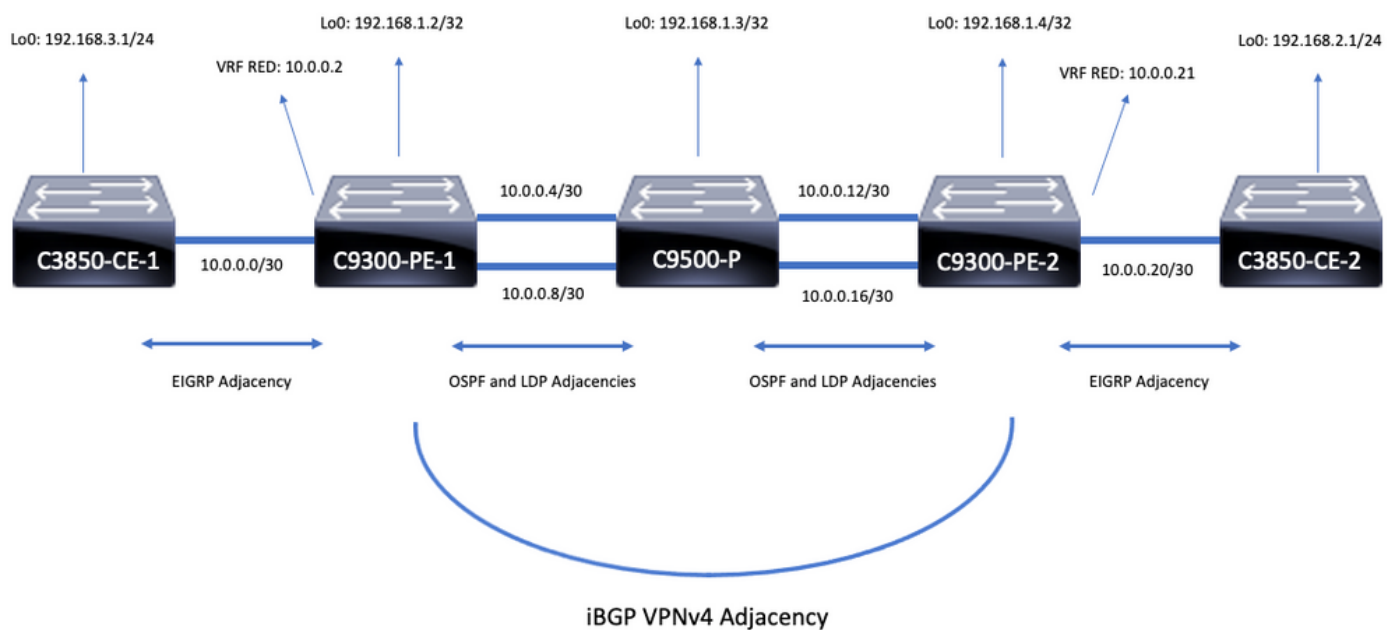

Detalles de la configuración

Configuración de C3850-CE-1

```

hostname C3850-CE-1
!
interface Loopback0
ip address 192.168.3.1 255.255.255.0
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.1 255.255.255.252
!
router eigrp 420
network 10.0.0.0 0.0.0.3
network 192.168.3.0
eigrp stub connected summary
!
ip route 0.0.0.0 0.0.0.0 10.0.0.2

```

Configuración de C9300-PE-1


```

hostname C9300-PE-1
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.2 255.255.255.255
!
interface GigabitEthernet1/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.2 255.255.255.252
!
interface GigabitEthernet1/0/2
no switchport
ip address 10.0.0.5 255.255.255.252
!
interface GigabitEthernet1/0/3
no switchport
ip address 10.0.0.9 255.255.255.252
!
router eigrp 420
!
address-family ipv4 vrf RED
network 10.0.0.0 0.0.0.3
autonomous-system 420
exit-address-family
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.4 remote-as 69420
neighbor 192.168.1.4 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.4 activate
neighbor 192.168.1.4 send-community extended
exit-address-family
!
address-family ipv4 vrf RED
redistribute eigrp 420
exit-address-family

```

Configuración de C9500-P

```

hostname C9500-P
!
interface Loopback0
ip address 192.168.1.3 255.255.255.255
!
interface TenGigabitEthernet1/0/1
no switchport
ip address 10.0.0.6 255.255.255.252
!
interface TenGigabitEthernet1/0/2

```

```
no switchport
ip address 10.0.0.13 255.255.255.252
!
interface TenGigabitEthernet2/0/1
no switchport
ip address 10.0.0.10 255.255.255.252
!
interface TenGigabitEthernet2/0/2
no switchport
ip address 10.0.0.17 255.255.255.252
!
router ospf 420
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
```

Configuración de C9300-PE-2

```
hostname C9300-PE-2
!
ip vrf RED
rd 69:69
route-target export 69:69
route-target import 69:69
!
mpls ldp explicit-null
!
interface Loopback0
ip address 192.168.1.4 255.255.255.255
!
interface GigabitEthernet2/0/1
no switchport
ip vrf forwarding RED
ip address 10.0.0.21 255.255.255.252
!
interface GigabitEthernet2/0/2
no switchport
ip address 10.0.0.14 255.255.255.252
!
interface GigabitEthernet2/0/3
no switchport
ip address 10.0.0.18 255.255.255.252
!
router eigrp 400
!
address-family ipv4 vrf RED
network 10.0.0.20 0.0.0.3
autonomous-system 400
exit-address-family
!
router ospf 420
passive-interface GigabitEthernet2/0/24
network 0.0.0.0 255.255.255.255 area 0
mpls ldp autoconfig
!
router bgp 69420
bgp log-neighbor-changes
neighbor 192.168.1.2 remote-as 69420
neighbor 192.168.1.2 update-source Loopback0
!
address-family vpnv4
neighbor 192.168.1.2 activate
neighbor 192.168.1.2 send-community extended
exit-address-family
```

```
!  
address-family ipv4 vrf RED  
redistribute eigrp 400  
exit-address-family
```

Configuración de C3850-CE-2

```
hostname C3850-CE-2  
!  
interface Loopback0  
ip address 192.168.2.1 255.255.255.0  
!  
interface TenGigabitEthernet2/0/1  
no switchport  
ip address 10.0.0.22 255.255.255.252  
!  
router eigrp 400  
network 10.0.0.20 0.0.0.3  
network 192.168.2.0  
eigrp stub connected summary  
!  
ip route 0.0.0.0 0.0.0.0 10.0.0.21
```

Validación básica

Antes de la validación de la programación MPLS, hay requisitos básicos que deben validarse:

- La validación de la conectividad PE a PE está presente
- Validar la ruta conmutada de etiquetas (LSP) entre los PE
- Validar la adyacencia BGPv4 entre PEs
- Validar etiquetas VPNv4 y LDP
- Validar Tabla de Reenvío MPLS

Validar conectividad PE a PE

Puede hacer ping al loopback PE remoto y al origen desde el loopback local, pero esto no confirma que la ruta conmutada de etiquetas (LSP) MPLS sea buena, ya que las direcciones IP de loopback se anuncian en la parte inferior.

Nota: La adyacencia VPNv4 de PE a PE MP-BGP se logra a través de sus respectivas interfaces Loopback0.

```
C9300-PE-1#ping 192.168.1.4 source 192.168.1.2  
Type escape sequence to abort.  
Sending 5, 100-byte ICMP Echos to 192.168.1.4, timeout is 2 seconds:  
Packet sent with a source address of 192.168.1.2  
!!!!!  
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
```

```
C9300-PE-1#show ip route 192.168.1.4  
Routing entry for 192.168.1.4/32  
Known via "ospf 420", distance 110, metric 3, type intra area  
Last update from 10.0.0.10 on GigabitEthernet1/0/3, 18:39:30 ago  
Routing Descriptor Blocks:  
 10.0.0.10, from 192.168.1.4, 18:39:30 ago, via GigabitEthernet1/0/3  
    Route metric is 3, traffic share count is 1  
 * 10.0.0.6, from 192.168.1.4, 18:39:30 ago, via GigabitEthernet1/0/2  
    Route metric is 3, traffic share count is 1
```

Validar el LSP

Puede utilizar un traceroute MPLS de PE a PE loopback para validar el LSP y todas las etiquetas MPLS LDP a lo largo de la trayectoria.

Nota: Este traceroute MPLS sólo impone una etiqueta, la etiqueta LDP, esto no demuestra que el tráfico del CE sea exitoso, ya que el tráfico se impone con 2 etiquetas, la etiqueta VPNv4 (interna) y la etiqueta LDP (externa).

```
C9300-PE-1#traceroute mpls ipv4 192.168.1.4/32 source 192.168.1.2
Tracing MPLS Label Switched Path to 192.168.1.4/32, timeout is 2 seconds
```

```
Codes: '!' - success, 'Q' - request not sent, '.' - timeout,
'L' - labeled output interface, 'B' - unlabeled output interface,
'D' - DS Map mismatch, 'F' - no FEC mapping, 'f' - FEC mismatch,
'M' - malformed request, 'm' - unsupported tlvs, 'N' - no label entry,
'P' - no rx intf label prot, 'p' - premature termination of LSP,
'R' - transit router, 'I' - unknown upstream index,
'l' - Label switched with FEC change, 'd' - see DDMAP for return code,
'X' - unknown return code, 'x' - return code 0
```

Type escape sequence to abort.

```
0 10.0.0.5 MRU 1500 [Labels: 17 Exp: 0]
L 1 10.0.0.6 MRU 1500 [Labels: explicit-null Exp: 0] 7 ms
! 2 10.0.0.18 1 ms
```

Si no tiene acceso al CE o a un dispositivo detrás del CE y desea demostrar que hay una imposición/disposición correcta de etiquetas VPNv4 y LDP, puede intentar hacer ping desde la interfaz de cara CE en el VRF en un PE a la otra interfaz de cara CE en el VRF en el PE remoto.

```
C9300-PE-1#ping vrf RED 10.0.0.21 source 10.0.0.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 10.0.0.21, timeout is 2 seconds:
Packet sent with a source address of 10.0.0.2
!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/1 ms
```

Validar la adyacencia VPNv4 BGP entre los PE

```
C9300-PE-1#show bgp vpnv4 unicast all neighbors 192.168.1.4
BGP neighbor is 192.168.1.4, remote AS 69420, internal link
  BGP version 4, remote router ID 192.168.1.4
  BGP state = Established, up for 18:40:49
  Last read 00:00:40, last write 00:00:47, hold time is 180, keepalive interval is 60 seconds
  Neighbor sessions:
    1 active, is not multiseession capable (disabled)
  Neighbor capabilities:
    Route refresh: advertised and received(new)
    Four-octets ASN Capability: advertised and received
    Address family IPv4 Unicast: advertised and received
    Address family VPNv4 Unicast: advertised and received
    Enhanced Refresh Capability: advertised and received
    Multiseession Capability:
      Stateful switchover support enabled: NO for session 1
  Message statistics:
    InQ depth is 0
```

OutQ depth is 0

	Sent	Rcvd
Opens:	1	1
Notifications:	0	0
Updates:	4	4
Keepalives:	1237	1233
Route Refresh:	0	0
Total:	1242	1238

Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds

<snip>

C9300-PE-2#**show bgp vpnv4 unicast all neighbors 192.168.1.2**

BGP neighbor is 192.168.1.2, remote AS 69420, internal link
BGP version 4, remote router ID 192.168.1.2
BGP state = Established, up for 18:41:36
Last read 00:00:42, last write 00:00:32, hold time is 180, keepalive interval is 60 seconds

Neighbor sessions:

1 active, is not multisesion capable (disabled)

Neighbor capabilities:

Route refresh: advertised and received(new)
Four-octets ASN Capability: advertised and received
Address family IPv4 Unicast: advertised and received
Address family VPNv4 Unicast: advertised and received
Enhanced Refresh Capability: advertised and received
Multisesion Capability:
Stateful switchover support enabled: NO for session 1

Message statistics:

InQ depth is 0
OutQ depth is 0

	Sent	Rcvd
Opens:	1	1
Notifications:	0	0
Updates:	4	4
Keepalives:	1234	1238
Route Refresh:	0	0
Total:	1239	1243

Do log neighbor state changes (via global configuration)
Default minimum time between advertisement runs is 0 seconds

La adyacencia VPNv4 PE remota está activa y se ha recibido un prefijo

C9300-PE-1#**show bgp vpnv4 unicast all summary**

BGP router identifier 192.168.1.2, local AS number 69420
BGP table version is 7, main routing table version 7
4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 18:49:56 Jun 23 2021 UTC (18:41:06.070 ago)

Neighbor	V	AS	MsgRcvd	MsgSent	TblVer	InQ	OutQ	Up/Down	State/PfxRcd
192.168.1.4	4	69420	1240	1244	7	0	0	18:41:59	2

C9300-PE-2#**show bgp vpnv4 unicast all summary**

BGP router identifier 192.168.1.4, local AS number 69420
BGP table version is 7, main routing table version 7

```

4 network entries using 1024 bytes of memory
4 path entries using 544 bytes of memory
4/4 BGP path/bestpath attribute entries using 1216 bytes of memory
4 BGP extended community entries using 1000 bytes of memory
0 BGP route-map cache entries using 0 bytes of memory
0 BGP filter-list cache entries using 0 bytes of memory
BGP using 3784 total bytes of memory
BGP activity 4/0 prefixes, 4/0 paths, scan interval 60 secs
4 networks peaked at 18:49:37 Jun 23 2021 UTC (18:41:06.851 ago)

```

```

Neighbor      V          AS MsgRcvd MsgSent  TblVer  InQ  OutQ  Up/Down  State/PfxRcd
192.168.1.2    4          69420   1244   1240      7     0     0 18:42:17      2

```

Verifique qué prefijos se intercambian en el VRF particular

C9300-PE-1#**show ip bgp vpnv4 vrf RED**

```

BGP table version is 7, local router ID is 192.168.1.2
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*> 10.0.0.0/30	0.0.0.0	0		32768	?
*>i 10.0.0.20/30	192.168.1.4	0	100	0	?
*>i 192.168.2.0	192.168.1.4	130816	100	0	?
*> 192.168.3.0	10.0.0.1	130816		32768	?

C9300-PE-2#**show ip bgp vpnv4 vrf RED**

```

BGP table version is 7, local router ID is 192.168.1.4
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found

```

Network	Next Hop	Metric	LocPrf	Weight	Path
Route Distinguisher: 69:69 (default for vrf RED)					
*>i 10.0.0.0/30	192.168.1.2	0	100	0	?
*> 10.0.0.20/30	0.0.0.0	0		32768	?
*> 192.168.2.0	10.0.0.22	130816		32768	?
*>i 192.168.3.0	192.168.1.2	130816	100	0	?

Validar etiquetas VPNv4 y LDP

C9300-PE-1#**show ip bgp vpnv4 vrf RED labels**

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	0.0.0.0	20/nolabel(RED)
10.0.0.20/30	192.168.1.4	nolabel/20
192.168.2.0	192.168.1.4	nolabel/21 <-- VPNv4 label that is be imposed to reach
192.168.20		
192.168.3.0	10.0.0.1	21/nolabel

```
C9300-PE-1#show ip route vrf RED 192.168.2.1
```

```
Routing Table: RED
```

```
Routing entry for 192.168.2.0/24
```

```
Known via "bgp 69420", distance 200, metric 130816, type internal
```

```
Last update from 192.168.1.4 18:41:56 ago
```

```
Routing Descriptor Blocks:
```

```
* 192.168.1.4 (default), from 192.168.1.4, 18:41:56 ago
```

```
Route metric is 130816, traffic share count is 1
```

```
AS Hops 0
```

```
MPLS label: 21 <-- VPNv4 label that matches the previous output
```

```
MPLS Flags: MPLS Required
```

```
C9300-PE-2#show ip bgp vpnv4 vrf RED labels
```

Network	Next Hop	In label/Out label
Route Distinguisher: 69:69 (RED)		
10.0.0.0/30	192.168.1.2	nolabel/20
10.0.0.20/30	0.0.0.0	20/nolabel(RED)
192.168.2.0	10.0.0.22	21/nolabel <-- VPNv4 label that is advertised to reach 192.168.2.0
192.168.3.0	192.168.1.2	nolabel/21

```
C9300-PE-2#show ip route vrf RED 192.168.2.1
```

```
Routing Table: RED
```

```
Routing entry for 192.168.2.0/24
```

```
Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal
```

```
Redistributing via eigrp 400, bgp 69420
```

```
Advertised by bgp 69420
```

```
Last update from 10.0.0.22 on GigabitEthernet2/0/1, 18:45:04 ago
```

```
Routing Descriptor Blocks:
```

```
* 10.0.0.22, from 10.0.0.22, 18:45:04 ago, via GigabitEthernet2/0/1 <-- CE-facing interface in the VRF
```

```
Route metric is 130816, traffic share count is 1
```

```
Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit
```

```
Reliability 255/255, minimum MTU 1500 bytes
```

```
Loading 1/255, Hops 1
```

Verifique las etiquetas LDP que se utilizan

```
C9300-PE-1#show mpls forwarding-table 192.168.1.4
```

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
19	17	192.168.1.4/32	0	Gi1/0/2	10.0.0.6 <-- 17 is the LDP label imposed to reach PE at 192.168.1.4 through Gi1/0/2
	17	192.168.1.4/32	0	Gi1/0/3	10.0.0.10 <-- 17 is the LDP label imposed to reach PE at 192.168.1.4 through Gi1/0/3

```
C9300-PE-2#show mpls forwarding-table 192.168.1.2
```

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
17	16	192.168.1.2/32	0	Gi2/0/2	10.0.0.13 <-- 16 is the LDP label imposed to reach PE at 192.168.1.2 through Gi2/0/2
	16	192.168.1.2/32	0	Gi2/0/3	10.0.0.17 <-- 16 is the LDP label imposed to reach PE at 192.168.1.2 through Gi2/0/3

Validar la Tabla de Reenvío MPLS

```
C9300-PE-1#show mpls forwarding-table
```

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0		Gi1/0/2	10.0.0.6
	Pop Label	192.168.1.3/32	0		Gi1/0/3	10.0.0.10
17	Pop Label	10.0.0.16/30	0		Gi1/0/2	10.0.0.6
	Pop Label	10.0.0.16/30	0		Gi1/0/3	10.0.0.10
18	Pop Label	10.0.0.12/30	0		Gi1/0/2	10.0.0.6
	Pop Label	10.0.0.12/30	0		Gi1/0/3	10.0.0.10
19	17	192.168.1.4/32	0		Gi1/0/2	10.0.0.6
	17	192.168.1.4/32	0		Gi1/0/3	10.0.0.10
20	No Label	10.0.0.0/30[V]	630		aggregate/RED	
21	No Label	192.168.3.0/24[V]	\			
			0		Gi1/0/1	10.0.0.1

C9300-PE-2#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Label	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0		Gi2/0/2	10.0.0.13
	Pop Label	192.168.1.3/32	0		Gi2/0/3	10.0.0.17
17	16	192.168.1.2/32	0		Gi2/0/2	10.0.0.13
	16	192.168.1.2/32	0		Gi2/0/3	10.0.0.17
18	Pop Label	10.0.0.4/30	0		Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.4/30	0		Gi2/0/3	10.0.0.17
19	Pop Label	10.0.0.8/30	0		Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.8/30	0		Gi2/0/3	10.0.0.17
20	No Label	10.0.0.20/30[V]	630		aggregate/RED	
21	No Label	192.168.2.0/24[V]	\			
			0		Gi2/0/1	10.0.0.22

Confirme las etiquetas interna (VPNv4) y externa (LDP) utilizadas para alcanzar cada prefijo determinado en el VRF

C9300-PE-1#show ip cef vrf RED 192.168.2.0/24 detail

```
192.168.2.0/24, epoch 0, flags [rib defined all labels]
  recursive via 192.168.1.4 label 21 <-- VPNv4 label
    nexthop 10.0.0.6 GigabitEthernet1/0/2 label 17-(local:19) <-- 17 is the LDP label that is
imposed to reach the remote PE, 19 is the local LDP label advertised to the P router
    nexthop 10.0.0.10 GigabitEthernet1/0/3 label 17-(local:19)<-- 17 is the LDP label that is
imposed to reach the remote PE, 19 is the local LDP label advertised to the P router
```

C9300-PE-2#show ip cef vrf RED 192.168.3.0/24 detail

```
192.168.3.0/24, epoch 0, flags [rib defined all labels]
  recursive via 192.168.1.2 label 21 <-- VPNv4 label
    nexthop 10.0.0.13 GigabitEthernet2/0/2 label 16-(local:17) <-- 16 is the LDP label that is
imposed to reach the remote PE, 17 is the local LDP label advertised to the P router
    nexthop 10.0.0.17 GigabitEthernet2/0/3 label 16-(local:17) <-- 16 is the LDP label that is
imposed to reach the remote PE, 17 is the local LDP label advertised to the P router
```

Verificar Estadísticas del Administrador de Objetos:

En escenarios ideales, no hay objetos pendientes

C9300-PE-1#show platform software object-manager switch active f0 statistics

Forwarding Manager Asynchronous Object Manager Statistics

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
```



```
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
9500-P#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
```

```
Total-objects: 491
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

```
C9300-PE-2#show platform software object-manager switch active f0 statistics
Forwarding Manager Asynchronous Object Manager Statistics
```

```
Object update: Pending-issue: 0, Pending-acknowledgement: 0
Batch begin:   Pending-issue: 0, Pending-acknowledgement: 0
Batch end:     Pending-issue: 0, Pending-acknowledgement: 0
Command:      Pending-acknowledgement: 0
```

```
Total-objects: 482
Stale-objects: 0
Resolve-objects: 0
Childless-delete-objects: 0
Error-objects: 0
Paused-types: 0
```

Programación de prefijos

La siguiente sección trata la programación de prefijos en los routers MPLS, C9300-PE-1, C9500-P y C9300-PE-2.

Programación de prefijos C9300-PE-1

Software Prefix Programming

```
C9300-PE-1#show ip route vrf RED 192.168.2.1
```

```
Routing Table: RED
```

```
Routing entry for 192.168.2.0/24
```

```
Known via "bgp 69420", distance 200, metric 130816, type internal
```

```
Last update from 192.168.1.4 19:21:45 ago
```

```
Routing Descriptor Blocks:
```

```
* 192.168.1.4 (default), from 192.168.1.4, 19:21:45 ago <-- Remote PE reachable in the global routing table
```

```
Route metric is 130816, traffic share count is 1
```

```
AS Hops 0
```

```
MPLS label: 21 <-- VPNv4 label
```

```
MPLS Flags: MPLS Required
```

```
C9300-PE-1#show ip route 192.168.1.4
```

```
Routing entry for 192.168.1.4/32
```

```
Known via "ospf 420", distance 110, metric 3, type intra area
```

```
Last update from 10.0.0.10 on GigabitEthernet1/0/3, 19:23:17 ago
```

```
Routing Descriptor Blocks:
```

```
10.0.0.10, from 192.168.1.4, 19:23:17 ago, via GigabitEthernet1/0/3 <-- Next-hop to reach
```

192.168.1.4

Route metric is 3, traffic share count is 1

* **10.0.0.6**, from 192.168.1.4, 19:23:17 ago, via **GigabitEthernet1/0/2** <-- Next-hop to reach

192.168.1.4

Route metric is 3, traffic share count is 1

*****FMAN RP Prefix Programming*****

C9300-PE-1#**show ip vrf detail**

VRF RED (**VRF Id = 2**); default RD 69:69; default VPNID <-- **VRF ID is important in subsequent command**

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi1/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-1#**show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24** <-
- **Index value is the VRF ID from previous command**

Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_LABEL	0x78

C9300-PE-1#**show platform software mpls switch active r0 label index 0x78** <-- **Utilize the Index value from previous command**

Label OCE 0x78 -> OBJ_LOADBALANCE (**0x70**) <-- **Utilized in next command**

Flags: Real, Number of labels in the OCE: 1

Label values: 0x15

Backup flags: Pop, UHP, backup label 0x100001

OM handle: 0x3480644d88

C9300-PE-1#**show platform software loadinfo switch active r0 index 0x70** <-- **Utilize the OBJ_LOADBALANCE value from previous command**

Number of loadinfo objects: 8

Index: 0x70, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16

Anti-polarising Factor: 0xf4a19ba0

Next Object Type: OBJ_LABEL, OBJ_LABEL

Next obj handle: **0x6e, 0x6f**

Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1

Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0

OM handle: 0x3480641fb8

C9300-PE-1#**show platform software mpls switch active r0 label index 0x6e** <-- **Utilize the obj handle value from previous command**

Label OCE 0x6e -> OBJ_ADJACENCY (**0x4b**)

Flags: Real, Number of labels in the OCE: 1

Label values: 0x11

Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x34806420d0

C9300-PE-1#**show platform software mpls switch active r0 label index 0x6f** <-- Utilize the obj handle value from previous command

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480642268

C9300-PE-1#**show platform software adjacency switch active r0 index 0x4b** <-- Utilize the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4b (75)

Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG
Encap: **d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47** <-- MAC ending in DDE4 is the DMAC, MAC ending in D1D6 is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: **10.0.0.6** <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x34806375f8

C9300-PE-1#**show platform software adjacency switch active r0 index 0x4e** <-- Utilize the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4e (78)

Interface: GigabitEthernet1/0/3, IF index: 55, Link Type: MCP_LINK_TAG
Encap: **d4:ad:71:b5:dd:c2:a0:f8:49:11:d1:d8:88:47** <-- MAC ending DDC2 is the DMAC, MAC ending in D1D8 is the SMAC, 8847 is the MPLS ETPYE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: **10.0.0.10** <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480638200

*****FMAN FP Prefix Programming*****

C9300-PE-1#**show ip vrf detail**

VRF RED (VRF Id = 2); default RD 69:69; default VPNID

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi1/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-1#**show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24 detail** <-- Index value is the VRF ID from previous command

Forwarding Table

192.168.2.0/24 -> OBJ_LABEL (0x78), urpf: 118

Prefix Flags: unknown

aom id: 618, HW handle: (nil) (created)

C9300-PE-1#**show platform software mpls switch active f0 label index 0x78** <-- Use the OBJ_LABEL value from previous command

Label OCE 0x78 -> OBJ_LOADBALANCE (0x70)

Flags: Real, Number of labels in the OCE: 1

Label values: 0x15

Backup flags: Pop, UHP, backup label 0x100001

aom id: 617, CPP handle: 0xdeadbeef (created)

C9300-PE-1#**show platform software object-manager switch active f0 object 617 parents** <-- Use the aom id from previous command

Object identifier: 600

Description: LB 0x70

Status: Done

C9300-PE-1#**show platform software loadinfo switch active f0 index 0x70** <-- Use the LB value from previous command

Number of loadinfo objects: 8

Index: 0x70, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16

Anti-polarising Factor: 0xf4a19ba0

Next Object Type: OBJ_LABEL, OBJ_LABEL

Next obj handle: 0x6e, 0x6f

Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1

Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0

aom id: 600, HW handle: (nil)

C9300-PE-1#**show platform software mpls switch active f0 label index 0x6e** <-- Use the obj handle values from previous commands

Label OCE 0x6e -> OBJ_ADJACENCY (0x4b)

Flags: Real, Number of labels in the OCE: 1

Label values: 0x11

Backup flags: Pop, UHP, backup label 0x100001

aom id: 598, CPP handle: 0xdeadbeef (created)

C9300-PE-1#**show platform software mpls switch active f0 label index 0x6f** <-- Use the obj handle values from previous command

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)

Flags: Real, Number of labels in the OCE: 1

Label values: 0x11

Backup flags: Pop, UHP, backup label 0x100001

aom id: 599, CPP handle: 0xdeadbeef (created)

C9300-PE-1#**show platform software adjacency switch active f0 index 0x4b** <-- Use the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4b (75)

Interface: GigabitEthernet1/0/2, IF index: 54, Link Type: MCP_LINK_TAG
Encap: d4:ad:71:b5:dd:e4:a0:f8:49:11:d1:d6:88:47
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.6
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 531, HW handle: (nil) (created)

C9300-PE-1#show platform software adjacency switch active f0 index 0x4e <-- Use the
OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x4e (78)

Interface: GigabitEthernet1/0/3, IF index: 55, Link Type: MCP_LINK_TAG
Encap: d4:ad:71:b5:dd:c2:a0:f8:49:11:d1:d8:88:47
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.10
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 535, HW handle: (nil) (created)

FED Prefix Programming

C9300-PE-1#show platform software fed switch active ip route vrf-name RED 192.168.2.0/24

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
---	----	---	-----	---	----	-----	-----

2 192.168.2.0/24 0x7fbae8d86228 0x0 0 0 lspax2

2021/06/23 18:50:13.079 <-- HTM value significant for next command

FIB: prefix_hdl:0x50000026, mpls_ecr_prefix_hdl:0
===== OCE chain =====

LABEL:objid:120 link_type:IP local_label:1048577 outlabel:(21, 0) <-- VPNv4 label
flags:0x1:(REAL,) pdflags:0x80:(INSTALL_HW_OK,RECIR_ADJ,) adj_handle:0xcb00003c <--

adj_handle and local_adj_hdl values must match

unsupported recursion:0 olbl_changed 0 local_adj:1 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:3405774908 lbl:19 smac:0000.0000.0000 dmac:0000.0000.0000 <-- Label 19 matches the
local transport label

sub_type:0 link_type:0 adj_flags:0x10 label_type:0 rewrite_type:PSH2(121)
vlan_id:0 vrf_id:0 ri:0x7fbae8d73648, ri_id:0x46 phdl:0, ref_cnt:2 <-- ri_id and

ri_idx values must match

si:0x7fbae8d834d8, si_id:0xb6, di_id:0x5013

LB:obj_id:112 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:19 path_inhw:2 ecrh:0x7d000002 old_ecrh:0
modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]

AAL: ecr:id:2097152002 af:0 ecr_type:0 ref:7 ecrh:0x7fbae8a99268(28:2)

hwhdl:3903427176 ::0x7fbae8a98b98,0x7fbae8a9ad48,0x7fbae8a98b98,0x7fbae8a9ad48

Sw Enh ECR scale: objid:112 llabel:19 eos:1 #adjs:2 mixed_adj:0

reprogram_hw:0 ecrhdl:0x7d000002 ecr_hwhdl:0x7fbae8a99268
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:4278190135 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:1744830509

sih:0x7fbae8a98b98(179) di_id:20499 rih:0x7fbae8a985d8(33)

adj_lentry [eos0:0x7fbae8d7bf48 eos1:0x7fbae8d76e88]

ecr_adj: id:1392508984 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:2013265966

sih:0x7fbae8a9ad48(180) di_id:20499 rih:0x7fbae8a9a788(46)

=====

C9300-PE-1#**show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x535f 0x535f** <-- Utilize the di_id from the previous command

ASIC#0:

index = 0x535f
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

index = 0x535f
pmap = 0x00000000 **0x00000002** <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
000 0000 0000 0010 = Port 1 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

C9300-PE-1#**show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x5360 0x5360** <-- Utilize the di_id from the previous command ASIC#0:

ASIC#0:

index = 0x5360
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

index = 0x5360

```

pmap = 0x00000000 0x00000004 <-- Looking at 0x00000004, in binary that is 0000 0000 0000 0000
0000 0000 0000 0100 = Port 2 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

```

```

C9300-PE-1#show platform software fed switch active ifm map
Interface          IF_ID      Inst Asic Core Port SubPort Mac  Cntx LPN  GPN  Type Active
GigabitEthernet1/0/2  0x36      1  0  1  1  0  6  7  2  2  NIF  Y <--
Port 1 is an egress port, Gi1/0/2
GigabitEthernet1/0/3  0x37      1  0  1  2  0  28 8  3  3  NIF  Y <--
Port 2 is an egress port, Gi1/0/3

```

Programación de prefijos C9500

Software Prefix Programming

```

C9500-P#show ip route 192.168.1.4
Routing entry for 192.168.1.4/32
  Known via "ospf 420", distance 110, metric 2, type intra area
  Last update from 10.0.0.18 on TenGigabitEthernet2/0/2, 20:15:25 ago
  Routing Descriptor Blocks:
    10.0.0.18, from 192.168.1.4, 20:15:25 ago, via TenGigabitEthernet2/0/2 <-- Next-hop towards
192.168.1.4
      Route metric is 2, traffic share count is 1
    * 10.0.0.14, from 192.168.1.4, 20:15:25 ago, via TenGigabitEthernet1/0/2 <-- Next-hop towards
192.168.1.4
      Route metric is 2, traffic share count is 1

```

C9500-P#show ip cef 192.168.1.4 detail

```

192.168.1.4/32, epoch 4, per-destination sharing
  dflt local label info: global/17 [0x3]
  nexthop 10.0.0.14 TenGigabitEthernet1/0/2 label explicit-null-(local:17) <-- Explicit null to reach 192.168.1.4
  nexthop 10.0.0.18 TenGigabitEthernet2/0/2 label explicit-null-(local:17) <-- Explicit null to reach 192.168.1.4

```

FMAN RP Prefix Programming

```

C9500-P#show platform software ip switch active r0 cef prefix 192.168.1.4/32

```

Forwarding Table

Prefix/Len	Next Object	Index
192.168.1.4/32	OBJ_LOADBALANCE	0x6a

```

C9500-P#show platform software loadinfo switch active r0 index 0x6a <-- Use the OBJ_LOADBALANCE value from previous command

```

Number of loadinfo objects: 4

```

Index: 0x6a, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16
  Anti-polarising Factor: 0x57a70068
  Next Object Type: OBJ_LABEL, OBJ_LABEL
  Next obj handle: 0x68, 0x69

```


Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1
Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
OM handle: 0x348064de58

C9500-P#show platform software mpls switch active r0 label index 0x68 <-- Use the obj handle values from the previous command

Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064df70

C9500-P#show platform software mpls switch active r0 label index 0x69

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064e108

C9500-P#show platform software adjacency switch active r0 index 0x49 <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x49 (73)
Interface: TenGigabitEthernet1/0/2, IF index: 66, Link Type: MCP_LINK_TAG
Encap: 70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47 <-- MAC ending in AE71 is the DMAC, MAC ending is B5DD is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.14 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480647700

C9500-P#show platform software adjacency switch active r0 index 0x4e <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x4e (78)
Interface: TenGigabitEthernet2/0/2, IF index: 68, Link Type: MCP_LINK_TAG
Encap: 70:d3:79:be:ae:61:d4:ad:71:b5:dd:f1:88:47 <-- MAC ending in AE61 is DMAC, MAC ending in B5DD is SMAC, 8847 is MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.18 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x3480648f68

FMAN FP Prefix Programming

C9500-P#show platform software ip switch active f0 cef prefix 192.168.1.4/32
Forwarding Table

Prefix/Len	Next Object	Index

C9500-P#**show platform software loadinfo switch active f0 index 0x6a** <-- Use the OBJ_LOADBALANCE value from previous command

Number of loadinfo objects: 4

Index: 0x6a, Flags: unknown, Hash Algorithm: , Number of Paths: 2, Number of buckets: 16
Anti-polarising Factor: 0x57a70068
Next Object Type: OBJ_LABEL, OBJ_LABEL
Next obj handle: **0x68, 0x69**
Hash Buckets: 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1, 0, 1
Color Buckets Map: 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0, 0
aom id: 578, HW handle: (nil)

C9500-P#**show platform software mpls switch active f0 label index 0x68** <-- Use the obj handle values from previous command

Label OCE 0x68 -> OBJ_ADJACENCY (**0x49**)

Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 576, CPP handle: 0xdeadbeef (created)

C9500-P#**show platform software mpls switch active f0 label index 0x69** <-- Use the obj handle values from previous command

Label OCE 0x69 -> OBJ_ADJACENCY (**0x4e**)

Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 577, CPP handle: 0xdeadbeef (created)

C9500-P#**show platform software adjacency switch active f0 index 0x49** <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x49 (73)

Interface: TenGigabitEthernet1/0/2, IF index: 66, Link Type: MCP_LINK_TAG
Encap: **70:d3:79:be:ae:71:d4:ad:71:b5:dd:d6:88:47** <-- MAC ending in AE71 is the DMAC, MAC ending in DDD6 is the SMAC, 8847 is the MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: **10.0.0.14** <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 536, HW handle: (nil) (created)

C9500-P#**show platform software adjacency switch active f0 index 0x4e** <-- Use the OBJ_ADJACENCY values from previous commands

Number of adjacency objects: 16

Adjacency id: 0x4e (78)

Interface: TenGigabitEthernet2/0/2, IF index: 68, Link Type: MCP_LINK_TAG
Encap: **70:d3:79:be:ae:61:d4:ad:71:b5:dd:f1:88:47** <-- MAC ending in AE61 is the DMAC, MAC ending in DDF1 is the SMAC, 8847 is the MPLS ETYPE
Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: unknown
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown

NextHop addr: 10.0.0.18 <-- Next-hop IP address

IP FRR MCP_ADJ_IPFRR_NONE 0

aom id: 545, HW handle: (nil) (created)

FED Prefix Programming

C9500-P#show platform software fed switch active ip route 192.168.1.4/32

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
-----	------	-----	-------	-----	------	------	-------

modified	---	----	---	----	---	----	-----
----------	-----	------	-----	------	-----	------	-------

0 192.168.1.4/32 0x7f0b284c1118 0x0 0 0

2021/06/23 18:47:01.761 <-- HTM value important for subsequent command

FIB: prefix_hdl:0x9b000020, mpls_ecr_prefix_hdl:0xdd00003a

===== OCE chain =====

LB:obj_id:106 link_type:IP num_choices:2 Flags:0

mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0x44000002 old_ecrh:0

modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0

bwalk:[req:0 in_prog:0 nested:0]

AAL: ecr:id:1140850690 af:0 ecr_type:0 ref:2 ecrh:0x7f0b284a3998(28:2)

hwhdl:675953048 ::0x7f0b284b4268,0x7f0b284a1d78,0x7f0b284b4268,0x7f0b284a1d78

Sw Enh ECR scale: objid:106 llabel:17 eos:1 #adjs:2 mixed_adj:0

reprogram_hw:0 ecrhdl:0x44000002 ecr_hwhdl:0x7f0b284a3998

mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0

ecr_adj: id:4127195192 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:1207959601

sih:0x7f0b284b4268(181) di_id:23709 rih:0x7f0b284b3ca8(31)

adj_lentry [eos0:0x7f0b284c38e8 eos1:0x7f0b284cd858]

ecr_adj: id:1157627961 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:67108914

sih:0x7f0b284a1d78(182) di_id:23709 rih:0x7f0b284b47d8(44)

adj_lentry [eos0:0x7f0b284c3af8 eos1:0x7f0b284cdb28]

ecr_prefix_adj: id:3707764794 (ref:1)

sih:0x7f0b284c5028(184) di_id:23709 rih:0x7f0b284c4c48(60)

LABEL:objid:104 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local transport label, 0 is the LDP label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xf6000038

unsupported_recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:4127195192 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71 <-- Matches the next-hop information to reach 192.168.1.4/32

sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)

vlan_id:0 vrf_id:0 ri:0x7f0b284ceaa8, ri_id:0x38 phdl:0x76000058, ref_cnt:1

si:0x7f0b284ceeb8, si_id:0x400b, di_id:0x2 <-- Used in subsequent commands

ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x1f000028, }

LABEL:objid:105 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local transport label, 0 is the LDP label

flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x45000039

unsupported_recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:1157627961 lbl:0 smac:d4ad.71b5.ddf1 dmac:70d3.79be.ae61 <-- Matches the next-hop information to reach 192.168.1.4/32

sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)

vlan_id:0 vrf_id:0 ri:0x7f0b284c4588, ri_id:0x3a phdl:0x5500005a, ref_cnt:1

si:0x7f0b284d0548, si_id:0x400c, di_id:0x62 <-- Used in subsequent commands

ADJ:objid:78 {link_type:MPLS ifnum:0x44, si:0x4900002a, }

=====

MPLS info: mpls_ecr_scale_prefix_adj:0xdd00003a, mpls_lspa_hdl:0

=====

C9500-P#show platform hardware fed switch active fwd-asic abstraction print-resource-handle

0x7f0b284c1118 1 <-- Use the HTM value from previous command

Handle:0x7f0b284c1118 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-

ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1

priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f0b284c1328

Features sharing this resource:Cookie length: 12
04 01 a8 c0 00 00 00 d0 07 00 00 00

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7f0b284c1328)

Absolute Index: 126650

Time Stamp: 1

KEY - vrf:0 mtr:0 **prefix:192.168.1.4** rcp_redirect_index:0x0

MASK - vrf:0 mtr:0 **prefix:0.0.0.0** rcp_redirect_index:0x0

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5

afdLabelOrDestClientId:0 SI:184 destined_to_us:0 hw_stats_idx:1 stats_id:0

redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0

SRC-AD = learning_violation:0 need_to_learn:0 locally_connected:0 staticentryViolation:0

rpfValid:1 rpfLe:2 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1

rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:1

rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,

sgtCacheControl0 = 0

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0

group_label:0x0 group_mask:0x0

=====

C9500-P#show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x2 0x2 <-- Use the di_id values from previous command

ASIC#0:

index = 0x2

pmap = 0x00000000 0x00000000

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

ASIC#1:

index = 0x2

pmap = 0x00000000 **0x00000002 <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000 0000 0000 0010 = Port 1 (Zero based, count right to left)**

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

C9500-P#show platform hardware fed switch active fwd-asic resource asic all destination-index range 0x62 0x62

ASIC#0:

index = 0x62

pmap = 0x00000000 0x00008000 <-- Looking at 0x00008000, in binary that is 0000 0000 0000 0000 1000 0000 0000 0000 = Port 15 (Zero based, count right to left)

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

ASIC#1:

index = 0x62

pmap = 0x00000000 0x00000000

cmi = 0x0

rcp_pmap = 0x0

al_rsc_cmi

CPU Map Index (CMI) [0]

ctiLo0 = 0

ctiLo1 = 0

ctiLo2 = 0

cpuQNum0 = 0

cpuQNum1 = 0

cpuQNum2 = 0

npuIndex = 0

stripSeg = 0

copySeg = 0

C9500-P#show platform software fed switch standby ip route 192.168.1.4/32

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
-----	------	-----	-------	-----	------	------	-------

---	----	---	-----	---	----	-----	-----
-----	------	-----	-------	-----	------	-------	-------

0	192.168.1.4/32	0x7f57c0545938	0x0	0	0		
---	----------------	----------------	-----	---	---	--	--

2021/06/23 18:46:51.399 <-- HTM value used in subsequent command

FIB: prefix_hdl:0x29000020, mpls_ecr_prefix_hdl:0x8f000039

=====
OCE chain =====

LB:obj_id:106 link_type:IP num_choices:2 Flags:0

mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0xf1000002 old_ecrh:0

modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0

bwalk:[req:0 in_prog:0 nested:0]

AAL: ecr:id:4043309058 af:0 ecr_type:0 ref:2 ecrh:0x7f57c04d2148(28:2)

hwhdl:3226280264 ::0x7f57c0547538,0x7f57c05497d8,0x7f57c0547538,0x7f57c05497d8

Sw Enh ECR scale: objid:106 llabel:17 eos:1 #adjs:2 mixed_adj:0

reprogram_hw:0 ecrhdl:0xf1000002 ecr_hwhdl:0x7f57c04d2148

mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0

ecr_adj: id:201326647 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:3925868592

sih:0x7f57c0547538(181) di_id:23717 rih:0x7f57c0546f18(31)

adj_lentry [eos0:0x7f57c04c8a08 eos1:0x7f57c04d07f8]

ecr_adj: id:738197560 is_mpls_adj:1 l3adj_flags:0x100000

recirc_adj_id:3070230577

sih:0x7f57c05497d8(182) di_id:23717 rih:0x7f57c0547838(44)

```
adj_lentry [eos0:0x7f57c04c8c18 eos1:0x7f57c04d0ac8]
ecr_prefix_adj: id:2399141945 (ref:1)
  sih:0x7f57c04c8788(184) di_id:23717 rih:0x7f57c04c8508(60)
LABEL:objid:104 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local
transport label, 0 is the LDP label
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xc000037
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:201326647 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71 <-- Matches next-hop
information to reach 192.168.1.4/32
  sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
  vlan_id:0 vrf_id:0 ri:0x7f57c04d18e8, ri_id:0x38 phdl:0x76000058, ref_cnt:1
  si:0x7f57c04d1b18, si_id:0x400b, di_id:0x2 <-- di_id utilized in subsequent
```

commands

```
ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0xdf000027, }
LABEL:objid:105 link_type:MPLS local_label:17 outlabel:(0, 0) <-- Label 17 is the local
transport label, 0 is the LDP label
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x2c000038
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:738197560 lbl:0 smac:d4ad.71b5.ddf1 dmac:70d3.79be.ae61 <-- Matches next-hop
information to reach 192.168.1.4/32
  sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
  vlan_id:0 vrf_id:0 ri:0x7f57c04da418, ri_id:0x3a phdl:0x5500005a, ref_cnt:1
  si:0x7f57c04da838, si_id:0x400c, di_id:0x62 <-- di_id utilized in subsequent
```

commands

```
ADJ:objid:78 {link_type:MPLS ifnum:0x44, si:0xfa000029, }
=====
MPLS info: mpls_ecr_scale_prefix_adj:0x8f000039, mpls_lspa_hdl:0
=====
```

C9500-P#**show platform hardware fed switch standby fwd-asic resource asic all destination-index range 0x62 0x62**

ASIC#0:

```
index = 0x62
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:
```

```
index = 0x62
pmap = 0x00000000 0x00000002 <-- Looking at 0x00000002, in binary that is 0000 0000 0000 0000
0000 0000 0000 0010 = Port 1 (Zero based, count right to left)
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
```

```
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

```
C9500-P#show platform hardware fed switch standby fwd-asic resource asic all destination-index range 0x2 0x2
```

```
ASIC#0:
```

```
index = 0x2
pmap = 0x00000000 0x00008000 <-- Looking at 0x00008000, in binary that is 0000 0000 0000 0000 1000 0000 0000 0000 = Port 15 (Zero based, count right to left)
```

```
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:
```

```
index = 0x2
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

```
C9500-P#show platform software fed switch active ifm mappings
```

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
TenGigabitEthernet1/0/2	0x42	1	0	1	1	0	10	1	2	2	NIF	Y <--
Port 1 is an egress port, TenGi1/0/2												
TenGigabitEthernet1/0/16	0x18	0	0	0	15	0	8	11	16	2360	NIF	Y <--
Port 15 is the SVL												

```
C9500-P#show platform software fed switch standby ifm mappings
```

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
TenGigabitEthernet2/0/2	0x44	1	0	1	1	0	10	1	2	98	NIF	Y <--
Port 1 is an egress port, TenGi2/0/2												
TenGigabitEthernet2/0/16	0x33	0	0	0	15	0	8	11	16	2360	NIF	Y <--
Port 15 is the SVL												

Verificar prefijos C9300-PE-2

```
***Software Prefix Programming***
```

```
C9300-PE-2#show ip route vrf RED 192.168.2.0
```

Routing Table: RED

Routing entry for 192.168.2.0/24

Known via "eigrp 400", distance 90, metric 130816, precedence routine (0), type internal
Redistributing via eigrp 400, bgp 69420
Advertised by bgp 69420

Last update from 10.0.0.22 on GigabitEthernet2/0/1, 21:35:22 ago

Routing Descriptor Blocks:

* **10.0.0.22**, from 10.0.0.22, 21:35:22 ago, via GigabitEthernet2/0/1 **<-- Next-hop to reach 192.168.2.0/24**

Route metric is 130816, traffic share count is 1
Total delay is 5010 microseconds, minimum bandwidth is 1000000 Kbit
Reliability 255/255, minimum MTU 1500 bytes
Loading 1/255, Hops 1

C9300-PE-2#**show ip route vrf RED 10.0.0.22**

Routing Table: RED

Routing entry for 10.0.0.20/30

Known via "connected", distance 0, metric 0 (connected, via interface)
Redistributing via eigrp 400, bgp 69420
Advertised by bgp 69420

Routing Descriptor Blocks:

* directly connected, via GigabitEthernet2/0/1
Route metric is 0, traffic share count is 1

C9300-PE-2#**show ip cef vrf RED 192.168.2.0/24 detail**

192.168.2.0/24, epoch 0

QOS: Precedence routine (0)
dflt local label info: other/21 [0x2] **<-- VPNv4 Label**
nexthop 10.0.0.22 GigabitEthernet2/0/1

*****FMAN RP Prefix Programming*****

C9300-PE-2#**show ip vrf detail**

VRF RED (**VRF Id = 2**); default RD 69:69; default VPNID **<-- VRF ID used in next command**

Old CLI format, supports IPv4 only

Flags: 0xC

Interfaces:

Gi2/0/1

Address family ipv4 unicast (Table ID = 0x2):

Flags: 0x0

Export VPN route-target communities

RT:69:69

Import VPN route-target communities

RT:69:69

No import route-map

No global export route-map

No export route-map

VRF label distribution protocol: not configured

VRF label allocation mode: per-prefix

C9300-PE-2#**show platform software ip switch active r0 cef table index 2 prefix 192.168.2.0/24 <-
- Use the VRF ID from previous command**

Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_ADJACENCY	0x3a

C9300-PE-2#**show platform software adjacency switch active r0 index 0x3a <-- Use the
OBJ_ADJACENCY value from previous command**

Number of adjacency objects: 10

Adjacency id: 0x3a (58)

Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP

Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0 <-- MAC ending in C9C2 is the DMAC, MAC ending in AE42 is SMAC, 0800 is IP ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: no-l3-inject
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.22 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
OM handle: 0x348062b578

FMAN FP Prefix Programming

C9300-PE-2#show platform software ip switch active f0 cef table index 2 prefix 192.168.2.0/24
Forwarding Table

Prefix/Len	Next Object	Index
192.168.2.0/24	OBJ_ADJACENCY	0x3a

C9300-PE-2#show platform software adjacency switch active f0 index 0x3a <-- Use the OBJ_ADJACENCY value from previous command

Number of adjacency objects: 10

Adjacency id: 0x3a (58)

Interface: GigabitEthernet2/0/1, IF index: 53, Link Type: MCP_LINK_IP

Encap: 0:72:78:c8:c9:c2:70:d3:79:be:ae:42:8:0 <-- MAC ending in C9C2 is the DMAC, MAC ending in AE42 is SMAC, 0800 is IP ETYPE

Encap Length: 14, Encap Type: MCP_ET_ARPA, MTU: 1500
Flags: no-l3-inject
Incomplete behavior type: None
Fixup: unknown
Fixup_Flags_2: unknown
Nexthop addr: 10.0.0.22 <-- Next-hop IP address
IP FRR MCP_ADJ_IPFRR_NONE 0
aom id: 477, HW handle: (nil) (created)

FED Prefix Programming

C9300-PE-2#show platform hardware fed switch active ip route vrf-name RED 192.168.2.0/24

vrf	dest	htm	flags	SGT	DGID	MPLS	Last-
modified							
2	192.168.2.0/24	0x7f0650a7e3e8	0x0	0	0		

2021/06/23 18:46:56.801 <-- HTM value used in subsequent command

FIB: prefix_hdl:0x38000016, mpls_ecr_prefix_hdl:0

==== OCE chain =====

ADJ:objid:58 {link_type:IP ifnum:0x35, si:0x9700001b, IPv4: 10.0.0.22 } <-- objid

relevant in subsequent command, 10.0.0.22 is the next-hop IP

=====

MPLS info: mpls_ecr_scale_prefix_adj:0, mpls_lspa_hdl:0

=====

C9300-PE-2#show platform hardware fed switch active fwd-asic abstraction print-resource-handle 0x7f0650a7e3e8 1 <-- Use the HTM value from previous command

Handle:0x7f0650a7e3e8 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_IPV4_L3_UNICAST ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f0650ba4028

Detailed Resource Information (ASIC# 0)

Number of HTM Entries: 1

Entry 0: (handle 0x7f0650ba4028)

Absolute Index: 92180

Time Stamp: 1

KEY - vrf:2 mtr:0 prefix:192.168.2.0 rcp_redirect_index:0x0

MASK - vrf:255 mtr:0 prefix:255.255.255.0 rcp_redirect_index:0x0

(SI value used later)

FWD-AD = afd_label_flag:0 icmp_redir_enable:1 lvx_smr_enabled:0, dstNatType:0 priority:5

afdLabelOrDestClientId:0 SI:173 destined_to_us:0 hw_stats_idx:1 stats_id:0

redirectSetRouterMac:0 dgtIdx:0 destModIndex:0 dstNatTypeOrVpnPrefixPtrMsb:0 vpnPrefixPtr:0

SRC-AD = learning_violation:1 need_to_learn:1 locally_connected:0 staticentryViolation:0

rpfValid:1 rpfLe:37 rpfLePointer:0 rpfForcePass:0 rpfForceFail:0 reachableviaSome:1

rpfCheckIncomplete:0 defaultRoute:0 ChainPtrValid:0 ChainPtrOrPortLeIndex:72 UseRpfmatchTable:0

rpfIncomplete:0 is_src_ce:0 sgtValid:0 sgt:0 src_rloc_trusted:0,sgtCacheControl1 = 0,

sgtCacheControl0 = 0

port_label:0x0 port_mask:0x0 vlan_label:0x0 vlan_mask:0x0 l3if_label:0x0 l3if_mask:0x0

group_label:0x0 group_mask:0x0

=====

C9300-PE-2#show platform software fed switch active ip adj

IPV4 Adj entries

dest	if_name	dst_mac	si_hdl	ri_hdl	pd_flags
adj_id	Last-modified				
----	-----	-----	-----	-----	-----
10.0.0.22	GigabitEthernet2/0/1	0072.78c8.c9c2	0x7f0650a32858	0x7f0650a1af48	0x0
0x3a	2021/06/23 18:46:52.956				

C9300-PE-2#show ip arp vrf RED 10.0.0.22

Protocol	Address	Age (min)	Hardware Addr	Type	Interface
Internet	10.0.0.22	131	0072.78c8.c9c2	ARPA	GigabitEthernet2/0/1

<-- dst_mac matches the ARP entry

C9300-PE-2#show platform hardware fed fwd-asic abstraction print-resource-handle 0x7f0650a32858 1 <-- Use the HTM value from previous command

Handle:0x7f0650a32858 Res-Type:ASIC_RSC_SI Res-Switch-Num:255 Asic-Num:255 Feature-ID:AL_FID_L3_UNICAST_IPV4 Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1

priv_ri/priv_si Handle: 0x7f0650a1af48Hardware Indices/Handles: index0:0xad

mtu_index/l3u_ri_index0:0x0 index1:0xad mtu_index/l3u_ri_index1:0x0

Features sharing this resource:66 (1)]

Cookie length: 56

00 00 00 00 00 00 00 00 25 00 00 00 00 00 00 00 00 00 00 00 08 00 00 72 78 c8 c9 c2 00 00 00 00

00 00

Detailed Resource Information (ASIC# 0)

Station Index (SI) [0xad]

RI = 0x18

DI = 0x5338

stationTableGenericLabel = 0

stationFdConstructionLabel = 0x7

lookupSkipIdIndex = 0

rcpServiceId = 0

dejaVuPreCheckEn = 0

Replication Bitmap: CD

Detailed Resource Information (ASIC# 1)

Station Index (SI) [0xad]

RI = 0x18

```

DI = 0x5338
stationTableGenericLabel = 0
stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0
rcpServiceId = 0
dejaVuPreCheckEn = 0
Replication Bitmap: LD

```

=====

```

C9300-PE-2#show platform hardware fed switch active fwd-asic resource asic all destination-index
range 0x5338 0x5338 <-- Use the DI value from previous command

```

ASIC#0:

```

index = 0x5338
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
ASIC#1:

```

```

index = 0x5338
pmap = 0x00000000 0x00000001 <-- Looking at 0x00000001, in binary that is 0000 0000 0000 0000
0000 0000 0000 0001 = Port 0 (Zero based, count right to left)

```

```

cmi = 0x0
rcp_pmap = 0x0
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0

```

```

C9300-PE-2#show platform software fed switch active ifm mappings

```

Interface	IF_ID	Inst	Asic	Core	Port	SubPort	Mac	Cntx	LPN	GPN	Type	Active
GigabitEthernet2/0/1	0x35	1	0	1	0	0	26	6	1	97	NIF	Y

- Port 0 is the egress port, Gi2/0/1

Programación de etiquetas VPNv4

La siguiente sección trata la programación de etiquetas VPNv4 en los routers PE MPLS, C9300-PE-1 y C9300-PE-2. El C9500=P no reenvía en la etiqueta VPNv4, por lo que no hay salida de C9500-P.

Programación de etiquetas VPNv4 C9300-PE-1:

Verifique el prefijo local al PE, no el prefijo remoto. Verifique la etiqueta desde una perspectiva FED y luego retroceda a FMAN RP y FMAN FP.

*****Software VPNv4 Label Programming*****

C9300-PE-1#show ip cef vrf RED 192.168.3.0/24 detail

192.168.3.0/24, epoch 0

QOS: Precedence routine (0)

dflt local label info: other/21 [0x2] <-- VPNv4 label associated with the local prefix

nexthop 10.0.0.1 GigabitEthernet1/0/1

*****FMAN RP VPNv4 Label Programming*****

C9300-PE-1#show platform software mpls switch active r0 eos index 117 <-- Utilize the objid from the FED command

EOS Choice 0x75, Number of paths: 2

Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL

Next Object Index: 0,0x74

OM handle: 0x3480644470

*****FMAN FP VPNv4 Label Programming*****

C9300-PE-1#show platform software mpls switch active f0 eos index 117 <-- Utilize the objid from the FED command

EOS Choice 0x75, Number of paths: 2

Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL

Next Object Index: 0,0x74

aom id: 612, CPP handle: 0xdeadbeef (created), flags: 0

C9300-PE-1#show platform software object-manager switch active f0 object 612 <-- Use the aom id from previous command

Object identifier: 612

Description: EOS Choice 0x75

Status: Done, Epoch: 0, Client data: 0xe05e9318

C9300-PE-1#show platform software object-manager switch active f0 object 612 parents <-- Use the aom id from previous command

Object identifier: 7

Description: Special Object adj_drop

Status: Done

Object identifier: 611

Description: label 0x74

Status: Done

*****FED VPNv4 Label Programming*****

C9300-PE-1#show platform software fed switch active mpls forwarding label 21 detail

LENTRY:label:21 nobj:(EOS, 117) lentry_hdl:0x8b000009

modify_cnt:0 backwalk_cnt:0

lspa_handle:0

AAL: id:2332033033 lbl:21

eos0:[adj_hdl:0, hw_hdl:0x7fbae8d87428]

eos1:[adj_hdl:0x4300003b, hw_hdl:0x7fbae8d87278]

deagg_vrf_id = 0 lspa_handle:0

EOS:objid:117 local_label:0 flags:0:() pdflags:0 <-- Utilized in previous commands

nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 116) modify:0 bwalk:0

LABEL:objid:116 link_type:IP local_label:21 outlabel:(1048577, 0)

flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0x4300003b

unsupported_recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0

bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

AAL: id:1124073531 lbl:0 smac:a0f8.4911.d1e4 dmac:0072.78c8.06e4

```
sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)
vlan_id:0 vrf_id:0 ri:0x7fbae8d811b8, ri_id:0x3e phdl:0xf1000024, ref_cnt:1
si:0x7fbae8d72078, si_id:0x4012, di_id:0x5338
ADJ:objid:58 {link_type:IP ifnum:0x35, si:0x1900001b, IPv4: 10.0.0.1 }
```

Verificar las etiquetas C9300-PE-2 VPNv4

Verifique el prefijo local al PE, no el prefijo remoto. Verifique la etiqueta desde una perspectiva FED y luego retroceda a FMAN RP y FMAN FP.

```
C9300-PE-2#show ip cef vrf RED 192.168.2.0/24 detail
```

```
192.168.2.0/24, epoch 0
QOS: Precedence routine (0)
dflt local label info: other/21 [0x2] <-- VPNv4 label associated with the local prefix
nexthop 10.0.0.22 GigabitEthernet2/0/1
```

```
C9300-PE-2#show platform software mpls switch active r0 eos index 118 <-- Utilize the objid
value from the FED command
```

```
EOS Choice 0x76, Number of paths: 2
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
Next Object Index: 0,0x75
OM handle: 0x34806402d0
```

```
C9300-PE-2#show platform software mpls switch active f0 eos index 118 <-- Utilize the objid
value from the FED command
```

```
EOS Choice 0x76, Number of paths: 2
Next Object Type: OBJ_ADJ_DROP,OBJ_LABEL
Next Object Index: 0,0x75
aom id: 589, CPP handle: 0xdeadbeef (created), flags: 0
```

```
C9300-PE-2#show platform software object-manager switch active f0 object 589 <-- Utilize the aom
id from the previous command
```

```
Object identifier: 589
Description: EOS Choice 0x76
Status: Done, Epoch: 0, Client data: 0x248cac8
```

```
C9300-PE-2#show platform software object-manager switch active f0 object 589 parents <-- Utilize
the aom id from the previous command
```

```
Object identifier: 7
Description: Special Object adj_drop
Status: Done
```

```
Object identifier: 588
Description: label 0x75
Status: Done
```

```
C9300-PE-2#show platform software fed switch active mpls forwarding label 21 detail
```

```
LENTRY:label:21 nobj:(EOS, 118) lentry_hdl:0x63000009
modify_cnt:0 backwalk_cnt:0
lspa_handle:0
AAL: id:1660944393 lbl:21
eos0:[adj_hdl:0, hw_hdl:0x7f0650a40408]
eos1:[adj_hdl:0xcb00003a, hw_hdl:0x7f0650a401f8]
deagg_vrf_id = 0 lspa_handle:0
EOS:objid:118 local_label:0 flags:0:( ) pdflags:0
nobj0:(ADJ SPECIAL,DROP 0), nobj1:(LABEL, 117) modify:0 bwalk:0
```

```

LABEL:objid:117 link_type:IP local_label:21 outlabel:(1048577, 0)
  flags:0xc:(UHP,POP,) pdflags:0x2:(INSTALL_HW_OK,) adj_handle:0xcb00003a
  unsupported_recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3405774906 lbl:0 smac:70d3.79be.ae42 dmac:0072.78c8.c9c2
  sub_type:0 link_type:0 adj_flags:0x2 label_type:1 rewrite_type:POP2IP(135)
  vlan_id:0 vrf_id:0 ri:0x7f0650a3f2a8, ri_id:0x48 phdl:0xf1000024, ref_cnt:1
  si:0x7f0650a3d5e8, si_id:0x400a, di_id:0x5338
ADJ:objid:58 {link_type:IP ifnum:0x35, si:0x9700001b, IPv4:      10.0.0.22 }

```

Programación de Etiquetas LDP

La siguiente sección cubre la programación de etiquetas LDP en los routers MPLS, C9300-PE-1, C9500-P y C9300-PE-2.

La etiqueta LDP (exterior) es lo que la etiqueta de red MPLS conmuta los paquetes. Valide la etiqueta LDP local que se anuncia al PE remoto, no valide la etiqueta LDP remota.

Programación de etiquetas LDP C9300-PE-1:

Valide la etiqueta LDP local que se anuncia al PE remoto, no valide la etiqueta LDP remota. Verifique la etiqueta desde una perspectiva FED y luego retroceda a FMAN RP y FMAN FP.

Software LDP Label Programming

C9300-PE-1#**show mpls forwarding-table**

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0	Gi1/0/2	10.0.0.6
	Pop Label	192.168.1.3/32	0	Gi1/0/3	10.0.0.10
17	Pop Label	10.0.0.16/30	0	Gi1/0/2	10.0.0.6
	Pop Label	10.0.0.16/30	0	Gi1/0/3	10.0.0.10
18	Pop Label	10.0.0.12/30	0	Gi1/0/2	10.0.0.6
	Pop Label	10.0.0.12/30	0	Gi1/0/3	10.0.0.10
19	17	192.168.1.4/32	0	Gi1/0/2	10.0.0.6 <-- LDP label 19 is advertised to reach PE 192.168.1.4
	17	192.168.1.4/32	0	Gi1/0/3	10.0.0.10
20	No Label	10.0.0.0/30[V]	630	aggregate/RED	
21	No Label	192.168.3.0/24[V]	\		
			0	Gi1/0/1	10.0.0.1

FMAN RP LDP Label Programming

C9300-PE-1#**show platform software mpls switch active r0 label index 110 <-- Use the objid value from the FED commands**

```

Label OCE 0x6e -> OBJ_ADJACENCY (0x4b)
  Flags: Real, Number of labels in the OCE: 1
  Label values: 0x11
  Backup flags: Pop, UHP, backup label 0x100001
  OM handle: 0x34806420d0

```

C9300-PE-1#**show platform software mpls switch active r0 label index 111 <-- Use the objid value from the FED commands**

```

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)
  Flags: Real, Number of labels in the OCE: 1
  Label values: 0x11
  Backup flags: Pop, UHP, backup label 0x100001

```

OM handle: 0x3480642268

*****FMAN FP LDP Label Programming*****

C9300-PE-1#**show platform software mpls switch active f0 label index 110 <-- Use the objid value from the FED commands**

Label OCE 0x6e -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 598, CPP handle: 0xdeadbeef (created)

C9300-PE-1#**show platform software mpls switch active f0 label index 111 <-- Use the objid value from the FED commands**

Label OCE 0x6f -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x11
Backup flags: Pop, UHP, backup label 0x100001
aom id: 599, CPP handle: 0xdeadbeef (created)

C9300-PE-1#**show platform software object-manager switch active f0 object 598 <-- Utilize the aom id from previous commands**

Object identifier: 598
Description: label 0x6e
Status: Done, Epoch: 0, Client data: 0xe05e6d78

C9300-PE-1#**show platform software object-manager switch active f0 object 598 parents <-- Utilize the aom id from previous commands**

Object identifier: 531
Description: adj 0x4b, Flags None
Status: Done

C9300-PE-1#**show platform software object-manager switch active f0 object 599 <-- Utilize the aom id from previous commands**

Object identifier: 599
Description: label 0x6f
Status: Done, Epoch: 0, Client data: 0xe05e6f78

C9300-PE-1#**show platform software object-manager switch active f0 object 599 parents <-- Utilize the aom id from previous commands**

Object identifier: 535
Description: adj 0x4e, Flags None
Status: Done

C9300-PE-1#**show platform software fed switch active mpls forwarding label 19 detail**

LENTRY:label:19 nobj:(LB, 112) lentry_hdl:0x9000007
modify_cnt:1 backwalk_cnt:0
lspa_handle:0
AAL: id:150994951 lbl:19
eos0:[adj_hdl:0x7d000002, hw_hdl:0x7fbae8d778b8]
eos1:[adj_hdl:0x7d000002, hw_hdl:0x7fbae8d776a8]
deagg_vrf_id = 0 lspa_handle:0
LB:obj_id:112 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:19 path_inhw:2 ecrh:0x7d000002 old_ecrh:0
modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]
AAL: ecr:id:2097152002 af:0 ecr_type:0 ref:7 ecrh:0x7fbae8a99268(28:2)
hwhdl:3903427176 ::0x7fbae8a98b98,0x7fbae8a9ad48,0x7fbae8a98b98,0x7fbae8a9ad48
Sw Enh ECR scale: objid:112 llabel:19 eos:1 #adjs:2 mixed_adj:0
reprogram_hw:0 ecrhdl:0x7d000002 ecr_hwhdl:0x7fbae8a99268

```

mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:4278190135 is_mpls_adj:1 l3adj_flags:0x100000
  recirc_adj_id:1744830509
    sih:0x7fbae8a98b98(179) di_id:20499 rih:0x7fbae8a985d8(33)
    adj_lentry [eos0:0x7fbae8d7bf48 eos1:0x7fbae8d76e88]
ecr_adj: id:1392508984 is_mpls_adj:1 l3adj_flags:0x100000
  recirc_adj_id:2013265966
    sih:0x7fbae8a9ad48(180) di_id:20499 rih:0x7fbae8a9a788(46)
    adj_lentry [eos0:0x7fbae8d7c1b8 eos1:0x7fbae8d77158]
ecr_prefix_adj: id:2164260921 (ref:1)
  sih:0x7fbae8d7df08(181) di_id:20499 rih:0x7fbae8d7db98(68)
LABEL:objid:110 link_type:MPLS local_label:19 outlabel:(17, 0) <-- Used in previous
commands
  flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0xff000037
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:4278190135 lbl:0 smac:a0f8.4911.d1d6 dmac:d4ad.71b5.dde4
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7fbae8d78c48, ri_id:0x40 phdl:0x9f00004b, ref_cnt:1
    si:0x7fbae8d78fd8, si_id:0x4013, di_id:0x535f
  ADJ:objid:75 {link_type:MPLS ifnum:0x36, si:0x22000023, }
  LABEL:objid:111 link_type:MPLS local_label:19 outlabel:(17, 0) <-- Used in previous
commands
  flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0x53000038
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:1392508984 lbl:0 smac:a0f8.4911.d1d8 dmac:d4ad.71b5.ddc2
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7fbae8d7d0a8, ri_id:0x42 phdl:0x8400004c, ref_cnt:1
    si:0x7fbae8d7a908, si_id:0x4014, di_id:0x5360
  ADJ:objid:78 {link_type:MPLS ifnum:0x37, si:0x74000026, }

```

Programación de etiquetas LDP C9500-P:

Valide la etiqueta LDP local que se anuncia al PE remoto, no valide la etiqueta LDP remota. Verifique la etiqueta desde una perspectiva FED y luego retroceda a FMAN RP y FMAN FP.

Software LDP Label Programming

C9500-P#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	explicit-n	192.168.1.2/32	1240	Te1/0/1	10.0.0.5 <-- LDP Label 16
advertised to reach PE 192.168.1.2					
	explicit-n	192.168.1.2/32	226537	Te2/0/1	10.0.0.9
17	explicit-n	192.168.1.4/32	610	Te1/0/2	10.0.0.14 <-- LDP Label 17
advertised to reach PE 192.168.1.4					
	explicit-n	192.168.1.4/32	227592	Te2/0/2	10.0.0.18

FMAN RP LDP Label Programming

C9500-P#show platform software mpls switch active r0 label index 94

Label OCE 0x5e -> OBJ_ADJACENCY (0x3f)

```

  Flags: Real, Number of labels in the OCE: 1
  Label values: 0
  Backup flags: Pop, UHP, backup label 0x100001
  OM handle: 0x348064c530

```

C9500-P#show platform software mpls switch active r0 label index 95

Label OCE 0x5f -> OBJ_ADJACENCY (0x44)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064c6c8

C9500-P#show platform software mpls switch active r0 label index 104

Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064df70

C9500-P#show platform software mpls switch active r0 label index 105

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x348064e108

FMAN FP LDP Label Programming

C9500-P#show platform software mpls switch active f0 label index 94

Label OCE 0x5e -> OBJ_ADJACENCY (0x3f)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 564, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 95

Label OCE 0x5f -> OBJ_ADJACENCY (0x44)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 565, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 104

Label OCE 0x68 -> OBJ_ADJACENCY (0x49)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 576, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software mpls switch active f0 label index 105

Label OCE 0x69 -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0
Backup flags: Pop, UHP, backup label 0x100001
aom id: 577, CPP handle: 0xdeadbeef (created)

C9500-P#show platform software object-manager switch active f0 object 564
Object identifier: 564

Description: label 0x5e
Status: Done, Epoch: 0, Client data: 0x4f737108

C9500-P#show platform software object-manager switch active f0 object 564 parents

Object identifier: 515
Description: adj 0x3f, Flags None
Status: Done

C9500-P#show platform software object-manager switch active f0 object 565

Object identifier: 565
Description: label 0x5f
Status: Done, Epoch: 0, Client data: 0x4f737448

C9500-P#show platform software object-manager switch active f0 object 565 parents

Object identifier: 525
Description: adj 0x44, Flags None
Status: Done

C9500-P#show platform software object-manager switch active f0 object 576

Object identifier: 576
Description: label 0x68
Status: Done, Epoch: 0, Client data: 0x4f6d4bf8

C9500-P#show platform software object-manager switch active f0 object 576 parents

Object identifier: 536
Description: adj 0x49, Flags None
Status: Done

C9500-P#show platform software object-manager switch active f0 object 577

Object identifier: 577
Description: label 0x69
Status: Done, Epoch: 0, Client data: 0x4f737f78

C9500-P#show platform software object-manager switch active f0 object 577 parents

Object identifier: 545
Description: adj 0x4e, Flags None
Status: Done

FED LDP Label Programming

C9500-P#show platform software fed switch active mpls forwarding label 16 detail

LENTRY:label:16 nobj:(LB, 96) lentry_hdl:0xeb000004
modify_cnt:2 backwalk_cnt:0
lspa_handle:0
AAL: id:3942645764 lbl:16
eos0:[adj_hdl:0x44000002, hw_hdl:0x7f0b284b4d98]
eos1:[adj_hdl:0x44000002, hw_hdl:0x7f0b284b4be8]
deagg_vrf_id = 0 lspa_handle:0
LB:obj_id:96 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:16 path_inhw:2 ecrh:0x44000002 old_ecrh:0
modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]
AAL: ecr:id:1140850690 af:0 ecr_type:0 ref:2 ecrh:0x7f0b284a3998(28:2)
hwhdl:675953048 ::0x7f0b284b4268,0x7f0b284a1d78,0x7f0b284b4268,0x7f0b284a1d78
Sw Enh ECR scale: objid:96 llabel:16 eos:1 #adjs:2 mixed_adj:0
reprogram_hw:0 ecrhdl:0x44000002 ecr_hwhdl:0x7f0b284a3998
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:1610612787 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:1207959601
sih:0x7f0b284b4268(181) di_id:23709 rih:0x7f0b284b3ca8(31)
adj_lentry [eos0:0x7f0b284a32d8 eos1:0x7f0b284a3cc8]
ecr_adj: id:805306420 is_mpls_adj:1 l3adj_flags:0x100000

```

recirc_adj_id:67108914
  sih:0x7f0b284a1d78(182) di_id:23709 rih:0x7f0b284b47d8(44)
adj_lentry [eos0:0x7f0b284c1608 eos1:0x7f0b284a2138]
ecr_prefix_adj: id:3976200245 (ref:1)
  sih:0x7f0b284c2bf8(183) di_id:23709 rih:0x7f0b284c2888(50)
LABEL:objid:94 link_type:MPLS local_label:16 outlabel:(0, 0)
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x60000033
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:1610612787 lbl:0 smac:d4ad.71b5.dde4 dmac:a0f8.4911.d1d6
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7f0b284a2cd8, ri_id:0x2e phdl:0xe9000057, ref_cnt:1
    si:0x7f0b284a3048, si_id:0x4009, di_id:0x1
ADJ:objid:63 {link_type:MPLS ifnum:0x41, si:0x2d000023, }
LABEL:objid:95 link_type:MPLS local_label:16 outlabel:(0, 0)
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x30000034
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:805306420 lbl:0 smac:d4ad.71b5.ddc2 dmac:a0f8.4911.d1d8
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7f0b284a57c8, ri_id:0x30 phdl:0x67000059, ref_cnt:1
    si:0x7f0b284a6008, si_id:0x400a, di_id:0x61
ADJ:objid:68 {link_type:MPLS ifnum:0x43, si:0xef000026, }

```

C9500-P#show platform software fed switch active mpls forwarding label 17 detail

```

LENTRY:label:17 nobj:(LB, 106) lentry_hdl:0xf6000005
  modify_cnt:1 backwalk_cnt:0
  lsp_handle:0
  AAL: id:4127195141 lbl:17
    eos0:[adj_hdl:0x44000002, hw_hdl:0x7f0b284ce2f8]
    eos1:[adj_hdl:0x44000002, hw_hdl:0x7f0b284ce0e8]
    deagg_vrf_id = 0 lsp_handle:0
LB:obj_id:106 link_type:IP num_choices:2 Flags:0
  mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0x44000002 old_ecrh:0
  modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
  bwalk:[req:0 in_prog:0 nested:0]
  AAL: ecr:id:1140850690 af:0 ecr_type:0 ref:2 ecrh:0x7f0b284a3998(28:2)
  hwhdl:675953048 ::0x7f0b284b4268,0x7f0b284a1d78,0x7f0b284b4268,0x7f0b284a1d78
Sw Enh ECR scale: objid:106 llabel:17 eos:1 #adjs:2 mixed_adj:0
reprogram_hw:0 ecrhdl:0x44000002 ecr_hwhdl:0x7f0b284a3998
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:4127195192 is_mpls_adj:1 l3adj_flags:0x100000
  recirc_adj_id:1207959601
    sih:0x7f0b284b4268(181) di_id:23709 rih:0x7f0b284b3ca8(31)
    adj_lentry [eos0:0x7f0b284c38e8 eos1:0x7f0b284cd858]
ecr_adj: id:1157627961 is_mpls_adj:1 l3adj_flags:0x100000
  recirc_adj_id:67108914
    sih:0x7f0b284a1d78(182) di_id:23709 rih:0x7f0b284b47d8(44)
    adj_lentry [eos0:0x7f0b284c3af8 eos1:0x7f0b284cdb28]
ecr_prefix_adj: id:3707764794 (ref:1)
  sih:0x7f0b284c5028(184) di_id:23709 rih:0x7f0b284c4c48(60)
LABEL:objid:104 link_type:MPLS local_label:17 outlabel:(0, 0)
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0xf6000038
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
  AAL: id:4127195192 lbl:0 smac:d4ad.71b5.ddd6 dmac:70d3.79be.ae71
    sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
    vlan_id:0 vrf_id:0 ri:0x7f0b284ceaa8, ri_id:0x38 phdl:0x76000058, ref_cnt:1
    si:0x7f0b284ceeb8, si_id:0x400b, di_id:0x2
ADJ:objid:73 {link_type:MPLS ifnum:0x42, si:0x1f000028, }
LABEL:objid:105 link_type:MPLS local_label:17 outlabel:(0, 0)
  flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x45000039
  unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
  bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0

```

```
AAL: id:1157627961 lbl:0 smac:d4ad.71b5.ddf1 dmac:70d3.79be.ae61
sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
vlan_id:0 vrf_id:0 ri:0x7f0b284c4588, ri_id:0x3a phdl:0x5500005a, ref_cnt:1
si:0x7f0b284d0548, si_id:0x400c, di_id:0x62
ADJ:objid:78 {link_type:MPLS ifnum:0x44, si:0x4900002a, }
```

Programación de etiquetas LDP C9300-PE-2:

Valide la etiqueta LDP local que se anuncia al PE remoto, no valide la etiqueta LDP remota. Comience comprobando la etiqueta desde la perspectiva de la FED y, a continuación, retroceda a FMAN RP y FMAN FP.

Software LDP Label Programming

C9300-PE-2#show mpls forwarding-table

Local Label	Outgoing Label	Prefix or Tunnel Id	Bytes Switched	Outgoing interface	Next Hop
16	Pop Label	192.168.1.3/32	0	Gi2/0/2	10.0.0.13
	Pop Label	192.168.1.3/32	0	Gi2/0/3	10.0.0.17
17	16	192.168.1.2/32	0	Gi2/0/2	10.0.0.13 <-- LDP Label 17 is advertised to Remote PE 192.168.1.2
	16	192.168.1.2/32	0	Gi2/0/3	10.0.0.17
18	Pop Label	10.0.0.4/30	0	Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.4/30	0	Gi2/0/3	10.0.0.17
19	Pop Label	10.0.0.8/30	0	Gi2/0/2	10.0.0.13
	Pop Label	10.0.0.8/30	0	Gi2/0/3	10.0.0.17
20	No Label	10.0.0.20/30[V]	630	aggregate/RED	
21	No Label	192.168.2.0/24[V] \	0	Gi2/0/1	10.0.0.22

FMAN RP Label Programming

C9300-PE-2#show platform software mpls switch active r0 label index 106 <-- Use the objid values from the FED commands

```
Label OCE 0x6a -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480637358
```

C9300-PE-2#show platform software mpls switch active r0 label index 107 <-- Use the objid values from the FED commands

```
Label OCE 0x6b -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
OM handle: 0x3480638c10
```

FMAN FP LDP Label Programming

C9300-PE-2#show platform software mpls switch active f0 label index 106

```
Label OCE 0x6a -> OBJ_ADJACENCY (0x4b)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
aom id: 548, CPP handle: 0xdeadbeef (created)
```

C9300-PE-2#show platform software mpls switch active f0 label index 107

Label OCE 0x6b -> OBJ_ADJACENCY (0x4e)
Flags: Real, Number of labels in the OCE: 1
Label values: 0x10
Backup flags: Pop, UHP, backup label 0x100001
aom id: 549, CPP handle: 0xdeadbeef (created)

C9300-PE-2#**show platform software object-manager switch active f0 object 548 <-- Use the aom id value from the previous commands**

Object identifier: 548
Description: label 0x6a
Status: Done, Epoch: 0, Client data: 0x24843d8

C9300-PE-2#**show platform software object-manager switch active f0 object 548 parents <-- Use the aom id value from the previous commands**

Object identifier: 509
Description: adj 0x4b, Flags None
Status: Done

C9300-PE-2#**show platform software object-manager switch active f0 object 549 <-- Use the aom id value from the previous commands**

Object identifier: 549
Description: label 0x6b
Status: Done, Epoch: 0, Client data: 0x2484518

C9300-PE-2#**show platform software object-manager switch active f0 object 549 parents <-- Use the aom id value from the previous commands**

Object identifier: 513
Description: adj 0x4e, Flags None
Status: Done

*****FED LDP Label Programming*****

C9300-PE-2#**show platform software fed switch active mpls forwarding label 17 detail**

LENTRY:label:17 nobj:(LB, 108) lentry_hdl:0x64000005
modify_cnt:1 backwalk_cnt:0
lspa_handle:0
AAL: id:1677721605 lbl:17
eos0:[adj_hdl:0xa0000002, hw_hdl:0x7f0650a5c8e8]
eos1:[adj_hdl:0xa0000002, hw_hdl:0x7f0650a5b908]
deagg_vrf_id = 0 lspa_handle:0
LB:obj_id:108 link_type:IP num_choices:2 Flags:0
mpls_ecr:1 local_label:17 path_inhw:2 ecrh:0xa0000002 old_ecrh:0
modify_cnt:0 bwalk_cnt:0 subwalk_cnt:0 finish_cnt:0
bwalk:[req:0 in_prog:0 nested:0]
AAL: ecr:id:2684354562 af:0 ecr_type:0 ref:7 ecrh:0x7f0650a62888(28:2)
hwhdl:1353066632 ::0x7f0650a60998,0x7f0650a630d8,0x7f0650a60998,0x7f0650a630d8
Sw Enh ECR scale: objid:108 llabel:17 eos:1 #adjs:2 mixed_adj:0
reprogram_hw:0 ecrhdl:0xa0000002 ecr_hwhdl:0x7f0650a62888
mod_cnt:0 prev_npath:0 pmismatch:0 pordermatch:0
ecr_adj: id:436207667 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:2113929262
sih:0x7f0650a60998(178) di_id:20507 rih:0x7f0650a60378(50)
adj_lentry [eos0:0x7f0650a877d8 eos1:0x7f0650a1cf78]
ecr_adj: id:3976200246 is_mpls_adj:1 l3adj_flags:0x100000
recirc_adj_id:1509949487
sih:0x7f0650a630d8(179) di_id:20507 rih:0x7f0650a62b18(51)
adj_lentry [eos0:0x7f0650a87a48 eos1:0x7f0650a1d188]
ecr_prefix_adj: id:2919235640 (ref:1)
sih:0x7f0650a87558(180) di_id:20507 rih:0x7f0650a871d8(68)
LABEL:**objid:106** link_type:MPLS local_label:17 outlabel:(16, 0) <-- Used in previous
commands
flags:0x1:(REAL,) pdflags:0:(INSTALL_HW_OK,) adj_handle:0x1a000033

```

unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:436207667 lbl:0 smac:70d3.79be.ae71 dmac:d4ad.71b5.ddd6
  sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
  vlan_id:0 vrf_id:0 ri:0x7f0650a67d48, ri_id:0x3a phdl:0x9f00004b, ref_cnt:1
  si:0x7f0650a65408, si_id:0x4010, di_id:0x535f
ADJ:objid:75 {link_type:MPLS ifnum:0x36, si:0x35000023, }
LABEL:objid:107 link_type:MPLS local_label:17 outlabel:(16, 0) <-- Used in previous
commands
flags:0x1:(REAL,) pdfflags:0:(INSTALL_HW_OK,) adj_handle:0xed000036
unsupported recursion:0 olbl_changed 0 local_adj:0 modify_cnt:0
bwalk_cnt:0 subwalk_cnt:0 collapsed_oce:0
AAL: id:3976200246 lbl:0 smac:70d3.79be.ae61 dmac:d4ad.71b5.ddf1
  sub_type:0 link_type:2 adj_flags:0 label_type:2 rewrite_type:PSH1(119)
  vlan_id:0 vrf_id:0 ri:0x7f0650a6f4f8, ri_id:0x40 phdl:0x8400004c, ref_cnt:1
  si:0x7f0650a73088, si_id:0x4013, di_id:0x5360
ADJ:objid:78 {link_type:MPLS ifnum:0x37, si:0xa2000025, }

```

Resolución de problemas de escalabilidad de hardware

En esta sección se brinda información que puede utilizar para resolver problemas en su configuración.

Registros de Sistemas de Hardware MPLS

Si se queda sin un recurso determinado, como las etiquetas MPLS, el sistema genera el mensaje SYSLOG.

Puntos clave que recordar

- MPLS LABEL se utiliza para la **disposición de etiquetas**. (Este recurso se consume cuando se aprenden prefijos de un CE local)
- LSPA se utiliza para la **imposición de etiquetas**. (Este recurso se consume cuando se aprenden prefijos de un PE remoto)

Mensaje de registro MPLS	Definición	Acción de recuperación
%FED_L3_ERRMSG-3-RSRC_ERR: Switch 1 R0/0: fed: No se pudo asignar el recurso de hardware para la entrada fib debido al agotamiento de los recursos de hardware	El hardware reservado para los prefijos IP se ha quedado sin espacio (EM o TCAM)	Realice una de estas acciones para reducir el número de prefijos aprendidos por el PE local o remoto: 1. Resumir prefijos en CE 2. Cambiar el modo de asignación de etiquetas de per-prefix a per-prefix Realice una de estas acciones para reducir el número de cables usados en PE local :
%FED_L3_ERRMSG-3-mpls_out_of_resource: Switch 1 R0/0: alimentado: Falta el recurso para MPLS LABEL ENTRY . No se pudo programar la etiqueta local:8205 (8192/8192) en el hardware	Asignación de etiqueta local: El hardware reservado para etiquetas locales MPLS se ha quedado sin espacio (EM o TCAM)	1. Resumir prefijos en CE local 2. Cambiar el modo de asignación de etiquetas de por prefijo a per-prefix en el PE local
%FED_L3_ERRMSG-3-MPLS_LENTRY_PAUSE: Switch 1 R0/0: alimentado: Se ha alcanzado un límite crítico para el recurso MPLS LABEL	Asignación de etiqueta local: El hardware reservado para las etiquetas locales MPLS se ha quedado sin espacio (EM o	Realice una de estas acciones para reducir el número de cables usados en PE local : 1. Resumir prefijos en CE local

ENTRY. Lentry Create PAUSED.

TCAM)

%FED_L3_ERRMSG-3-
mpls_out_of_resource: Switch 1 R0/0:
alimentado: **Falta el recurso para MPLS
LSPA. Error al programar en hardware**

Asignación de etiquetas remotas: El hardware reservado para las etiquetas remotas de LSPA se ha quedado sin espacio

local

2. Cambiar el modo de asignación de etiquetas de por prefijo a por etiqueta en el PE local

Realice una de estas acciones para reducir el número de cables usados en **PE remoto:**

1. Resumir prefijos en CE remoto PE remoto
2. Cambiar el modo de asignación de etiquetas de por prefijo a por etiqueta en el PE remoto


Comandos de validación de hardware

`show platform hardware fed active fwd-asic resource tcam` utilización es el primer lugar en el que desea evaluar si tiene un problema de escala de hardware. Muestra información por ASIC.

Esta sección muestra un PE aprendiendo prefijos de BGP en vrf MPLS con los parámetros descritos aquí:

- Se utiliza la asignación de etiqueta por prefijo predeterminada
- PE es C9300-48U con Cisco IOS-XE 17.3.4
- CE es Ixia como vecino BGP que anuncia los prefijos a una interfaz en vrf MPLS
- La longitud del prefijo utilizada es /28. Por lo tanto, la plataforma utiliza TCAM para las longitudes de prefijo /31 o más cortas
- Esta plataforma utiliza la memoria EM para las etiquetas MPLS/BGP primero y luego se desborda a TCAM si EM se completa

Topología

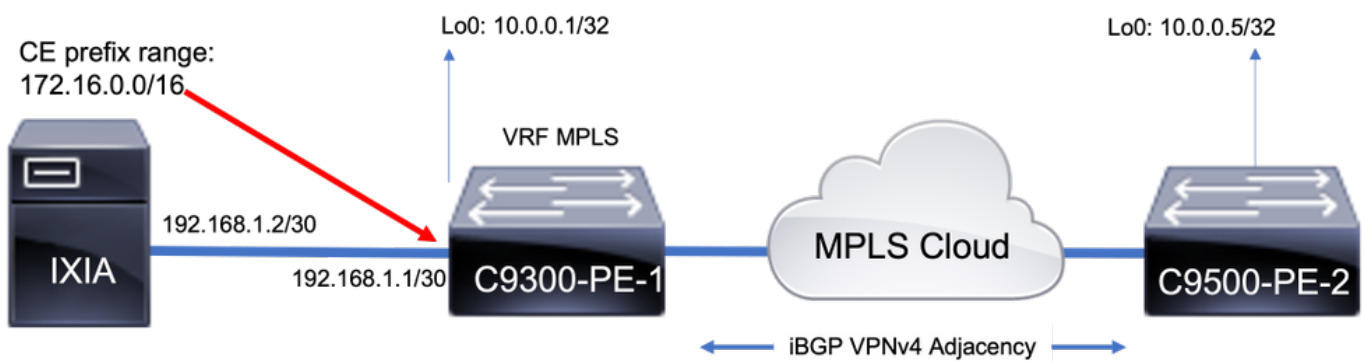

Uso de recursos previsto

Antes de la adición de cualquier prefijo, hay cierto uso base:

- Esta línea de base se tomó después de que los vecinos MPLS LDP se formaran en la tabla global
- A partir de esta línea de base, se agregan prefijos VPNv4 en MPLS VRF
- Los números de línea de base pueden variar. Depende de lo que ya esté programado en el switch

Nota: En este ejemplo, los prefijos se agregan desde un lado CE-PE, lo que da como

resultado recursos como LSPA sólo asignados en el PE remoto que necesitan utilizar una pila de etiquetas para alcanzar. En escenarios reales, el recurso se asignaría a ambos dispositivos PE.

```
C9300-48U#show version | inc IOS
Cisco IOS XE Software, Version 17.03.04
Cisco IOS Software [Amsterdam], Catalyst L3 Switch Software (CAT9K_IOSXE), Version 17.3.4,
RELEASE SOFTWARE (fc3)
```

```
C9300-48U#show platform hardware fed switch active fwd-asic resource tcam utilization
Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable
```

```
CAM Utilization for ASIC [0]
```

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

Mac Address Table	EM	I	32768	20	0.06%	0	0	0
20								
Mac Address Table	TCAM	I	1024	21	2.05%	0	0	0
21								
L3 Multicast	EM	I	8192	0	0.00%	0	0	0
0								
L3 Multicast	TCAM	I	512	9	1.76%	3	6	0
0								
L2 Multicast	EM	I	8192	0	0.00%	0	0	0
0								
L2 Multicast	TCAM	I	512	11	2.15%	3	8	0
0								
IP Route Table	EM	I	24576	23	0.09%	14	0	9
0	<-- 23 EM (hash) base usage							
IP Route Table	TCAM	I	8192	25	0.31%	12	10	2
1	<-- 25 TCAM base usage							

```
C9300-48U#show platform software fed switch active mpls summary | b Resource shar
Resource sharing info:
SI: 4/65536
RI: 10/65536
Well Known Index: 49/2048
Tcam: 21/57344
lv1_ecr: 0/64
lv2_ecr: 0/256
lspa: 0/16385
label_stack_id: 2/65537
vpn_spoke_id: 0/255
indirect_si: 0/255
RSM resource database stats:
Num of (L3+mpls) ADJ entries allocated: 36/131072
Num of LABEL entries allocated: 4/8192 <-- Baseline label usage = 4 (label entries
allocated on local PE-CE side)
Num of LSPA entries allocated: 0/8192 <-- LSPA resource used when prefix learnt
from another PE, not from a local CE (The SDM template determines max value)
Num of local adjs in mpls adjs: 3
Num of SI stats allocated: 6/49152
Adjs stats allocated by MPLS:
Num of mpls adjs: 11
Num of L3 adjs: 0
Num of VPN prefix_id: 0
<...snip...>
Other MPLS resource alloc error stats: <-- reported resource allocation issues
```


shown here

```
LENTRY out-of-resource errors: 0
LENTRY general errors: 0
LSPA out-of-resource errors: 0
LSPA general errors: 0
ADJ out-of-resource errors: 0
SI stats alloc error: 0
MPLS ADJ stats error: 0
MPLS ADJ stats last error rc: 0
```

Nota: SI/RI/DI son recursos necesarios para la reescritura de paquetes, el puerto de destino, etc. Para resolver problemas con SI/DI/RI consulte el artículo [Comprensión de Recursos de Hardware en Catalyst 9000 Switches](#)

Agregar 1000 prefijos BGP VPNv4

Vecino (Ixia) con 1000 prefijos agregados a VRF MPLS de CE

9300 PE local (conectado a CE)

```
C9300-48U#show bgp vpnv4 unicast all summary
BGP router identifier 10.0.0.1, local AS number 65000
<...snip...> Neighbor V AS MsgRcvd MsgSent TblVer InQ OutQ Up/Down State/PfxRcd 10.0.0.5 4 65000
102 304 3001 0 0 01:28:23 0 192.168.1.2 4 65005 102 5 3001 0 0
00:00:58 1000 <-- PE learns 1000 prefixes from CE device
C9300-48U#show bgp vpnv4 unicast all | count /28
Number of lines which match regexp = 1000 <-- All 1000 prefixes are /28
C9300-48U#show platform hardware fed switch active fwd-asic resource tcam utilization
Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable
```

```
CAM Utilization for ASIC [0]
Table Subtype Dir Max Used %Used V4 V6 MPLS
Other
-----
-----
Mac Address Table EM I 32768 20 0.06% 0 0 0
20
Mac Address Table TCAM I 1024 21 2.05% 0 0 0
21
L3 Multicast EM I 8192 0 0.00% 0 0 0
0
L3 Multicast TCAM I 512 9 1.76% 3 6 0
0
L2 Multicast EM I 8192 0 0.00% 0 0 0
0
L2 Multicast TCAM I 512 11 2.15% 3 8 0
0
IP Route Table EM I 24576 2023 8.23% 14 0 2009
0
IP Route Table TCAM I 8192 1025 12.51% 1012 10 2
1
```

```
<-- 25 base + 1000 /28 prefixes = 1025 TCAM entries
<-- MPLS labels are added to EM, and each MPLS label uses 2 entries (one IPv4 prefix, and one
MPLS label results in 3 entries used in hardware)
```

```
C9300-48U#show platform software fed switch active mpls summary | b Resource shar
Resource sharing info:
SI: 4/65536
RI: 1010/65536
```

Well Known Index: 49/2048
 Tcam: 1021/57344
 lv1_ecr: 0/64
 lv2_ecr: 0/256
 lspas: 0/16385
 label_stack_id: 1002/65537
 vpn_spoke_id: 0/255
 indirect_si: 0/255

RSM resource database stats:

Num of (L3+mpls) ADJ entries allocated: 1036/131072

Num of LABEL entries allocated: 1004/8192

<-- Increased by 1000 on local PE

Num of LSPA entries allocated: 0/8192

<-- No prefixes learnt from remote

PE, no LSPA allocated

Num of local adjs in mpls adjs: 3
 Num of SI stats allocated: 1006/49152
 Adjs stats allocated by MPLS:
 Num of mpls adjs: 1011
 Num of L3 adjs: 0
Num of VPN prefix_id: 0

<...snip...>

Other MPLS resource alloc error stats: <-- no resource allocation issues

LENTY out-of-resource errors: 0
 LENTRY general errors: 0
 LSPA out-of-resource errors: 0
 LSPA general errors: 0
 ADJ out-of-resource errors: 0
 SI stats alloc error: 0
 MPLS ADJ stats error: 0
 MPLS ADJ stats last error rc: 0

<-- Resources shown in baseline outputs are now increased by 1000

PE remoto 9500H (aprendido sobre MPLS)

C9500-24Y4C#show platform hardware fed active fwd-asic resource tcam utilization

Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								
Mac Address Table	EM	I	32768	19	0.06%	0	0	0
19								
Mac Address Table	TCAM	I	768	21	2.73%	0	0	0
21								
L3 Multicast	EM	I	32768	0	0.00%	0	0	0
0								
L3 Multicast	TCAM	I	768	6	0.78%	3	3	0
0								
L2 Multicast	TCAM	I	2304	7	0.30%	3	4	0
0								
IP Route Table	EM/LPM	I	212992	1012	0.48%	1003	0	9
0								
IP Route Table	TCAM	I	1536	28	1.82%	23	3	2
0								
CTS Cell Matrix/VPN								
Label	EM	O	32768	992	3.03%	0	0	992
0								
<-- MPLS VPN used 992 entries								
CTS Cell Matrix/VPN								
Label TCAM 0 768 9 1.17% 0 0 8 1								

<-- 1000 /28 IPv4 prefixes learned from remote PE (On the 9500HP these /28 prefixes are be

stored in EM/LPM memory, not TCAM)

<-- Hardware shared between CTS and VPN (resource is used when prefixes learned PE-PE, label imposition)

C9500-24Y4C#show platform software fed active mpls summary | b Resource shar

Resource sharing info:

SI: 4/131072

RI: 11/98304

Well Known Index: 48/2048

Tcam: 20/245760

lv1_ecr: 0/64

lv2_ecr: 0/256

lspa: 1000/65536

label_stack_id: 2/65537

vpn_spoke_id: 0/255

indirect_si: 0/255

RSM resource database stats:

Num of (L3+mpls) ADJ entries allocated: 37/196608

Num of LABEL entries allocated: 4/45056

<-- LABEL does not increase (no

prefixes learnt from a local CE)

Num of LSPA entries allocated: 1000/32768

<-- LSPA usage increased by 1000

(these prefixes require label stack to reach)

Num of local adjs in mpls adjs: 4

Num of SI stats allocated: 6/49152

Adjs stats allocated by MPLS:

Num of mpls adjs: 12

Num of L3 adjs: 0

Num of VPN prefix_id: 1000

AL MPLS SI/RI resource alloc stats:

SI allocated: 1

RI allocated: 6

SI_STATS allocated: 6

Unknowns allocs: 0

Alloc no resource: 0

Alloc errors: 0

Free errors: 0

Invalid free: 0

Free unknown: 0

Other MPLS resource alloc error stats:

<-- no resource allocation issues

LENTRY out-of-resource errors: 0

LENTRY general errors: 0

LSPA out-of-resource errors: 0

LSPA general errors: 0

ADJ out-of-resource errors: 0

SI stats alloc error: 0

MPLS ADJ stats error: 0

MPLS ADJ stats last error rc: 0

<-- Different resources are allocated to reach a local prefix (LABEL) versus a remote prefix (LSPA)

Nota: Para obtener información general sobre la TCAM de Catalyst 9000, o detalles sobre cómo verificar la TCAM para otras funciones, consulte el artículo [Comprensión de los Recursos de Hardware en los Switches Catalyst 9000](#).

Nota: ADJ (adyacencias) son un recurso compartido. Para resolver problemas con ADJ consulte el artículo [Comprensión de los Recursos de Hardware en los Catalyst 9000 Switches](#).

En la mayoría de los casos en que se utiliza la función MPLS y se consumen demasiados recursos de hardware, un cambio en la asignación de etiquetas de (predeterminado) por prefijo a por vrf puede ayudar. En este ejemplo, considere la asignación de recursos antes y después (en este caso, el 9500 es el dispositivo CE-PE).

Usage with per-prefix label allocation

C9500-24Y4C#show platform hardware fed active fwd-asic resource tcam utilization

Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

Mac Address Table	EM	I	32768	19	0.06%	0	0	0
19								
Mac Address Table	TCAM	I	768	21	2.73%	0	0	0
21								
L3 Multicast	EM	I	32768	0	0.00%	0	0	0
0								
L3 Multicast	TCAM	I	768	6	0.78%	3	3	0
0								
L2 Multicast	TCAM	I	2304	7	0.30%	3	4	0
0								
IP Route Table	EM/LPM	I	212992	3023	1.42%	1014	0	2009
0 <-- 1 IPv4 prefix entry + 2 entries for labels (2 labels created per every 1 IPv4 prefix)								
IP Route Table	TCAM	I	1536	17	1.11%	12	3	2
0								

New usage after change to per-vrf lable allocation

C9500-24Y4C(config)#mpls label mode vrf MPLS protocol all-afs per-vrf

C9500-24Y4C#show bgp vpnv4 unicast all BGP table version is 164901, local router ID is 10.0.0.5

```

Network          Next Hop          Metric LocPrf Weight Path
Status codes: s suppressed, d damped, h history, * valid, > best, i - internal,
               r RIB-failure, S Stale, m multipath, b backup-path, f RT-Filter,
               x best-external, a additional-path, c RIB-compressed,
               t secondary path, L long-lived-stale,
Origin codes: i - IGP, e - EGP, ? - incomplete
RPKI validation codes: V valid, I invalid, N Not found
Network Next Hop Metric LocPrf Weight Path
Route Distinguisher: 1:1 (default for vrf MPLS) *> 172.30.0.0/24 192.168.3.2 2219
0 65100 65101 65102 65103 {65104} e
<...snip...>

```

C9500-24Y4C#show bgp vpnv4 unicast all 172.30.0.0

BGP routing table entry for 1:1:172.30.0.0/24, version 163902

Paths: (1 available, best #1, table MPLS)

Advertised to update-groups:

8

Refresh Epoch 1

65100 65101 65102 65103 {65104}

192.168.3.2 (via vrf MPLS) from 192.168.3.2 (192.168.3.2)

Origin EGP, metric 2219, localpref 100, valid, external, best

Extended Community: RT:1:1

mpls labels in/out IPv4 VRF Aggr:18116/nolabel <-- Verify you see a 'VRF Aggr' label

type

rx pathid: 0, tx pathid: 0x0

Updated on Dec 9 2021 19:50:22 UTC

Usage with per-vrf label allocation

Allocation on both local and remote PE is dramatically reduced via change to label allocation mode

local switch (PE-CE)

C9500-24Y4C#show platform hardware fed active fwd-asic resource tcam utilization

Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

Mac Address Table	EM	I	32768	19	0.06%	0	0	0
19								
Mac Address Table	TCAM	I	768	21	2.73%	0	0	0
21								
L3 Multicast	EM	I	32768	0	0.00%	0	0	0
0								
L3 Multicast	TCAM	I	768	6	0.78%	3	3	0
0								
L2 Multicast	TCAM	I	2304	7	0.30%	3	4	0
0								
IP Route Table	EM/LPM	I	212992	1025	0.48%	1014	0	11
0	<-- one local LABEL used to reach the CE learnt prefixes							
IP Route Table	TCAM	I	1536	17	1.11%	12	3	2
0								
QOS ACL	TCAM	I	1024	45	4.39%	15	20	0
10								

remote switch (PE-PE)

C9300-48U#show platform hardware fed switch active fwd-asic resource tcam utilization

Codes: EM - Exact_Match, I - Input, O - Output, IO - Input & Output, NA - Not Applicable

CAM Utilization for ASIC [0]

Table	Subtype	Dir	Max	Used	%Used	V4	V6	MPLS
Other								

<...snip...>								
IP Route Table	EM	I	24576	23	0.09%	14	0	9
0								
IP Route Table	TCAM	I	8192	1025	12.51%	1012	10	2
1	<-- Still 1:1 usage for IPv4 prefixes							
<...snip...>								
CTS Cell Matrix/VPN								
Label	EM	O	8192	1	0.01%	0	0	1
0	<-- one remote LSPA used to reach the PE learnt prefixes							

Nota: El uso de recursos en **show platform software fed switch active mpls summary** también muestra esta reducción en LABEL o LSPA (lo que sea aplicable).

Comandos a recopilar para TAC

Los problemas de recursos de hardware más comunes relacionados con MPLS se tratan en esta guía, con los pasos de remediación adecuados. Sin embargo, en caso de que esta guía no resolviera su problema, recopile la lista de comandos mostrada y adáptelos a la solicitud de

servicio.

```
show ip route summary
show ip bgp vpnv4 all | redirect flash:bgp_vpnv4_all
show ip bgp vpnv4 all summary
show ip route vrf <vrf-name> summary
show mpls forwarding-table summary
show ip cef vrf <name> | redirect flash:sh_ip_cef_vrf_<name>
show ip cef vrf <name> summary
show platform software fed switch active ip route summary
show platform software mpls switch <all switches> f0 forwarding-table
show platform software mpls switch <all switches> f0 label
show platform software mpls switch <all switches> f0 eos
show platform software object-manager switch <all switches> f0 error-object
show platform software object-manager switch <all switches> f0 pending-issue-update
show platform software fed switch <all switches> mpls label_oce all detail
show platform software fed switch <all switches> mpls eos all det
show platform software fed switch <all switches> mpls summary
show platform software fed switch active mpls forwarding all detail
show platform software object-manager switch 1 f0 statistics
show tech-support mpls | redirect flash:sh_tech_mpls
show logging | redirect flash:sh_logging_console
show platform hard fed switch active fwd resource tcam table sghash asic 0 format 0 | redirect
flash:vpn_lspa
```

```
request platform software trace archive last 30 days target flash
```

Información Relacionada

[Soporte Técnico y Documentación - Cisco Systems](#)

[Guía de Configuración de Multiprotocol Label Switching \(MPLS\), Cisco IOS XE Edition 17.7.x \(Switches Catalyst 9300\)](#)

[Guía de Configuración de Multiprotocol Label Switching \(MPLS\), Cisco IOS XE Edition 17.7.x \(Switches Catalyst 9500\)](#)

[Comprender los recursos de hardware en los switches Catalyst 9000](#)