

Configuration de l'hôte iSCSI Solaris sur MDS/IPS-8

Contenu

[Introduction](#)

[Conditions préalables](#)

[Conditions requises](#)

[Components Used](#)

[Conventions](#)

[Informations générales](#)

[Configuration](#)

[Diagramme du réseau](#)

[Configurations](#)

[Vérification](#)

[Dépannage](#)

[Procédure de dépannage](#)

[Informations connexes](#)

[Introduction](#)

Les pilotes iSCSI (Cisco Small Computer Systems Interface over IP) sont un composant clé de la solution iSCSI. Ces pilotes iSCSI résident sur le serveur où ils :

- Interceptez les commandes iSCSI.
- Encapsulez les commandes en paquets IP.
- Redirigez les commandes vers Cisco SN 5420, Cisco SN 5428, Cisco SN 5428-2 ou Cisco MDS/IPS-8.

Ce document fournit des exemples de configuration pour l'hôte iSCSI Solaris vers Cisco MDS/IPS-8.

[Conditions préalables](#)

[Conditions requises](#)

Assurez-vous que vous répondez à ces exigences avant d'essayer cette configuration :

- Installez le pilote iSCSI compatible avec votre version Solaris, puis créez la configuration iSCSI sur le Cisco MDS 9000. Référez-vous à [Pilotes iSCSI Cisco](#) (clients [enregistrés](#) uniquement) pour la version la plus récente du pilote (solaris-iscsi-3.3.5.tar.Z). Un fichier README.txt est inclus dans le fichier ZIP (TAR) du pilote. Le fichier README.txt contient

:Informations sur le contrat de licence
Instructions d'installation et de configuration du pilote
Présentation technique de l'architecture du pilote

- Reportez-vous aux sections Configuration système requise de [Cisco iSCSI Driver for Sun Solaris Release Notes](#) pour connaître la configuration système d'exploitation et les correctifs requis.
- Le pilote Cisco iSCSI pour Sun Solaris fonctionne uniquement sur les machines SPARC. Le pilote ne fonctionne avec aucun autre type de processeur (par exemple x86).

Components Used

Les informations contenues dans ce document sont basées sur les versions de matériel et de logiciel suivantes :

- SunOS 5.9, SPARC Ultra-4 E450

```
#uname -a
```

```
SunOS baboon 5.9 Generic sun4u sparc SUNW,Ultra-4
```

- Pilote Cisco iSCSI 3.3.3 pour Solaris

```
#pkginfo -l CSCoiscsi
```

```
PKGINST: CSCoiscsi
NAME: Cisco iSCSI device driver
CATEGORY: system
ARCH: sparc
VERSION: 3.3.3
BASEDIR: /opt/CSCoiscsi
VENDOR: Cisco Systems, Inc.
DESC: Cisco iSCSI device driver 3.3.3
PSTAMP: solaris-920030807170521
INSTDATE: Aug 25 2003 23:41
HOTLINE: For contracted support, 1-800-553-2447,
Cisco Technical Assistance Center (TAC)
EMAIL: For online help, go to http://www.cisco.com/
STATUS: completely installed
FILES: 74 installed pathnames
16 shared pathnames
29 directories
32 executables
2182 blocks used (approx)
```

```
#iscsi-ls -v
```

```
iSCSI driver version: 3.3.3
```

- Cisco MDS 9216 avec version logicielle 1.1.2

```
canterbury#show module
```

| Mod | Ports | Module-Type | Model | Status |
|-----|-------|------------------------|-----------------|----------|
| 1 | 16 | 1/2 Gbps FC/Supervisor | DS-X9216-K9-SUP | active * |
| 2 | 8 | IP Storage Module | DS-X9308-SMIP | ok |

| Mod | Sw | Hw | World-Wide-Name(s) (WWN) |
|-----|--------|-----|--|
| 1 | 1.1(2) | 1.0 | 20:01:00:0c:30:6c:24:40 to 20:10:00:0c:30:6c:24:40 |
| 2 | 1.1(2) | 0.3 | 20:41:00:0c:30:6c:24:40 to 20:48:00:0c:30:6c:24:40 |

| Mod | MAC-Address(es) | Serial-Num |
|-----|--|-------------|
| 1 | 00-0b-be-f8-7f-08 to 00-0b-be-f8-7f-0c | JAB070804QK |
| 2 | 00-05-30-00-ad-e2 to 00-05-30-00-ad-ee | JAB070806SB |

* this terminal session

canterbury#**show version**

Cisco Storage Area Networking Operating System (SAN-OS) Software
TAC support: <http://www.cisco.com/tac>
Copyright (c) 2002-2003 by Cisco Systems, Inc. All rights reserved.
The copyright for certain works contained herein are owned by
Andiamo Systems, Inc. and/or other third parties and are used and
distributed under license.

Software

BIOS: version 1.0.7
loader: version 1.0(3a)
kickstart: version 1.1(2)
system: version 1.1(2)

BIOS compile time: 03/20/03
kickstart image file is: bootflash:/k112
kickstart compile time: 7/13/2003 20:00:00
system image file is: bootflash:/s112
system compile time: 7/13/2003 20:00:00

Hardware

RAM 963112 kB

bootflash: 500736 blocks (block size 512b)
slot0: 0 blocks (block size 512b)

canterbury uptime is 16 days 20 hours 51 minute(s) 36 second(s)

Last reset at 684726 usecs after Mon Aug 11 13:53:17 2003
Reason: Reset Requested by CLI command reload
System version: 1.1(2)

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

Pour plus d'informations sur les conventions utilisées dans ce document, reportez-vous à [Conventions relatives aux conseils techniques Cisco](#).

Informations générales

Le module de stockage IP permet aux hôtes IP d'accéder aux périphériques de stockage Fibre Channel (FC). Le module de stockage IP est un DS-X9308-SMIP qui fournit un routage iSCSI transparent. Les hôtes IP qui utilisent le protocole iSCSI peuvent accéder de manière transparente aux cibles iSCSI (FC Protocol [FCP]) sur le réseau FC. L'hôte IP envoie des commandes iSCSI encapsulées dans des unités de données de protocole (PDU) iSCSI à un port de stockage IP Cisco MDS 9000 via une connexion TCP/IP. Les interfaces Gigabit Ethernet (GE) correctement configurées sur le module de stockage IP fournissent la connectivité. Le module de stockage IP :

- Permet de créer des cibles iSCSI virtuelles et de les mapper à des cibles FC physiques disponibles dans le SAN FC
- Présente les cibles FC aux hôtes IP comme si les cibles physiques étaient connectées

localement au réseau IP.

Un pilote iSCSI compatible doit être installé sur chaque hôte iSCSI nécessitant un accès au stockage via le module de stockage IP. Le pilote iSCSI permet à un hôte iSCSI de transporter des requêtes et des réponses iSCSI sur un réseau IP avec le protocole iSCSI. Du point de vue d'un système d'exploitation hôte, le pilote iSCSI semble être un pilote de transport iSCSI similaire à un pilote FC pour un canal périphérique dans l'hôte. Chaque hôte IP apparaît comme un hôte FC du point de vue du périphérique de stockage.

Effectuez ces étapes pour acheminer iSCSI de l'hôte IP vers le périphérique de stockage FC :

- Transport des requêtes et des réponses iSCSI sur un réseau IP entre les hôtes et le module de stockage IP.
- Utilisez le module de stockage IP pour acheminer les requêtes et les réponses iSCSI entre les hôtes d'un réseau IP et le périphérique de stockage FC (convertissez iSCSI en FCP et vice versa).
- Transport des requêtes ou des réponses FCP entre le module de stockage IP et les périphériques de stockage FC.

Par défaut, le module de stockage IP n'importe pas de cibles FC vers iSCSI. Vous devez configurer le mappage dynamique ou statique afin que le module de stockage IP mette les cibles FC à la disposition des initiateurs iSCSI. Les cibles FC mappées de manière statique ont un nom configuré lorsque les deux sont configurées. Cette configuration fournit des exemples de mappage statique.

Chaque fois que l'hôte iSCSI se connecte au module de stockage IP avec mappage dynamique :

- Un nouveau port FC N est créé.
- Les noms mondiaux de noeud (nWWN) et les noms mondiaux de port (pWWN) attribués à ce port N peuvent être différents.

Utilisez la méthode de mappage statique si vous devez obtenir les mêmes nWWN et pWWN pour l'hôte iSCSI chaque fois qu'il se connecte au module de stockage IP. Vous pouvez utiliser le mappage statique sur le module de stockage IP pour accéder aux baies de stockage FC intelligentes qui ont :

- Contrôle d'accès
- Mappage de numéro d'unité logique (LUN) et configuration de masquage basés sur les nWWN ou pWWN de l'initiateur

Spécifiez ces éléments pour contrôler l'accès à chaque cible iSCSI mappée de manière statique :

- Liste des ports de stockage IP sur lesquels ils sont annoncés
- Liste des noms de noeud initiateur iSCSI auxquels l'accès est autorisé

Le contrôle d'accès basé sur le zonage FC et le contrôle d'accès basé sur iSCSI sont les deux mécanismes par lesquels le contrôle d'accès peut être fourni pour iSCSI. Vous pouvez utiliser les deux méthodes simultanément. Le zonage par défaut a été autorisé pour un réseau de zone de stockage virtuel (VSAN) spécifique dans cette configuration. Les modules de stockage IP utilisent à la fois des listes de contrôle d'accès basées sur le nom de noeud iSCSI et sur le zonage FC pour appliquer le contrôle d'accès lors de la découverte iSCSI et de la création de sessions iSCSI.

L'initiateur iSCSI peut être défini de manière statique par adresse IP ou par nom qualifié iSCSI (IQN). Une option **proxy-initiator** permet la création dynamique d'initiateurs iSCSI dans SAN-IO 1.3 pour les commutateurs Cisco MDS.

La découverte iSCSI se produit lorsqu'un hôte iSCSI crée une session de découverte iSCSI et des requêtes pour toutes les cibles iSCSI. Le module de stockage IP renvoie uniquement la liste des cibles iSCSI auxquelles les politiques de contrôle d'accès permettent à l'hôte iSCSI d'accéder.

La création de session iSCSI se produit lorsqu'un hôte IP initie une session iSCSI. Le module de stockage IP vérifie :

- Si la cible iSCSI spécifiée (dans la demande de connexion de session) est une cible mappée statique
- Que le nom de noeud iSCSI de l'hôte IP est autorisé à accéder à la cible

La connexion est rejetée si l'hôte IP n'a pas accès.

Le module de stockage IP :

- Crée un port N virtuel FC (le port N peut déjà exister) pour cet hôte IP
- Un serveur de noms FC demande-t-il l'ID Fibre Channel (FCID) du nom de domaine virtuel cible FC auquel l'hôte IP accède ?

Le module de stockage IP utilise le pWWN du port N virtuel de l'hôte IP comme demandeur de la requête de serveur de noms. Ainsi, le serveur de noms effectue une requête appliquée à la zone pour le nom de domaine virtuel (pWWN) et répond à la requête. La session iSCSI est acceptée si le serveur de noms renvoie le FCID. Sinon, la demande de connexion est rejetée.


[Configuration](#)

Cette section vous fournit des informations pour configurer les fonctionnalités décrites dans ce document.

Remarque : Utilisez [l'outil de recherche de commandes](#) (clients [inscrits](#) seulement) pour en savoir plus sur les commandes figurant dans le présent document.

[Diagramme du réseau](#)

Ce document utilise la configuration réseau suivante :

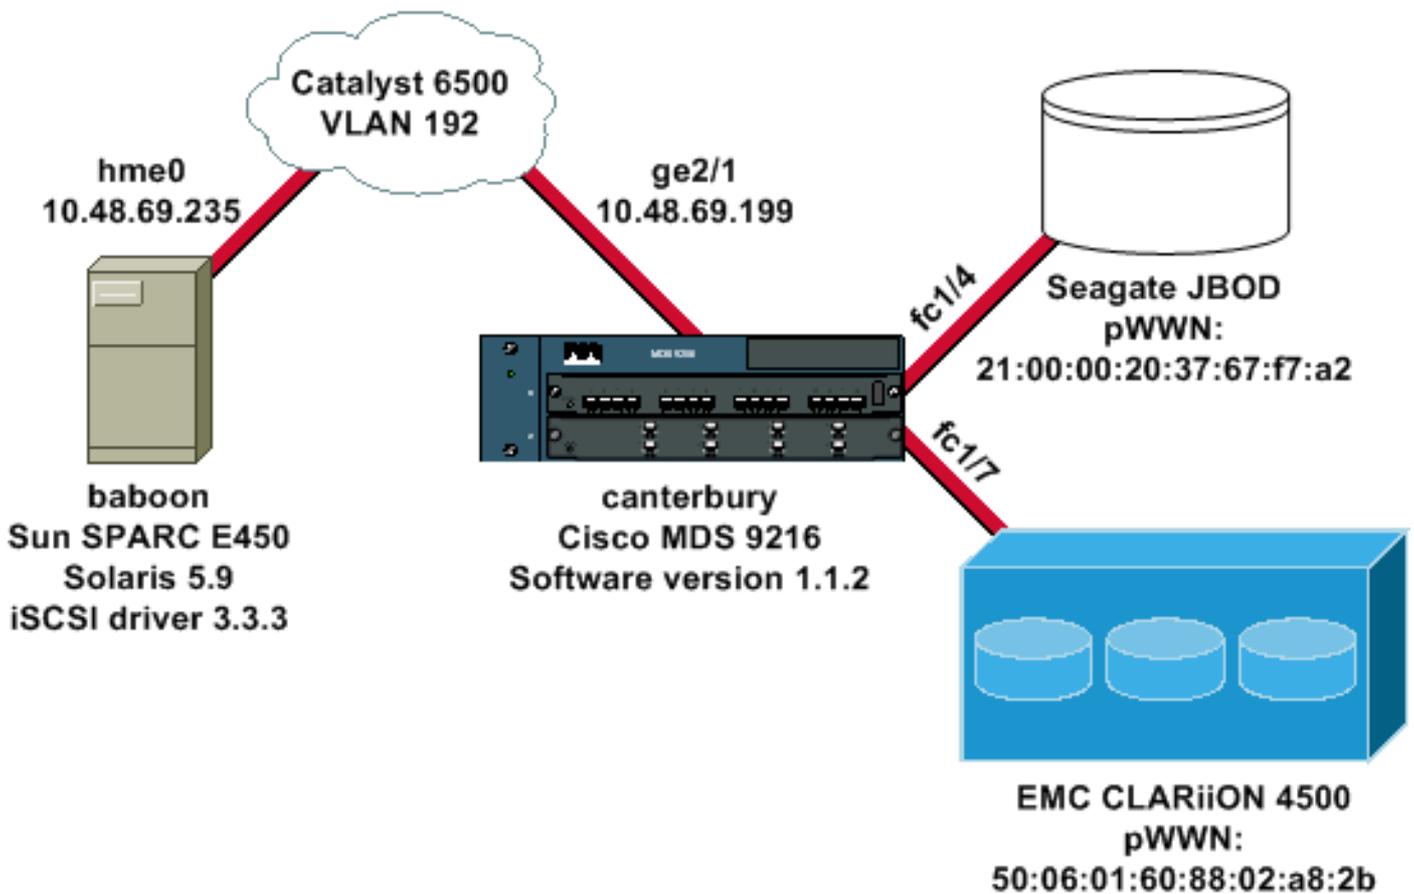

Configurations

Ce document utilise les configurations suivantes :

- [babouin \(SunOS 5.9, SPARC E450\)](#)
- [canterbury \(Cisco MDS 9216\)](#)

babouin (SunOS 5.9, SPARC E450)

Modifiez ces fichiers sur l'hôte Solaris :

- /etc/iscsi.conf
- /etc/iscsi.bindings
- /kernel/drv/sd.conf

Voici un exemple de résultat de configuration :

```
bash-2.05#cat /etc/iscsi.conf

# iSCSI configuration file - see iscsi.conf(4)

# DiscoveryAddress Settings
# -----
# Add "DiscoveryAddress=xxx" entries for each iSCSI
router instance.
# The driver will attempt to discover iSCSI targets at
that address
# and make as many targets as possible available for
use.
# 'xxx' can be an IP address or a hostname. A TCP port
number can be
# specified by appending a colon and the port number to
the address.
# All entries have to start in column one and must not
```

```

contain any
# whitespace.
#
# Example:
#
# DiscoveryAddress=scsirouter1
DiscoveryAddress=10.48.69.199
!--- Configure the IP address of the GE interface that
accepts iSCSI !--- requests from your host. # The
DiscoveryAddress Settings can take following entry. # #
1) Authentication Settings # 2) ConnectionTimeout
Settings !--- Other required driver parameters can be
changed in the iscsi.conf file. !--- Output is
suppressed. bash-2.05#cat /etc/iscsi.bindings

# iSCSI bindings, file format version 1.0.
# NOTE: this file is automatically maintained by the
iSCSI daemon.
# You should not need to edit this file under most
circumstances.
# If iSCSI targets in this file have been permanently
deleted, you
# may wish to delete the bindings for the deleted
targets.
#
# Format:
# bus   target   iSCSI
# id    id       TargetName
#
0       0         san-fc-jbod-1
0       1         clariion
0       2         clariion-lun-3-4-5
!--- The iSCSI driver discovery daemon process looks up
each discovered target !--- in the /etc/iscsi.bindings
file. !--- The corresponding iSCSI target ID is assigned
to the target if an entry exists in the file for the
target. !--- The smallest available iSCSI target ID !---
is assigned if no entry exists for the target, and an
entry is written to the /etc/iscsi.bindings file for !--
- this target. !--- Note that the /etc/iscsi.bindings
file permanently contains entries !--- for all iSCSI
targets ever logged into from this host. !--- You can
manually edit the file and remove !--- entries so that
the obsolete target no longer consumes an iSCSI target
ID if a target is no longer available to a host. !---
Add an entry manually if you know the iSCSI target name
!--- in advance and want it to be assigned a particular
iSCSI target ID. !--- Stop the iSCSI driver before you
edit the /etc/iscsi.bindings !--- file. Issue the !---
/etc/init.d/iscsi start command to manually start the
iSCSI driver. !--- Issue the /etc/init.d/iscsi stop
command to manually stop the iSCSI driver.

bash-2.05#cat /kernel/drv/sd.conf

name="sd" class="scsi" class_prop="ataapi"
target=0 lun=0;

name="sd" class="scsi" target=1 lun=0;
name="sd" class="scsi" target=1 lun=1;
name="sd" class="scsi" target=1 lun=2;

# Start iSCSI auto-generated configuration -- do NOT
alter or delete this line

```

```

# You may need to add additional lines to probe for
additional LUNs
# or targets. You SHOULD delete any lines that represent
iSCSI targets
# or LUNs that are not used.
name="sd" parent="iscsi" target=0 lun=0;
name="sd" parent="iscsi" target=1 lun=0;
name="sd" parent="iscsi" target=1 lun=1;
name="sd" parent="iscsi" target=1 lun=2;
name="sd" parent="iscsi" target=2 lun=3;
name="sd" parent="iscsi" target=2 lun=4;
name="sd" parent="iscsi" target=2 lun=5;
name="sd" parent="iscsi" target=2 lun=0;

# End iSCSI auto-generated configuration -- do NOT alter
or delete this line

!--- The corresponding entries for these devices must
be made in the standard device configuration files !---
if the targets that get discovered by the iSCSI driver
at any point in time !--- do not have a corresponding
entry in the standard device configuration files (for
example, /kernel/drv/sd.conf or /kernel/drv/st.conf). !-
-- Then reboot the system and issue the standard Solaris
administrative commands !--- (devfsadm, drvconfig) once
the system comes up. !--- You do not need to reboot the
system if the entries in the device configuration files
are already present. However, the standard device
configuration !--- commands (devfsadm, drvconfig, and so
on) must be issued to configure the !--- new iSCSI
devices in the system.

```

canterbury (Cisco MDS 9216)

```

!--- Output is suppressed. vsan database vsan 777 !---
VSAN 777 has been used for iSCSI targets. !--- Output is
suppressed. vsan database vsan 777 interface fc1/4 vsan
777 interface fc1/7 !--- Output is suppressed. boot
system bootflash:/s112 boot kickstart bootflash:/k112 ip
domain-name cisco.com ip name-server 144.254.10.123 ip
default-gateway 10.48.69.129 ip routing iscsi
authentication none iscsi initiator ip-address
10.48.69.235 !--- Identifies the iSCSI initiator based
on the IP address. A virtual N port is !--- created for
each network interface card (NIC) or network interface.
vsan 777 !--- VSAN 777 has been used for iSCSI targets.
Configure the initiator IP address. !--- Targets via
VSAN 777 are accessible by iSCSI initiators. iscsi
virtual-target name san-fc-jbod-1 pWWN
21:00:00:20:37:67:f7:a2 advertise interface
GigabitEthernet2/1 initiator ip address 10.48.69.235
permit !--- Create a static iSCSI virtual target for LUN
0, 1, and 2 of CLARiiON. iscsi virtual-target name
clariion pWWN 50:06:01:60:88:02:a8:2b fc-lun 0000 iscsi-
lun 0000 pWWN 50:06:01:60:88:02:a8:2b fc-lun 0001 iscsi-
lun 0001 pWWN 50:06:01:60:88:02:a8:2b fc-lun 0002 iscsi-
lun 0002 advertise interface GigabitEthernet2/1
initiator ip address 10.48.69.235 permit !--- Create a
static iSCSI virtual target for LUN 3, 4, and 5 of
CLARiiON. iscsi virtual-target name clariion-lun-3-4-5
pWWN 50:06:01:60:88:02:a8:2b fc-lun 0003 iscsi-lun 0003

```

```
pWWN 50:06:01:60:88:02:a8:2b fc-lun 0004 iscsi-lun 0004
pWWN 50:06:01:60:88:02:a8:2b fc-lun 0005 iscsi-lun 0005
advertise interface GigabitEthernet2/1 initiator ip
address 10.48.69.235 permit !--- Output is suppressed.
switchname canterbury !--- Output is suppressed. zone
default-zone permit vsan 777 !--- Output is suppressed.
interface GigabitEthernet2/1 ip address 10.48.69.199
255.255.255.192 iscsi authentication none switchport mtu
2156 no shutdown !--- Output is suppressed. interface
fc1/4 no shutdown !--- Output is suppressed. interface
fc1/7 no shutdown interface mgmt0 ip address
10.48.69.156 255.255.255.192 interface iscsi2/1 no
shutdown
```

Vérification

Référez-vous à cette section pour vous assurer du bon fonctionnement de votre configuration.

L'[Outil Interpréteur de sortie \(clients enregistrés uniquement\) \(OIT\) prend en charge certaines commandes show](#). Utilisez l'OIT pour afficher une analyse de la sortie de la commande **show**.

- **netstat -n** : vérifie les connexions TCP sur l'hôte Solaris.
- **iscsi-ls -l** : affiche les périphériques actuellement disponibles sur l'hôte Solaris.
- **show zone status** : affiche les informations de zone.
- **show fcns database vsan 777** : affiche les informations du serveur de noms pour un VSAN spécifique.
- **show flogi database vsan 777** —Affiche les informations de connexion au serveur de fabric (FLOGI) pour un VSAN spécifique.
- **show vsan member** : affiche les informations d'interface pour différents VSAN.
- **show iscsi initiator detail** : affiche les informations sur l'initiateur iSCSI.
- **show iscsi initiator iscsi-session detail** : affiche des informations détaillées pour la session initiateur iSCSI.
- **show iscsi initiator fcp-session detail** : affiche des informations détaillées pour la session FCP initiateur iSCSI.
- **show ips stats tcp interface gigabitethernet 2/1 detail** —Affiche les statistiques TCP pour une interface GE spécifique.
- **show iscsi virtual-target configuré** — Affiche les cibles virtuelles iSCSI configurées sur le Cisco MDS 9000.
- **show iscsi initiator configure** - Affiche les initiateurs iSCSI qui ont été configurés sur le Cisco MDS 9000.
- **show ips arp interface gigabitethernet 2/1** : affiche les informations ARP (Address Resolution Protocol) de stockage IP pour une interface GE spécifique.
- **show scsi-target devices vsan 777** : affiche les périphériques iSCSI pour un VSAN spécifique (pour mapper les LUN FC aux LUN iSCSI).
- **show int iscsi 2/1** : affiche les interfaces iSCSI.
- **show iscsi stats iscsi 2/1** : affiche les statistiques iSCSI.
- **show int gigabitethernet 2/1** : affiche l'interface GE.
- **show ip route** — Affiche les informations de route IP.

Dépannage

Utilisez cette section pour dépanner votre configuration.

Procédure de dépannage

- [sortie de babouin](#)
- [Sortie du Cisco MDS 9216 de canterbury](#)
- [Sortie Fabric Manager et Device Manager](#)

sortie de babouin

```
bash-2.05# /etc/init.d/iscsi stop
```

```
iSCSI is stopping.  
Aug 28 09:42:08 baboon iscsimod: iSCSIs: closing  
connection to target 2 at 10.48.69.199  
Aug 28 09:42:08 baboon iscsimod: iSCSIs: closing  
connection to target 1 at 10.48.69.199  
Aug 28 09:42:08 baboon iscsimod: iSCSIs: closing  
connection to target 0 at 10.48.69.199
```

```
bash-2.05# /etc/init.d/iscsi start
```

```
iSCSI is starting.
```

```
bash-2.05#bash-2.05# netstat -n
```

```
TCP: IPv4  
Local Address Remote Address Swind Send-Q  
Rwind Recv-Q State  
-----  
-----  
10.48.69.235.32797 10.48.69.199.3260 65535 0  
49172 0 ESTABLISHED  
10.48.69.235.32798 10.48.69.199.3260 9379072 0  
263152 0 ESTABLISHED  
10.48.69.235.32799 10.48.69.199.3260 9379072 0  
263152 0 ESTABLISHED
```

```
Active UNIX domain sockets  
Address Type Vnode Conn Local Addr  
Remote Addr  
30002d95c88 dgram 30000205828 00000000 /tmp/portal
```

```
/etc/iscsi.bindings
```

```
#  
0 0 san-fc-jbod-1  
0 1 clariion
```

```
bash-2.05# devfsadm
```

```
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0  
tgt 1 lun 0, Cmd 0x4d, Sense:  
Aug 28 09:45:04 baboon iscsimod: 70000500 0000000a  
00000000 20000000 0000  
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0  
tgt 1 lun 0, Cmd 0x5e, Sense:  
Aug 28 09:45:04 baboon iscsimod: 70000500 0000000a  
00000000 20000000 0000
```

```

Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 1, Cmd 0x00, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000600 0000000a
00000000 29000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 1, Cmd 0x4d, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 1, Cmd 0x5e, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 2, Cmd 0x00, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000600 0000000a
00000000 29000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 2, Cmd 0x4d, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
Aug 28 09:45:04 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 1 lun 2, Cmd 0x5e, Sense:
Aug 28 09:45:04 baboon iscsimod:      70000500 0000000a
00000000 20000000 0000
Aug 28 09:45:05 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 0 lun 0, Cmd 0x1c, Sense:
Aug 28 09:45:05 baboon iscsimod:      70000500 0000000a
00000000 35010300 0000

```

bash-2.05# format output

AVAILABLE DISK SELECTIONS:

0. c0t0d0 <SUN18G cyl 7506 alt 2 hd 19 sec 248>
/pci@1f,4000/scsi@3/sd@0,0
1. c0t1d0 <SUN18G cyl 7506 alt 2 hd 19 sec 248>
/pci@1f,4000/scsi@3/sd@1,0
2. c3t0d0 <SEAGATE-ST318203FC-0004 cyl 9770 alt 2
hd 12 sec 303>
/iscsipseudo/iscsi@0/sd@0,0
3. c3t1d0 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
/iscsipseudo/iscsi@0/sd@1,0
4. c3t1d1 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
/iscsipseudo/iscsi@0/sd@1,1
5. c3t1d2 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
/iscsipseudo/iscsi@0/sd@1,2
6. c3t2d0 <drive not available>
/iscsipseudo/iscsi@0/sd@2,0

!--- After you add the clariion-lun-3-4-5 virtual target on the Cisco MDS 9216. /etc/iscsi.bindings

```

0      0      san-fc-jbod-1
0      1      clariion
0      2      clariion-lun-3-4-5

```

bash-2.05# netstat -n

```

TCP: IPv4
  Local Address      Remote Address      Swind Send-Q
Rwind Recv-Q  State
-----

```

```
10.48.69.235.32797 10.48.69.199.3260 65535 0
49172 0 TIME_WAIT
10.48.69.235.32798 10.48.69.199.3260 9379072 0
263152 0 ESTABLISHED
10.48.69.235.32799 10.48.69.199.3260 9379072 0
263152 0 ESTABLISHED
10.48.69.235.32800 10.48.69.199.3260 65535 0
49108 0 ESTABLISHED
10.48.69.235.32801 10.48.69.199.3260 9379072 0
263152 0 ESTABLISHED
```

Active UNIX domain sockets

```
Address Type Vnode Conn Local Addr
Remote Addr
30002d95c88 dgram 30000205828 00000000 /tmp/portal
```

bash-2.05# devfsadm

```
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 3, Cmd 0x00, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000600 0000000a
00000000 29000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 3, Cmd 0x4d, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 3, Cmd 0x5e, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 4, Cmd 0x00, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000600 0000000a
00000000 29000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 4, Cmd 0x5e, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 5, Cmd 0x00, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000600 0000000a
00000000 29000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 5, Cmd 0x4d, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000
Aug 28 09:47:58 baboon iscsimod: NOTICE: iSCSIs: bus 0
tgt 2 lun 5, Cmd 0x5e, Sense:
Aug 28 09:47:58 baboon iscsimod: 70000500 0000000a
00000000 20000000 0000
```

And the **format** output:

```
0. c0t0d0 <SUN18G cyl 7506 alt 2 hd 19 sec 248>
   /pci@1f,4000/scsi@3/sd@0,0
1. c0t1d0 <SUN18G cyl 7506 alt 2 hd 19 sec 248>
   /pci@1f,4000/scsi@3/sd@1,0
2. c3t0d0 <SEAGATE-ST318203FC-0004 cyl 9770 alt 2
hd 12 sec 303>
   /iscsipseudo/iscsi@0/sd@0,0
3. c3t1d0 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
   /iscsipseudo/iscsi@0/sd@1,0
4. c3t1d1 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
```

```
        /iscsipseudo/iscsi@0/sd@1,1
5. c3t1d2 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
        /iscsipseudo/iscsi@0/sd@1,2
6. c3t2d0 <drive not available>
        /iscsipseudo/iscsi@0/sd@2,0
7. c3t2d3 <DGC-RAID0-0632 cyl 10920 alt 2 hd 3
sec 128>
        /iscsipseudo/iscsi@0/sd@2,3
8. c3t2d4 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
        /iscsipseudo/iscsi@0/sd@2,4
9. c3t2d5 <DGC-RAID0-0632 cyl 5459 alt 2 hd 3 sec
128>
        /iscsipseudo/iscsi@0/sd@2,5
!--- Issue the iscsi-ls -v command to see iSCSI driver
version.
```

```
bash-2.05# iscsi-ls -v
```

```
iSCSI driver version: 3.3.3
```

```
!--- Issue the iscsi-ls -l or iscsi-ls commands to see
the devices that are currently available.
```

```
bash-2.05# iscsi-ls -l
```

```
*****
*****
TARGET NAME san-fc-jbod-1
TARGET ID 0:
  ADDRESS = 10.48.69.199:3260, 128
  STATUS = Connected 10.48.69.235:32798<-
>10.48.69.199:3260 8/28/2003 09:43:59
  SESSION = ISID 00023d000001 TSID 128 PID 463
  LUN 0 = DISK c3t0d0 (sd296) 'SEAGATE-ST318203FC-
0004' SERIAL# LRE80915
  BLOCKS: 35566479 BLOCK SIZE: 512
*****
*****
TARGET NAME clariion
TARGET ID 1:
  ADDRESS = 10.48.69.199:3260, 128
  STATUS = Connected 10.48.69.235:32799<-
>10.48.69.199:3260 8/28/2003 09:43:59
  SESSION = ISID 00023d000001 TSID 128 PID 464
  LUN 0 = DISK c3t1d0 (sd297) 'DGC-RAID 0-0632'
SERIAL# 008E080000CL
  BLOCKS: 2097023 BLOCK SIZE: 512
  LUN 1 = DISK c3t1d1 (sd298) 'DGC-RAID 0-0632'
SERIAL# 0127AB0000CL
  BLOCKS: 2097023 BLOCK SIZE: 512
  LUN 2 = DISK c3t1d2 (sd299) 'DGC-RAID 0-0632'
SERIAL# 02E4180000CL
  BLOCKS: 2097023 BLOCK SIZE: 512
*****
*****
TARGET NAME clariion-lun-3-4-5
TARGET ID 2:
  ADDRESS = 10.48.69.199:3260, 128
  STATUS = Connected 10.48.69.235:32801<-
>10.48.69.199:3260 8/28/2003 09:46:42
  SESSION = ISID 00023d000001 TSID 128 PID 482
  LUN 0 : SCSI Inquiry failed - Bad file number
  LUN 3 = DISK c3t2d3 (sd371) 'DGC-RAID 0-0632'
```

```
SERIAL# 03E0A1E330CL
      BLOCKS: 4194047  BLOCK SIZE: 512
LUN   4 = DISK c3t2d4 (sd372) 'DGC-RAID 0-0632'
SERIAL# 04E9A1E330CL
      BLOCKS: 2097023  BLOCK SIZE: 512
LUN   5 = DISK c3t2d5 (sd373) 'DGC-RAID 0-0632'
SERIAL# 0594B1E330CL
      BLOCKS: 2097023  BLOCK SIZE: 512
*****
*****
! -- Issue the iscsi-ls -c command to see detailed
statistics for currently established iSCSI sessions.

bash-2.05# iscsi-ls -c

*****
*****
TARGET NAME san-fc-jbod-1
TARGET ID 0:
  ADDRESS = 10.48.69.199:3260, 128
  STATUS  = Connected 10.48.69.235:32798<-
>10.48.69.199:3260 8/28/2003 09:43:59
  SESSION = ISID 00023d000001  TSID 128  PID 463
  InitialR2T          = Yes
  MaxRecvDataSegmentLength = 131072 Bytes
  MaxXmitDataSegmentLength = 2048 Bytes
  FirstBurstLength    = 262144 Bytes
  MaxBurstLength      = 16776192 Bytes
  LoginTimeout        = 15 Seconds
  AuthTimeout         = 45 Seconds
  ActiveTimeout       = 5 Seconds
  IdleTimeout         = 60 Seconds
  PingTimeout         = 5 Seconds
  HeaderDigest        = None
  DataDigest          = None
  ConnFailTimeout     = Default
  MultiPath           = None
*****
*****
TARGET NAME clariion
TARGET ID 1:
  ADDRESS = 10.48.69.199:3260, 128
  STATUS  = Connected 10.48.69.235:32799<-
>10.48.69.199:3260 8/28/2003 09:43:59
  SESSION = ISID 00023d000001  TSID 128  PID 464
  InitialR2T          = Yes
  MaxRecvDataSegmentLength = 131072 Bytes
  MaxXmitDataSegmentLength = 2048 Bytes
  FirstBurstLength    = 262144 Bytes
  MaxBurstLength      = 16776192 Bytes
  LoginTimeout        = 15 Seconds
  AuthTimeout         = 45 Seconds
  ActiveTimeout       = 5 Seconds
  IdleTimeout         = 60 Seconds
  PingTimeout         = 5 Seconds
  HeaderDigest        = None
  DataDigest          = None
  ConnFailTimeout     = Default
  MultiPath           = None
*****
*****
TARGET NAME clariion-lun-3-4-5
TARGET ID 2:
  ADDRESS = 10.48.69.199:3260, 128
```

```

STATUS = Connected 10.48.69.235:32801<-
>10.48.69.199:3260 8/28/2003 09:46:42
SESSION = ISID 00023d000001 TSID 128 PID 482
InitialR2T = Yes
MaxRecvDataSegmentLength = 131072 Bytes
MaxXmitDataSegmentLength = 2048 Bytes
FirstBurstLength = 262144 Bytes
MaxBurstLength = 16776192 Bytes
LoginTimeout = 15 Seconds
AuthTimeout = 45 Seconds
ActiveTimeout = 5 Seconds
IdleTimeout = 60 Seconds
PingTimeout = 5 Seconds
HeaderDigest = None
DataDigest = None
ConnFailTimeout = Default
MultiPath = None
*****
*****
!--- You can see these iSCSI connections in the
/var/adm/messages or dmesg:

Aug 28 09:43:59 baboon iscsid[454]: [ID 702911
daemon.notice]
    version 3.3.3 ( 7-Aug-2003)
Aug 28 09:43:59 baboon iscsid[463]: [ID 702911
daemon.notice]
    iSCSI normal session to san-fc-jbod-1 established
Aug 28 09:43:59 baboon iscsid[463]: [ID 702911
daemon.notice]
    logged into target san-fc-jbod-1 -- id 0, Initiator
sid 00023d000001, target sid 128
Aug 28 09:43:59 baboon iscsid[464]: [ID 702911
daemon.notice]
    iSCSI normal session to clariion established
Aug 28 09:43:59 baboon iscsid[464]: [ID 702911
daemon.notice]
    logged into target clariion -- id 1, Initiator sid
00023d000001, target sid 128
Aug 28 09:45:23 baboon iscsi: [ID 318680 kern.notice]
NOTICE:
    tran_start disabled to bus 0, target 2, lun 0
Aug 28 09:46:42 baboon iscsid[482]: [ID 702911
daemon.notice]
    iSCSI normal session to clariion-lun-3-4-5
established
Aug 28 09:46:42 baboon iscsid[482]: [ID 702911
daemon.notice]
    logged into target clariion-lun-3-4-5 -- id 2,
Initiator sid 00023d000001,
target sid 128

```

Sortie du Cisco MDS 9216 de canterbury

```

canterbury#show zone status

VSAN: 1 default-zone: permit distribute: active only
Interop: Off
Full Zoning Database :
    Zonesets:0 Zones:0 Aliases: 0
Active Zoning Database :
    Database Not Available
Status: Deactivation completed at Fri Aug 22 11:47:53

```

2003

VSAN: 777 default-zone: permit distribute: active only
Interop: Off.

Full Zoning Database :

Zonesets:0 Zones:0 Aliases: 0

Active Zoning Database :

Database Not Available

Status: Default zoning policy changed to permit at Mon
Aug 25 20:19:31 2003

*!--- VSAN 777 has been used for this configuration, and
default-zone behavior has been !--- set to permit.*

canterbury#**show flogi da vsan 777**

```
-----  
-----  
INTERFACE  VSAN    FCID                PORT NAME  
NODE NAME  
-----  
-----  
fc1/4      777    0x7000e8  21:00:00:20:37:67:f7:a2  
20:00:00:20:37:67:f7:a2  
fc1/7      777    0x700103  50:06:01:60:88:02:a8:2b  
50:06:01:60:11:02:a8:2b  
iscsi2/1   777    0x700100  21:02:00:0c:30:6c:24:42  
21:01:00:0c:30:6c:24:42
```

Total number of flogi = 3.

canterbury#**show fcns database vsan 777**

VSAN 777:

```
-----  
-----  
FCID        TYPE  PWWN                (VENDOR)  
FC4-TYPE:FEATURE  
-----  
-----  
0x7000e8    NL    21:00:00:20:37:67:f7:a2 (Seagate)  
scsi-fcp:target  
0x700100    N     21:02:00:0c:30:6c:24:42 (Cisco)  
scsi-fcp:init isc..w  
0x700103    N     50:06:01:60:88:02:a8:2b (Clariion)  
scsi-fcp:target
```

Total number of entries = 3

*!--- FCID 0X700100 is the virtual N port (HBA) for the
iSCSI host.* canterbury#**show fcns database detail vsan**

777

```
-----  
VSAN:777    FCID:0x7000e8  
-----  
port-wwn (vendor)      :21:00:00:20:37:67:f7:a2 (Seagate)  
node-wwn              :20:00:00:20:37:67:f7:a2  
class                 :3  
node-ip-addr          :0.0.0.0  
ipa                   :ff ff ff ff ff ff ff ff  
fc4-types:fc4_features:scsi-fcp:target  
symbolic-port-name    :  
symbolic-node-name    :  
port-type             :NL  
port-ip-addr          :0.0.0.0  
fabric-port-wwn       :20:04:00:0c:30:6c:24:40
```

```

hard-addr          :0x000000
-----
VSAN:777   FCID:0x700100
-----
port-wwn (vendor)   :21:02:00:0c:30:6c:24:42 (Cisco)
node-wwn            :21:01:00:0c:30:6c:24:42
class               :2,3
node-ip-addr        :10.48.69.235
ipa                 :ff ff ff ff ff ff ff ff
fc4-types:fc4_features:scsi-fcp:init iscsi-gw
!--- Virtual N port for host. symbolic-port-name :
symbolic-node-name :10.48.69.235 port-type :N port-ip-
addr :0.0.0.0 fabric-port-wwn :20:41:00:0c:30:6c:24:40
hard-addr :0x000000 ----- VSAN:777
FCID:0x700103 ----- port-wwn (vendor)
:50:06:01:60:88:02:a8:2b (Clariion) node-wwn
:50:06:01:60:11:02:a8:2b class :3 node-ip-addr :0.0.0.0
ipa :ff ff ff ff ff ff ff ff fc4-
types:fc4_features:scsi-fcp:target symbolic-port-name :
symbolic-node-name : port-type :N port-ip-addr :0.0.0.0
fabric-port-wwn :20:07:00:0c:30:6c:24:40 hard-addr
:0x000000 Total number of entries = 3 canterbury#show
vsan membership

vsan 777 interfaces:
    fc1/4   fc1/7

canterbury#show iscsi initiator

iSCSI Node name is 10.48.69.235
    iSCSI Initiator name: iqn.1987-
05.com.cisco:01.894b196796e7
    iSCSI alias name: baboon
    Node WWN is 21:01:00:0c:30:6c:24:42 (dynamic)
    Member of vsans: 777
    Number of Virtual n_ports: 1
    Virtual Port WWN is 21:02:00:0c:30:6c:24:42
(dynamic)
    Interface iSCSI 2/1, Portal group tag: 0x80
    VSAN ID 777, FCID 0x700100

canterbury#show iscsi initiator detail

iSCSI Node name is 10.48.69.235
    iSCSI Initiator name: iqn.1987-
05.com.cisco:01.894b196796e7
    iSCSI alias name: baboon
    Node WWN is 21:01:00:0c:30:6c:24:42 (dynamic)
    Member of vsans: 777
    Number of Virtual n_ports: 1

    Virtual Port WWN is 21:02:00:0c:30:6c:24:42
(dynamic)
    Interface iSCSI 2/1, Portal group tag is 0x80
    VSAN ID 777, FCID 0x700100
    2 FC sessions, 3 iSCSI sessions
    iSCSI session details
        Target: san-fc-jbod-1
        Statistics:
            PDU: Command: 24, Response: 24
            Bytes: TX: 3504, RX: 0
            Number of connection: 1
        TCP parameters
            Local 10.48.69.199:3260, Remote

```

```
10.48.69.235:32798
    Path MTU: 1500 bytes
    Retransmission timeout: 300 ms
    Round trip time: Smoothed 4 ms, Variance: 6
    Advertized window: Current: 256 KB, Maximum:
257 KB, Scale: 3
    Peer receive window: Current: 9159 KB,
Maximum: 9159 KB, Scale: 8
    Congestion window: Current: 11 KB
Target: clariion-lun-3-4-5
    Statistics:
    PDU: Command: 73, Response: 73
    Bytes: TX: 9740, RX: 0
    Number of connection: 1
    TCP parameters
    Local 10.48.69.199:3260, Remote
10.48.69.235:32801
    Path MTU: 1500 bytes
    Retransmission timeout: 300 ms
    Round trip time: Smoothed 7 ms, Variance: 13
    Advertized window: Current: 256 KB, Maximum:
257 KB, Scale: 3
    Peer receive window: Current: 9159 KB,
Maximum: 9159 KB, Scale: 8
    Congestion window: Current: 11 KB
Target: clariion
    Statistics:
    PDU: Command: 101, Response: 101
    Bytes: TX: 14828, RX: 0
    Number of connection: 1
    TCP parameters
    Local 10.48.69.199:3260, Remote
10.48.69.235:32799
    Path MTU: 1500 bytes
    Retransmission timeout: 300 ms
    Round trip time: Smoothed 2 ms, Variance: 1
    Advertised window: Current: 256 KB, Maximum:
257 KB, Scale: 3
    Peer receive window: Current: 9159 KB,
Maximum: 9159 KB, Scale: 8
    Congestion window: Current: 11 KB

    FCP Session details
    Target FCID: 0x7000e8 (S_ID of this session:
0x700100)
    pWWN: 21:00:00:20:37:67:f7:a2, nWWN:
20:00:00:20:37:67:f7:a2
    Session state: LOGGED_IN
    1 iSCSI sessions share this FC session
    Target: san-fc-jbod-1
    Negotiated parameters
    RcvDataFieldSize 2048 our_RcvDataFieldSize
2048
    MaxBurstSize 0, EMPD: FALSE
    Random Relative Offset: FALSE, Sequence-in-
order: Yes
    Statistics:
    PDU: Command: 0, Response: 24
    Target FCID: 0x700103 (S_ID of this session:
0x700100)
    pWWN: 50:06:01:60:88:02:a8:2b, nWWN:
50:06:01:60:11:02:a8:2b
    Session state: LOGGED_IN
    2 iSCSI sessions share this FC session
```

```
Target: clariion-lun-3-4-5
Target: clariion
Negotiated parameters
RcvDataFieldSize 1024 our_RcvDataFieldSize
2048
MaxBurstSize 0, EMPD: FALSE
Random Relative Offset: FALSE, Sequence-in-
order: Yes
Statistics:
PDU: Command: 0, Response: 174

canterbury#show iscsi initiator iscsi-session detail

iSCSI Node name is 10.48.69.235
iSCSI Initiator name: iqn.1987-
05.com.cisco:01.894b196796e7
iSCSI alias name: baboon
Node WWN is 21:01:00:0c:30:6c:24:42 (dynamic)
Member of vsans: 777
Number of Virtual n_ports: 1

Virtual Port WWN is 21:02:00:0c:30:6c:24:42
(dynamic)
Interface iSCSI 2/1, Portal group tag is 0x80
VSAN ID 777, FCID 0x700100
2 FC sessions, 3 iSCSI sessions
iSCSI session details
Target: san-fc-jbod-1
Statistics:
PDU: Command: 24, Response: 24
Bytes: TX: 3504, RX: 0
Number of connection: 1
TCP parameters
Local 10.48.69.199:3260, Remote
10.48.69.235:32798
Path MTU: 1500 bytes
Retransmission timeout: 300 ms
Round trip time: Smoothed 4 ms, Variance: 6
Advertized window: Current: 256 KB, Maximum:
257 KB, Scale: 3
Peer receive window: Current: 9159 KB,
Maximum: 9159 KB, Scale: 8
Congestion window: Current: 11 KB
Target: clariion-lun-3-4-5
Statistics:
PDU: Command: 73, Response: 73
Bytes: TX: 9740, RX: 0
Number of connection: 1
TCP parameters
Local 10.48.69.199:3260, Remote
10.48.69.235:32801
Path MTU: 1500 bytes
Retransmission timeout: 300 ms
Round trip time: Smoothed 7 ms, Variance: 13
Advertized window: Current: 256 KB, Maximum:
257 KB, Scale: 3
Peer receive window: Current: 9159 KB,
Maximum: 9159 KB, Scale: 8
Congestion window: Current: 11 KB
Target: clariion
Statistics:
PDU: Command: 101, Response: 101
Bytes: TX: 14828, RX: 0
Number of connection: 1
```

```
TCP parameters
  Local 10.48.69.199:3260, Remote
10.48.69.235:32799
  Path MTU: 1500 bytes
  Retransmission timeout: 300 ms
  Round trip time: Smoothed 2 ms, Variance: 1
  Advertized window: Current: 256 KB, Maximum:
257 KB, Scale: 3
  Peer receive window: Current: 9159 KB,
Maximum: 9159 KB, Scale: 8
  Congestion window: Current: 11 KB

canterbury#show iscsi initiator fcp-session detail

iSCSI Node name is 10.48.69.235
  iSCSI Initiator name: iqn.1987-
05.com.cisco:01.894b196796e7
  iSCSI alias name: baboon
  Node WWN is 21:01:00:0c:30:6c:24:42 (dynamic)
  Member of vsans: 777
  Number of Virtual n_ports: 1

  Virtual Port WWN is 21:02:00:0c:30:6c:24:42
(dynamic)
  Interface iSCSI 2/1, Portal group tag is 0x80
  VSAN ID 777, FCID 0x700100
  2 FC sessions, 3 iSCSI sessions

  FCP Session details
  Target FCID: 0x7000e8 (S_ID of this session:
0x700100)
  pWWN: 21:00:00:20:37:67:f7:a2, nWWN:
20:00:00:20:37:67:f7:a2
  Session state: LOGGED_IN
  1 iSCSI sessions share this FC session
  Target: san-fc-jbod-1
  Negotiated parameters
  RcvDataFieldSize 2048 our_RcvDataFieldSize
2048
  MaxBurstSize 0, EMPD: FALSE
  Random Relative Offset: FALSE, Sequence-in-
order: Yes
  Statistics:
  PDU: Command: 0, Response: 24
  Target FCID: 0x700103 (S_ID of this session:
0x700100)
  pWWN: 50:06:01:60:88:02:a8:2b, nWWN:
50:06:01:60:11:02:a8:2b
  Session state: LOGGED_IN
  2 iSCSI sessions share this FC session
  Target: clariion-lun-3-4-5
  Target: clariion
  Negotiated parameters
  RcvDataFieldSize 1024 our_RcvDataFieldSize
2048
  MaxBurstSize 0, EMPD: FALSE
  Random Relative Offset: FALSE, Sequence-in-
order: Yes
  Statistics:
  PDU: Command: 0, Response: 174

canterbury#show ips stats tcp interface gigabitethernet
2/1 detail
```

```

TCP Statistics for port GigabitEthernet2/1
  TCP send stats
    28621 segments, 4231096 bytes
    15842 data, 12335 ack only packets
    168 control (SYN/FIN/RST), 0 probes, 210 window
updates
    66 segments retransmitted, 63724 bytes
    66 retransmitted while on ethernet send queue,
1127 packets split
    480 delayed acks sent
  TCP receive stats
    36728 segments, 12911 data packets in sequence,
2668162 bytes in sequence
    0 predicted ack, 12050 predicted data
    0 bad checksum, 0 multi/broadcast, 0 bad offset
    0 no memory drops, 0 short segments
    48 duplicate bytes, 1 duplicate packets
    0 partial duplicate bytes, 0 partial duplicate
packets
    0 out-of-order bytes, 164 out-of-order packets
    0 packet after window, 0 bytes after window
    0 packets after close
    12621 acks, 3486850 ack bytes, 0 ack toomuch,
11652 duplicate acks
    0 ack packets left of snd_una, 6 non-4 byte
aligned packets
    8333 window updates, 0 window probe
    624 pcb hash miss, 79 no port, 0 bad SYN, 0 paws
drops
  TCP Connection Stats
    0 attempts, 231 accepts, 231 established
    227 closed, 14 drops, 0 conn drops
    0 drop in retransmit timeout, 2 drop in keepalive
timeout
    0 drop in persist drops, 0 connections drained
  TCP Miscellaneous Stats
    11761 segments timed, 12027 rtt updated
    51 retransmit timeout, 304 persist timeout
    10452 keepalive timeout, 10450 keepalive probes
  TCP SACK Stats
    0 recovery episodes, 0 data packets, 0 data bytes
    0 data packets retransmitted, 0 data bytes
retransmitted
    0 connections closed, 0 retransmit timeouts
  TCP SYN Cache Stats
    233 entries, 231 connections completed, 1 entries
timed out
    0 dropped due to overflow, 1 dropped due to RST
    0 dropped due to ICMP unreachable, 0 dropped due to
bucket overflow
    0 abort due to no memory, 4 duplicate SYN, 76 no-
route SYN drop
    0 hash collisions, 0 retransmitted

  TCP Active Connections
    Local Address      Remote Address      State
Send-Q  Recv-Q
    10.48.69.199:3260  10.48.69.235:32798
ESTABLISH 0      0
    10.48.69.199:3260  10.48.69.235:32799
ESTABLISH 0      0
    10.48.69.199:3260  10.48.69.235:32800
ESTABLISH 0      0
    10.48.69.199:3260  10.48.69.235:32801

```

```
ESTABLISH 0 0
0.0.0.0:3260 0.0.0.0:0 LISTEN
0 0
```

canterbury#**show iscsi virtual-target configured**

target: san-fc-jbod-1

* Port WWN 21:00:00:20:37:67:f7:a2

!--- *The* * means that you have both discovery and target sessions. !--- You only have a discovery session if there is no * in front of the pWWN.

Configured node

No. of advertised interface: 1

GigabitEthernet 2/1

No. of initiators permitted: 3

initiator iqn.1987-

05.com.cisco.02.89451e183581.mcandegew2k1 is permitted

initiator 10.48.69.235/32 is permitted

initiator 10.48.69.232/32 is permitted

all initiator permit is disabled

target: clariion

* Port WWN 50:06:01:60:88:02:a8:2b

Configured node

No. of LU mapping: 3

iSCSI LUN: 0000, FC LUN: 0000

iSCSI LUN: 0001, FC LUN: 0001

iSCSI LUN: 0002, FC LUN: 0002

No. of advertised interface: 1

GigabitEthernet 2/1

No. of initiators permitted: 1

initiator 10.48.69.235/32 is permitted

all initiator permit is disabled

target: clariion-lun-3-4-5

* Port WWN 50:06:01:60:88:02:a8:2b

Configured node

No. of LU mapping: 3

iSCSI LUN: 0003, FC LUN: 0003

iSCSI LUN: 0004, FC LUN: 0004

iSCSI LUN: 0005, FC LUN: 0005

No. of advertised interface: 1

GigabitEthernet 2/1

No. of initiators permitted: 1

initiator 10.48.69.235/32 is permitted

all initiator permit is disabled

canterbury#**show iscsi initiator configured**

iSCSI Node name is 10.48.69.235

Member of vsans: 777

canterbury#**show ips arp interface gigabitethernet 2/1**

| Protocol | Address | Age (min) | Hardware Addr |
|----------|--------------------|-----------|----------------|
| Internet | 10.48.69.200 | 0 | 0008.e21e.c7bc |
| ARPA | GigabitEthernet2/1 | | |
| Internet | 10.48.69.206 | 7 | 0005.9ba6.95ff |
| ARPA | GigabitEthernet2/1 | | |
| Internet | 10.48.69.209 | 4 | 0009.7c60.561f |
| ARPA | GigabitEthernet2/1 | | |
| Internet | 10.48.69.226 | 0 | 0060.08f6.bc1a |

```

ARPA GigabitEthernet2/1
Internet 10.48.69.229 15 0800.209e.edab
ARPA GigabitEthernet2/1
Internet 10.48.69.233 0 0010.4200.7d5b
ARPA GigabitEthernet2/1
Internet 10.48.69.235 9 0800.20b6.6559
ARPA GigabitEthernet2/1
Internet 10.48.69.238 5 0030.6e1b.6f51
ARPA GigabitEthernet2/1
Internet 10.48.69.239 12 0030.6e1c.a00b
ARPA GigabitEthernet2/1
Internet 10.48.69.248 5 0202.3d30.45f8
ARPA GigabitEthernet2/1
Internet 10.48.69.252 1 0202.3d30.45fc
ARPA GigabitEthernet2/1
Internet 10.10.2.28 9 0202.3d0a.021c
ARPA GigabitEthernet2/1

```

canterbury#show scsi-target devices vsan 777

```

-----
VSAN      FCID      PWWN      VENDOR
MODEL          REV
-----
777      0x7000e8  21:00:00:20:37:67:f7:a2  SEAGATE
ST318203FC      0004
777      0x700103  50:06:01:60:88:02:a8:2b  DGC
RAID 0          0632

```

canterbury#show scsi-target lun vsan 777

```

- ST318203FC from SEAGATE (Rev 0004)
  FCID is 0x7000e8 in VSAN 777, PWWN is
21:00:00:20:37:67:f7:a2

```

```

-----
LUN      Capacity Status  Serial Number  Device-Id
(MB)
-----
0x0      18210   Online  LRE8091500007039 C:1 A:0 T:3
20:00:00:20:37:67:f7:a2

```

```

- RAID from DGC (Rev 0632)
  FCID is 0x700103 in VSAN 777, PWWN is
50:06:01:60:88:02:a8:2b

```

```

-----
LUN      Capacity Status  Serial Number  Device-Id
(MB)
-----
0x0      1074    Online  f60004202091   C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

```

```

da:05:b6:a9:b6:9d:7b:00
C:1 A:0 T:0
00:00:00:00

```

```

0x1      1074    Online  f60004202091   C:1 A:0 T:3
60:06:01:60:88:02:a8:2b
6a:66:0d:74:cb:33:88:6c
C:1 A:0 T:0

```

| | | | | | |
|-------------------------|-----|------|--------|--------------|-------------|
| 00:01:00:00 | 0x2 | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| ec:81:5b:a2:c4:43:0d:8a | | | | | C:1 A:0 T:0 |
| 00:02:00:00 | 0x3 | 2147 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| e0:47:b3:be:3b:00:e0:d5 | | | | | C:1 A:0 T:0 |
| 00:03:00:00 | 0x4 | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| 00:51:5b:7f:3d:9a:7b:ce | | | | | C:1 A:0 T:0 |
| 00:04:00:00 | 0x5 | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| ab:b1:ae:80:59:c0:fc:f0 | | | | | C:1 A:0 T:0 |
| 00:05:00:00 | 0x6 | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| ad:91:58:af:d2:fd:c7:47 | | | | | C:1 A:0 T:0 |
| 00:06:00:00 | 0x7 | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| b1:ef:e7:6c:44:5c:16:97 | | | | | C:1 A:0 T:0 |
| 00:07:00:00 | 0x8 | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| 84:4f:09:60:30:1e:fc:50 | | | | | C:1 A:0 T:0 |
| 00:08:00:00 | 0x9 | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| aa:6d:e2:0e:ce:7a:cc:21 | | | | | C:1 A:0 T:0 |
| 00:09:00:00 | 0xa | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| 5b:66:67:89:6c:f2:d1:56 | | | | | C:1 A:0 T:0 |
| 00:0a:00:00 | 0xb | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |
| a9:32:bd:04:4a:bb:3d:9b | | | | | C:1 A:0 T:0 |
| 00:0b:00:00 | 0xc | 1074 | Online | f60004202091 | C:1 A:0 T:3 |
| 60:06:01:60:88:02:a8:2b | | | | | |

```

cd:d9:96:f7:57:3f:07:0c
C:1 A:0 T:0
00:0c:00:00
 0xd 1074 Online f60004202091 C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

0c:e5:ba:39:68:ca:d6:f0
C:1 A:0 T:0
00:0d:00:00
 0xe 1074 Online f60004202091 C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

60:6e:ee:76:98:fc:ab:97
C:1 A:0 T:0
00:0e:00:00
 0xf 1074 Online f60004202091 C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

8b:58:80:7b:12:fb:6b:12
C:1 A:0 T:0
00:0f:00:00
 0x10 1074 Online f60004202091 C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

a1:2f:6d:b0:c3:d6:c2:46
C:1 A:0 T:0
00:10:00:00
 0x11 1074 Online f60004202091 C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

2c:48:c4:74:25:4b:26:dd
C:1 A:0 T:0
00:11:00:00
 0x20 5369 Online f60004202091 C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

ba:18:6a:40:22:40:94:75
C:1 A:0 T:0
00:20:00:00
 0x21 3221 Online f60004202091 C:1 A:0 T:3
60:06:01:60:88:02:a8:2b

74:d2:42:9e:31:8d:ff:86
C:1 A:0 T:0
00:21:00:00

canterbury#show interface iscsi 2/1

iscsi2/1 is up
  Hardware is GigabitEthernet
  Port WWN is 20:41:00:0c:30:6c:24:40
  Admin port mode is ISCSI
  Port mode is ISCSI
  Speed is 1 Gbps
  iSCSI initiator is identified by name
  Number of iSCSI session: 4, Number of TCP
connection: 4
  Configured TCP parameters
    Local Port is 3260
    PMTU discover is enabled, reset timeout is 3600
sec
    Keepalive-timeout is 60 sec
    Minimum-retransmit-time is 300 ms
    Max-retransmissions 4

```

```
Sack is disabled
Maximum allowed bandwidth is 800000 kbps
Minimum available bandwidth is 800000 kbps
Estimated round trip time is 100000 usec
5 minutes input rate 168 bits/sec, 21 bytes/sec, 0
frames/sec
5 minutes output rate 728 bits/sec, 91 bytes/sec, 0
frames/sec
iSCSI statistics
Input 12209 packets, 2668348 bytes
Command 3282 pdus, Data-out 1038 pdus, 1989664
bytes
Output 14762 packets, 3486596 bytes
Response 3059 pdus (with sense 77), R2T 153 pdus
Data-in 3215 pdus, 2744116 bytes
```

canterbury#**show iscsi stats iscsi 2/1**

```
iscsi2/1
5 minutes input rate 168 bits/sec, 21 bytes/sec, 0
frames/sec
5 minutes output rate 728 bits/sec, 91 bytes/sec, 0
frames/sec
iSCSI statistics
12209 packets input, 2668348 bytes
Command 3282 pdus, Data-out 1038 pdus, 1989664
bytes, 0 fragments
output 14762 packets, 3486596 bytes
Response 3059 pdus (with sense 77), R2T 153 pdus
Data-in 3215 pdus, 2744116 bytes
```

canterbury#**show interface gigabitethernet 2/1**

```
GigabitEthernet2/1 is up
Hardware is GigabitEthernet, address is
0005.3000.ade6
Internet address is 10.48.69.199/26
MTU 2156 bytes
Port mode is IPS
Speed is 1 Gbps
Beacon is turned off
Auto-Negotiation is turned on
iSCSI authentication: NONE
5 minutes input rate 392 bits/sec, 49 bytes/sec, 0
frames/sec
5 minutes output rate 64 bits/sec, 8 bytes/sec, 0
frames/sec
126128 packets input, 12476013 bytes
2 multicast frames, 0 compressed
0 input errors, 0 frame, 0 overrun 0 fifo
43443 packets output, 6256174 bytes, 0 underruns
0 output errors, 0 collisions, 0 fifo
0 carrier errors
```

canterbury#**show ip route**

Codes: C - connected, S - static

Gateway of last resort is 10.48.69.129

C 10.48.69.192/26 is directly connected,


gigabitethernet2-1

C 10.48.69.128/26 is directly connected, mgmt0

Sortie Fabric Manager et Device Manager

Cette section fournit un exemple de sortie de MDS Fabric Manager 1.1(2) et Device Manager 1.1.2(2).

Schéma de topologie à partir de Fabric Manager

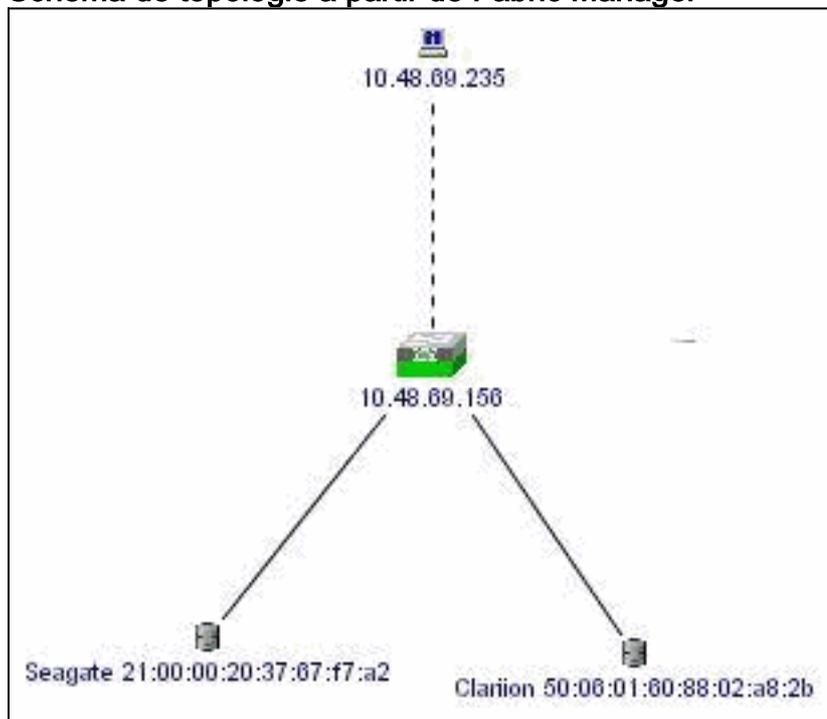

Voici un exemple de capture d'écran de la vue Device Manager 1.1(2) sur canterbury.



1. Sélectionnez **FC > LUNs** dans la fenêtre Gestionnaire de périphériques pour afficher les noms de domaine (pWWN), les ID de LUN et la capacité de vos

canterbury - LUN

Discover Targets LUNs

| Vsanid, Port WWN | Id | Capacity (MB) | SerialNum |
|--------------------------------------|------|---------------|----------------------|
| 777, Seagate 21:00:00:20:37:67:17:a2 | 0x0 | 18210 | LRE8091500007039HLT6 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x0 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x1 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x2 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x3 | 2147 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x4 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x5 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x6 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x7 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x8 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x9 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0xa | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0xb | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0xc | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0xd | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0xe | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0xf | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x10 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x11 | 1074 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x20 | 5369 | f60004202091 |
| 777, Clarion 50:06:01:60:88:02:a8:2b | 0x21 | 3221 | f60004202091 |

Refresh Help Close

Data retrieved at 10:03:45

LUN.

2. Sélectionnez IP > iSCSI pour afficher les sessions iSCSI.

canterbury - iSCSI

Initiators Targets Sessions Sessions Detail Session Statistics

| Type | Direction | Initiator | | | Target | | |
|-----------|-----------|-------------------|--------|-------------------|-------------------|-------|-----|
| | | Name or IpAddress | Alias | Id | Name | Alias | Id |
| normal | inbound | 10.48.69.235 | baboon | 00:02:3d:00:00:01 | san-fc-ibod-1 | | 128 |
| normal | inbound | 10.48.69.235 | baboon | 00:02:3d:00:00:01 | clarion | | 128 |
| discovery | inbound | 10.48.69.235 | baboon | 00:02:3d:00:00:01 | | | 128 |
| normal | inbound | 10.48.69.235 | baboon | 00:02:3d:00:00:01 | clarion-lun-3-4-5 | | 128 |

4 row(s)

Connection... Refresh Help Close

Informations connexes

- [Prise en charge de la technologie iSCSI \(Small Computer Systems Interface over IP\)](#)