

Verifica di SPAN ed ERSPAN sugli switch Catalyst serie 9000

Sommario

[Introduzione](#)
[Prerequisiti](#)
[Requisiti](#)
[Componenti usati](#)
[Verifica SPAN](#)
[Esempio di rete](#)
[Configurazione SPAN](#)
[Verifica di ERSPAN](#)
[Esempio di rete](#)
[Configurazione ERSPAN](#)
[Dispositivo di origine](#)
[Dispositivo di destinazione ERSPAN](#)
[Debug e tracce rilevanti](#)
[Informazioni correlate](#)

Introduzione

Questo documento descrive come verificare SPAN ed ERSPAN sugli switch Catalyst serie 9000.

Prerequisiti

Requisiti

Nessun requisito specifico previsto per questo documento.

Componenti usati

Le informazioni fornite in questo documento si basano sulle seguenti versioni software e hardware:

- Catalyst 9300 (Cisco IOS®-XE 17.3.5)
- Catalyst 9500 (Cisco IOS®-XE 17.3.5)

Le informazioni discusse in questo documento fanno riferimento a dispositivi usati in uno specifico ambiente di emulazione. Su tutti i dispositivi menzionati nel documento la configurazione è stata ripristinata ai valori predefiniti. Se la rete è operativa, valutare attentamente eventuali conseguenze derivanti dall'uso dei comandi.


Prodotti correlati

Il presente documento può essere utilizzato anche per le seguenti versioni hardware e software:

- Catalyst 9200
- Catalyst 9300
- Catalyst 9500
- Catalyst 9400
- Catalyst 9600

Verifica SPAN

Esempio di rete

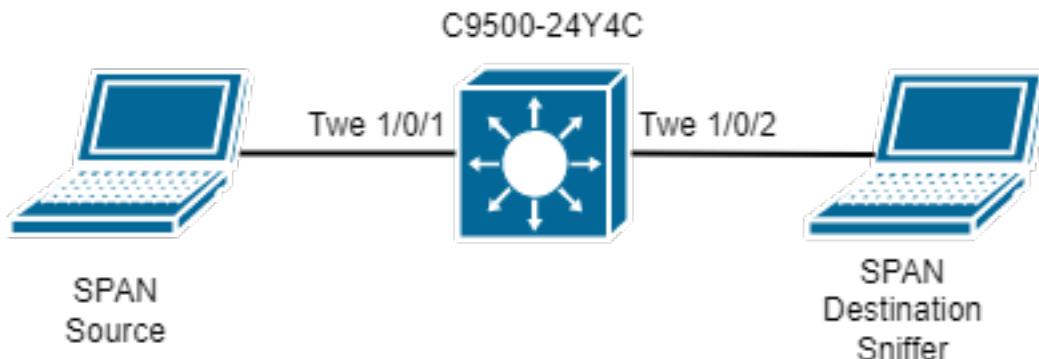

Configurazione SPAN

```
monitor session 1 source interface Twe1/0/1  
monitor session 1 destination interface Twe1/0/2
```

Verificare la configurazione del software SPAN. Prendere nota delle interfacce SPAN di origine e di destinazione e della direzione dell'acquisizione SPAN.

```
C9500-SPAN#show monitor session all  
Session 1  
-----  
Type : Local Session  
Source Ports :  
    Both : Twe1/0/1  
Destination Ports : Twe1/0/2  
Encapsulation : Native  
Ingress : Disabled
```

Verificare la voce hardware SPAN. Utilizzare il ID sessione FED univoco per configurazione SPAN. Possono essere configurate contemporaneamente fino a 8 sessioni FED (da 0 a 7).

```
C9500-SPAN# show platform software monitor session 1  
Span Session 1 (FED Session 0):  
Type: Local SPAN  
Prev type: Local SPAN  
Ingress Src Ports: Twe1/0/1      <-- Hardware entry for source interface.  
Egress Src Ports:  Twe1/0/1      <-- Hardware entry for source interface.  
Ingress Local Src Ports: (null)  
Egress Local Src Ports: (null)  
Destination Ports:  Twe1/0/2     <-- Hardware entry for destination interface.
```

```

Ingress Src Vlans:
Egress Src Vlans:
Ingress Up Src Vlans: (null)
Egress Up Src Vlans: (null)
Src Trunk filter Vlans:
RSPAN dst vlan: 0
RSPAN src vlan: 0
RSPAN src vlan sav: 0
Dest port encap = 0x0000
Dest port ingress encap = 0xFFFFFFFFFFFFFF
Dest port ingress vlan = 0x0
SrcSess: 1 DstSess: 0 DstPortCfgd: 1 RspnDstCfg: 0 RspnSrcVld: 0
DstCliCfg: 0 DstPrtInit: 1 PsLclCfgd: 0
Flags: 0x00000031 PSPAN
Remote dest port: 0 Dest port group: 0
FSPAN disabled
FSPAN not notified

```

Raccogliere i numeri ASIC, Core e Port per le porte SPAN di origine e di destinazione configurate. Il numero di porta è necessario per verificare che l'interfaccia SPAN di origine sia programmata correttamente e che lo SPAN punti all'interfaccia SPAN di destinazione corretta.

Suggerimento: Utilizzare la nomenclatura corretta dispositivo standalone **show platform software/hardware feed active** o stack dispositivo **show platform software/hardware feed switch <number>**.

```
C9500-SPAN# show platform software fed active ifm mappings
Interface          IF_ID   Inst Asic Core Port SubPort Mac  Cntx LPN  GPN  Type Active
TwentyFiveGigE1/0/1 0x8     1    0   1    20      0    16   4    1    101  NIF  Y
TwentyFiveGigE1/0/2 0x9     1    0   1    21      0    17   5    2    102  NIF  Y
```

Il registro Doppler **IlePortLeSpanBitMapTable** viene utilizzato per definire se una porta è soggetta a SPAN in direzione in entrata (RX). Per confermare che la porta SPAN di origine configurata (porta ASIC 20) è stata assegnata alla **sessione FED** corretta (sessione 0):

```
C9500-SPAN# show platform hardware fed active fwd-asic register read register-name
IlePortLeSpanBitMapTable-20 asic 0 core 1
For asic 0 core 1

Module 0 - IlePortLeSpanBitMapTable[0][20]

ssbm           : 0x1      <- Convert from Hexadecimal to Binary: 0b00000001. Bit 0 is set.
```

La mappa di bit della sessione SPAN è un registro a 8 bit. Ogni bit corrisponde a una sessione FED: Il bit meno significativo corrisponde alla sessione FED 0, il bit più significativo corrisponde alla sessione FED 7. Pertanto, il numero massimo di sessioni SPAN supportate è 8, come indicato in precedenza.

Se un'interfaccia è configurata come porta di origine SPAN per più sessioni SPAN, tutte le sessioni FED devono essere visualizzate nel registro SSBM. Ad esempio, SSBM con valore 0x5 (0b00000101) indica che l'interfaccia è un'origine SPAN sia per la sessione FED 0 che per la sessione FED 2.

Analogamente, il registro Doppler **ElePortLeSpanBitMapTable** determina se una porta è soggetta a SPAN in direzione uscita (TX). L'analisi è uguale al registro IlePortLeSpanBitMapTable. Per confermare che la porta SPAN di origine configurata (porta ASIC 20) è stata assegnata alla

sessione FED corretta (sessione 0):

```
C9500-SPAN# show platform hardware fed active fwd-asic register read register-name  
ElePortLeSpanBitMapTable-20 asic 0 core 1  
For asic 0 core 1
```

```
Module 0 - ElePortLeSpanBitMapTable[0][20]
```

```
ssbm : 0x1
```

Ciò conferma che l'interfaccia SPAN di origine è mappata alla sessione FED destra per entrambe le direzioni RX e TX.

Con l'**ID sessione FED**, è possibile trovare le porte di destinazione per l'SPAN all'interno del registro Doppler **AqmRepSpanPortMap**. Per confermare che la sessione FED 0 punta alla porta di destinazione SPAN destra (porta ASIC 21):

```
C9500-SPAN# show platform hardware fed active fwd-asic register read register-name  
AqmRepSpanPortMap-0 asic 0 core 1  
For asic 0 core 1
```


```
Module 0 - AqmRepSpanPortMap[0][0]
```

```
cpuQueueNum : 0x0  
cpuSpanValid : 0x0  
indirectApPortMap : 0x0  
portMap0 : 0x200000      <-- Convert from Hexadecimal to Binary:  
0b00100000000000000000000000000000. Bit 21 is set.  
rcpPortMap : 0x0  
spanCtiLo : 0x0
```

Ciò conferma che i pacchetti acquisiti con SPAN devono essere mostrati replicati fuori dall'interfaccia Tw1/0/2 (porta ASIC 21). Se sono configurate più porte di destinazione SPAN, vengono mostrate nel registro **AqmRepSpanPortMap**.

Verifica di ERSPAN

Esempio di rete

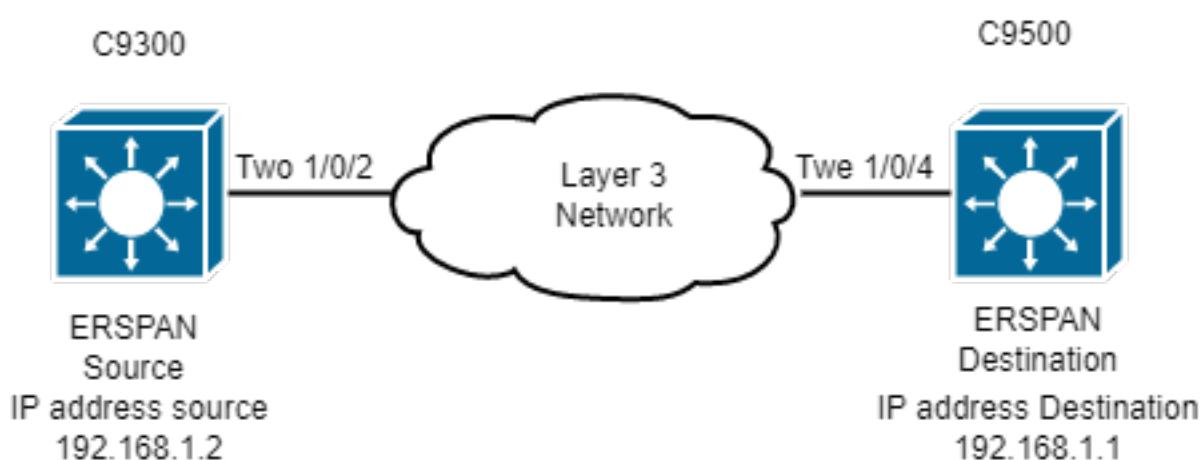

Nota: Catalyst C9200 non supporta ERSPAN.

Nota: È necessaria una licenza DNA-Advantage.

Configurazione ERSPAN

```
### Source ERSPAN Device ###

C9300-ERSPAN# show run | section monitor
monitor session 1 type erspan-source
source vlan 10
destination
  erspan-id 3           <-- ERSPAN id must be identical on source and destination.
  ip address 192.168.1.1 <-- GRE tunnel destination IP (IP addr configured on ERSPAN
destination switch).
  origin ip address 192.168.1.2 <-- GRE tunnel source IP (IP addr configured on ERSPAN source
switch).

C9300-ERSPAN# show ip interface brief | exclude unassigned
Interface          IP-Address      OK? Method Status          Protocol
<snip>
Loopback0          192.168.1.2    YES NVRAM   up

### Destination ERSPAN Device ###

C9500-ERSPAN# show run | section monitor
monitor session 1 type erspan-destination
destination interface Twel1/0/3
source
  erspan-id 3 <-- ERSPAN id must be identical on source and destination.
  ip address 192.168.1.1 <-- GRE tunnel destination IP (IP addr configured on ERSPAN destination
switch).

C9500-ERSPAN# show ip interface brief | exclude unassigned
Interface IP-Address OK? Method Status Protocol
<snip>
Loopback0 192.168.1.1 YES NVRAM up up
```

Dispositivo di origine

Verificare la raggiungibilità tra l'indirizzo IP di origine e quello di destinazione.

```
C9300-ERSPAN#ping 192.168.1.1 source 192.168.1.2
Type escape sequence to abort.
Sending 5, 100-byte ICMP Echos to 192.168.1.1, timeout is 2 seconds:
Packet sent with a source address of 192.168.1.2
!!!!!
Success rate is 100 percent (5/5), round-trip min/avg/max = 1/1/2 ms
```

Programmazione software Cisco IOS

Verificare nel software Cisco IOS la voce relativa alla sessione ERSPAN.

```
C9300-ERSPAN#show monitor session 1
Session 1
-----
Type          : ERSPAN Source Session
Status        : Admin Enabled
```

```

Source VLANs          :
  Both             : 10
Destination IP Address : 192.168.1.1
Destination ERSPAN ID   : 3
Origin IP Address      : 192.168.1.2

```

Programmazione SHIM

Verificare i dati inviati dal software all'hardware del programma (oggetto SHIM).

```

C9300-ERSPAN#show platform software monitor session 1
Span Session 1 (FED Session 0):
  Type:      ERSPAN Source
  Prev type: Unknown
  Ingress Src Ports:
  Egress Src Ports:
  Ingress Local Src Ports: (null)
  Egress Local Src Ports: (null)
  Destination Ports:
    Ingress Src Vlans: 10      <-- Replicate Traffic.
    Egress Src Vlans: 10      <-- Replicate Traffic.
  Ingress Up Src Vlans: 10
  Egress Up Src Vlans: 10
  Src Trunk filter Vlans:
    RSPAN dst vlan: 0
    RSPAN src vlan: 0
    RSPAN src vlan sav: 0
  Dest port encap = 0x0000
  Dest port ingress encap = 0x0000
  Dest port ingress vlan = 0x0
  SrcSess: 1 DstPortCfgd: 0 RspnDstCfg: 0 RspnSrcVld: 0      <-- Monitor session number.
  DstCliCfg: 0 DstPrtInit: 0 PsLclCfgd: 0
  Flags: 0x00000002 VSPAN
  Remote dest port: 0 Dest port group: 0
  FSPAN disabled
  FSPAN not notified
  ERSPAN Id     : 3           <-- Value match with the software setting.
  ERSPAN Org Ip: 192.168.1.2 <-- Value match with the software setting.
  ERSPAN Dst Ip: 192.168.1.1 <-- Value match with the software setting.
  ERSPAN Ip Ttl: 255
  ERSPAN State : Enabled
  ERSPAN Tun id: 77

```

Processore route di gestione inoltro

Verificare quali elementi software vengono inviati all'hardware del programma (FMAN RP Layer).

```

C9300-ERSPAN#show platform software swspan switch active R0 source
Showing SPAN source table summary info

  Sess-id  IF-type  IF-id  Sess-type  Dir
  -----
  0        VLAN     10     ERSPAN SRC  Ingress
  0        VLAN     10     ERSPAN SRC  Egress

```

```

C9300-ERSPAN#show platform software swspan switch active R0 source sess-id 0
Showing SPAN source detail info
Session ID : 0 Intf Type : VLAN Vlan id : 10 <-- Vlan entry
PD Sess ID : 0
Session Type : ERSPAN SRC

```

```

Direction : Ingress
Filter Enabled : No
ACL Configured : No
ERSPAN Enable : Yes

Session ID : 0
Intf Type : VLAN
Vlan id : 10    <-- Match with the Vlan/Interface SPAN.
PD Sess ID : 0
Session Type : ERSPAN SRC
Direction : Egress
Filter Enabled : No
ACL Configured : No
ERSPAN Enable : Yes

```

Forward Manager-Forwarding Processor

Verificare quali componenti software vengono inviati all'hardware del programma (FMAN FP Layer).

```
C9300-ERSPAN#show platform software swspan switch active F0 source
Showing SPAN source table summary info
```

Sess-id	IF-type	IF-id	Sess-type	Dir
0	VLAN	10	ERSPAN SRC	Ingress
0	VLAN	10	ERSPAN SRC	Egress

```
C9300-ERSPAN#show platform software swspan switch active F0 source sess-id 0
Showing SPAN source detail info
```

```

Session ID : 0
Intf Type : VLAN
Vlan id : 10
PD Sess ID : 0
Session Type : ERSPAN SRC    <-- Source Interface.
Direction : Ingress
Filter Enabled : No
ACL Configured : No
AOM Object id : 519
AOM Object Status : Done
Parent AOM object Id : 30
Parent AOM object Status : Done

```

```

Session ID : 0
Intf Type : VLAN
Vlan id : 10
PD Sess ID : 0
Session Type : ERSPAN SRC    <-- Source Interface.
Direction : Egress
Filter Enabled : No
ACL Configured : No
AOM Object id : 520
AOM Object Status : Done
Parent AOM object Id : 30
Parent AOM object Status : Done

```

```
C9300-ERSPAN#show platform software swspan switch active F0 counters  <-- Check for any err
counters that increment on PI/PD/HW
```

```
Dump Switch SPAN FP operation counters <-- Operational Counters.
```

Source SPAN Config Counters

```
PI: Create 2 (err 0), Modify 0 (err 0), Delete 0 (err 0) <-- PI = platform independent  
(Software/IOS).  
PD: Create 2 (err 0), Modify 0 (err 0), Delete 0 (err 0) <-- PD = platform dependent  
(SHIM/FMAN/FED).  
HW: Create 2 (err 0), Modify 0 (err 0), Delete 0 (err 0) <-- HW = hardware (FED/ASIC).
```

Destination SPAN Config Counters

```
PI: Create 1 (err 0), Modify 0 (err 0), Delete 0 (err 0)  
PD: Create 1 (err 0), Modify 0 (err 0), Delete 0 (err 0)  
HW: Create 1 (err 0), Modify 0 (err 0), Delete 0 (err 0)
```

Filter SPAN Config Counters

```
PI: Create 0 (err 0), Modify 0 (err 0), Delete 0 (err 0)  
PD: Create 0 (err 0), Modify 0 (err 0), Delete 0 (err 0)  
HW: Create 0 (err 0), Modify 0 (err 0), Delete 0 (err 0)
```

Driver motore di inoltro

Verificare il livello che programma l'ASIC (FED).

```
C9300-ERSPAN#show platform software fed switch active monitor 0
Session 0
-----
Session Type      : ERSPAN Source Session
Source Ports      : RX: None TX: None
Destination Ports : None
Source VLANs      : VLAN-10
Destination VLANs : VLAN-10
Source RSPAN VLAN : 0
DST RSPAN VLAN   : 0
Encap             : Native
Ingress Forwarding: Disabled
Filter VLANs     : None
ERSPAN Enable     : 1          <-- 1 = On/Completed.
ERSPAN Hw Programmed : 1        <-- 1 = On/Completed.
ERSPAN Mandatory Cfg : 1        <-- 1 = On/Completed.
ERSPAN Id         : 3
Gre Prot          : 88be
MTU               : 9000
Ip Tos            : 0
Ip Ttl            : 255
Cos               : 0
Vrf Id            : 0
Dst Ip            : 192.168.1.1
Org Ip : 192.168.1.2
Dst Ipv6 : :::
Org Ipv6 : :::
SGT count : 0
SGT Tag(s) :
```

Verificare la programmazione tunnel hardware (FED).

```
C9300-ERSPAN#show platform software fed switch active ifm interfaces tunnel
Interface           IF_ID           State
```

```
--  
Tunnel1000000000          0x00000035      READY      <-- 0x35 in Hex is 53 in  
Decimal (tunnel number 53).
```

```
C9300-ERSPAN#show platform software fed switch active ifm if-id 0x35 <-- Hardware tunnel number  
0x35.  
Interface IF_ID : 0x0000000000000035  
Interface Name : Tunnel1000000000  
Interface Block Pointer : 0x55d0ff5b6c98  
Interface Block State : READY  
Interface State : Enabled  
Interface Status : ADD  
Interface Ref-Cnt : 4  
Interface Type : TUNNEL  
Unit : 0  
SNMP IF Index : 0  
Encap L3If LE Handle : 0x7f00e0a50a28 <-- Hardware handle info (used to check final Hardware  
program state).  
Decap L3If LE Handle : 0x7f00e0a50bd8 <-- Hardware handle info (used to check final Hardware  
program state).  
Tunnel Mode : 0 [gre] <-- Tunnel Protocol Enable.  
Tunnel Sub-mode: 0 [none]  
Hw Support : Yes  
Tunnel Vrf : 0  
IPv4 MTU : 0  
IPv6 MTU : 0  
IPv4 VRF ID : 0  
IPv6 VRF ID : 0  
Protocol flags : 0x0001 [ ipv4 ]  
Misc flags : 0x0000 [ None ]  
ICMPv4 flags : 0x03 [ unreachable redirect ]  
ICMPv6 flags : 0x03 [ unreachable redirect ]
```

Port Information

```
Handle ..... [0xcf000051]  
Type ..... [L3-Tunnel]  
Identifier ..... [0x35]  
Unit ..... [53]  
Port Logical Tunnel Subblock  
Encap-L3ifile.....[0x7f00e0a50a28] <-- Same number as previous highlighted output.  
Decap-L3ifile.....[0x7f00e0a50bd8] <-- Same number as previous highlighted output.  
decap-portle.....[0x0]  
RI-decap.....[0x7f00e0a5a1a8]  
SI-decap.....[0x7f00e0a5a678]  
Decap-Tcam_handle..[0x7f00e0a5a9a8]  
Tunnel_capability..[0x3]  
Encap-RCP-PMAP.....[0x0]  
GPN.....[0]
```

```
C9300-ERSPAN#show platform software fed switch active ifm mappings 13if-le | include L3IF|Tunnel  
L3IF_LE           Interface           IF_ID        Type  
0x00007f00e0a50a28     Tunnel1000000000 0x00000035 ENCAP_L3_LE <--  
L3IF + IF_ID (ENCAP) match here.  
0x00007f00e0a50bd8     Tunnel1000000000 0x00000035 DECAP_L3_LE <--  
L3IF + IF_ID (DECAP) match here.
```

Encapsulation LE

```
C9300-ERSPAN#show platform hardware fed switch active fwd-asic abstraction print-resource-  
handle 0x00007f00e0a50a28 0 <-- ENCAP.  
Handle:0x7f00e0a50a28 Res-Type:ASIC_RSC_L3IF_LE Res-Switch-Num:255 Asic-Num:255 Feature-  
ID:AL_FID_IFM Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1
```

```

priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: index0:0x27 mtu_index/l3u_ri_index0:0x5
sm handle [ASIC 0]: 0x7f00e0a56d08 index1:0x27 mtu_index/l3u_ri_index1:0x5
=====
Decapsulation LE
C9300-ERSPAN#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x00007f00e0a50a28 0 <-- DECAP.
Handle:0x7f00e0a50bd8 Res-Type:ASIC_RSC_L3IF_LE Res-Switch-Num:255 Asic-Num:255 Feature-
ID:AL_FID_IFM Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: index0:0x28 mtu_index/l3u_ri_index0:0x0
sm handle [ASIC 0]: 0x7f00e0a559c8 index1:0x28 mtu_index/l3u_ri_index1:0x0
=====
```

Eseguire il comando Embedded Packet Capture sulla porta di uscita verso lo switch di destinazione. È possibile applicare un filtro utilizzando l'IP di origine e di destinazione del tunnel GRE (il pacchetto è un pacchetto incapsulato).

```

Frame 1: 110 bytes on wire (880 bits), 110 bytes captured (880 bits) on interface 0
<snip>
Internet Protocol Version 4, Src: 192.168.1.2, Dst: 192.168.1.1 <-- ERSPAN IP HEADER.
 0100 .... = Version: 4
  .... 0101 = Header Length: 20 bytes (5)
  Differentiated Services Field: 0x00 (DSCP: CS0, ECN: Not-ECT)
    0000 00.. = Differentiated Services Codepoint: Default (0)
    .... ..00 = Explicit Congestion Notification: Not ECN-Capable Transport (0)
  Total Length: 96
  Identification: 0x1018 (4120)
  Flags: 0x00
    0.... .... = Reserved bit: Not set
    .0... .... = Don't fragment: Not set
    ..0. .... = More fragments: Not set
  Fragment offset: 0
  Time to live: 255
Protocol: Generic Routing Encapsulation (47) <-- GRE tunnel encapsulation.
  Header checksum: 0x9c56 [validation disabled]
    [Good: False]
    [Bad: False]
  Source: 192.168.1.2           <-- Source GRE IP tunnel.
  Destination: 192.168.1.1      <-- Destination GRE IP tunnel.
Generic Routing Encapsulation (ERSPAN)
  Flags and Version: 0x1000
    0.... .... .... = Checksum Bit: No
    .0... .... .... = Routing Bit: No
    ..0. .... .... = Key Bit: No
    ...1 .... .... .... = Sequence Number Bit: Yes
    .... 0.... .... = Strict Source Route Bit: No
    .... .000 .... .... = Recursion control: 0
    .... .... 0000 0... = Flags (Reserved): 0
    .... .... .... .000 = Version: GRE (0)
  Protocol Type: ERSPAN (0x88be) <--ERSPAN enable.
  Sequence Number: 0
Encapsulated Remote Switch Packet Analysis
  0001 .... .... .... = Version: Type II (1)
  .... 0000 0001 1000 = Vlan: 10
  000. .... .... .... = Priority: 0
  ...1 .... .... .... = Unknown2: 1
  .... 1.... .... .... = Direction: Outgoing (1)
  .... .0... .... .... = Truncated: Not truncated (0)
  .... ..00 0000 0011 = SpanID: 3      <--ERSPAN ID.
  Unknown7: 00000002
Ethernet II, Src: Xerox_00:02:00 (00:00:08:00:02:00), Dst: Cisco_eb:90:68 (00:9e:1e:eb:90:68)
<snip>
(Internal data packet comes here, output truncated)
```

Dispositivo di destinazione ERSPAN

Programmazione software Cisco IOS

```
C9500-ERSPAN#show monitor session 1
Session 1
-----
Type : ERSPAN Destination Session
Status : Admin Enabled
Destination Ports : Twe1/0/3
Source IP Address : 192.168.1.1
Source ERSPAN ID : 3
```

Programmazione SHIM

Verificare l'invio del software all'hardware del programma (oggetto SHIM).

```
C9500-ERSPAN#show platform software monitor session 1
Span Session 1 (FED Session 0):
Type: ERSPAN Destination
Prev type: Unknown
Ingress Src Ports:
Egress Src Ports:
Ingress Local Src Ports: (null)
Egress Local Src Ports: (null)
Destination Ports: Twe1/0/3
Ingress Src Vlans:
Egress Src Vlans:
Ingress Up Src Vlans: (null)
Egress Up Src Vlans: (null)
Src Trunk filter Vlans:
RSPAN dst vlan: 0
RSPAN src vlan: 0
RSPAN src vlan sav: 0
Dest port encaps = 0x0004
Dest port ingress encaps = 0x0000
Dest port ingress vlan = 0x0
SrcSess: 0 DstSess: 1 DstPortCfgd: 1 RspnDstCfg: 0 RspnSrcVld: 0
DstCliCfg: 0 DstPrtInit: 1 PsLclCfgd: 0
Flags: 0x00000000
Remote dest port: 0 Dest port group: 0
FSPAN disabled
FSPAN not notified
ERSPAN Id : 3
ERSPAN Dst Ip: 192.168.1.1
ERSPAN Vrf : 0
```

Forward Manager-Forwarding Processor

Verificare quali elementi software vengono inviati all'hardware del programma (FMAN FP Layer).

```
C9500-ERSPAN#show platform software swspan switch active r0 destination
Showing SPAN destination table summary info Sess-id IF-type IF-id Sess-type -----
----- 0 PORT 11 Local      <-- IF-if 0xb maps to Twe1/0/3 (Check under 'show
platform software fed active ifm mapping').
```

0 ERSPAN ERSPAN DST

```
C9500-ERSpan#show platform software swspan R0 destination sess-id 0
Showing SPAN destination detail info

Session ID : 0
Intf Type : PORT
Port dpidx :11      ---Match with IF-id
PD Sess Id : 0
Session Type : Local  --- Type of monitor session
Ingress Fwd : No
Ingress Encap : Disabled
Ingress Vlan : 0
Encap Value : Replicate
RSPAN Vlan : 0

Session ID : 0
Intf Type : ERSPAN
Vlan id :
PD Sess Id : 0
Session Type : ERSPAN DST
ERSPAN Id : 3
ERSPAN Dst Ip: 192.168.1.1
ERSPAN Src Ip: 0.0.0.0
GRE Prot : 35006
MTU : 0
IP Tos : 0
IP Ttl : 255
Cos : 0
Vrf Id : 0
Tunnel Ifid: 38      --- 38 in Decimal is 0x26 in Hex which is the IF_ID of Tunnel1
ERSPAN En : TDL_TRUE
```

Forward Manager-Forwarding Processor

Verificare quali elementi software vengono inviati all'hardware del programma (FMAN FP Layer).

```
C9500-ERSpan#show platform software swspan switch active F0 counters  --- (check for any error
counters on PI/PD/HW).
Dump Switch SPAN FP operation counters

Source SPAN Config Counters

PI: Create 0 (err 0), Modify 0 (err 0), Delete 0 (err 0)  --- PI = platform independent
(Software/IOS).
PD: Create 0 (err 0), Modify 0 (err 0), Delete 0 (err 0)  --- PD = platform dependent
(SHIM/FMAN/FED).
HW: Create 0 (err 0), Modify 0 (err 0), Delete 0 (err 0)  --- HW = hardware (FED/ASIC).
```

Destination SPAN Config Counters

```
PI: Create 10 (err 0), Modify 6 (err 0), Delete 4 (err 0)
PD: Create 4 (err 0), Modify 0 (err 0), Delete 2 (err 0)
HW: Create 4 (err 0), Modify 0 (err 0), Delete 2 (err 0)
```

Filter SPAN Config Counters

```
PI: Create 0 (err 0), Modify 0 (err 0), Delete 0 (err 0)
PD: Create 0 (err 0), Modify 0 (err 0), Delete 0 (err 0)
HW: Create 0 (err 0), Modify 0 (err 0), Delete 0 (err 0)
```

```
C9500-ERSPAN#show platform software swspan switch active F0 destination
Showing SPAN destination table summary info
```

Sess-id	IF-type	IF-id	Sess-type
0	PORT	11	Local
0	VLAN	0	ERSPAN DST

Driver motore di inoltro

Verificare il livello che programma l'ASIC (FED).

```
C9500-ERSPAN#show platform software fed switch active monitor 0
Session 0
-----
Session Type      : ERSpan Destination Session
Source Ports : RX: None TX: Tunnel1000000000 Destination Ports      : TwentyFiveGigE1/0/3
Source VLANs       : None
Destination VLANs   : None
Source RSPAN VLAN    : 0
DST RSPAN VLAN     : 0
Encap             : Replicate
Ingress Forwarding  : Disabled
Filter VLANs       : None
ERSPAN Enable       : 1
ERSPAN Hw Programmed : 1
ERSPAN Mandatory Cfg : 1
ERSPAN Id           : 3
Ip Tos            : 0 (DSCP:0)
Ip Ttl             : 0
Cos                : 0
Vrf Id            : 0
Tunnel IfId        : 38          <-- 38 in Decimal is 0x26 in Hex which is the IF_ID
of Tunnel1
Dst Ip            : 192.168.1.1
Org Ip            : 0.0.0.0
SGT count          : 0
SGT Tag(s)         :
```

Verificare la programmazione tunnel hardware (FED).

```
C9500-ERSPAN#show platform software fed switch active ifm interfaces tunnel
Interface IF_ID State
-----
Tunnel1000000000 0x00000026 READY
```

```
C9500-ERSPAN#show platform software fed switch active ifm if-id 0x00000026
Interface IF_ID : 0x0000000000000026
Interface Name : Tunnel1000000000
Interface Block Pointer : 0x7f2cd48e9958
Interface Block State : READY
Interface State : Enabled
Interface Status : ADD
Interface Ref-Cnt : 5
Interface Type : TUNNEL
Unit : 0 SNMP IF Index : 0 Encap L3If LE Handle : 0x7f2cd4904e08    <-- Hardware handle info
```

```

(used to check final Hardware program state).
Decap L3If LE Handle : 0x7f2cd48dabc8    <-- Hardware handle info (used to check final Hardware
program state).
Tunnel Mode      : 0 [gre]                  <-- Tunnel Protocol Enable.
Hw Support       : Yes
Tunnel Vrf       : 0
IPv4 MTU         : 0
IPv6 MTU         : 0
IPv4 VRF ID     : 0
IPv6 VRF ID     : 0
Protocol flags   : 0x0001 [ ipv4 ]
Misc flags       : 0x0000 [ None ]
ICMPv4 flags    : 0x03 [ unreachable redirect ]
ICMPv6 flags    : 0x03 [ unreachable redirect ]

Port Information
Handle ..... [0xd4000043]
Type ..... [L3-Tunnel] Identifier ..... [0x26] Unit ..... [38] Port Logical
Tunnel Subblock Encap-L3ifle.....[0x7f2cd4904e08]    <-- Same number as previous highlighted
output.
Decap-L3ifle.....[0x7f2cd48dabc8]    <-- Same number as previous highlighted output.
decap-portle.....[0x0]
RI-decap.....[0x7f2cd49615d8]    <-- Same number as previous highlighted output.
SI-decap.....[0x7f2cd4958dd8]    <-- Same number as previous highlighted output.
Decap-Tcam_handle..[0x7f2cd46eee08]    <-- Same number as previous highlighted output.
Tunnel_capability..[0x3]
Encap-RCP-PMAP....[0x0]
GPN.....[0]
<snip>

```

```

C9500-ERSPAN#show platform software fed switch active ifm mappings l3if-le | include L3IF|Tunnel
L3IF_LE           Interface          IF_ID        Type
0x00007f2cd48dabc8 Tunnel100000000000 0x000000026 DECAP_L3_LE
<-- L3IF + IF_ID (DECAP) match here.
0x00007f2cd4904e08 Tunnel100000000000 0x000000026 ENCAP_L3_LE
<-- L3IF + IF_ID (ENCAP) match here.

```

Encapsulation LE

```

C9500-ERSPAN#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f2cd4904e08 0 <--ENCAP
Handle:0x7f2cd4904e08 Res-Type:ASIC_RSC_L3IF_LE Res-Switch-Num:255 Asic-Num:255 Feature-
ID:AL_FID_IFM Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: index0:0x27 mtu_index/l3u_ri_index0:0x2
sm handle [ASIC 0]: 0x7f2cd46ece38 index1:0x27 mtu_index/l3u_ri_index1:0x4
=====
```

Decapsulation LE

```

C9500-ERSPAN#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f2cd48dabc8 0 <--DECAP
Handle:0x7f2cd48dabc8 Res-Type:ASIC_RSC_L3IF_LE Res-Switch-Num:255 Asic-Num:255 Feature-
ID:AL_FID_IFM Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: index0:0x28 mtu_index/l3u_ri_index0:0x0
sm handle [ASIC 0]: 0x7f2cd46d91c8 index1:0x28 mtu_index/l3u_ri_index1:0x0

```

Rewrite Index (decapsulation)

```

C9500-ERSPAN#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f2cd49615d8 1    <-- RI-decap
Handle:0x7f2cd49615d8 Res-Type:ASIC_RSC_RI Res-Switch-Num:255 Asic-Num:255 Feature-ID:AL_FID_GRE

```

```

Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1
priv_ri/priv_si Handle: 0x7f2cd48daf28Hardware Indices/Handles: index0:0x16
mtu_index/l3u_ri_index0:0x0 index1:0x16 mtu_index/l3u_ri_index1:0x0
Features sharing this resource:107 (1)
Cookie length: 56
00 00 00 00 00 00 00 00 28 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 01 6b 33 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Detailed Resource Information (ASIC# 0) -----
Rewrite Data Table Entry, ASIC#:0 RI:22 Rewrite_type:AL_RRM_REWRITE_IPV4_ERSPAN2_DECAP(61)
Mapped_rii:TUNNEL_IPv4Ersan_DECAP(83) L3IF LE Index: 40 <-- 64 in Decimal is 0x40
in Hex which matches Decap LE index seen above

```

```

Detailed Resource Information (ASIC# 1)
-----
```

```

Rewrite Data Table Entry,
ASIC#:1 RI:22 Rewrite_type:AL_RRM_REWRITE_IPV4_ERSPAN2_DECAP(61)
Mapped_rii:TUNNEL_IPv4Ersan_DECAP(83)

```

```
L3IF LE Index: 40 =====
```

Station Index (decapsulation)

```
C9500-ERSpan#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f2cd4958dd8 1 <-- SI-decap
Handle:0x7f2cd4958dd8 Res-Type:ASIC_RSC_SI Res-Switch-Num:255 Asic-Num:255 Feature-ID:AL_FID_GRE
Lkp-ftr-id:LKP_FEAT_INVALID ref_count:1
priv_ri/priv_si Handle: 0x7f2cd49615d8Hardware Indices/Handles: index0:0xae
mtu_index/l3u_ri_index0:0x0 index1:0xae mtu_index/l3u_ri_index1:0x0
Features sharing this resource:107 (1)
Cookie length: 56
00 00 00 00 00 00 00 00 28 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 01 6b 36 00
00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00 00
Detailed Resource Information (ASIC# 0) ----- Station Index
(SI) [0xae]
RI = 0x16 DI = 0x5012 stationTableGenericLabel = 0 stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0x15 rcpServiceId = 0 dejaVuPreCheckEn = 0 Replication Bitmap: LD Detailed
Resource Information (ASIC# 1) ----- Station Index (SI)
[0xae]
RI = 0x16 DI = 0x5012 stationTableGenericLabel = 0 stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0x15 rcpServiceId = 0 dejaVuPreCheckEn = 0 Replication Bitmap: CD
=====
```

Tunnel Decap (TCAM)

```
C9500-ERSpan#show platform hardware fed switch active fwd-asic abstraction print-resource-handle
0x7f2cd46eee08 1 <-- Decap-Tcam_handle.
Handle:0x7f2cd46eee08 Res-Type:ASIC_RSC_HASH_TCAM Res-Switch-Num:0 Asic-Num:255 Feature-
ID:AL_FID_GRE Lkp-ftr-id:LKP_FEAT_TT_IPV4_GRE ref_count:1
priv_ri/priv_si Handle: (nil)Hardware Indices/Handles: handle [ASIC: 0]: 0x7f2cd48db018
Detailed Resource Information (ASIC# 0) ----- Number of HTM
Entries: 3 Entry 0: (handle 0x7f2cd48db018)
Labels Port Vlan L3If Group
M: 0000 0000 0000 0000
V: 0000 0000 0000 0000
M: ffffffff 00000000 00000000 000003ff 00000000 00000100 01000000 00000fff
3f000000 V: c0a80101 00000000 00000000 00000003 00000000 00000100 01000000 00000000 <--
c0a80101 in Hex maps to 192.168.1.1
00000000
```

GREv4 Dst	Src	Key	C	S	R	D	E	F	VRF	F1	L3P	GreP	Misc	RCPSVCId	<-- F=1
M: ffffffff	00000000	00000000	0	0	0	0	1	000	0	00	0000	00	3f		

Forwarding

V: **c0a80101** 00000000 00000000 0 0 0 0 0 **1** 000 0 00 0000 00 00
Action: 00000100 06000000 00000000 00000000 00000000 00000000 **ad** 00000000
00000000 00000000
RL2 RL3 ACF SPK CLPC LKV PRI STL LPC ADC LKI **SI**

0 1 0 0 0 6 0 0 0 0 **ad** --- Hexadecimal

value for Station Index.

Start/Skip Word: 0x00000003

Start Feature, Terminate

Entry 1: (handle 0x7f2cd495c3f8)

Labels Port Vlan L3If Group
M: 0000 0000 0000 0000
V: 0000 0000 0000 0000

M: ffffffff 00000000 00000000 000003ff 00000000 00000100 00000000 000a0000
3f000000
V: **c0a80101** 00000000 00000000 00000003 00000000 00000100 00000000 00080000
00000000

GREv4 Dst Src Key C S R D E F VRF F1 L3P GreP Misc RCPSVCId
M: ffffffff 00000000 00000000 0 0 0 0 0 0 000 a 00 0000 00 3f
V: **c0a80101** 00000000 00000000 0 0 0 0 0 0 000 8 00 0000 00 00
Action: 00000100 06000000 00000000 00000000 00000000 00000000 **ad** 00000000
00000000 00000000
RL2 RL3 ACF SPK CLPC LKV PRI STL LPC ADC LKI SI

0 1 0 0 0 6 0 0 0 0 **ad**

Start/Skip Word: 0x00000000

No Start, Terminate

Entry 2: (handle 0x7f2cd46ef568)

Labels Port Vlan L3If Group
M: 0000 0000 0000 0000
V: 0000 0000 0000 0000

M: ffffffff 00000000 00000000 000003ff 00000000 00000100 00000000 00020fff
00000000
V: **c0a80101** 00000000 00000000 00000003 00000000 00000100 00000000 00000000
00000000

GREv4 Dst Src Key C S R D E F VRF F1 L3P GreP Misc RCPSVCId
M: ffffffff 00000000 00000000 0 0 0 0 0 0 000 2 00 0000 00 00
V: **c0a80101** 00000000 00000000 0 0 0 0 0 0 000 0 00 0000 00 00
Action: 00000100 06000000 00000000 00000000 00000000 00000000 **ae** 00000000
00000000 00000000
RL2 RL3 ACF SPK CLPC LKV PRI STL LPC ADC LKI SI

0 1 0 0 0 6 0 0 0 0 **ae**

--- Hexadecimal

value for Station Index.

Start/Skip Word: 0x00000000

No Start, Terminate

=====

C9500-ERSPAN#show platform hardware fed switch active fwd-asic resource asic 0 station-index range 0xab 0xab
ASIC#0:
Station Index (SI) [0xad]
RI = 0x14
DI = **0x505a** --- Destination Index

```
stationTableGenericLabel = 0
stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0x15
rcpServiceId = 0xd
dejaVuPreCheckEn = 0
Replication Bitmap: LD
```

```
C9500-ERSPAN#show platform hardware fed switch active fwd-asic resource asic 0 station-index
range 0xae 0xae
```

```
Station Index (SI) [0xae]
RI = 0x16
DI = 0x5012           --- Destination Index
stationTableGenericLabel = 0
stationFdConstructionLabel = 0x7
lookupSkipIdIndex = 0x15
rcpServiceId = 0
dejaVuPreCheckEn = 0
Replication Bitmap: LD
```

```
C9500-ERSPAN#show platform hardware fed switch active fwd-asic resource asic 0 destination-index
range 0x505a 0x505a
```

```
Destination index = 0x505a DI_RCP_PORT2
pmap = 0x00000000 0x00000000
cmi = 0x0
rcp_pmap = 0x2
al_rsc_cmi
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

```
C9500-ERSPAN#show platform hardware fed switch active fwd-asic resource asic 0 destination-index
range 0x5012 0x5012
```

```
ASIC#0:
Destination Index (DI) [0x5012]
portMap = 0x00000000 00000000
cmi1 = 0
rcpPortMap = 0x1
```

```
CPU Map Index (CMI) [0]
ctiLo0 = 0
ctiLo1 = 0
ctiLo2 = 0
cpuQNum0 = 0
cpuQNum1 = 0
cpuQNum2 = 0
npuIndex = 0
stripSeg = 0
copySeg = 0
```

Debug e tracce rilevanti

Cisco IOS XE

```
debug monitor all
```

```
debug platform monitor
```

FMAN-RP

```
set platform software trace forwarding-manager switch <> R0 switch-span verbose  
show platform software trace message forwarding-manager switch <> R0
```

FMAN-FP

```
set platform software trace forwarding-manager switch <> F0 switch-span verbose  
show platform software trace message forwarding-manager switch <> F0
```

FED

```
set platform software trace fed switch <> swspan verbose  
set platform software trace fed switch <> asic_spn verbose  
set platform software trace fed switch <> acl verbose (Useful when ip/ipv6 filter is configured)  
show platform software trace message fed switch <>
```

Informazioni correlate

- [Documentazione e supporto tecnico – Cisco Systems](#)
- [Guida alla configurazione della gestione della rete, Cisco IOS XE Amsterdam 17.3.x \(switch Catalyst 9500\) ERSPAN](#)
- [Guida alla configurazione della gestione della rete, Cisco IOS XE Amsterdam 17.3.x \(switch Catalyst 9500\) SPAN](#)
- [Blog: In che modo Cisco TAC sta trasformando la documentazione e semplificando il self-service](#)

Informazioni su questa traduzione

Cisco ha tradotto questo documento utilizzando una combinazione di tecnologie automatiche e umane per offrire ai nostri utenti in tutto il mondo contenuti di supporto nella propria lingua. Si noti che anche la migliore traduzione automatica non sarà mai accurata come quella fornita da un traduttore professionista. Cisco Systems, Inc. non si assume alcuna responsabilità per l'accuracy di queste traduzioni e consiglia di consultare sempre il documento originale in inglese (disponibile al link fornito).