

Configuring IPsec Between a Catalyst 4224 Access Gateway Switch and a Cisco IOS Router

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Componentes Utilizados](#)

[Conventions](#)

[Configurar](#)

[Diagrama de Rede](#)

[Configurações](#)

[Verificar](#)

[Troubleshoot](#)

[Comandos para Troubleshooting](#)

[Exemplo de depurações](#)

[Informações Relacionadas](#)

[Introduction](#)

Este documento ilustra a configuração de exemplo de IPsec entre um Switch de Gateway de Acesso Cisco Catalyst 4224 e um roteador Cisco que executa o Software Cisco IOS®. A criptografia é feita entre a VLAN1 do gateway de acesso (onde o mapa de criptografia é aplicado) e a interface FastEthernet0/1 do roteador.

[Prerequisites](#)

[Requirements](#)

Não existem requisitos específicos para este documento.

[Componentes Utilizados](#)

As informações neste documento são baseadas nestas versões de software e hardware:

- Software Cisco IOS versão 12.1(1)14
- Software IOS c4224 12.2(2)YC1

As informações neste documento foram criadas a partir de dispositivos em um ambiente de laboratório específico. All of the devices used in this document started with a cleared (default) configuration. Se você estiver trabalhando em uma rede ativa, certifique-se de que entende o impacto potencial de qualquer comando antes de utilizá-lo.

Conventions

Para obter mais informações sobre convenções de documento, consulte as [Convenções de dicas técnicas Cisco](#).


Configurar

Nesta seção, você encontrará informações para configurar os recursos descritos neste documento.

Observação: para encontrar informações adicionais sobre os comandos usados neste documento, use a [ferramenta Command Lookup Tool](#) (somente clientes [registrados](#)).

Diagrama de Rede

Este documento utiliza a seguinte configuração de rede:

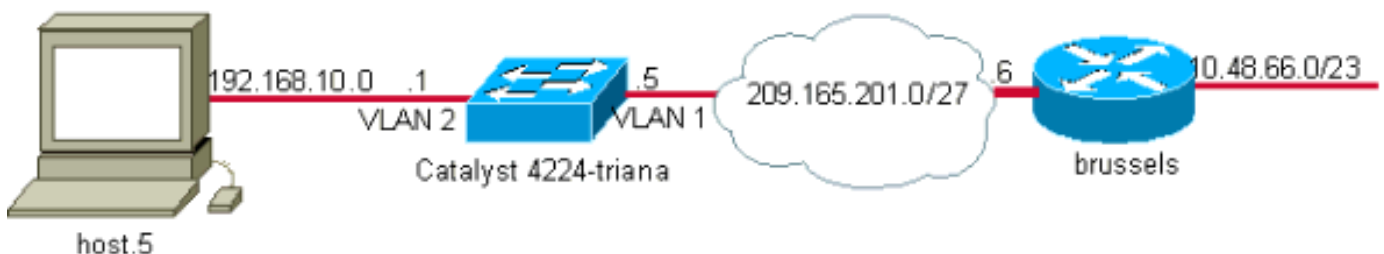

Configurações

Este documento utiliza as seguintes configurações:

- [Switch de gateway de acesso Catalyst 4224](#)
- [Cisco IOS Router](#)

Switch de gateway de acesso Catalyst 4224

```
 triana#show version
Cisco Internetwork Operating System Software
IOS (tm) c4224 Software (c4224-IK903SX3-M), Version
12.2(2)YC1,
EARLY DEPLOYMENT RELEASE SOFTWARE (fc2)

26 FastEthernet/IEEE 802.3 interface(s)
2 Serial(sync/async) network interface(s)
2 Channelized E1/PRI port(s)
1 Virtual Private Network (VPN) Module(s)
!--- Access gateway has onboard encryption service
adapter. 8 Voice FXS interface(s) 256K bytes of non-
volatile configuration memory. 31744K bytes of processor
board System flash (Read/Write) Configuration register
is 0x2102 triana#show run
Building configuration...

Current configuration : 5111 bytes
!
! Last configuration change at 13:56:01 UTC Wed May 29
```



```
!  
controller E1 2/0  
!  
controller E1 2/1  
!  
translation-rule 1  
  Rule 0 ^... 1  
!  
translation-rule 2  
  Rule 0 ^10.. 0  
  Rule 1 ^11.. 1  
  Rule 2 ^12.. 2  
  Rule 3 ^13.. 3  
  Rule 4 ^14.. 4  
  Rule 5 ^15.. 5  
  Rule 6 ^16.. 6  
  Rule 7 ^17.. 7  
  Rule 8 ^18.. 8  
  Rule 9 ^19.. 9  
!  
translation-rule 6  
  Rule 0 ^112. 119  
!  
translation-rule 7  
  Rule 0 ^1212 1196  
!  
translation-rule 3  
  Rule 0 ^. 0  
!  
translation-rule 9  
  Rule 0 ^. 9  
!  
translation-rule 99  
  Rule 0 ^90.. 0  
  Rule 1 ^91.. 1  
  Rule 2 ^92.. 2  
  Rule 3 ^93.. 3  
  Rule 4 ^94.. 4  
  Rule 5 ^95.. 5  
  Rule 6 ^96.. 6  
  Rule 7 ^97.. 7  
  Rule 8 ^98.. 8  
  Rule 9 ^99.. 9  
!  
translation-rule 999  
  Rule 0 ^2186 1196  
!  
translation-rule 1122  
  Rule 0 ^1122 528001  
  Rule 1 ^1121 519352  
!  
translation-rule 20  
  Rule 0 ^000 500  
!  
!  
!  
interface Loopback0  
  no ip address  
!  
interface FastEthernet0/0  
  no ip address  
  duplex auto  
  speed auto  
!
```

```
interface Serial1/0
  no ip address
  no fair-queue
!
interface Serial1/1
  no ip address
!
interface FastEthernet5/0
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/1
  no ip address
  shutdown
  duplex auto
  speed auto
  switchport voice vlan 3
  spanning-tree portfast
!
!--- For the lab setup, a host is connected on this
port. interface FastEthernet5/2
no ip address
duplex auto
speed auto
!--- Place the port in VLAN 2. switchport access vlan 2
spanning-tree portfast
!
interface FastEthernet5/3
  no ip address
  shutdown
  duplex auto
  speed auto
  switchport access vlan 999
  spanning-tree portfast
!
interface FastEthernet5/4
  no ip address
  duplex auto
  speed auto
  switchport access vlan 2
  switchport voice vlan 3
  spanning-tree portfast
!
interface FastEthernet5/5
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/6
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/7
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/8
  no ip address
  duplex auto
  speed auto
!
```

```
interface FastEthernet5/9
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/10
  no ip address
  duplex auto
  speed auto
  switchport trunk allowed vlan 1-3
  switchport mode trunk
!--- By default, the port belongs to VLAN 1. interface
FastEthernet5/11
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/12
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/13
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/14
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/15
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/16
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/17
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/18
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/19
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/20
  no ip address
  duplex auto
  speed auto
!
interface FastEthernet5/21
  no ip address
```

```
duplex auto
speed auto
!
interface FastEthernet5/22
no ip address
duplex auto
speed auto
!
interface FastEthernet5/23
no ip address
duplex auto
speed auto
!
interface FastEthernet5/24
no ip address
duplex auto
speed auto
!
!--- Define an IP address and apply crypto map to enable
!--- IPSec processing on this interface. interface Vlan
1
ip address 209.165.201.5 255.255.255.224
crypto map mymap
!
!--- Define an IP address for VLAN 2. interface Vlan 2
ip address 192.168.10.1 255.255.255.0
!
ip classless
ip route 10.48.66.0 255.255.254.0 209.165.201.6
no ip http server
!
!
ip access-list extended cryptoacl
remark This is crypto ACL
permit ip 192.168.10.0 0.0.0.255 10.48.66.0 0.0.1.255
call rsvp-sync
!
voice-port 4/0
output attenuation 0
!
voice-port 4/1
output attenuation 0
!
voice-port 4/2
output attenuation 0
!
voice-port 4/3
output attenuation 0
!
voice-port 4/4
output attenuation 0
!
voice-port 4/5
output attenuation 0
!
voice-port 4/6
output attenuation 0
!
voice-port 4/7
output attenuation 0
!
mgcp
no mgcp timer receive-rtcp
!
```

```
mgcp profile default
!
dial-peer cor custom
!
!
!
dial-peer voice 1 voip
!
dial-peer voice 2 pots
shutdown
!
!
line con 0
exec-timeout 0 0
length 0
line vty 0 4
password ww
login
!
end

 triana#
```

Cisco IOS Router

```
brussels#show run
Building configuration...

Current configuration : 1538 bytes
!
! Last configuration change at 17:16:19 UTC Wed May 29
2002
! NVRAM config last updated at 13:58:44 UTC Wed May 29
2002
!
version 12.1
no service single-slot-reload-enable
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname brussels
!
enable secret 5 $1$/vuT$081TvZgSFJ0xq5uTFc94u.
!
!
!
!
!
ip subnet-zero
no ip domain-lookup
!
ip cef
ip audit notify log
ip audit po max-events 100
!
!
!--- Define Phase 1 policy. crypto isakmp policy 10
authentication pre-share
crypto isakmp key yoursecretkey address 209.165.201.5
!
!
```



```

!--- Define the encryption policy for this setup. crypto
ipsec transform-set basic esp-des esp-md5-hmac
!
!--- Define a static crypto map entry for the remote PIX
!--- with mode ipsec-isakmp. !--- This indicates that
Internet Key Exchange (IKE) !--- is used to establish
the IPSec !--- security associations for protecting the
traffic !--- specified by this crypto map entry. crypto
map vpnmap 10 ipsec-isakmp
  set peer 209.165.201.5
  set transform-set basic
  match address cryptoacl
!
!
!
!
!
interface FastEthernet0/0
  ip address 10.48.66.34 255.255.254.0
  no ip mroute-cache
  duplex auto
  speed auto
!
interface Serial10/0
  no ip address
  shutdown
!
!--- Enable crypto processing on the interface !---
where traffic leaves the network. interface
FastEthernet0/1
  ip address 209.165.201.6 255.255.255.224
  no ip mroute-cache
  duplex auto
  speed auto
  crypto map vpnmap
!
interface Serial10/1
  no ip address
  shutdown
!
interface Group-Async1
  no ip address
  encapsulation ppp
  async mode dedicated
  ppp authentication pap
  group-range 33 40
!
ip classless
ip route 192.168.10.0 255.255.255.0 209.165.201.5
ip http server
!
!
!--- This access list defines interesting traffic for
IPSec. ip access-list extended cryptoacl
  permit ip 10.48.66.0 0.0.1.255 192.168.10.0 0.0.0.255
!
!
line con 0
  exec-timeout 0 0
  length 0
line 33 40
  modem InOut
line aux 0

```

```
line vty 0 4
 login local
!
end
```

Verificar

Esta seção fornece informações que você pode usar para confirmar se sua configuração está funcionando adequadamente. A verificação da operação de IPSec é feita com comandos **debug**. Um ping estendido é tentado do roteador para um host atrás do gateway de acesso.

A [Output Interpreter Tool \(somente clientes registrados\) oferece suporte a determinados comandos show](#), o que permite exibir uma análise da saída do comando **show**.

- **show debug** — Exibe as configurações de depuração atuais.
- **show crypto isakmp sa** — Exibe todas as associações de segurança atuais (SAs) de IKE em um peer.
- **show crypto ipsec sa** — Exibe as configurações usadas pelas SAs atuais.

Troubleshoot

Esta seção fornece informações que podem ser usadas para o troubleshooting da sua configuração.

Comandos para Troubleshooting

Observação: antes de emitir comandos **debug**, consulte [Informações importantes sobre comandos debug](#).

- **debug crypto ipsec** — Exibe eventos de IPSec.
- **debug crypto isakmp** — Exibe mensagens sobre eventos de IKE.
- **debug crypto engine** — Exibe informações a partir do cripto mecanismo.

Exemplo de depurações

Esta seção fornece um exemplo de saída de depuração para o gateway de acesso e o roteador.

- [Switch de gateway de acesso Catalyst 4224](#)
- [Cisco IOS Router](#)

Switch de gateway de acesso Catalyst 4224

```
 triana#debug crypto ipsec
Crypto IPSEC debugging is on
 triana#debug crypto isakmp
Crypto ISAKMP debugging is on
 triana#debug crypto engine
Crypto Engine debugging is on
 triana#show debug
```

Cryptographic Subsystem:

Crypto ISAKMP debugging is on

Crypto Engine debugging is on

Crypto IPSEC debugging is on

triana#

May 29 18:01:57.746: ISAKMP (0:0): received packet from 209.165.201.6 (N) NEW SA

May 29 18:01:57.746: ISAKMP: local port 500, remote port 500

May 29 18:01:57.746: ISAKMP (0:1): Input = IKE_MESG_FROM_PEER, IKE_MM_EXCH

Old State = IKE_READY New State = IKE_R_MM1

May 29 18:01:57.746: ISAKMP (0:1): processing SA payload. message ID = 0

May 29 18:01:57.746: ISAKMP (0:1): found peer pre-shared key

matching 209.165.201.6

!--- 4224 access gateway checks the attributes for Internet Security !--- Association & Key Management Protocol (ISAKMP) negotiation !--- against the policy it has in its local

configuration. May 29 18:01:57.746: ISAKMP (0:1): Checking ISAKMP transform 1 against priority

10 policy May 29 18:01:57.746: ISAKMP: encryption DES-CBC May 29 18:01:57.746: ISAKMP: hash SHA

May 29 18:01:57.746: ISAKMP: default group 1 May 29 18:01:57.746: ISAKMP: auth pre-share *!---*

The received attributes are acceptable !--- against the configured set of attributes. May 29

18:01:57.746: ISAKMP (0:1): atts are acceptable. Next payload is 0 May 29 18:01:57.746:

CryptoEngine0: generate alg parameter May 29 18:01:57.746: CryptoEngine0:

CRYPTO_ISA_DH_CREATE(hw)(ipsec) May 29 18:01:57.898: CRYPTO_ENGINE: Dh phase 1 status: 0 May 29

18:01:57.898: ISAKMP (0:1): Input = IKE_MESG_INTERNAL, IKE_PROCESS_MAIN_MODE Old State =

IKE_R_MM1 New State = IKE_R_MM1 May 29 18:01:57.898: ISAKMP (0:1): SA is doing pre-shared key

authentication using id type ID_IPV4_ADDR May 29 18:01:57.898: ISAKMP (0:1): sending packet to

209.165.201.6 (R) MM_SA_SETUP May 29 18:01:57.898: ISAKMP (0:1): Input = IKE_MESG_INTERNAL,

IKE_PROCESS_COMPLETE Old State = IKE_R_MM1 New State = IKE_R_MM2 May 29 18:01:58.094: ISAKMP

(0:1): received packet from 209.165.201.6 (R) MM_SA_SETUP May 29 18:01:58.094: ISAKMP (0:1):

Input = IKE_MESG_FROM_PEER, IKE_MM_EXCH Old State = IKE_R_MM2 New State = IKE_R_MM3 May 29

18:01:58.098: ISAKMP (0:1): processing KE payload. message ID = 0 May 29 18:01:58.098:

CryptoEngine0: generate alg parameter May 29 18:01:58.098: CryptoEngine0:

CRYPTO_ISA_DH_SHARE_SECRET(hw)(ipsec) May 29 18:01:58.246: ISAKMP (0:1): processing NONCE

payload. message ID = 0 May 29 18:01:58.246: ISAKMP (0:1): found peer pre-shared key matching

209.165.201.6 May 29 18:01:58.250: CryptoEngine0: create ISAKMP SKEYID for conn id 1 May 29

18:01:58.250: CryptoEngine0: CRYPTO_ISA_SA_CREATE(hw)(ipsec) **May 29 18:01:58.250: ISAKMP (0:1):**

SKEYID state generated

May 29 18:01:58.250: ISAKMP (0:1): processing vendor id payload

May 29 18:01:58.250: ISAKMP (0:1): speaking to another IOS box!

May 29 18:01:58.250: ISAKMP (0:1): Input = IKE_MESG_INTERNAL, IKE_PROCESS_MAIN_MODE

Old State = IKE_R_MM3 New State = IKE_R_MM3

May 29 18:01:58.250: ISAKMP (0:1): sending packet to 209.165.201.6 (R) MM_KEY_EXCH

May 29 18:01:58.250: ISAKMP (0:1): Input = IKE_MESG_INTERNAL, IKE_PROCESS_COMPLETE

Old State = IKE_R_MM3 New State = IKE_R_MM4

May 29 18:01:58.490: ISAKMP (0:1): received packet from 209.165.201.6

(R) MM_KEY_EXCH

May 29 18:01:58.490: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)

May 29 18:01:58.490: ISAKMP (0:1): Input = IKE_MESG_FROM_PEER, IKE_MM_EXCH

Old State = IKE_R_MM4 New State = IKE_R_MM5

May 29 18:01:58.490: ISAKMP (0:1): processing ID payload. message ID = 0

May 29 18:01:58.490: ISAKMP (0:1): processing HASH payload. message ID = 0

May 29 18:01:58.490: CryptoEngine0: generate hmac context for conn id 1

May 29 18:01:58.490: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)

May 29 18:01:58.490: ISAKMP (0:1): SA has been authenticated with 209.165.201.6

!--- Phase 1 authentication is successful and the SA is authenticated. May 29 18:01:58.494:

ISAKMP (0:1): Input = IKE_MESG_INTERNAL, IKE_PROCESS_MAIN_MODE Old State = IKE_R_MM5 New State =

IKE_R_MM5 May 29 18:01:58.494: ISAKMP (1): ID payload next-payload : 8 type : 1 protocol : 17

port : 500 length : 8 May 29 18:01:58.494: ISAKMP (1): Total payload length: 12 May 29

18:01:58.494: CryptoEngine0: generate hmac context for conn id 1 May 29 18:01:58.494:

CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec) May 29 18:01:58.494: CryptoEngine0: clear dh

number for conn id 1 May 29 18:01:58.494: CryptoEngine0: CRYPTO_ISA_DH_DELETE(hw)(ipsec) May 29

18:01:58.494: CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec) May 29 18:01:58.494: ISAKMP

(0:1): sending packet to 209.165.201.6 (R) QM_IDLE May 29 18:01:58.498: ISAKMP (0:1): Input = IKE_MSG_INTERNAL, IKE_PROCESS_COMPLETE Old State = IKE_R_MM5 New State = IKE_P1_COMPLETE May 29 18:01:58.518: ISAKMP (0:1): received packet from 209.165.201.6 (R) QM_IDLE May 29 18:01:58.518: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec) May 29 18:01:58.518: CryptoEngine0: generate hmac context for conn id 1 May 29 18:01:58.518: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec) May 29 18:01:58.522: ISAKMP (0:1): processing HASH payload. message ID = -1809462101 May 29 18:01:58.522: ISAKMP (0:1): processing SA payload. message ID = -1809462101 May 29 18:01:58.522: ISAKMP (0:1): Checking IPsec proposal 1 May 29 18:01:58.522: ISAKMP: transform 1, ESP_DES May 29 18:01:58.522: ISAKMP: attributes in transform: May 29 18:01:58.522: ISAKMP: encaps is 1 May 29 18:01:58.522: ISAKMP: SA life type in seconds May 29 18:01:58.522: ISAKMP: SA life duration (basic) of 3600 May 29 18:01:58.522: ISAKMP: SA life type in kilobytes May 29 18:01:58.522: ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0 May 29 18:01:58.522: ISAKMP: authenticator is HMAC-MD5 May 29 18:01:58.522: validate proposal 0 **May 29 18:01:58.522: ISAKMP (0:1): atts are acceptable.**

May 29 18:01:58.522: IPSEC(validate_proposal_request): proposal part #1,
!--- After the attributes are negotiated, !--- IKE asks IPsec to validate the proposal. (key eng. msg.) dest= 209.165.201.5, src= 209.165.201.6, dest_proxy= 192.168.10.0/255.255.255.0/0/0 (type=4), src_proxy= 10.48.66.0/255.255.254.0/0/0 (type=4), protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 0s and 0kb, spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4 *!--- spi is still zero because SAs have not been set.* May 29 18:01:58.522: validate proposal request 0 May 29 18:01:58.522: ISAKMP (0:1): processing NONCE payload. message ID = -1809462101 May 29 18:01:58.522: ISAKMP (0:1): processing ID payload. message ID = -1809462101 May 29 18:01:58.522: ISAKMP (1): ID_IPV4_ADDR_SUBNET src 10.48.66.0/255.255.254.0 prot 0 port 0 May 29 18:01:58.522: ISAKMP (0:1): processing ID payload. message ID = -1809462101 May 29 18:01:58.522: ISAKMP (1): ID_IPV4_ADDR_SUBNET dst 192.168.10.0/255.255.255.0 prot 0 port 0 May 29 18:01:58.522: ISAKMP (0:1): asking for 1 spis from ipsec May 29 18:01:58.522: ISAKMP (0:1): Node -1809462101, Input = IKE_MSG_FROM_PEER, IKE_QM_EXCH Old State = IKE_QM_READY New State = IKE_QM_SPI_STARVE May 29 18:01:58.526: IPSEC(key_engine): got a queue event... May 29 18:01:58.526: IPSEC(spi_response): getting spi 3384026087 for SA from 209.165.201.6 to 209.165.201.5 for prot 3 May 29 18:01:58.526: ISAKMP: received ke message (2/1) May 29 18:01:58.774: CryptoEngine0: generate hmac context for conn id 1 May 29 18:01:58.774: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec) May 29 18:01:58.774: CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw)(ipsec) May 29 18:01:58.774: ISAKMP (0:1): sending packet to 209.165.201.6 (R) QM_IDLE May 29 18:01:58.774: ISAKMP (0:1): Node -1809462101, Input = IKE_MSG_FROM_IPSEC, IKE_SPI_REPLY Old State = IKE_QM_SPI_STARVE New State = IKE_QM_R_QM2 May 29 18:01:58.830: ISAKMP (0:1): received packet from 209.165.201.6 (R) QM_IDLE May 29 18:01:58.830: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec) May 29 18:01:58.834: CryptoEngine0: generate hmac context for conn id 1 May 29 18:01:58.834: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec) May 29 18:01:58.834: ipsec allocate flow 0 May 29 18:01:58.834: ipsec allocate flow 0 May 29 18:01:58.834: CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw)(ipsec) May 29 18:01:58.834: CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw)(ipsec) **May 29 18:01:58.838: ISAKMP (0:1): Creating IPsec SAs**
May 29 18:01:58.838: inbound SA from 209.165.201.6 to 209.165.201.5
(proxy 10.48.66.0 to 192.168.10.0)
May 29 18:01:58.838: has spi 0xC9B423E7 and conn_id 50 and flags 4
May 29 18:01:58.838: lifetime of 3600 seconds
May 29 18:01:58.838: lifetime of 4608000 kilobytes
May 29 18:01:58.838: outbound SA from 209.165.201.5 to 209.165.201.6
(proxy 192.168.10.0 to 10.48.66.0)
May 29 18:01:58.838: has spi 561973207 and conn_id 51 and flags 4
May 29 18:01:58.838: lifetime of 3600 seconds
May 29 18:01:58.838: lifetime of 4608000 kilobytes
May 29 18:01:58.838: ISAKMP (0:1): deleting node -1809462101 error FALSE reason
"quick mode done (await()"
May 29 18:01:58.838: ISAKMP (0:1): Node -1809462101, Input = IKE_MSG_FROM_PEER,
IKE_QM_EXCH
Old State = IKE_QM_R_QM2 New State = IKE_QM_PHASE2_COMPLETE

May 29 18:01:58.838: IPSEC(key_engine): got a queue event...
May 29 18:01:58.838: IPSEC(initialize_sas): ,
(key eng. msg.) dest= 209.165.201.5, src= 209.165.201.6,
dest_proxy= 192.168.10.0/255.255.255.0/0/0 (type=4),
src_proxy= 10.48.66.0/255.255.254.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,

```

spi= 0xC9B423E7(3384026087), conn_id= 50, keysize= 0, flags= 0x4
!--- IPsec SAs are now initialized and encrypted !--- communication can now take place. May 29
18:01:58.838: IPSEC(initialize_sas): , (key eng. msg.) src= 209.165.201.5, dest= 209.165.201.6,
src_proxy= 192.168.10.0/255.255.255.0/0/0 (type=4), dest_proxy= 10.48.66.0/255.255.254.0/0/0
(type=4), protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 3600s and 4608000kb, spi=
0x217F07D7(561973207), conn_id= 51, keysize= 0, flags= 0x4 !--- IPsec SAs are now initialized
and encrypted !--- communication can now take place. May 29 18:01:58.838: IPSEC(create_sa): sa
created, (sa) sa_dest= 209.165.201.5, sa_prot= 50, sa_spi= 0xC9B423E7(3384026087), sa_trans=
esp-des esp-md5-hmac , sa_conn_id= 50 May 29 18:01:58.838: IPSEC(create_sa): sa created, (sa)
sa_dest= 209.165.201.6, sa_prot= 50, sa_spi= 0x217F07D7(561973207), sa_trans= esp-des esp-md5-
hmac , sa_conn_id= 51 !--- Observe that two IPsec SAs are created. !--- Recollect that IPsec SAs
are bidirectional. triana# triana# triana# triana#show crypto isakmp sa
dst                src                state                conn-id    slot
209.165.201.5     209.165.201.6     QM_IDLE              &n bsp;    1          0

```

```
triana#show crypto ipsec sa
```

interface: Vlan 1

```
Crypto map tag: mymap, local addr. 209.165.201.5
```

```

local ident (addr/mask/prot/port): (192.168.10.0/255.255.255.0/0/0)
remote ident (addr/mask/prot/port): (10.48.66.0/255.255.254.0/0/0)
current_peer: 209.165.201.6

```

```
PERMIT, flags={origin_is_acl,}
```

```
#pkts encaps: 4, #pkts encrypt: 4, #pkts digest 4
```

```
#pkts decaps: 4, #pkts decrypt: 4, #pkts verify 4
```

```
#pkts compressed: 0, #pkts decompressed: 0
```

```
#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0
```

```
#send errors 0, #recv errors 0
```

```
local crypto endpt.: 209.165.201.5, remote crypto endpt.: 209.165.201.6
```

```
path mtu 1500, media mtu 1500
```

```
current outbound spi: 217F07D7
```

```
inbound esp sas:
```

```
spi: 0xC9B423E7(3384026087)
```

```
transform: esp-des esp-md5-hmac ,
```

```
in use settings ={Tunnel, }
```

```
slot: 0, conn id: 50, flow_id: 1, crypto map: mymap
```

```
sa timing: remaining key lifetime (k/sec): (4607998/3536)
```

```
IV size: 8 bytes
```

```
replay detection support: Y
```

```
inbound ah sas:
```

```
inbound pcp sas:
```

```
outbound esp sas:
```

```
spi: 0x217F07D7(561973207)
```

```
transform: esp-des esp-md5-hmac ,
```

```
in use settings ={Tunnel, }
```

```
slot: 0, conn id: 51, flow_id: 2, crypto map: mymap
```

```
sa timing: remaining key lifetime (k/sec): (4607999/3536)
```

```
IV size: 8 bytes
```

```
replay detection support: Y
```

```
outbound ah sas:
```

```
outbound pcp sas:
```

```
triana#
```

brussels#show debug

Cryptographic Subsystem:

 Crypto ISAKMP debugging is on

 Crypto Engine debugging is on

 Crypto IPSEC debugging is on

brussels#p

Protocol [ip]:

Target IP address: 192.168.10.5

Repeat count [5]:

Datagram size [100]:

Timeout in seconds [2]:

Extended commands [n]: y

Source address or interface: fastethernet0/0

Type of service [0]:

Set DF bit in IP header? [no]:

Validate reply data? [no]:

Data pattern [0xABCD]:

Loose, Strict, Record, Timestamp, Verbose[none]:

Sweep range of sizes [n]:

Type escape sequence to abort.

Sending 5, 100-byte ICMP Echos to 192.168.10.5, timeout is 2 seconds:

May 29 18:01:54.285: IPSEC(sa_request): ,

 (key eng. msg.) src= 209.165.201.6, dest= 209.165.201.5,

 src_proxy= 10.48.66.0/255.255.254.0/0/0 (type=4),

 dest_proxy= 192.168.10.0/255.255.255.0/0/0 (type=4),

 protocol= ESP, transform= esp-des esp-md5-hmac ,

 lifedur= 3600s and 4608000kb,

 spi= 0x217F07D7(561973207), conn_id= 0, keysize= 0, flags= 0x4004

May 29 18:01:54.285: ISAKMP: received ke message (1/1)

May 29 18:01:54.285: ISAKMP: local port 500, remote port 500

May 29 18:01:54.289: ISAKMP (0:1): beginning Main Mode exchange

May 29 18:01:54.289: ISAKMP (1): sending packet to 209.165.201.5 (I) MM_NO_STATE

May 29 18:01:54.461: ISAKMP (1): received packet from 209.165.201.5 (I) MM_NO_STATE

May 29 18:01:54.461: ISAKMP (0:1): processing SA payload. message ID = 0

May 29 18:01:54.461: ISAKMP (0:1): Checking ISAKMP transform 1

 against priority 10 policy

May 29 18:01:54.465: ISAKMP: encryption DES-CBC

May 29 18:01:54.465: ISAKMP: hash SHA

May 29 18:01:54.465: ISAKMP: default group 1

May 29 18:01:54.465: ISAKMP: auth pre-share

May 29 18:01:54.465: ISAKMP (0:1): atts are acceptable. Next payload is 0

May 29 18:01:54.465: CryptoEngine0: generate alg parameter

May 29 18:01:54.637: CRYPTO_ENGINE: Dh phase 1 status: 0

May 29 18:01:54.637: CRYPTO_ENGINE: Dh phase 1 status: 0

May 29 18:01:54.637: ISAKMP (0:1): SA is doing pre-shared key authentication

May 29 18:01:54.637: ISAKMP (1): SA is doing pre-shared key authentication using

 id type ID_IPV4_ADDR

May 29 18:01:54.641: ISAKMP (1): sending packet to 209.165.201.5 (I) MM_SA_SETUP

May 29 18:01:54.805: ISAKMP (1): received packet from 209.165.201.5 (I) MM_SA_SETUP

May 29 18:01:54.805: ISAKMP (0:1): processing KE payload. message ID = 0

May 29 18:01:54.805: CryptoEngine0: generate alg parameter

May 29 18:01:55.021: ISAKMP (0:1): processing NONCE payload. messa!!!!

Success rate is 80 percent (4/5), round-trip min/avg/max = 20/21/24 ms

brussels#ge ID = 0

May 29 18:01:55.021: CryptoEngine0: create ISAKMP SKEYID for conn id 1

May 29 18:01:55.025: ISAKMP (0:1): SKEYID state generated

May 29 18:01:55.029: ISAKMP (0:1): processing vendor id payload

May 29 18:01:55.029: ISAKMP (0:1): speaking to another IOS box!

May 29 18:01:55.029: ISAKMP (1): ID payload

 next-payload : 8

 type : 1

```
protocol      : 17
port         : 500
length      : 8
May 29 18:01:55.029: ISAKMP (1): Total payload length: 12
May 29 18:01:55.029: CryptoEngine0: generate hmac context for conn id 1
May 29 18:01:55.033: ISAKMP (1): sending packet to 209.165.201.5 (I) MM_KEY_EXCH
May 29 18:01:55.049: ISAKMP (1): received packet from 209.165.201.5 (I) MM_KEY_EXCH
May 29 18:01:55.053: ISAKMP (0:1): processing ID payload. message ID = 0
May 29 18:01:55.053: ISAKMP (0:1): processing HASH payload. message ID = 0
May 29 18:01:55.053: CryptoEngine0: generate hmac context for conn id 1
May 29 18:01:55.057: ISAKMP (0:1): SA has been authenticated with 209.165.201.5
!--- Phase 1 is completed and Phase 2 starts now. May 29 18:01:55.057: ISAKMP (0:1): beginning
Quick Mode exchange, M-ID of -1809462101 May 29 18:01:55.061: CryptoEngine0: generate hmac
context for conn id 1 May 29 18:01:55.065: ISAKMP (1): sending packet to 209.165.201.5 (I)
QM_IDLE May 29 18:01:55.065: CryptoEngine0: clear dh number for conn id 1 May 29 18:01:55.337:
ISAKMP (1): received packet from 209.165.201.5 (I) QM_IDLE May 29 18:01:55.341: CryptoEngine0:
generate hmac context for conn id 1 May 29 18:01:55.345: ISAKMP (0:1): processing SA payload.
message ID = -1809462101 May 29 18:01:55.345: ISAKMP (0:1): Checking IPsec proposal 1 May 29
18:01:55.345: ISAKMP: transform 1, ESP_DES May 29 18:01:55.345: ISAKMP: attributes in transform:
May 29 18:01:55.345: ISAKMP: encaps is 1 May 29 18:01:55.345: ISAKMP: SA life type in seconds
May 29 18:01:55.345: ISAKMP: SA life duration (basic) of 3600 May 29 18:01:55.345: ISAKMP: SA
life type in kilobytes May 29 18:01:55.345: ISAKMP: SA life duration (VPI) of 0x0 0x46 0x50 0x0
May 29 18:01:55.349: ISAKMP: authenticator is HMAC-MD5 May 29 18:01:55.349: validate proposal 0
May 29 18:01:55.349: ISAKMP (0:1): atts are acceptable.
May 29 18:01:55.349: IPSEC(validate_proposal_request): proposal part #1,
!--- After negotiating the attributes, IKE asks IPsec to !--- validate the proposal. (key eng.
msg.) dest= 209.165.201.5, src= 209.165.201.6, dest_proxy= 192.168.10.0/255.255.255.0/0/0
(type=4), src_proxy= 10.48.66.0/255.255.254.0/0/0 (type=4), protocol= ESP, transform= esp-des
esp-md5-hmac , lifedur= 0s and 0kb, spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4 !--- spi is
still zero because SAs have not been set. May 29 18:01:55.353: validate proposal request 0 May
29 18:01:55.357: ISAKMP (0:1): processing NONCE payload. message ID = -1809462101 May 29
18:01:55.357: ISAKMP (0:1): processing ID payload. message ID = -1809462101 May 29 18:01:55.357:
ISAKMP (0:1): processing ID payload. message ID = -1809462101 May 29 18:01:55.357:
CryptoEngine0: generate hmac context for conn id 1 May 29 18:01:55.361: ipsec allocate flow 0
May 29 18:01:55.361: ipsec allocate flow 0 May 29 18:01:55.369: ISAKMP (0:1): Creating IPsec SAs
May 29 18:01:55.369: inbound SA from 209.165.201.5 to 209.165.201.6
(proxy 192.168.10.0 to 10.48.66.0)
May 29 18:01:55.369: has spi 561973207 and conn_id 2000 and flags 4
May 29 18:01:55.373: lifetime of 3600 seconds
May 29 18:01:55.373: lifetime of 4608000 kilobytes
May 29 18:01:55.373: outbound SA from 209.165.201.6 to 209.165.201.5
(proxy 10.48.66.0 to 192.168.10.0)
May 29 18:01:55.373: has spi -910941209 and conn_id 2001 and flags 4
May 29 18:01:55.373: lifetime of 3600 seconds
May 29 18:01:55.373: lifetime of 4608000 kilobytes
May 29 18:01:55.377: ISAKMP (1): sending packet to 209.165.201.5 (I) QM_IDLE
May 29 18:01:55.377: ISAKMP (0:1): deleting node -1809462101 error FALSE reason ""
May 29 18:01:55.381: IPSEC(key_engine): got a queue event...
May 29 18:01:55.381: IPSEC(initialize_sas): ,
(key eng. msg.) dest= 209.165.201.6, src= 209.165.201.5,
dest_proxy= 10.48.66.0/255.255.254.0/0/0 (type=4),
src_proxy= 192.168.10.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 3600s and 4608000kb,
spi= 0x217F07D7(561973207), conn_id= 2000, keysize= 0, flags= 0x4
!--- IPsec SAs are now initialized and encrypted !--- communication can now take place. May 29
18:01:55.381: IPSEC(initialize_sas): , (key eng. msg.) src= 209.165.201.6, dest= 209.165.201.5,
src_proxy= 10.48.66.0/255.255.254.0/0/0 (type=4), dest_proxy= 192.168.10.0/255.255.255.0/0/0
(type=4), protocol= ESP, transform= esp-des esp-md5-hmac , lifedur= 3600s and 4608000kb, spi=
0xC9B423E7(3384026087), conn_id= 2001, keysize= 0, flags= 0x4 !--- IPsec SAs are now initialized
and encrypted !--- communication can now take place. May 29 18:01:55.385: IPSEC(create_sa): sa
created, (sa) sa_dest= 209.165.201.6, sa_prot= 50, sa_spi= 0x217F07D7(561973207), sa_trans= esp-
des esp-md5-hmac , sa_conn_id= 2000 May 29 18:01:55.385: IPSEC(create_sa): sa created, (sa)
sa_dest= 209.165.201.5, sa_prot= 50, sa_spi= 0xC9B423E7(3384026087), sa_trans= esp-des esp-md5-
```

hmac , sa_conn_id= 2001 !--- Observe that two IPSec SAs are created. !--- Recollect that IPSec SAs are bidirectional. brussels# brussels#show crypto isakmp sa

dst	src	state	conn-id	slot
209.165.201.5	209.165.201.6	QM_IDLE	1	0

brussels#show crypto ipsec sa

interface: FastEthernet0/1

Crypto map tag: vpnmap, local addr. 209.165.201.6

local ident (addr/mask/prot/port): (10.48.66.0/255.255.254.0/0/0)
remote ident (addr/mask/prot/port): (192.168.10.0/255.255.255.0/0/0)
current_peer: 209.165.201.5
PERMIT, flags={origin_is_acl,}
#pkts encaps: 4, #pkts encrypt: 4, #pkts digest 4
#pkts decaps: 4, #pkts decrypt: 4, #pkts verify 4
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0
#send errors 1, #recv errors 0

local crypto endpt.: 209.165.201.6, remote crypto endpt.: 209.165.201.5
path mtu 1500, media mtu 1500
current outbound spi: C9B423E7

inbound esp sas:

spi: 0x217F07D7(561973207)
transform: esp-des esp-md5-hmac ,
in use settings ={Tunnel, }
slot: 0, conn id: 2000, flow_id: 1, crypto map: vpnmap
sa timing: remaining key lifetime (k/sec): (4607998/3560)
IV size: 8 bytes
replay detection support: Y

inbound ah sas:

inbound pcp sas:

outbound esp sas:

spi: 0xC9B423E7(3384026087)
transform: esp-des esp-md5-hmac ,
in use settings ={Tunnel, }
slot: 0, conn id: 2001, flow_id: 2, crypto map: vpnmap
sa timing: remaining key lifetime (k/sec): (4607999/3560)
IV size: 8 bytes
replay detection support: Y

outbound ah sas:

outbound pcp sas:

brussels#

[Informações Relacionadas](#)

- [Página de suporte do IPSec](#)
- [Uma introdução ao IPSec](#)
- [Suporte Técnico - Cisco Systems](#)