

Alterar ou recuperar senha para FTD por meio do gerenciador de chassi FXOS

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Componentes Utilizados](#)

[Informações de Apoio](#)

[Configurar](#)

[Configurações](#)

[Verificar](#)

Introduction

Este documento descreve como alterar a senha de uma instância do Cisco Firepower Threat Defense (FTD) por meio do Cisco Firepower eXtensible Operating System (FXOS) Chassis Manager mesmo quando você não sabe a senha atual.

Prerequisites

Requirements

A Cisco recomenda que você tenha conhecimento destes tópicos:

- Cisco Firepower Threat Defense (FTD)
- Gestor de chassis do Cisco Firepower eXtensible Operating System (FXOS)

Componentes Utilizados

- Cisco Firepower Threat Defense (FTD) 6.2.2 ou posterior
- Cisco Firepower 4120 Security Appliance versão FXOS 2.2 ou superior

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. Se a rede estiver ativa, certifique-se de que você entenda o impacto potencial de qualquer comando.

Informações de Apoio

Há casos em que as políticas de segurança exigem que os administradores de rede alterem as senhas regularmente para os dispositivos.

Além disso, pode ser que uma senha para um dispositivo seja perdida e precise ser recuperada.

No caso de instâncias de FTD sobre dispositivos de segurança FP41xx e FP93xx, isso pode ser feito através do gerenciador de chassi do FXOS.

Configurar


Configurações

Para alterar a senha do aplicativo FTD, siga estes passos:

Etapa 1. Faça login no Chassis Manager com um nome de usuário de direitos de administrador.



Etapa 2. Navegue até a guia **Dispositivos** e selecione o botão **Editar** para o aplicativo FTD relacionado.

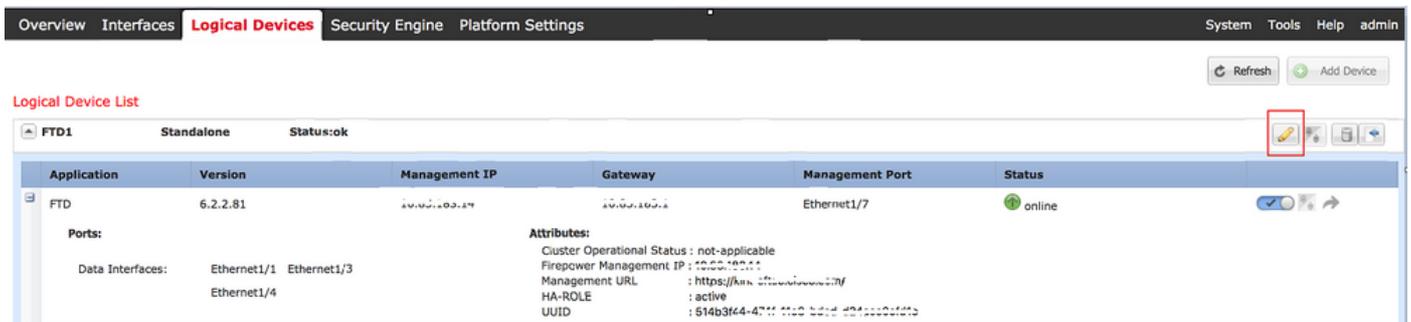

Etapa 3. Selecione o ícone da instância FTD como mostrado na imagem.



Etapa 4. Uma janela de configuração é exibida. Assim que estiver lá, navegue até a guia **Configurações**.

Cisco Firepower Threat Defense - Configuration

General Information Settings Agreement

Interface Information

Management Interface: Ethernet1/7

Management

Address Type: IPv4 only

IPv4

Management IP: 192.168.1.1

Network Mask: 255.255.255.0

Network Gateway: 192.168.1.254

OK Cancel

Etapa 5. Digite sua nova senha para o aplicativo FTD na caixa de texto **Senha**.

Cisco Firepower Threat Defense - Configuration

General Information Settings Agreement

Registration Key: Set: Yes

Confirm Registration Key: *****

Password: ***** Set: Yes

Confirm Password:

Firepower Management Center IP: 192.168.1.1

Search domains:

Firewall Mode: Transparent

DNS Servers: 192.168.1.1

Fully Qualified Hostname:

Eventing Interface:

OK Cancel

Etapa 6. Reintroduza a nova senha na caixa de texto **Confirmar senha**.

Note: Reinicie o dispositivo no nível FXOS antes que a nova senha entre em vigor.

Bootstrap Settings Update Confirmation



Updating the bootstrap settings from the Firepower Chassis Manager is for disaster recovery only; we recommend that you instead change bootstrap settings in the application. To update the bootstrap settings from the Firepower Chassis Manager, click **Restart Now**: the old bootstrap configuration will be overwritten, and the application will restart. Or click **Restart Later** so you can manually restart the application at a time of your choosing and apply the new bootstrap settings (**Logical Devices > Restart**).

Note: For FTD, if you change the management IP address, be sure to change the device IP address in **FMC (Devices > Device Management > Device tab > Management area)**. This task is not required if you specified the NAT ID instead of the device IP address in FMC.

Restart Now

Restart Later

Cancel

Verificar

Faça login no seu aplicativo FTD via SSH para garantir que sua nova senha foi corretamente aplicada.