

配置用于内联部署的SD-WAN边缘路由器

目录

[简介](#)

[先决条件](#)

[要求](#)

[使用的组件](#)

[背景信息](#)

[网络图](#)

[配置](#)

[确认](#)

[相关信息](#)

简介

本文档介绍如何配置带MPLS传输的Cisco SD-WAN Edge，以通过内联DC广域网边缘访问互联网上的Cisco SD-WAN控制器。

先决条件

要求

建议掌握下列主题的相关知识：

- 思科软件定义的广域网(SD-WAN)
- 路由

使用的组件

本文档中的信息基于以下软件和硬件版本：

- Cisco vManage版本20.6.5.2
- 思科广域网边缘路由器版本17.06.05

本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始（默认）配置。如果您的网络处于活动状态，请确保您了解所有命令的潜在影响。


背景信息

在内联数据中心广域网边缘部署中，控制从MPLS传入的流量需要到达互联网上的SD-WAN控制器。流量可以在VPN 0中的MPLS和互联网之间路由。

在这种情况下，需要从MPLS和互联网物理接口删除隧道配置，并将其置于两个独立的环回接口上

o

网络图

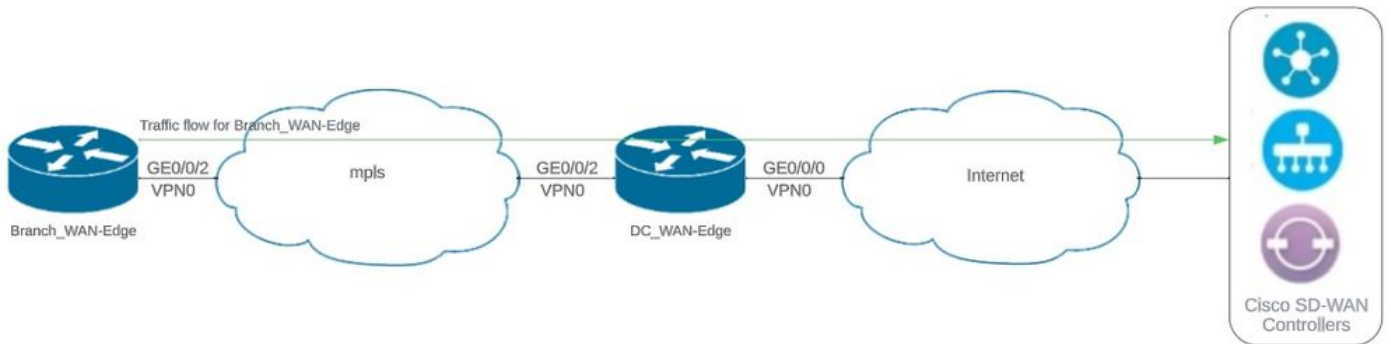

网络拓扑

配置

在此部署中，分支机构广域网边缘设备需要通过数据中心广域网边缘访问控制器。在此场景中，在DC WAN边缘的VPN 0中添加了一个额外的物理接口，并且隧道从物理接口移至环回接口。

将隧道从物理接口移至环回接口允许DC WAN边缘路由器充当来自DC WAN边缘和分支WAN边缘路由器的流量的中转。环回IP地址与控制器之间必须存在连接，才能形成控制平面和数据平面。

以下输出捕获了直流WAN边缘接口配置：

```
interface GigabitEthernet0/0/0
 ip address 10.201.186.175 255.255.255.224
 no shutdown
!
interface GigabitEthernet0/0/2
 description connection to Branch_WAN-Edge
 ip address 192.168.20.21 255.255.255.252
 no shutdown
!
interface Loopback1
 description wan_color_green
 ip address 192.168.20.2 255.255.255.255
 no shutdown
!
interface Loopback2
 description wan_color_custom2
 ip address 192.168.20.10 255.255.255.255
 no shutdown
!
```

下一个输出捕获了DC广域网边缘隧道配置：

```
DC_WAN-Edge#sh sdwan running-config sdwan
```

```
sdwan
interface Loopback1
 tunnel-interface
  encapsulation ipsec weight 1
  no border
  color green
  no last-resort-circuit
  no low-bandwidth-link
  max-control-connections 1
  no vbond-as-stun-server
  vmanage-connection-preference 5
  port-hop
  carrier default
  nat-refresh-interval 5
  hello-interval 1000
  hello-tolerance 12
  no allow-service all
  no allow-service bgp
  allow-service dhcp
  allow-service dns
  allow-service icmp
  no allow-service sshd
  no allow-service netconf
  no allow-service ntp
  no allow-service ospf
  no allow-service stun
  allow-service https
  no allow-service snmp
  no allow-service bfd
 exit
exit
interface Loopback2
 tunnel-interface
  encapsulation ipsec weight 1
  no border
  color custom2 restrict
  no last-resort-circuit
  no low-bandwidth-link
  max-control-connections 1
  no vbond-as-stun-server
  vmanage-connection-preference 5
  port-hop
  carrier default
  nat-refresh-interval 5
  hello-interval 1000
  hello-tolerance 12
  no allow-service all
  no allow-service bgp
  allow-service dhcp
  allow-service dns
  allow-service icmp
  no allow-service sshd
  no allow-service netconf
  no allow-service ntp
  no allow-service ospf
  no allow-service stun
  allow-service https
  no allow-service snmp
  no allow-service bfd
 exit
exit
!
```

下一个输出捕获了Branch_WAN-Edge隧道配置：

```
Branch_WAN-Edge#sh sdwan run sdwan
sdwan
interface GigabitEthernet0/0/2
 tunnel-interface
  encapsulation ipsec weight 1
  no border
  color custom2
  no last-resort-circuit
  no low-bandwidth-link
  no vbond-as-stun-server
  vmanage-connection-preference 5
  port-hop
  carrier default
  nat-refresh-interval 5
  hello-interval 1000
  hello-tolerance 12
  no allow-service all
  no allow-service bgp
  allow-service dhcp
  allow-service dns
  allow-service icmp
  no allow-service sshd
  no allow-service netconf
  no allow-service ntp
  no allow-service ospf
  no allow-service stun
  allow-service http
  no allow-service snmp
  no allow-service bfd
exit
exit
!
```

确认

下一个输出捕获了DC_WAN-Edge的控制平面连接。

```
DC_WAN-Edge#sh sdwan control connections
PEER PEER CONTROLLER
PEER PEER PEER SITE DOMAIN PEER PRIV PEER PUB GROUP
TYPE PROT SYSTEM IP ID ID PRIVATE IP PORT PUBLIC IP PORT ORGANIZATION LOCAL COLOR PROXY STATE UPTIME ID
-----
vsmart dtls 10.10.10.2 1 1 10.201.186.172 12346 10.201.186.172 12346 rch_sdwan_lab custom2 No up 0:00:00
vsmart dtls 10.10.10.2 1 1 10.201.186.172 12346 10.201.186.172 12346 rch_sdwan_lab green No up 0:00:00
vmanage dtls 10.10.10.1 1 0 10.201.186.171 12746 10.201.186.171 12746 rch_sdwan_lab green No up 0:00:00
```

下一个输出捕获了Branch_WAN-Edge的控制平面连接。

```
Branch_WAN-Edge#show sdwan control connections
PEER PEER CONTROLLER
PEER PEER PEER SITE DOMAIN PEER PRIV PEER PUB GROUP
TYPE PROT SYSTEM IP ID ID PRIVATE IP PORT PUBLIC IP PORT LOCAL COLOR PROXY STATE UPTIME ID
-----
vsmart dtls 10.10.10.2 1 1 10.201.186.172 12346 10.201.186.172 12346 custom2 No up 0:00:00:20 0
vmanage dtls 10.10.10.1 1 0 10.201.186.171 12346 10.201.186.171 12346 custom2 No up 0:00:00:22 0
```

下一个输出捕获了DC_WAN-Edge的数据平面连接。本地绿色正在形成与远程边缘设备的BFD会话。

```
DC_WAN-Edge#sh sdwan bfd sessions
SOURCE TLOC REMOTE TLOC DST PUBLIC DST PUBLIC DETECT TX
SYSTEM IP SITE ID STATE COLOR COLOR SOURCE IP IP PORT ENCAP MULTIPLIER INTERVAL(msec UPTIME TRANSITIONS
-----
10.10.10.60 60 up green biz-internet 192.168.20.2 10.201.186.167 12346 ipsec 7 1000 0:00:06:37 6
10.10.10.20 20 up green biz-internet 192.168.20.2 10.201.186.180 12346 ipsec 7 1000 0:00:06:37 6
10.10.10.5 5 up green default 192.168.20.2 10.201.186.181 12346 ipsec 7 1000 0:00:06:37 6
10.10.10.10 10 up green gold 192.168.20.2 10.201.186.182 12346 ipsec 7 1000 0:00:06:37 6
```

下一个输出捕获了Branch_WAN-Edge的数据平面连接。本地颜色custom2正在形成与远程边缘设备的BFD会话。

```
Branch_WAN-Edge#sh sdwan bfd sessions
SOURCE TLOC REMOTE TLOC DST PUBLIC DST PUBLIC DETECT TX
SYSTEM IP SITE ID STATE COLOR COLOR SOURCE IP IP PORT ENCAP MULTIPLIER INTERVAL(msec) UPTIME TRANSITION
-----
10.10.10.5 5 up custom2 default 192.168.20.22 10.201.186.181 12346 ipsec 7 1000 0:00:07:37 2
10.10.10.10 10 up custom2 gold 192.168.20.22 10.201.186.182 12346 ipsec 7 1000 0:00:07:37 2
10.10.10.20 20 up custom2 biz-internet 192.168.20.22 10.201.186.180 12346 ipsec 7 1000 0:00:07:37 2
10.10.10.60 60 up custom2 biz-internet 192.168.20.22 10.201.186.167 12346 ipsec 7 1000 0:00:07:37 2
```

相关信息

- [Cisco SD-WAN设计指南](#)

关于此翻译

思科采用人工翻译与机器翻译相结合的方式将此文档翻译成不同语言，希望全球的用户都能通过各自的语言得到支持性的内容。

请注意：即使是最好的机器翻译，其准确度也不及专业翻译人员的水平。

Cisco Systems, Inc. 对于翻译的准确性不承担任何责任，并建议您总是参考英文原始文档（已提供链接）。