

# RV130W上SSID的當天訪問時間

## 目標

管理員可以通過為特定服務集識別符號(SSID)配置訪問時間來提高網路安全性。SSID是與無線網路關聯的唯一識別符號。「訪問時間」(Time of Day Access)允許管理員指定允許使用者訪問網路的時間以及限制使用者的時間。


本文檔的目的是解釋如何在RV130W上配置SSID的接入時間設定。

## 適用裝置

·RV130W

## 程式步驟

步驟1.登入到Web配置實用程式並選擇Wireless > Basic Settings。將開啟基本設定頁面：

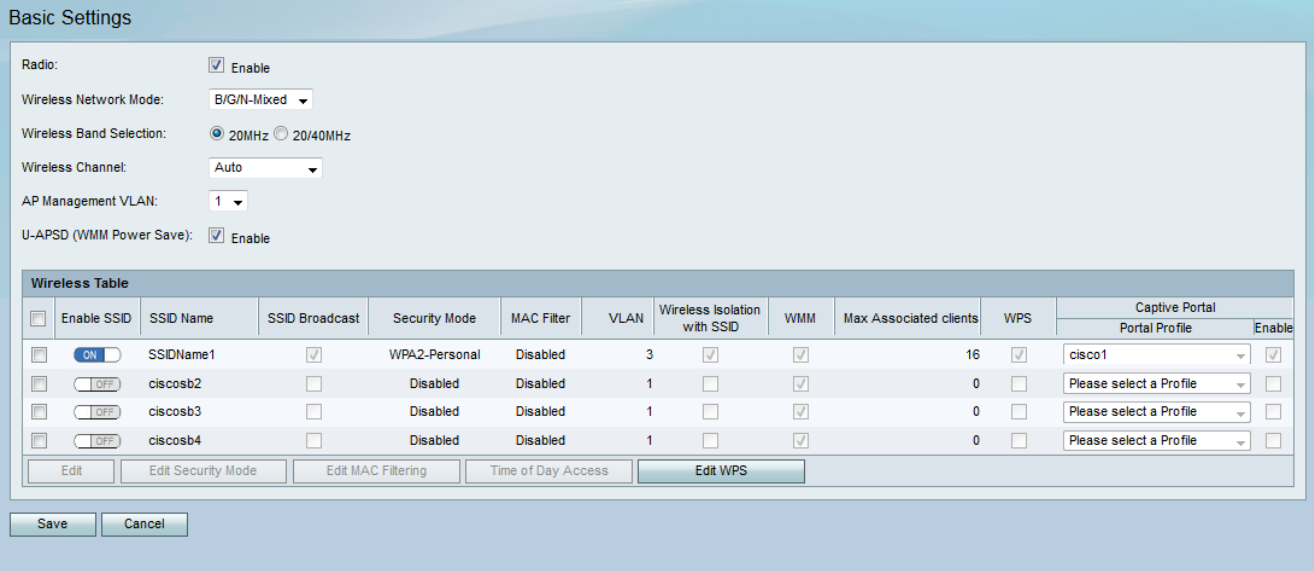

The screenshot displays the 'Basic Settings' configuration page. At the top, there are several settings: Radio is checked 'Enable'; Wireless Network Mode is set to 'B/G/N-Mixed'; Wireless Band Selection has '20MHz' selected; Wireless Channel is set to 'Auto'; AP Management VLAN is '1'; and U-APSD (WMM Power Save) is checked 'Enable'.

Below these settings is a 'Wireless Table' with the following columns: Enable SSID, SSID Name, SSID Broadcast, Security Mode, MAC Filter, VLAN, Wireless Isolation with SSID, WMM, Max Associated clients, WPS, and Captive Portal (Portal Profile, Enable). The table contains four rows of SSID configurations:

Enable SSID	SSID Name	SSID Broadcast	Security Mode	MAC Filter	VLAN	Wireless Isolation with SSID	WMM	Max Associated clients	WPS	Captive Portal (Portal Profile)	Enable
<input checked="" type="checkbox"/>	SSIDName1	<input checked="" type="checkbox"/>	WPA2-Personal	Disabled	3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	16	<input checked="" type="checkbox"/>	cisco1	<input checked="" type="checkbox"/>
<input type="checkbox"/>	ciscosb2	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>
<input type="checkbox"/>	ciscosb3	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>
<input type="checkbox"/>	ciscosb4	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>

At the bottom of the table, there are buttons for 'Edit', 'Edit Security Mode', 'Edit MAC Filtering', 'Time of Day Access', and 'Edit WPS'. Below the table are 'Save' and 'Cancel' buttons.

步驟2.選中您要編輯的服務集識別符號(SSID)的覈取方塊，然後按一下Time of Day Access按鈕，為SSID配置Time of Day Access。

Basic Settings

Radio:  Enable

Wireless Network Mode: B/G/N-Mixed

Wireless Band Selection:  20MHz  20/40MHz

Wireless Channel: Auto

AP Management VLAN: 1

U-APSD (WMM Power Save):  Enable

<input type="checkbox"/>	Enable SSID	SSID Name	SSID Broadcast	Security Mode	MAC Filter	VLAN	Wireless Isolation with SSID	WMM	Max Associated clients	WPS	Captive Portal	
											Portal Profile	Enable
<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	SSIDName1	<input checked="" type="checkbox"/>	WPA2-Personal	Disabled	3	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	16	<input checked="" type="checkbox"/>	cisco1	<input checked="" type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	ciscosb2	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	ciscosb3	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>
<input type="checkbox"/>	<input type="checkbox"/>	ciscosb4	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	0	<input type="checkbox"/>	Please select a Profile	<input type="checkbox"/>

Buttons: Edit, Edit Security Mode, Edit MAC Filtering, Time of Day Access, Edit WPS, Save, Cancel

此時將開啟時間訪問頁面：

Time of Day Access

Add / Edit Access Point Configuration

Active Time:  Enable

Start Time: 12 Hours 0 Minutes AM

Stop Time: 12 Hours 0 Minutes AM

Buttons: Save, Cancel, Back

步驟3.在Active Time欄位中，選中Enable 覈取方塊以啟用Time of Day Access。

Time of Day Access

Add / Edit Access Point Configuration

Active Time:  Enable

Start Time: 12 Hours 0 Minutes AM

Stop Time: 12 Hours 0 Minutes AM

Buttons: Save, Cancel, Back

步驟4.在Start Time欄位中，使用提供的下拉選單指定使用者在一天中可以訪問網路的時間。

Time of Day Access

**Add / Edit Access Point Configuration**

Active Time:  Enable

Start Time: 12 Hours 0 Minutes AM

Stop Time: 12 Hours 0 Minutes AM

Save Cancel Back

步驟5.在 *Stop Time* 欄位中，使用所提供的下拉式清單指定一天內網路受限於使用者的時間。

Time of Day Access

**Add / Edit Access Point Configuration**

Active Time:  Enable

Start Time: 05 Hours 08 Minutes PM

Stop Time: 12 Hours 0 Minutes AM

Save Cancel Back

步驟6.按一下 **Save** 以儲存設定。

06		28		50	
07		29		51	
08		30		52	
09		31		53	
10		32		54	
11		33		55	
12		34		56	
13		35		57	
14		36		58	
15		37		59	
16		38		60	
17		39		61	
18		40		62	
19		41		63	
20		42		64	
21		43			
22		44			

Save Cancel Back