

# Catalyst 9800無線控制器常見無線客戶端連線問題故障排除

## 目錄

[簡介](#)

[必要條件](#)

[需求](#)

[採用元件](#)

[收集日誌](#)

[客戶端無法連線的情況](#)

[Web身份驗證憑據無效](#)

[策略配置檔案中未定義有效的VLAN](#)

[密碼錯誤](#)

[9800 WLC上不存在RADIUS傳送的存取控制清單\(ACL\)](#)

[9800 WLC上不存在RADIUS傳送的VLAN](#)

[由於WLAN或策略配置檔案中的更改而斷開連線](#)

[從網路中手動刪除客戶端](#)

[由於EAP超時而斷開連線](#)

[由於AP無線電重置，已斷開連線](#)

[由於Web身份驗證超時而斷開連線](#)

[由於會話超時而斷開連線](#)

[由於空閒超時而斷開連線](#)

[客戶端在SSID之間移動](#)

## 簡介

本檔案介紹最常見的無線使用者端連線問題案例，以及如何在Catalyst 9800無線控制器上解決這些問題。

## 必要條件

### 需求

思科建議您瞭解以下主題：

- Cisco Catalyst 9800 系列無線控制器
- 對無線控制器的命令列介面(CLI)訪問

### 採用元件

本檔案中的資訊是根據Cisco IOS® XE直布羅陀版16.10或更新軟體和硬體版本。

本文中的資訊是根據特定實驗室環境內的裝置所建立。文中使用到的所有裝置皆從已清除（預設）的組態來啟動。如果您的網路運作中，請確保您瞭解任何指令可能造成的影響。

## 收集日誌

WLC 9800 提供永不間斷的追蹤功能。這可確保所有與客戶端連線相關的錯誤、警告和通知級別消息均持續記錄，並且您可以在發生事故或故障情況後檢視其日誌。

**注意：**根據生成的日誌量，您可以將時間從幾小時縮短到幾天。

若要檢視9800 WLC在預設情況下蒐集的追蹤，可以透過SSH/Telnet連線到9800 WLC，然後按照以下步驟操作（確保作業階段已記錄到文字檔中）。

步驟1.檢查控制器當前時間，這樣您就可以跟蹤問題發生時之前的日誌。

```
# show clock
```

步驟2.根據系統配置的指示，從控制器緩衝區或外部系統日誌中收集系統日誌。這樣可以快速檢視系統的運行狀況和錯誤（如果有）。

```
# show logging
```

步驟3.驗證是否已啟用任何調試條件。

```
# show debugging
```

```
IOSXE Conditional Debug Configs:
```

```
Conditional Debug Global State: Stop
```

```
IOSXE Packet Tracing Configs:
```

```
Packet Infra debugs:
```

```
Ip Address
```

```
Port
```

```
-----|-----
```

**註：**如果您看到列出了任何條件，則表示遇到啟用條件（mac地址、ip地址等）的所有進程的跟蹤將記錄到調試級別。這將增加日誌量。因此，建議在不主動調試時清除所有條件。

步驟4.假設步驟3中未列出測試的mac地址作為條件，請收集特定mac地址的always-on通知級別跟蹤。

```
# show logging profile wireless filter { mac | ip } { <aaaa.bbbb.cccc> | <a.b.c.d> } to-file  
always-on-<FILENAME.txt>
```

您可顯示作業階段中的內容，或可將檔案複製到外部 TFTP 伺服器。

```
# more bootflash:always-on-<FILENAME.txt>  
or  
# copy bootflash:always-on-<FILENAME.txt> tftp://a.b.c.d/path/always-on-<FILENAME.txt>
```

條件調試和無線電活動跟蹤：

如果永遠線上(always-on)跟蹤未為您提供足夠的資訊來確定所調查問題的觸發因素，則可以啟用條件調試並捕獲無線活動(RA)跟蹤，該跟蹤為與指定條件（本例中為客戶端mac地址）互動的所有進程提供調試級別跟蹤。若要啟用條件調試，請檢查以下步驟。

步驟5.確保未啟用調試條件。

```
# clear platform condition all
```

步驟6.為要監控的無線客戶端mac地址啟用調試條件。

此命令開始監控提供的mac地址達30分鐘（1800秒）。您可選擇將此時間增加至 2085978494 秒。

```
# debug wireless mac <aaaa.bbbb.cccc> {monitor-time <seconds>}
```

**附註：**若要一次監控多個使用者端，請執行偵錯無線mac 命令獲取每個mac地址。

**注意：**您看不到終端會話上客戶端活動的輸出，因為所有內容都在內部緩衝，供以後檢視。

步驟7.重現您要監控的問題或行為。

步驟8.如果在預設或配置的監控器時間開啟之前重現問題，則停止調試。

```
# no debug wireless mac <aaaa.bbbb.cccc>
```

監控時間過後或偵錯無線功能停止後，9800 WLC會產生具有以下名稱的本地檔案：

```
ra_trace_MAC_aaaabbbbcccc_HHMMSS.XXX_timezone_DayWeek_Month_Day_year.log
```

步驟9.收集 MAC 位址活動的檔案。您可以複製 ra trace .log 或直接在螢幕上顯示輸出。

檢查 RA 追蹤檔案的名稱。

```
# dir bootflash: | inc ra_trace
```

將檔案複製到外部伺服器：

```
# copy bootflash:ra_trace_MAC_aaaabbbbcccc_HHMMSS.XXX_timezone_DayWeek_Month_Day_year.log  
tftp://a.b.c.d/ra-FILENAME.txt
```

顯示內容：

```
# more bootflash:ra_trace_MAC_aaaabbbbcccc_HHMMSS.XXX_timezone_DayWeek_Month_Day_year.log
```

步驟10.如果根本原因仍不明顯，請收集內部日誌，這些日誌是調試級別日誌的更詳細檢視。您無需再次調試客戶端，因為這只是進一步詳細檢視已收集並在內部儲存的調試日誌。

```
# show logging profile wireless internal filter { mac | ip } { <aaaa.bbbb.cccc> | <a.b.c.d> }  
to-file ra-internal-<FILENAME>.txt
```

**注意：**此命令輸出返回所有進程的所有日誌記錄級別的跟蹤，而且非常大。聯絡Cisco TAC以幫助分析這些跟蹤。

您可以複製 ra-internal-FILENAME.txt 或直接在螢幕上顯示輸出。

將檔案複製到外部伺服器：

```
# copy bootflash:ra-internal-<FILENAME>.txt tftp://a.b.c.d/ra-internal-<FILENAME>.txt
```

顯示內容：

```
# more bootflash:ra-internal-<FILENAME>.txt
```

步驟11.移除偵錯條件。

```
# clear platform condition all
```

**注意：**請確保在故障排除會話後始終刪除調試條件。

## 客戶端無法連線的情況

## Web身份驗證憑據無效

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [27915]: UUID: 100000000015b, ra: 15,  
(info): [e4b3.1851.90ff:capwap_90800003] Authc failure from WebAuth, Auth event fail
```

原因：

- 客戶端未使用有效憑據
- 9800 WLC上未定義預設授權網路

可能的解決方案：

- 確保客戶端正在使用有效的憑據
- 新增預設授權網路方法

GUI:

導航至 Configuration > Security > AAA > AAA Method List > Authorization > + Add 並使用這些引數建立新的授權方法。

Quick Setup: AAA Authorization

Method List Name\*

Type\*

Group Type

Available Server Groups: radius, ldap, tacacs+, ISF-KCG-grp

Assigned Server Groups:

Buttons: Cancel, Save & Apply to Device

CLI:

```
# config t  
# aaa authorization network default local
```

## 策略配置檔案中未定義有效的VLAN

日誌示例：

YYYY/DD/MM HH:MM:SS.xxx {wncd\_x\_R0-0}{1}: [epm] [25054]: UUID: 1000000000019, ra: 15, (ERR): EPM\_PLUGIN\_VLAN\_ERR: [HDL = 0x0] Unable to get active\_feature\_ctx for vlan group name YYYY/DD/MM HH:MM:SS.xxx {wncd\_x\_R0-0}{1}: [sanet-shim-miscellaneous] [25054]: UUID: 1000000000019, ra: 15, (ERR): MAC: 0874.0277.1345 Error in fetching vlans YYYY/DD/MM HH:MM:SS.xxx {wncd\_x\_R0-0}{1}: [sanet-shim-miscellaneous] [25054]: UUID: 1000000000019, ra: 15, (ERR): MAC: 0874.0277.1345 building Mobile Announce Vlanid payload failed

原因：


在分配給WLAN的策略配置檔案中沒有定義有效的VLAN。

解決方案：

1. 驗證客戶端使用的是哪個策略配置檔案。

GUI:

導航至 Monitoring > Wireless > Clients > Client row > Client Properties (使用特定客戶端的mac地址進行可選搜尋)。

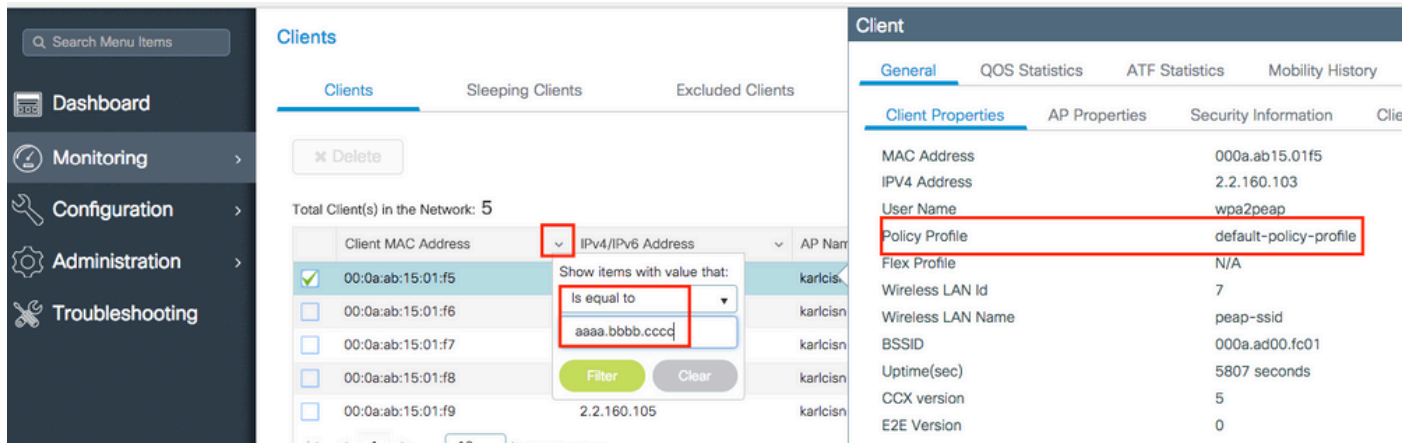

The screenshot shows the 'Clients' page in a monitoring interface. A search filter is applied to the 'IPv4/IPv6 Address' column with the value 'aaaa.bbbb.cccc'. The 'Client Properties' panel on the right shows the following details:

Client Properties	AP Properties	Security Information	Client
MAC Address			000a.ab15.01f5
IPv4 Address			2.2.160.103
User Name			wpa2peap
Policy Profile			default-policy-profile
Flex Profile			N/A
Wireless LAN Id			7
Wireless LAN Name			peap-ssid
BSSID			000a.ad00.fc01
Uptime(sec)			5807 seconds
CCX version			5
E2E Version			0


CLI:

```
# show wireless client mac-address <aaaa.bbbb.cccc> detail | inc Policy Profile  
Policy Profile : default-policy-profile
```

2. 檢驗分配給該策略配置檔案的VLAN。

GUI:

導航至 Configuration > Tags & Profiles > Policy > Policy Profile row > Access Policies .

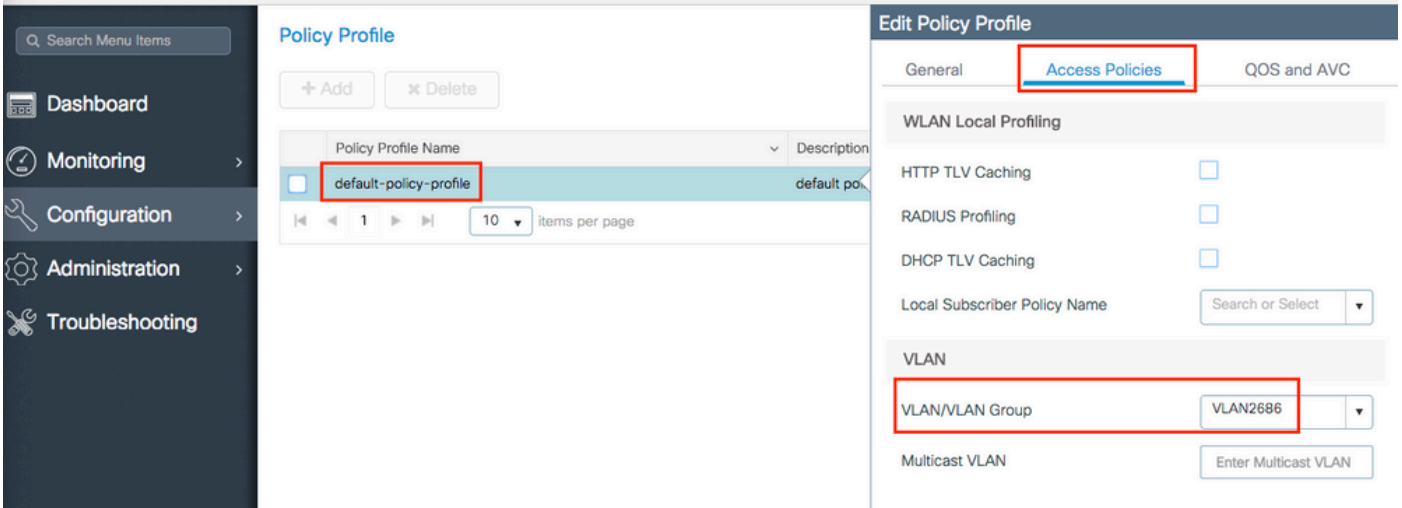


CLI:

```
# show wireless profile policy detailed default-policy-profile | inc VLAN
VLAN                               : VLAN2686
```

3.確保VLAN引數具有有效且活動的VLAN名稱或VLAN ID。

GUI:

導航至 Configuration > Layer2 > VLAN > VLAN .

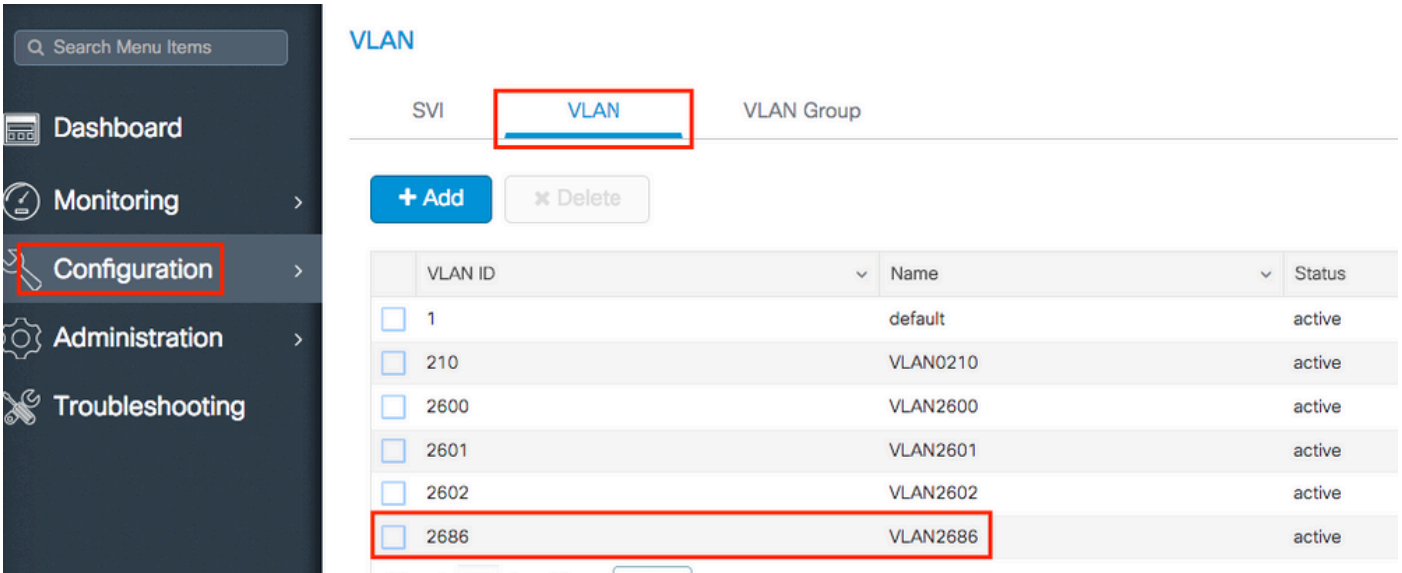

CLI:

```
# show vlan brief
```

```
VLAN Name                               Status      Ports
-----
1     default                                active     Te0/0/2, Te0/0/3
210   VLAN0210                               active
1002  fddi-default                           act/unsup
1003  token-ring-default                     act/unsup
```

```
1004 fddinet-default          act/unsup
1005 trnet-default            act/unsup
```

VLAN	Name	Status	Ports
2600	VLAN2600	active	
2601	VLAN2601	active	
2602	VLAN2602	active	
2686	<b>VLAN2686</b>	active	

**附註：** 如果使用VLAN名稱，則它區分大小寫，因此請確保其與 `show vlan brief` 指令。

#### 4. 根據需要修復VLAN。

GUI:

導航回到 Configuration > Tags & Profiles > Policy > Policy Profile row > Access Policies 並修復VLAN。

CLI:

```
# config t
# wireless profile policy default-policy-profile
# shutdown # vlan <vlan-# or vlan-name>
# no shutdown
```

#### 密碼錯誤

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-keymgmt] [27782]: UUID: 1000000000088, ra: 15,
(ERR): MAC: e4b3.187c.3058 Keymgmt: Failed to validate eapol mic. MIC mismatch. YYYY/DD/MM
HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-keymgmt] [27782]: UUID: 1000000000088, ra: 15, (ERR):
MAC: e4b3.187c.3058 Keymgmt: Failed to validate eapol key m2. MIC validation failed
```

原因：

客戶端輸入了錯誤的密碼。

可能的解決方案：

- 修復終端裝置中的密碼
- 修復SSID上的密碼

GUI:

導航至 Configuration > Wireless > WLANs > WLAN name > Security > Layer2 中，並修改密碼。



The screenshot shows the Cisco Wireless LAN Controller (WLC) configuration interface. On the left is a navigation menu with 'Configuration' highlighted. The main area is titled 'Edit WLAN' and has two tabs: 'General' and 'Security'. The 'Security' tab is active, and the 'Layer2' sub-tab is selected. The configuration includes:
 

- Layer 2 Security Mode: WPA + WPA2
- MAC Filtering: Disabled
- Protected Management Frame: Disabled
- WPA Policy: Disabled
- WPA2 Policy: Enabled
- WPA2 Encryption: AES(CCMP128) (checked), CCMP256, GCMP128, GCMP256 (unchecked)
- Auth Key Mgmt: PSK
- PSK Format: ASCII
- Pre-Shared Key: [Redacted]

CLI:

```
# config t
# wlan <wlan-name>
# shut
# security wpa psk set-key ascii 0 <clear-text-password>
# no shut
```

### 9800 WLC上不存在RADIUS傳送的存取控制清單(ACL)

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [epm-ac1] [8104]: (ERR): ACL acl-sent-by-ise is missing in configuration for mac e4b3.187c.3058
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [epm-ac1] [8104]: (ERR): Unable to parse EPM attributes
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet App Event
```

```
EV_PLUGIN_CONF
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [epm] [8104]: (ERR): Error in activating feature (EPM
ACL PLUG-IN)
.
.
.
EPM Data Base:
Number of Authz_info: 2
Authz info 1 details
Number of feat info: 2, State: Success, Priority: 254
EPM Vlan PLUG-IN Status: Success
VLAN Group: VLAN2602
VLAN-ID: 2602
SM Reauth PLUG-IN Status: Success
Authz info 2 details
Number of feat info: 4, State: Fail, Priority: 100
EPM MISC PLUG-IN Status: Success
Anchor Vlan: 0
EPM ACL PLUG-IN Status: Activate Failure
SM ACCOUNTING PLUG-IN Status: Success
linksec Status: Success
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-infra-evq-lib] [8104]: (note): already
started radioactive trace on key:[e4b3.187c.3058]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet App Event
EV_SVM_APPLY_UP_FAIL
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8104]: (ERR):
[e4b3.187c.3058:capwap_90000003] SM unable to apply User Profile for 0x1A000004 - 'Subsystem(4)'
detected the 'fatal' condition 'Code(47)'
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8104]: (ERR):
[e4b3.187c.3058:capwap_90000003] Unable to process authc result for 0x1A000004 - success
handling failed
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet eventQ: AUTH_MGR_MQ,
message:3
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-auth] [8104]: (ERR): MAC: e4b3.187c.3058
client authz result: FAILURE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-exclusion] [8104]: (info): MAC:
e4b3.187c.3058 Add client to exclusionlist, sending ipc to add client to client exclusion
table, reason: ACL failure, timeout: 60, AP: MAC: f07f.06ee.f590
```

原因：

9800 WLC上不存在RADIUS伺服器傳送的ACL。

可能的解決方案：

- 修復RADIUS伺服器配置以傳送正確的ACL名稱
- 將遺失的ACL新增到9800 WLC

9800 WLC上不存在RADIUS傳送的VLAN

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [epm] [8104]: (ERR): Error in activating feature (EPM
Vlan PLUG-IN)
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet App Event EV_START_CALL
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-infra-evq] [8104]: (ERR):
EPM Data Base:
```

```
Number of Authz_info: 2
Authz info 1 details
Number of feat info: 2, State: Success, Priority: 254
EPM Vlan PLUG-IN Status: Conflict
SM Reauth PLUG-IN Status: Success
Authz info 2 details
Number of feat info: 4, State: Activate, Priority: 100
EPM MISC PLUG-IN Status: Success
Anchor Vlan: 0
SM ACCOUNTING PLUG-IN Status: Success
EPM Vlan PLUG-IN Status: Activate Failure
VLAN Group: vlan-sent-by-ise
VLAN-ID: 0
linksec Status: Success
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet App Event
EV_SVM_APPLY_UP_FAIL
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8104]: (ERR):
[e4b3.187c.3058:capwap_90000003] SM unable to apply User Profile for 0x0E000005 - 'Subsystem(4)'
detected the 'fatal' condition 'Code(47)
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8104]: (ERR):
[e4b3.187c.3058:capwap_90000003] Unable to process authc result for 0x0E000005 - success
handling failed
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8104]: (info): Sanet eventQ: AUTH_MGR_MQ,
message:3
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-auth] [8104]: (ERR): MAC: e4b3.187c.3058
client authz result: FAILURE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-exclusion] [8104]: (info): MAC: e4b3.187c.3058
Add client to exclusionlist, sending ipc to add client to client exclusion table, reason: VLAN
failure, timeout: 60, AP: MAC: f07f.06ee.f590
```

原因：

9800 WLC上不存在RADIUS伺服器傳送的VLAN。

可能的解決方案：

- 修復RADIUS伺服器配置以傳送正確的VLAN名稱/ID
- 將遺失的VLAN新增到9800 WLC

由於WLAN或策略配置檔案中的更改而斷開連線

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-infra-evq] [8522]: (note): Mcast: Sent L2
MGID 2602 DEL to AP vap_id 2
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [apmgr-bssid] [8522]: (ERR): 00c8.8b26.d790 Radio:0
BSSID:1 - Bssid ifid is not created so no need to push data to fman
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [8522]: (info): MAC: e4b3.187c.3058
Deleting the client, reason: 5, CO_CLIENT_DELETE_REASON_BSSID_DOWN, Client state S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [8522]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_BSSID_DOWN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [8522]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-qos-client] [8522]: (ERR): MAC:
```

```
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [multicast-main] [8522]: (info): MAC: e4b3.187c.3058
No Flex/Fabric main record exists for client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-iplearn] [8522]: (info): MAC: e4b3.187c.3058
IP-learn state transition: S_IPLEARN_COMPLETE -> S_IPLEARN_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
e4b3.187c.3058 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCd[0]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dpath_svc] [8522]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa0000001
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-transition] [8522]: (info): MAC: e4b3.187c.3058
MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-client] [8522]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8522]: (info): Sanet App Event
EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8522]: (info):
[e4b3.187c.3058:capwap_90000003] Disconnect request from SANET-SHIM (12) for e4b3.187c.3058 /
0xfb6000001 - term: service-unavailable, abort: Unknown, disc: session disconnect
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [aaa-attr-inf] [8522]: (info): [ Applied attribute
:bsn-vlan-interface-name 0 "VLAN2602" ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [aaa-attr-inf] [8522]: (info): [ Applied attribute :
timeout 0 1800 (0x708) ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-auth] [8522]: (info): MAC: e4b3.187c.3058
Client auth-interface state transition: S_AUTHIF_PSK_AUTH_DONE -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dot11] [8522]: (info): MAC: e4b3.187c.3058 Sent
deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 5,
CO_CLIENT_DELETE_REASON_BSSID_DOWN.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dot11] [8522]: (info): MAC: e4b3.187c.3058 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
```

原因：

在GUI中進行了更改，或者手動禁用了SSID或策略配置檔案。

解決方案：

這是正常行為，請避免在生產時間更改SSID或策略配置檔案。

## 從網路中手動刪除客戶端

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [8522]: (info): MAC: e4b3.187c.3058
Deleting the client, reason: 12, CO_CLIENT_DELETE_REASON_ADMIN_RESET, Client state S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
e4b3.187c.3058 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCd[0]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [8522]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_ADMIN_RESET
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [8522]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-qos-client] [8522]: (ERR): MAC:
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [multicast-main] [8522]: (info): MAC: e4b3.187c.3058
No Flex/Fabric main record exists for client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-iplearn] [8522]: (info): MAC: e4b3.187c.3058
IP-learn state transition: S_IPLEARN_COMPLETE -> S_IPLEARN_DELETE_IN_PROGRESS
```

```

YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dpath_svc] [8522]: (note): MAC: e4b3.187c.3058 Client datapath entry deleted for ifid 0xfa0000001
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-transition] [8522]: (info): MAC: e4b3.187c.3058 MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-client] [8522]: (ERR): MAC: e4b3.187c.3058 Invalid transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [wncd_0] [8522]: (info): Sanet App Event EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [auth-mgr] [8522]: (info): [e4b3.187c.3058:capwap_90000003] Disconnect request from SANET-SHIM (12) for e4b3.187c.3058 / 0x30000003 - term: admin-reset, abort: Unknown, disc: session disconnect
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [aaa-attr-inf] [8522]: (info): [ Applied attribute :bsn-vlan-interface-name 0 "VLAN2602" ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [aaa-attr-inf] [8522]: (info): [ Applied attribute : timeout 0 1800 (0x708) ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-auth] [8522]: (info): MAC: e4b3.187c.3058 Client auth-interface state transition: S_AUTHIF_PSK_AUTH_DONE -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dot11] [8522]: (info): MAC: e4b3.187c.3058 Sent deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 12, CO_CLIENT_DELETE_REASON_ADMIN_RESET.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dot11] [8522]: (info): MAC: e4b3.187c.3058 DOT11 state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED


```

原因：

已通過CLI手動將客戶端從網路中刪除：

```
# wireless client mac-address aaaa.bbbb.cccc deauthenticate
```

或通過GUI:

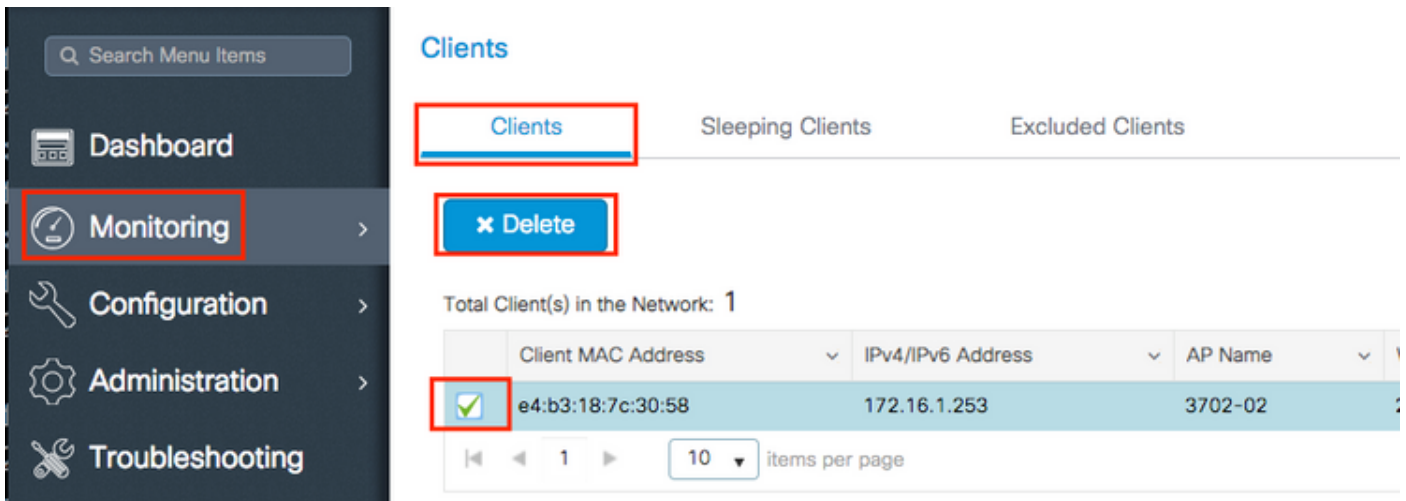

解決方案：

無，由使用者啟動的正常行為。

由於EAP超時而斷開連線

日誌示例：

```

YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [errmsg] [8681]: (note): %DOT1X-5-FAIL: Authentication
failed for client (0874.0277.1345) with reason (Timeout) on Interface capwap_90800003
AuditSessionID 34AD580A0000000D7F735399
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Authc failure from Dot1X, Auth event timeout
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] (Re)try failed method Dot1X - 0874.0277.1345
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Retrying (count 3) method dot1x
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-sm] [8681]: (info): MAC: 0874.0277.1345
Deleting the client, reason: 7, CO_CLIENT_DELETE_REASON_CONNECT_TIMEOUT, Client state
S_CO_L2_AUTH_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-sm] [8681]: (note): MAC: 0874.0277.1345
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_CONNECT_TIMEOUT
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-state] [8681]: (note): MAC:
0874.0277.1345 Client state transition: S_CO_L2_AUTH_IN_PROGRESS -> S_CO_DELETE_IN_PROGRESS
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [mm-transition] [8681]: (info): MAC: 0874.0277.1345
MMIF FSM transition: S_MA_INIT -> S_MA_LOCAL_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [mm-client] [8681]: (ERR): MAC: 0874.0277.1345 Client
not present in DB. Responding to CO with Delete Ack
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet App Event
EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Disconnect request from SANET-SHIM (12) for 0874.0277.1345 /
0x30000003 - term: supplicant-restart, abort: Unknown, disc: authorization failure
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_AUTHIF_DOT1XAUTH_PENDING -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [dot11] [8681]: (info): MAC: 0874.0277.1345 Sent
deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 7,
CO_CLIENT_DELETE_REASON_CONNECT_TIMEOUT.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [dot11] [8681]: (info): MAC: 0874.0277.1345 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_SANET_DELETE_IN_PROGRESS -> S_AUTHIF_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet eventQ: EAP_CORE_MQ,
message:2
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-state] [8681]: (note): MAC:
0874.0277.1345 Client state transition: S_CO_DELETE_IN_PROGRESS -> S_CO_DELETED

```

原因：

在EAP-Request Timeout間隔內和EAP-Request Max Retries時間內，客戶端未響應9800 WLC傳送的可擴展身份驗證協定(EAP)資料包。

可能的解決方案：

- 將無線客戶端驅動程式更新為最新驅動程式
- 確保無線客戶端信任RADIUS的證書
- 增加EAP-Request Timeout和/或EAP-Request Max Retries

CLI:

```
# config t
# wireless security dot1x request retries <0-20>
# wireless security dot1x timeout <1-120 seconds>
```

GUI:

導航至 Configuration > Security > Advanced EAP 並自定義所需的設定。

由於AP無線電重置，已斷開連線

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [apmgr-capwap-config] [8621]: (info): f07f.06ee.f590
Radio: 1 is Operationally DOWN.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [apmgr-db] [8621]: (note): MAC: f07f.06ee.f590 Radio 1
is disabled, on receiving change state event message from AP
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [radio-history-reset] [8621]: (info): Radio reset of
the AP f07f.06ee.f590 Slot:1 Band:802.11a due to Cause:0, Detailed Cause : 56 - Interface UP for
Channel Change
YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
e4b3.187c.3058 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCd[1]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8621]: (info): MAC: e4b3.187c.3058
Deleting the client, reason: 5, CO_CLIENT_DELETE_REASON_BSSID_DOWN, Client state S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8621]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_BSSID_DOWN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-state] [8621]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dpath_svc] [8621]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa000001
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [mm-transition] [8621]: (info): MAC: e4b3.187c.3058
MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [mm-client] [8621]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [wncd_1] [8621]: (info): Sanet App Event
EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [auth-mgr] [8621]: (info):
[e4b3.187c.3058:capwap_90400003] Disconnect request from SANET-SHIM (12) for e4b3.187c.3058 /
0xf89000008 - term: service-unavailable, abort: Unknown, disc: session disconnect
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-auth] [8621]: (info): MAC: e4b3.187c.3058
Client auth-interface state transition: S_AUTHIF_PSK_AUTH_DONE -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dot11] [8621]: (info): MAC: e4b3.187c.3058 Sent
deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 5,
CO_CLIENT_DELETE_REASON_BSSID_DOWN.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dot11] [8621]: (info): MAC: e4b3.187c.3058 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
```

原因：

與客戶端關聯的AP更改了通道或電源，導致無線電重置。

可能的解決方案：

- 這是正常行為
- 您可以設定9800 WLC進行通道變更的頻率

CLI:

```
# config t
# ap dot11 { 5ghz | 24ghz } rrm channel dca interval <0-24>

Valid values 1,2,3,4,6,8,12 and 24 hours, 0 = 10 minutes (default)
```

GUI:

導航至 **Configuration > Radio Configurations > RRM > 5 GHz Band/2.4 GHz Band > DCA > Increase Interval Setting.**

由於Web身份驗證超時而斷開連線

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Authc failure from WebAuth, Auth event no-response
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet eventQ: AUTH_MGR_MQ,
message:6
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet App Event
EV_SESSION_AUTHC_FAILED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] AUTHC_FAIL - unauthorize by default
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [9800 WLC-infra-evq] [8681]: (ERR): Authc failure for
mac 0874.0277.1345, username , audit session id 34AD580A0000000E7FFA4ED8, Failure reason: No
Response from Client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Signalling Authc fail for client 0874.0277.1345
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [errmsg] [8681]: (note): %SESSION_MGR-5-FAIL:
Authorization failed or unapplied for client (0874.0277.1345) on Interface capwap_90800003
AuditSessionID 34AD580A0000000E7FFA4ED8. Failure reason: Authc fail. Authc failure reason: No
Response from Client.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Authz failed/unapplied for 0x08000004 (0874.0277.1345), method:
webauth. Signal switch PI.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet App Event
EV_SESSION_AUTHZ_FAILED
.
.
.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_AUTHIF_WEBAUTH_PENDING -> S_AUTHIF_WEBAUTH_PENDING
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (ERR): MAC: 0874.0277.1345 L3
Authentication FAIL.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_AUTHIF_WEBAUTH_PENDING -> S_WAIT_FOR_CO_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [9800 WLC-infra-evq] [8681]: (ERR): WLAN profile =
prof-name, Policy profile = default-policy-profile, AP name = AP1702-05
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-sm] [8681]: (info): MAC: 0874.0277.1345
Deleting the client, reason: 0, CO_CLIENT_DELETE_REASON_NONE, Client state
S_CO_L3_AUTH_IN_PROGRESS
```



```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-sm] [8681]: (note): MAC: 0874.0277.1345
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_NONE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-orch-state] [8681]: (note): MAC:
0874.0277.1345 Client state transition: S_CO_L3_AUTH_IN_PROGRESS -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [9800 WLC-qos-client] [8681]: (ERR): MAC:
0874.0277.1345 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [multicast-main] [8681]: (info): MAC: 0874.0277.1345
No Flex/Fabric main record exists for client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-iplearn] [8681]: (info): MAC: 0874.0277.1345
IP-learn state transition: S_IPLEARN_COMPLETE -> S_IPLEARN_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [dpath_svc] [8681]: (note): MAC: 0874.0277.1345 Client
datapath entry deleted for ifid 0xfa000002
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [mm-transition] [8681]: (info): MAC: 0874.0277.1345
MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [mm-client] [8681]: (ERR): MAC: 0874.0277.1345 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [wncd_2] [8681]: (info): Sanet App Event
EV_SESSION_DELETE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [auth-mgr] [8681]: (info):
[0874.0277.1345:capwap_90800003] Disconnect request from SANET-SHIM (12) for 0874.0277.1345 /
0x08000004 - term: none, abort: Unknown, disc: (default)
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [aaa-attr-inf] [8681]: (info): [ Applied attribute
:bsn-vlan-interface-name 0 "VLAN2602" ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [aaa-attr-inf] [8681]: (info): [ Applied attribute :
timeout 0 1800 (0x708) ]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [client-auth] [8681]: (info): MAC: 0874.0277.1345
Client auth-interface state transition: S_WAIT_FOR_CO_DELETE -> S_SANET_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
0874.0277.1345 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCd[2]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-2}{1}: [dot11] [8681]: (info): MAC: 0874.0277.1345 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
```

原因：

使用者端沒有在允許的時間（約120秒）內完成Web驗證。

解決方案：

確保客戶端在120秒內完成Web身份驗證。

由於會話超時而斷開連線

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-auth] [8621]: (info): MAC: e4b3.187c.3058
Client auth-interface state transition: S_AUTHIF_PSK_AUTH_DONE -> S_SANET_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8621]: (info): MAC: e4b3.187c.3058
Deleting the client, reason: 23, CO_CLIENT_DELETE_REASON_SESSION_TIMEOUT, Client state S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8621]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_SESSION_TIMEOUT
YYYY/DD/MM HH:MM:SS.xxx {mobilityd_R0-0}{1}: [mm-transition] [19496]: (info): MAC:
e4b3.187c.3058 MMFSM transition: S_MC_RUN -> S_MC_HANDOFF_END_RCVD_TR on E_MC_HANDOFF_END_RCVD
from WNCd[1]
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-state] [8621]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [9800 WLC-qos-client] [8621]: (ERR): MAC:
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [multicast-main] [8621]: (info): MAC: e4b3.187c.3058
```

```
No Flex/Fabric main record exists for client
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-iplearn] [8621]: (info): MAC: e4b3.187c.3058
IP-learn state transition: S_IPLEARN_COMPLETE -> S_IPLEARN_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dpath_svc] [8621]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa0000001
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [mm-transition] [8621]: (info): MAC: e4b3.187c.3058
MMIF FSM transition: S_MA_LOCAL -> S_MA_DELETE_PROCESSED_TR on E_MA_CO_DELETE_RCVD
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [mm-client] [8621]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-auth] [8621]: (info): MAC: e4b3.187c.3058
Client auth-interface state transition: S_SANET_DELETED -> S_AUTHIF_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dot11] [8621]: (info): MAC: e4b3.187c.3058 Sent
deauth to client, deauth reason: 252, CLIENT_DEAUTH_REASON_ADMIN_RESET delete reason: 23,
CO_CLIENT_DELETE_REASON_SESSION_TIMEOUT.
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [dot11] [8621]: (info): MAC: e4b3.187c.3058 DOT11
state transition: S_DOT11_ASSOCIATED -> S_DOT11_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-state] [8621]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_DELETE_IN_PROGRESS -> S_CO_DELETED
```

原因：

客戶端已達到其會話超時。

可能的解決方案：

- 這是正常行為
- 增加與SSID關聯的策略配置檔案會話超時

CLI:

```
# config t
# wireless profile policy <policy-profile-name>
# shutdown
# session-timeout <20-86400 seconds>
# no shutdown
```

GUI:

導航至 Configuration > Tags & Profiles > Policy > Policy Profile Name > Advanced > WLAN Timeout 並根據需要定製計時器。

由於空閒超時而斷開連線

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [7807]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_MN_IDLE_TIMEOUT
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-qos-client] [7807]: (ERR): MAC:
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dpath_svc] [7807]: (note): MAC: e4b3.187c.3058 Client
datapath entry deleted for ifid 0xfa0000002
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-client] [7807]: (ERR): MAC: e4b3.187c.3058 Invalid
```

```
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_DELETE_IN_PROGRESS -> S_CO_DELETED
```

原因：

客戶端在配置的空閒超時時間間隔內沒有傳送流量（或足夠的流量）。

可能的解決方案：

- 這是正常行為
- 自定義與SSID關聯的策略配置檔案空閒設定

CLI:

```
# config t
# wireless profile policy <policy-profile-name>
# shutdown
# idle-timeout <15-100000 seconds>
# idle-threshold <0-4294967295 bytes>
# no shutdown
```

GUI:

導航至 Configuration > Tags & Profiles > Policy > Policy Profile Name > Advanced > WLAN Timeout 並根據需要自定義空閒設定。

**註:**如果未配置空閒閾值，則客戶端需要傳送空閒超時時間段內的任何流量才能不斷開連線。如果配置了idle-threshold，則客戶端必須在空閒超時內傳送該數量的位元組才能不斷開連線（即，配置了10位元組的空閒閾值和30秒的空閒超時，無線客戶端需要每30秒至少傳送10位元組的流量才能不斷開與網路的連線）。

## 客戶端在SSID之間移動

日誌示例：

```
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [7807]: (note): MAC: e4b3.187c.3058
Association received. BSSID f07f.06ee.f59d, old BSSID f07f.06ee.f59e, WLAN 1, Slot 1 AP
f07f.06ee.f590, 3702-02
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [7807]: (ERR): MAC: e4b3.187c.3058
Failed to start dot11 processing. Failed to populate client record in DB
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_RUN
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-sm] [7807]: (note): MAC: e4b3.187c.3058
Client delete initiated. Reason: CO_CLIENT_DELETE_REASON_WLAN_CHANGE
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_RUN -> S_CO_DELETE_IN_PROGRESS
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [9800 WLC-qos-client] [7807]: (ERR): MAC:
e4b3.187c.3058 Fail to get qos lib ctxt while handle sip cac on client delete
YYYY/DD/MM HH:MM:SS.xxx {fman_fp_F0-0}{1}: [wireless-client] [10254]: UUID: 1000000006930, ra: 5
(note): WLCLIENT 0xa0000002 pd_hdl 0x33 AOM delete succeeded
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [dpath_svc] [7807]: (note): MAC: e4b3.187c.3058 Client
```

```
datapath entry deleted for ifid 0xfa0000002
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [mm-client] [7807]: (ERR): MAC: e4b3.187c.3058 Invalid
transmitter ip in build client context
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-0}{1}: [client-orch-state] [7807]: (note): MAC:
e4b3.187c.3058 Client state transition: S_CO_DELETE_IN_PROGRESS -> S_CO_DELETED
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-sm] [8009]: (note): MAC: e4b3.187c.3058
Association received. BSSID 00c8.8b26.d79d, old BSSID 0000.0000.0000, WLAN 1, Slot 1 AP
00c8.8b26.d790, AP-1700-x
YYYY/DD/MM HH:MM:SS.xxx {wncd_x_R0-1}{1}: [client-orch-state] [8009]: (note): MAC:
e4b3.187c.3058 Client state transition: client_orch_sm_state__none -> S_CO_ASSOCIATING
```

原因：

客戶端已連線到SSID並移動到其他的SSID。

可能的解決方案：

- 正常行為
- 從客戶端刪除第2個SSID

## 關於此翻譯

思科已使用電腦和人工技術翻譯本文件，讓全世界的使用者能夠以自己的語言理解支援內容。請注意，即使是最佳機器翻譯，也不如專業譯者翻譯的內容準確。Cisco Systems, Inc. 對這些翻譯的準確度概不負責，並建議一律查看原始英文文件（提供連結）。