

# UCCX Smart Licensing-Direct جڏومن نيوكت

## تايوت حمل

[قمدق مل](#)

[قيساس ال تابلط مل](#)

[تابلط مل](#)

[قمدختس مل تانوك مل](#)

[قيساس ا تامول عم](#)

[يكدل صيخرت لىل ع قماع قرظن](#)

[رشن لىل اعاون ا](#)

[نيوكت لىل](#)

[تان نيوكت لىل](#)

[رشابم لىل اصت](#)

[زيم مل ققداص مل زمراش نىل](#)

[يكدل باسح مادختس اب لىل جس تىل](#)

[قحص لىل نم ققحت لىل](#)

[اهال صاواطخال لىل فاشكتسا](#)

## قمدق مل

يكدل صيخرت لىل نيوكت مل Contact Center Express لىل دوجومل نيوكت لىل دننتس مل اذه فصى.

## قيساس ال تابلط مل

## تابلط مل

قيلات لىل عيضاومل اب قفر عم كيدل نوكت ن اب Cisco ي صوت:

Cisco Unified Contact Center Express (UCCX)، رادص ال 12.5

## قمدختس مل تانوك مل

Cisco Unified Contact Center Express (UCCX)، رادص ال 12.5


قصاخ قىل عم قئىب ي ق دوجومل قزه ال نم دننتس مل اذه ي ق دراو لىل تامول عم لىل عاش ن ا م ت ناك اذ ا. (يضا رت فا) حوس مم نيوكت ب دننتس مل اذه ي ق قمدختس مل قزه ال عي مج ت ادب رما ي ال لم ت حمل لىل ريثا لىل كم هف نم دكا ت ف، لىل غشت لىل دي ق ك تكبش

## قيساس ا تامول عم

## يكدل صيخرت لىل ع قماع قرظن

لم عي شي ح. صيخرت لىل ي ق رىل قف لىل لىل قديج ققىرط Cisco نم Smart Software صيخرت دعى

اهب قعت و اهرشن و Cisco جمارب عارش ليه ست و ةسس ؤملا ربع صيخرتلا ةبرجت طيسبت ىلع مدختسم ةهجاو لالخ نم هكالتسا و صيخرتلا ةيكلمل لوح ةيؤرلا ةيناكمإ رفوي .اهديجت و ةطيسب ةدحاو .

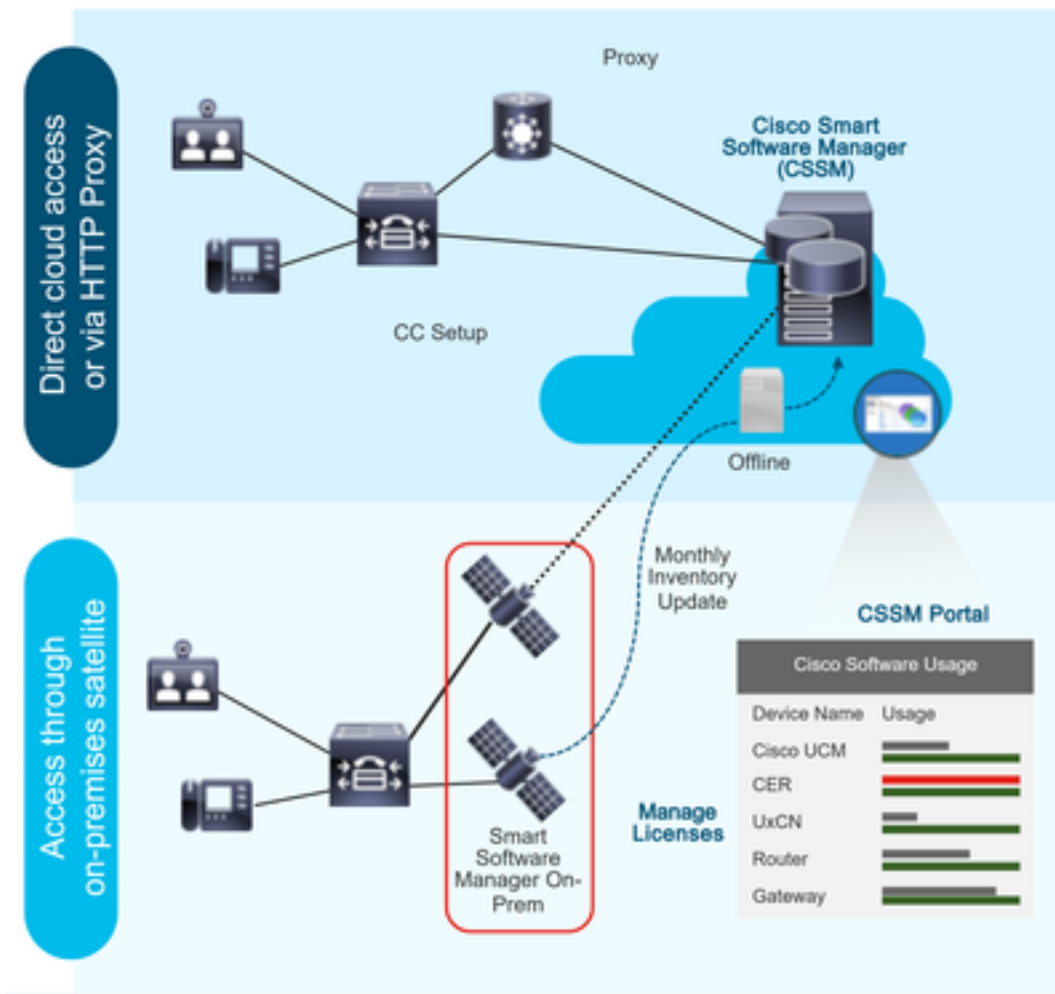

تامولعمل هذه ،يكذلا باسحلاب طبترم رمل او Cisco Commerce ىلع رما عضوب موقت تنأ ةرظن كيديل نالو .بيولا ىلع Cisco عقوم ىلع دوجوملا ،يكذلا جمانربلا ريديم ىلع اهؤلم متي .هئارشو هبلطب تمق دق ام ىلع ةلماك .

نوموقي ذإ ،CSSM في لّجسم ،(GUI و CLI ربع) هب يكذلا صيخرتلا نيكمت متي ذل جتنملا بصيخرتلا كالتسااب CSSM غالباب .

## رشنلا عاونأ

مادختسال نغالبال ناجذومن دجوي :

ةرشابم لاصتالا ةزهجالل اهيف نكمي يتلا تائيبل ايف جذومنلا اذه مدختسا - **رشابم زارط** HTTPS ربع CSSM ب لاصتالا متي . HTTPS ليك و ربع تنرتنالب لاصتالا و تنرتنالب نم رورملا ةكرح لاسرا مت اذإ .لقنلا يف تانايبلا رورم تاكرح عيمج ريفشت متي يلاتلابو نم CSSM و ةزهجالل نيب تالاصتالا عيمج هيجوت متيسف ،لقنلا ةرابع و HTTPS ليك و لالخ ةيفاضا نامأ و اصحف تاسايس قيبطتل ةجاح كانه تناك اذإ يزكرم عقوم لالخ .

جذومن يةزهجالل نمضتت ال يتلا تاكبشلا يف جذومنلا اذه مدختسا - **طيسولا رشنلا جذومن** اذه رشنلا جذومن بلطتي . CSSM ىلا لوصولا هونكمي ال يلاتلابو تنرتنالب لاصتالا

ةطساوب اهيلي لوصولو لك لذ دعب نكمي يتللا ينابلما لىل ع CSSM رمقل يرهاظ زاخ تيتبثت لصتم عوضو يف يلحمللا يعانصللا رمقللا رشن نكمي .ةيلخادلا ةفيضملا ةزهجالا ةفاك بلطتي امامت لصتم ريغ نيوكت يف هرشن نكمي وا اي عوبسا وا ايرهش CSSM عم نمازتي اعارجا بصوي .يعانصللا رمقللا ةنمازم لىل ع ظافحلل تاليزنتو ةيودي تافلما ليحت تاي لمع لقلال لىل ع اموي 30 لك ةنمازم

## نيوكتلا

### تانيوكتلا

### رشابم لاصتا

رايخ ددح لقنلا دادع ا صيخرتلا ةراد ا > صيخرت > ماطن لىل لقننا ،UCCX ةراد ا ةحفص تحت مق ،حاجنب لاصتالا رابتخا متي نا درجمب .لاصتالا رابتخا رايخ ددحو رشابملا ليصوتلا ظفحل رايخ ديحتب

The screenshot shows the Cisco Unified CCX Administration web interface. The top navigation bar includes 'Cisco Unified CCX Administration' and 'For Cisco Unified Communications Solutions'. A dropdown menu is open, showing options like 'Server', 'Cloud Connect', 'Cisco Unified CM Configuration', 'System Parameters', 'Single Sign-On (SSO)', 'Custom File Configuration', 'Standalone CUI/C Configuration', 'License Management', 'Language Information', and 'Logout'. The main content area displays a message: 'The system is in Evaluation period and will expire in 89 days. Register this Product Instance at the earliest.' Below this, there is a 'Smart License Management' section with a 'Ready' status and a 'Register' button.

The screenshot shows the 'Smart License Management' section of the Cisco Unified CCX Administration interface. It displays the following information:

- Status: Ready
- License Type Details: Current License Type: Flex. To change the License type [click here](#).
- License Control: Overage Allowance can be Enabled/Disabled during Registration.
- Registration Information: Your system is currently in Evaluation mode. To register your system with Cisco Smart Licensing:
  - Ensure that your system has access to Internet or Cisco SSM On-Prem. If you are using Cisco SSM On-Prem, you may have to edit Smart Call Home configuration settings.
  - Login to Smart account in [Cisco SSM](#) or Cisco SSM On-Prem.
  - Navigate to the virtual account containing the licenses to be used by your Product Instance.
  - Generate a Product Instance Registration Token (to identify your smart account) and copy or save it.
  - Return to this page, click the Register button and use the Product Instance Registration Token to register the product.

Buttons for 'Transport Settings' and 'Register' are visible. Below this, the 'Smart License Details' table is shown:

Smart License Details		Actions
Registration Status	Unregistered	
Authorization Status	Evaluation Mode ( 89 days remaining )	
Smart Account Name	-	
Virtual Account Name	-	
Serial Number	8817e50171e7	
Export-Controlled Functionality	Not Allowed	

## Transport Settings

Status



Ready

Configure how the product will communicate with Cisco. Note that this setting is shared with Smart Call Home, so any changes made here will apply to other features using this service.

- Direct** - product communicates directly with Cisco's licensing servers.  
URL: "https://tools.cisco.com/its/service/oddce/services/DDCEService"
- Transport gateway** - proxy data via Transport Gateway or Cisco SSM On-Prem  
URL:
- HTTP/HTTPS proxy** - send data via an intermediate HTTP or HTTPS proxy  
Host Name:   
Port:

Test Connection Successful

Save

Cancel

## زيمم لة قداصلم ل زمر عاشن

1. رورم لة م ل ك و مدخت س م ل م سا مادخت س اب <https://software.cisco.com/> ل ل ل و خ د ل ل ج س ل ك .
2. ة ي ك ذ ل ا ج م ا ر ب ل ل ص ي خ ر ت ب ج و م ب ن و ز خ م ل ا د ي د ح ت .
3. د ي د ج ز ي م م ز م ر د ي د ح ت .
4. م ا د خ ت س ا ل ا د د و د ع ب ة ي ح ا ل ص ل ا ء ا ه ت ن ا ، ف ص و ل ا ل ا خ د ا .
5. ز ي م م ز م ر ا ش ن ا ر ا ي خ د د ح .
6. ه و ا ش ن ا م ت ي ذ ل ا ز ي م م ل ا ز م ر ل ا خ س ن .

Virtual Account: UCCX\_TAC

General Licenses Product Instances Event Log

### Local Virtual Account

Description

Default Local Virtual Account:

No

### Product Instance Registration Tokens

The registration tokens below can be used to register new product instances to this Local Virtual Account. For products which support Smart Transport you must configure the "license smart uri" on the product to use the Smart Transport Registration URL. For legacy products which still use Smart Call Home, you must configure "destination address http" on the product to use the Smart Call Home Registration URL. The recommended method is Smart Transport. Please consult your Products Configuration Guide for setting the destination URL value.

New Token...

## Create Registration Token



This dialog will generate the token required to register your product instances with your Alpha Account.

Virtual Account	UCCX_TAC
Description	<input type="text" value="UCCX"/>
Expire After	<input type="text" value="30"/> Days <i>Enter the value between 1 and 365, but Cisco recommends a maximum of 30 days</i>
Max. Number of Uses	<input type="text" value="5"/> <i>The token will be expired when either the expiration or the maximum uses is reached</i>

Allow export-controlled functionality on the products registered with this token

Create Token

Cancel

## Registration Token



```
NTU5ODM5MDktMWEwOS00NjNjLThhNWEtMGI1MjY0MzEzYTBhLT
E2NTA1MDU0%0ANTU0MzB8VVM5OXU4cFpUaU9jRUtWTVdtaUpL
N3N6U0F4M2RZUmdTY0pOMctx%0Ab0NMRT0%3D%0A
```

*Press ctrl + c to copy selected text to clipboard*

## ي كذ باسح مادختساب ليجستال

1. ي كذال صيخرتلل ةراد ي ف ليجستال راخ ددح
2. خوسنملا ليجستال ل زيمملا زمرا قصل
3. ليجستال راخ ددح

Smart License Management

Status	Ready																		
License Type Details	Current License Type: Flex <a href="#">To change the License type click here</a>																		
License Control	Coverage Allowance can be Enabled/Disabled during Registration.																		
Registration Information	Your system is currently in Evaluation mode. To register your system with Cisco Smart Licensing: <ul style="list-style-type: none"><li>• Ensure that your system has access to Internet or Cisco SSM On-Prem. If you are using Cisco SSM On-Prem, you may have to edit Smart Call Home configuration settings.</li><li>• Login to Smart account in <a href="#">Cisco SSM</a> or Cisco SSM On-Prem.</li><li>• Navigate to the virtual account containing the licenses to be used by your Product Instance.</li><li>• Generate a Product Instance Registration Token (to identify your smart account) and copy or save it.</li><li>• Return to this page, click the Register button and use the Product Instance Registration Token to register the product.</li></ul>																		
	<input type="button" value="Transport Settings"/> <input type="button" value="Register"/>																		
Smart License Details	<table><tr><td>Registration Status</td><td> Unregistered</td><td>Actions</td></tr><tr><td>Authorization Status</td><td> Evaluation Mode ( 89 days remaining )</td><td></td></tr><tr><td>Smart Account Name</td><td>-</td><td></td></tr><tr><td>Virtual Account Name</td><td>-</td><td></td></tr><tr><td>Serial Number</td><td>8817e50171e7</td><td></td></tr><tr><td>Export-Controlled Functionality</td><td>Not Allowed</td><td></td></tr></table>	Registration Status	Unregistered	Actions	Authorization Status	Evaluation Mode ( 89 days remaining )		Smart Account Name	-		Virtual Account Name	-		Serial Number	8817e50171e7		Export-Controlled Functionality	Not Allowed	
Registration Status	Unregistered	Actions																	
Authorization Status	Evaluation Mode ( 89 days remaining )																		
Smart Account Name	-																		
Virtual Account Name	-																		
Serial Number	8817e50171e7																		
Export-Controlled Functionality	Not Allowed																		

## Smart Licensing Product Registration

Status

 Ready

- Ensure that you have connectivity to the URL specified in your Smart Call Home settings. By default this requires internet access. See the online help for registering to a Cisco SSM On-Prem.
- To register the product instance, copy the Product Instance Registration Token generated from [Cisco SSM](#) or your Cisco SSM On-Prem.

### Product Instance Registration Token

```
NTU5ODM5MDktMWEwOS00NjNjLThhNWetMGI1MjY0MzEzYTBlTE2NTA1MDU0
%0ANTU0MzB8VVM5OXU4cFpUaU9jRUtWTVdtaUpLN3N6U0F4M2RZUmdTY0pOM
Cbx%0Ab0NMRT0%3D%0A]
```

Reregister this product instance if it is already registered


License Control

Current License Type: Flex

Overage Allowance:  Enable  Disable

Number of Standard Seats\*

Number of Premium Seats\*

 \* - indicates required item.

ةداهشلا شيدحت ببسب "الاصتالا لاسرا أطخ" يكدلا صيخرتالا [CSCwa92591](#): فورعم بي ع

## ةحصلالا نم ققحتالا

"لجسم" ىلا "لجسم ريغ" نم يكدلا صيخرتالا ةرادا ةحفص ي ف ليحستالا ةلاح ريغتت  
"دمتعم" ىلا "مبيقتالا عضو" نم ليوختالا ةلاح ريغتت و

## اهحالصاوا ءاطخالا فاشكتسا

1. ةيامحال رادج ىلع 443 و 80 حتف مزلي ،رشابملا رشنلا ذفنم ل ةبسنلاب .
2. lib\_license ىوتسم مادختساب لوؤسمالا تالجسو ةومجملا فيرعت تانايب عيمجتب مق  
اهحالصاوا ءاطخالا فاشكتسا نم ديزمل يضارتالا
3. CCX كرحملا ءاطخالا حيحصت ىوتسم ىلا SS\_RM و enable lib\_license صيخرتالا باسحل .

4. INservice ةمدخل ةحفص نمض Cisco Unified CCX Cluster View جم انرب ةمدخ نوكت نأ بجي .

ةمچرتل هذه لوج

ةللأل تاينقتل نم ةومچم مادختساب دن تسمل اذہ Cisco تچرت  
ملاعلاء انءمچي فني مدختسمل معدى وتحم مي دقتل ةيرشبلاو  
امك ةقيقد نوك تنل ةللأل ةمچرت لصف أن ةظحال مچري. ةصاخلا مهتغب  
Cisco يلخت. فرتحم مچرت مامدقي يتل ةيفارتحال ةمچرتل عم لالحل وه  
ىلإ أمئاد عوچرلاب يصوت وتامچرتل هذه ةقدنع اهتيلوئسم Cisco  
Systems (رفوتم طبارلا) يلصلأل يزي لچنإل دن تسمل