

Collect Tech Support Files for Hyperflex UI and CLI

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Components Used](#)

[Background Information](#)

[Contents](#)

[HX 4.0 Onwards : HyperFlex Data Platform Support Bundle](#)

[HyperFlex Data Platform Support Bundle: Hyperflex Cluster UI Method \(HX Version 2.5 ~ 3.5\)](#)

[HyperFlex Data Platform Support Bundle: Hyperflex Cluster UI Method \(Pre version 2.5\)](#)

[HyperFlex Data Platform Support Bundle: Hyperflex Cluster CLI Method](#)

[Capturing Hyperflex Installer Logs: Hyperflex Platform Installer UI Method](#)

[Capturing Hyperflex Installer Logs: Hyperflex Platform Installer CLI Method](#)

[Capturing VMware ESXi Logs](#)

[Capturing VMware vCenter Logs](#)

[Capturing UCS Logs](#)

[Bias-Free Language](#)

Introduction

This document describes how to collect tech support files for the Hyperflex UI and CLI.

Prerequisites

Requirements

There are no specific requirements for this document.

Components Used

This document is not restricted to specific hardware and software versions.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, ensure that you understand the potential impact of any command.

Background Information

When you contact Cisco TAC, tech support files are a critical part of the troubleshooting process.



Note: For customers who use Cisco Intersight and have UCS Manager and HyperFlex Connect connected to Intersight, Cisco TAC can collect UCS Hardware or Storage Controller (storfs-support) files without them being manually uploaded.

Contents


HX 4.0 Onwards : HyperFlex Data Platform Support Bundle

From HX Connect UI

The recommended method to collect support bundles is through the HX Connect user interface. You can generate a support bundle that collects the logs from every selected controller VM and ESXi host in the HX storage cluster. The vCenter logs are not collected through HX Connect.

All support bundle timestamps are listed in the UTC timezone regardless of cluster timezone or server timezone settings.

Step 1. Log in to HX Connect and click **Settings** and then **Support Bundle**.

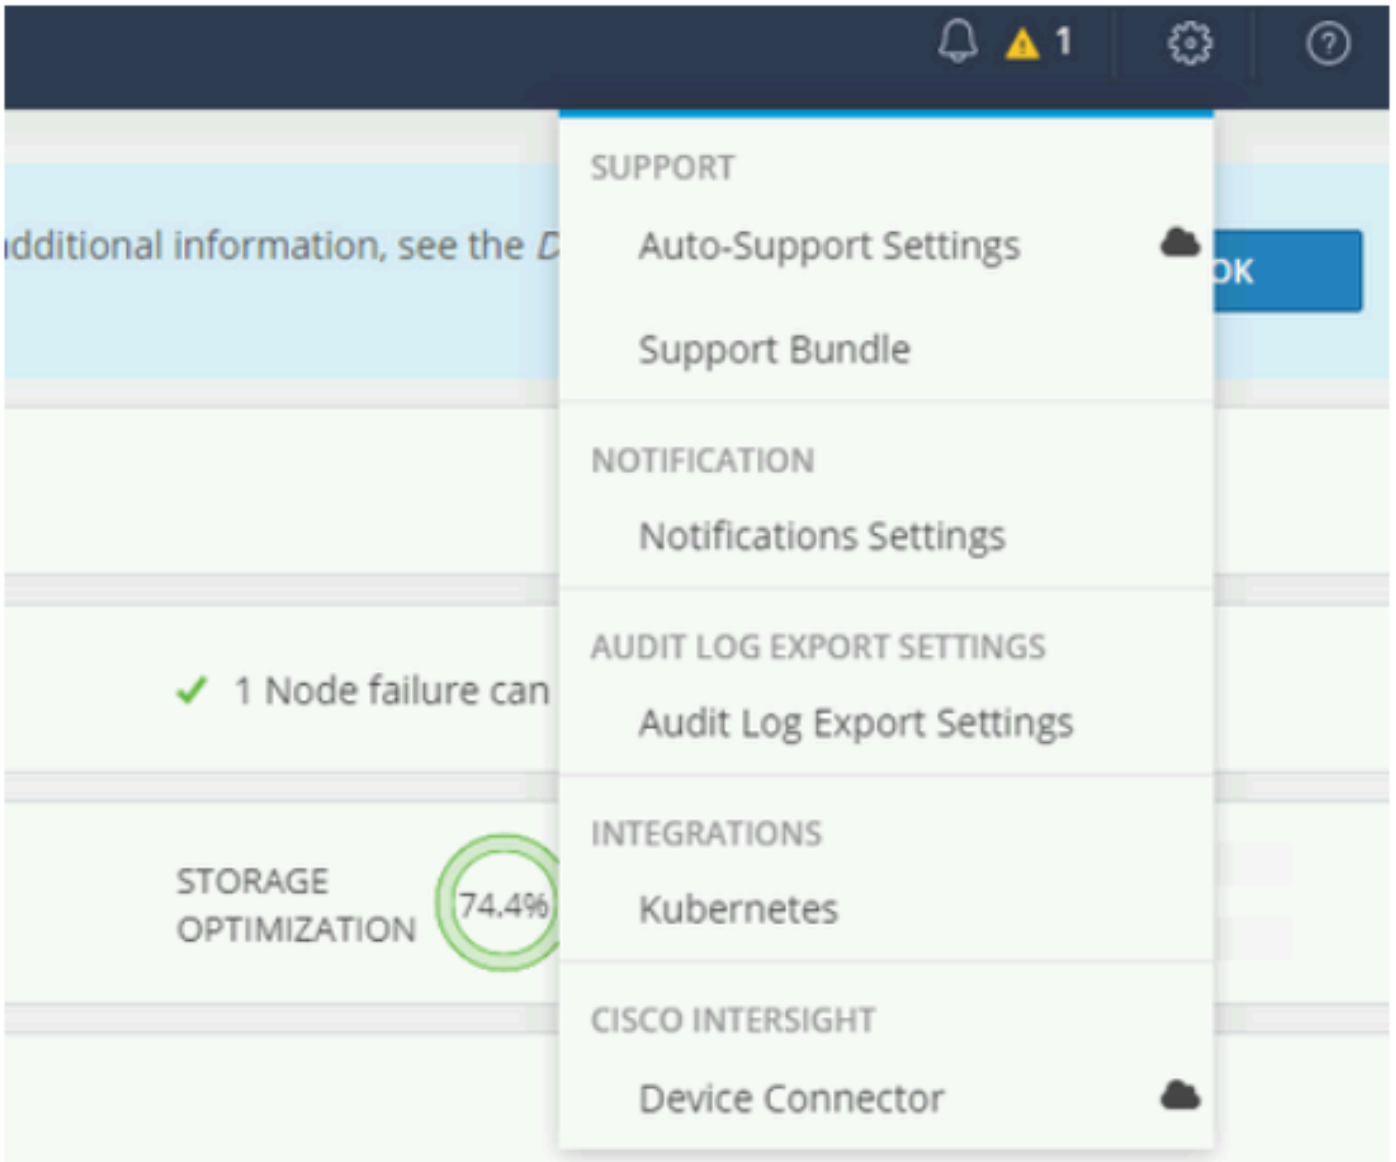


Step 2. Under Support Bundle, you can now see three options- **Basic, Detailed and Extended.**

Basic - Cisco HX Data Platform logs.

Detailed - Gathers Hyper-V logs and performance data for the environment in addition to the Basic support bundle. This is the default Support bundle as generated by storfs-support command.

Extended - When generated with just Extended support bundle option alone, then it only contains core files. When generated with the Recommended Support bundle and Extended Support bundle option, then it includes core files and detailed support bundles.

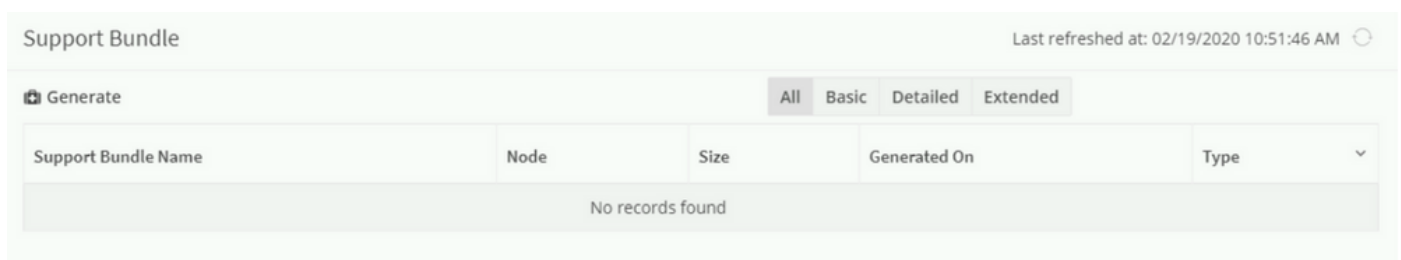

Step 3. Click **Generate**. This can give you a pop up to select the node and generate different types of support bundles for download.

- The default option is to generate Recommended Support Bundle.
- Recommended Support Bundle triggers creation of both Basic Support Bundle and Detailed Support Bundle from the same option.
- All the nodes are selected by default. Uncheck the Nodes which are not required manually.

Select bundle options ? ×

Recommended support bundle
Generate basic and detailed support bundles for each selected node. Use the basic support bundle to initiate support case.

Extended support bundle
Generate the extended support bundle for each selected node. This option should be used with guidance from Cisco support. This will create a support bundle with a large size.

Select Nodes to generate support bundle

Filter

<input checked="" type="checkbox"/>	Node	Hypervisor Address	Controller Address
<input checked="" type="checkbox"/>	hx-02-esxi-01	192.168.200.24	192.168.200.30
<input checked="" type="checkbox"/>	hx-02-esxi-02	192.168.200.25	192.168.200.31
<input checked="" type="checkbox"/>	hx-02-esxi-03	192.168.200.26	192.168.200.32

Cancel **Generate**

Click **Generate** to start the support bundle creation.

Once done, the Generate option can be greyed out and it can show you **Basic support bundle generation in process**.

Support Bundle Last refreshed

Generating All Basic Detailed Extended

Basic support bundle generation in process

Support Bundle Name	Node	Size	Generated On
No records found			

Once the basic support bundle generation is completed, it can start to generate the detailed support bundle. You can confirm this when you browse to the Basic tab.

The Generate option can be greyed out and it can show you **Detailed support bundle generation in**

process.

Support Bundle Last refreshed at: 02/19/2020 11:19:15 AM

① Use only the basic support bundle to initiate a support case.

Generating All Basic Detailed Extended Filter

Detailed support bundle generation in process

Support Bundle Name	Node	Size	Generated On	Type
storfs-support_2020-02-19--11-15-14_hx-02-scvms-02.rchs.local_basic.tar.gz	hx-02-esxi-02	72.38 MB	02/19/2020 11:15:14 AM	Basic
storfs-support_2020-02-19--11-15-14_hx-02-scvms-01.rchs.local_basic.tar.gz	hx-02-esxi-01	70.67 MB	02/19/2020 11:15:14 AM	Basic
storfs-support_2020-02-19--11-15-14_hx-02-scvms-03.rchs.local_basic.tar.gz	hx-02-esxi-03	81.43 MB	02/19/2020 11:15:14 AM	Basic


You can now open TAC cases that use Basic Supported bundle. Detailed supported bundles are required if the case needs to be escalated to Engineering.

Step 4. Once both the support bundles are generated, you see a prompt that says **Support Bundle Generation Completed**. Next, you can download Basic or Detailed support bundle as needed.


Generate All Basic Detailed Extended Filter

Support Bundle Name	Node	Size	Generated On	Type
storfs-support_2020-02-19--11-18-20_hx-02-scvms-01.rchs.local_detailed.tar.gz	hx-02-esxi-01	318.79 MB	02/19/2020 11:18:20 AM	Detailed
storfs-support_2020-02-19--11-18-20_hx-02-scvms-02.rchs.local_detailed.tar.gz	hx-02-esxi-02	321.37 MB	02/19/2020 11:18:20 AM	Detailed
storfs-support_2020-02-19--11-18-20_hx-02-scvms-03.rchs.local_detailed.tar.gz	hx-02-esxi-03	433.06 MB	02/19/2020 11:18:20 AM	Detailed

HyperFlex Data Platform Support Bundle: Hyperflex Cluster UI Method (HX Version 2.5 ~ 3.5)

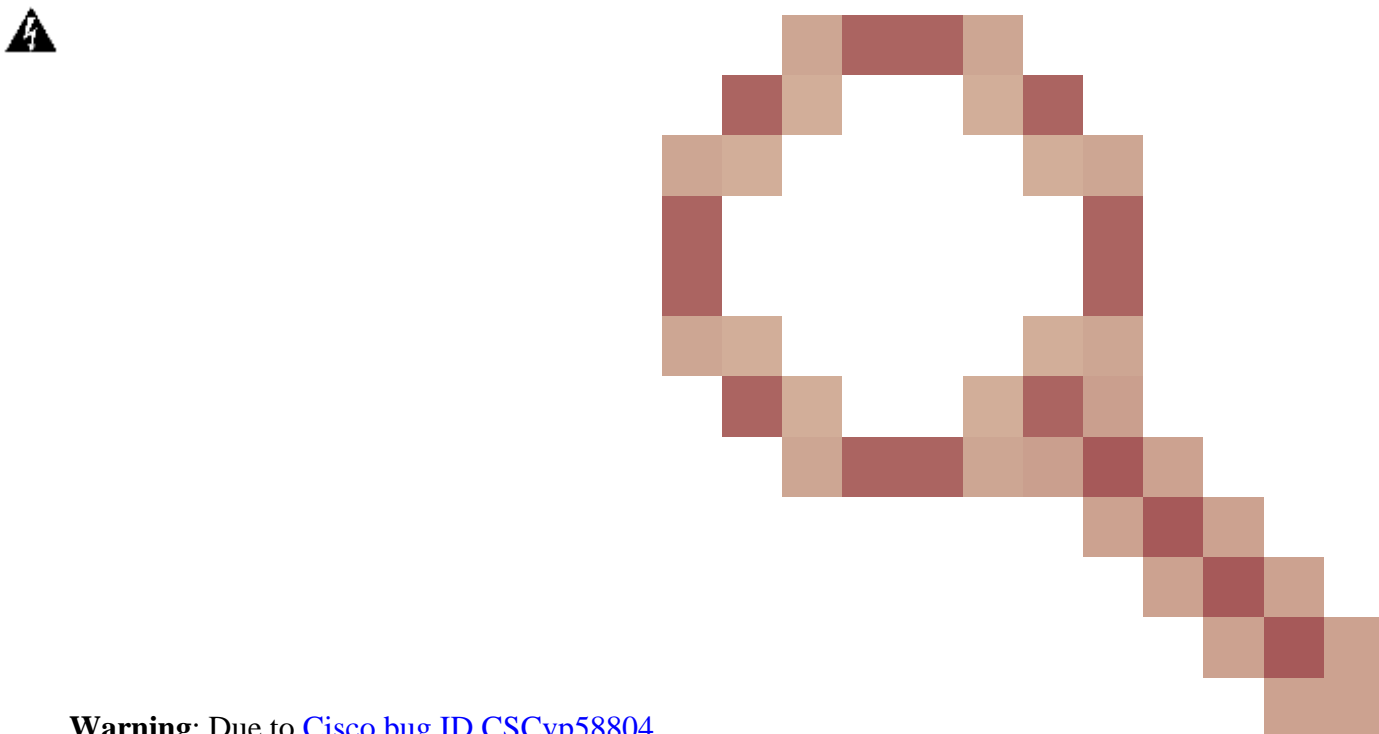


Warning: Due to [Cisco bug ID CSCvp58804](#)

 Cisco TAC strongly recommends to avoid this method of log collection unless you run a fixed release for the defect, such as Hyperflex 3.5(2c) or later.

To access this UI, navigate to <https://{stctlvm mgmt ip}>

stctlvm = Storage Controller VM

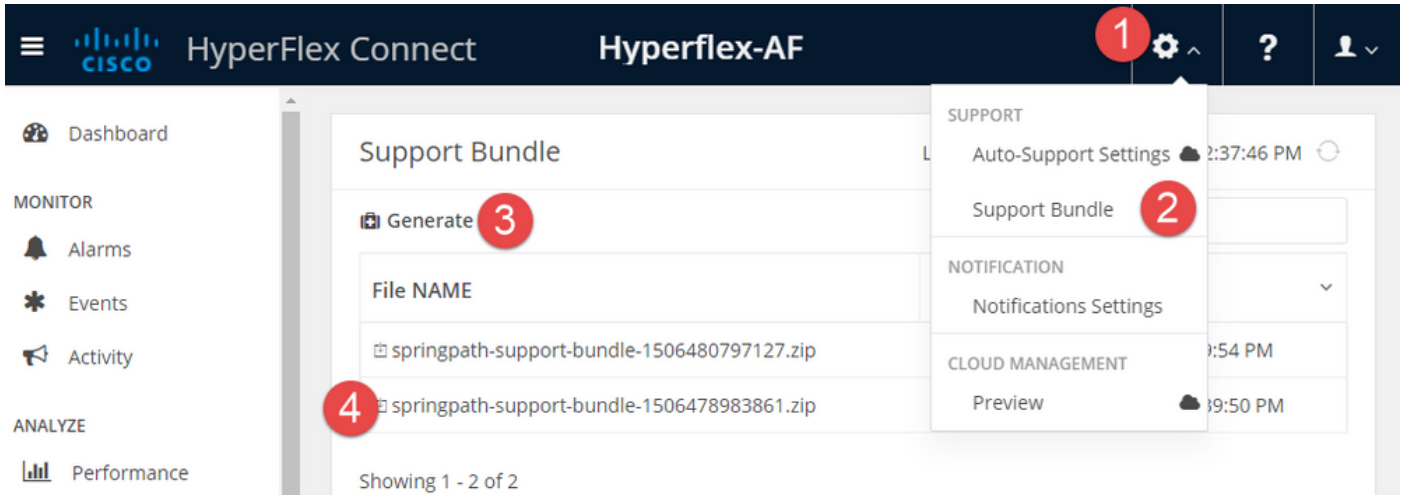

HyperFlex Data Platform Support Bundle: Hyperflex Cluster UI Method (Pre version 2.5)

To access this UI, navigate to <https://{stctlvm mgmt ip}/ui>

stctlvm = Storage Controller VM

The screenshot shows the Cisco HyperFlex management console. The left sidebar contains navigation options: Dashboard, Datastores, Servers, MONITOR (Performance, Alarms, Events), DATA SERVICES (Virtual Machines, VM Folders, Resource Pools), and ADMINISTRATION (System Services, Cluster Services, Network Configuration, Auto Support, Security, Support Bundle, Cleaner). The 'Support Bundle' option is highlighted with a red circle and the number 2. The main content area is titled 'Support' and 'Generate and download support bundle'. It features a 'Support Bundle' section with the instruction 'Generate cluster wide support bundle from all Hypervisors and Controller VMs'. A 'Generate' button is highlighted with a red circle and the number 3. Below this, a table lists generated support bundles. One bundle is shown: 'springpath-support-bundle-1486089622048.zip' with a 'Download' button highlighted with a red circle and the number 4.

HyperFlex Data Platform Support Bundle: Hyperflex Cluster CLI Method

Step 1. Use the **storfs-support** command.

Once you log into a storage controller with SSH client, you can run the given command to generate a tech support file. Later, it can be copied with SFTP client.

Detailed Support Bundle

Use the old method and run the CLI command **storfs-support** to generate the default (or detailed support bundle).

```
<#root>
```

```
root@SpringpathController0FDF9RNMJK:~#
```

```
storfs-support
```

```
2017-04-28 05:24:18,505 - Storfs-Support - INFO -
2017-04-28 05:24:18,505 - Storfs-Support - INFO -
2017-04-28 05:24:18,505 - Storfs-Support - INFO - Initiating support generation...
2017-04-28 05:24:18,506 - Storfs-Support - INFO -
2017-04-28 05:24:18,506 - Storfs-Support - INFO -
2017-04-28 05:24:18,506 - Storfs-Support - INFO - Generating support archive.This can take some time..
2017-04-28 05:24:18,506 - Storfs-Support - INFO -
2017-04-28 05:31:57,692 - Storfs-Support - INFO - Support archive generated at:
```

```
/var/support/storfs-support_2017-04-28--05-24-18_SpringpathController0FDF9RNMJK.tar.gz
```

```
2017-04-28 05:31:57,692 - Storfs-Support - INFO - Removing directory... /var/support/cmds_output
```

This CLI scrolls until all files are gathered.

CLI shows the output like this when the tech support bundle is finished:

```
<#root>
```

```
2017-04-28 05:31:57,692 - Storfs-Support - INFO -
```

```
Support archive generated at:
```

```
/var/support/storfs-support_2017-04-28--05-24-18_SpringpathController0FDF9RNMJK.tar.gz
```

```
2017-04-28 05:31:57,692 - Storfs-Support - INFO - Removing directory... /var/support/cmds_output
```

```
2017-04-28 05:31:57,694 - Storfs-Support - INFO -
```

```
2017-04-28 05:31:57,694 - Storfs-Support - INFO -
```

```
2017-04-28 05:31:57,694 - Storfs-Support - INFO - Adding file...
```

```
    /var/support/storfs_support-20170428-052418.out
```

```
2017-04-28 05:31:57,698 - Storfs-Support - INFO - Removing file...
```

```
    /var/support/storfs_support-20170428-052418.out
```

```
root@SpringpathController0FDF9RNMJK:~#
```

Support bundle is saved to /var/support.

```
<#root>
```

```
root@SpringpathController0FDF9RNMJK:~#
```

```
ls -lh /var/support
```

```
total 398M
```

```
drwxrwxrwx+ 3 root root 4.0K Apr 28 05:19 asup
```

```
-rw-rw-rw- 1 root root 398M Apr 28 05:31
```

```
storfs-support_2017-04-28--05-24-18_SpringpathController0FDF9RNMJK.tar.gz
```

```
root@SpringpathController0FDF9RNMJK:~#
```



Note: With the CLI method, only a bundle for the local storage controller, is generated. If environment logs are required, this must run manually on individual storage controllers.

These are other options also available to use with the **storfs-support** command:

```
storfs-support --perf
```

```
storfs-support --extended
```


--perf

Gathers performance data for the environment.

--extended

It includes core files that are located in the /var/core directory in the support bundle.

New : Basic Support Bundle

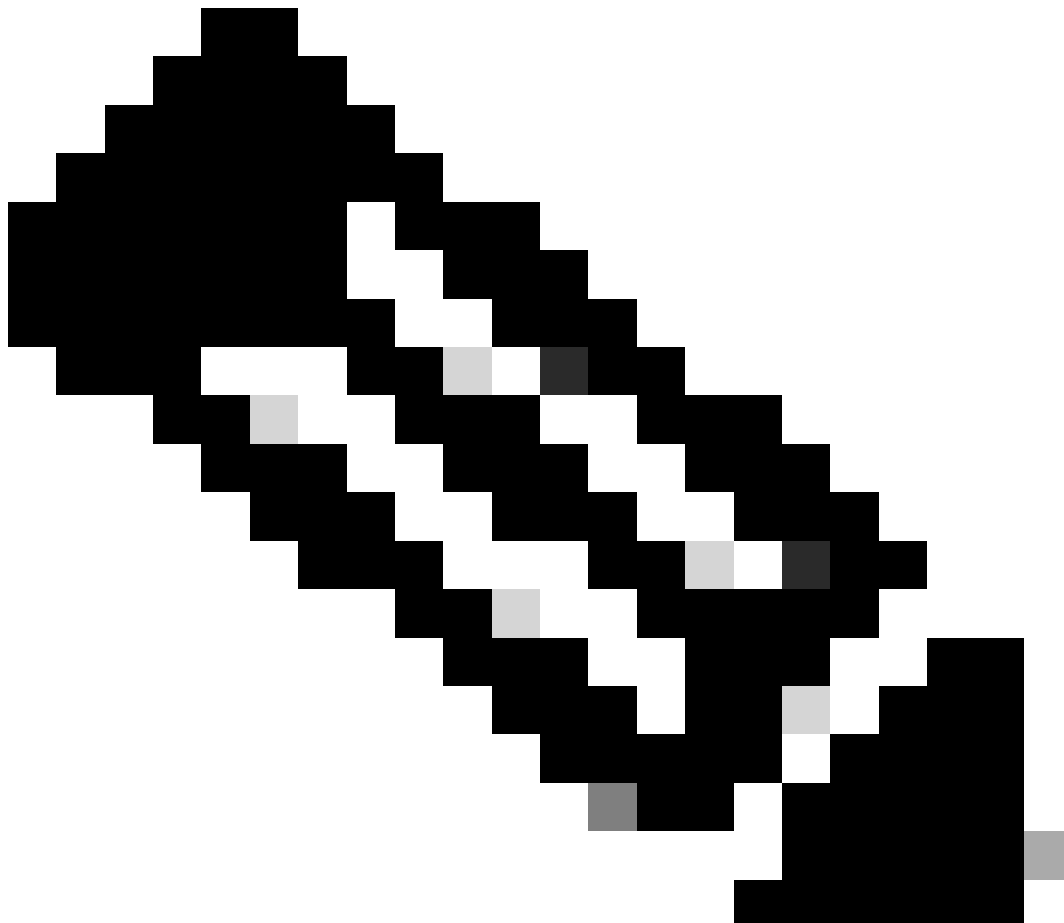

Note: storfs-support DOES have the option for the basic support bundle but DOES NOT have the capability to append the file name (basic vs detailed) to the support bundle file name.

As you can see below, the file name for basic bundle is the same as the one generated for detailed storfs-support without any append.

```
<#root>
```

```
root@hx-02-scvn-03:~#
```

```
storfs-support --basic
```

```
/var/support
```

```
2020-02-19 12:33:01,315 - Storfs-Support - INFO -
```

```
2020-02-19 12:33:01,315 - Storfs-Support - INFO -
2020-02-19 12:33:01,315 - Storfs-Support - INFO - Initiating support generation...
2020-02-19 12:33:01,317 - Storfs-Support - INFO -
2020-02-19 12:33:01,317 - Storfs-Support - INFO -
2020-02-19 12:33:01,317 - Storfs-Support - INFO - Generating support archive. This can take some time..
2020-02-19 12:33:01,317 - Storfs-Support - INFO -
2020-02-19 12:33:01,317 - Storfs-Support - INFO -
2020-02-19 12:33:01,318 - Storfs-Support - INFO - STORFS_RUNTIMEDIR: /tmp
2020-02-19 12:33:01,318 - Storfs-Support - INFO - STORFS_SOURCEDIR:

2020-02-19 12:35:34,446 - Storfs-Support - INFO -
2020-02-19 12:35:34,446 - Storfs-Support - INFO - Support archive generated at:

/var/support/storfs-support_2020-02-19--12-33-01_hx-02-scv-03.rchs.local.tar.gz

2020-02-19 12:35:34,446 - Storfs-Support - INFO - Removing directory... /var/support/cmds_output
```

Step 2. Use the **asupcli** command.

Run the command **asupcli generate**. You can run **asupcli generate--help** to get the list of options.

```
root@hx-02-scv-03:~# asupcli generate --help
usage: asupcli generate [-h] --type {basic,detailed,core-only}
                        [--prefix PREFIX] [--core]

Generate regular support bundle

optional arguments:
  -h, --help            show this help message and exit
  --type {basic,detailed,core-only}
                        type of bundle [basic|detailed|core-only]
  --prefix PREFIX      prefix to the support bundle file name
  --core                add core to the support bundle
root@hx-02-scv-03:~#
root@hx-02-scv-03:~#
```

Generate Default/Detailed Support Bundle

```
root@hx-02-scv-03:~#
root@hx-02-scv-03:~# asupcli generate --type detailed
root@hx-02-scv-03:~#
root@hx-02-scv-03:~#
```

Generate Basic Support Bundle

```
root@hx-02-scv-03:~#
root@hx-02-scv-03:~#
root@hx-02-scv-03:~# asupcli generate --type basic
root@hx-02-scv-03:~#
```

The logs are saved under **/var/support**.

```
root@hx-02-scvms-03:~# cd /var/support/
root@hx-02-scvms-03:/var/support# ls -l
total 1.1G
-rw-rw-rw- 1 root root 435M Feb 19 12:50 storfs-support_2020-02-19--12-42-27_hx-02-scvms-03.rchs.local_detailed.tar.gz
-rw-rw-rw- 1 root root 434M Feb 19 11:26 storfs-support_2020-02-19--11-18-20_hx-02-scvms-03.rchs.local_detailed.tar.gz
-rw-rw-rw- 1 root root 83M Feb 19 12:41 storfs-support_2020-02-19--12-38-52_hx-02-scvms-03.rchs.local_basic.tar.gz
-rw-rw-rw- 1 root root 83M Feb 19 12:35 storfs-support_2020-02-19--12-33-01_hx-02-scvms-03.rchs.local.tar.gz
-rw-rw-rw- 1 root root 82M Feb 19 11:17 storfs-support_2020-02-19--11-15-14_hx-02-scvms-03.rchs.local_basic.tar.gz
drwxrwxrwx+ 3 root root 4.0K Jan 13 17:42 asup
drwxrwxrwx+ 2 root root 4.0K Feb 19 06:00 asup_default
drwxrwxrwx+ 2 root root 4.0K Feb 19 12:44 asup-restapi-outputs
drwxrwxrwx+ 3 root root 4.0K Feb 19 12:49 esx-asup-default
drwxrwxrwx+ 2 root root 4.0K Jan 13 17:42 java_heap_dump
drwxrwxrwx+ 2 root root 4.0K Jan 13 17:43 supportbundle
root@hx-02-scvms-03:/var/support#
```


Capturing Hyperflex Installer Logs: Hyperflex Platform Installer UI Method

To access this UI, navigate to <https://{HX Installer ip}>.

Log in with credentials:

Username: root

Password: Cisco123

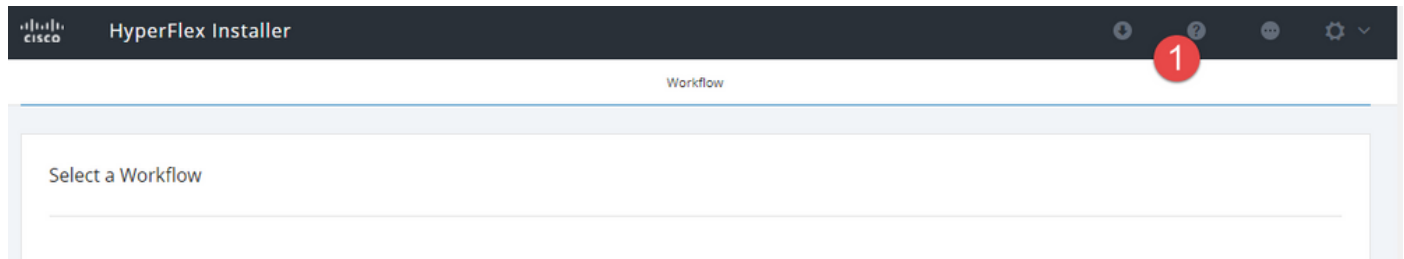

Tech Support



HyperFlex Installer

Version	2.1(1c)
---------	---------

HyperFlex Data Platform

Version	2.1(1c)
---------	---------

Build Release	2.1.1c
---------------	--------

Build Id	21048
----------	-------

Build Type	release
------------	---------

Build Date	Aug 04, 2017
------------	--------------

Build Git Hash	ec0043c515d628fb2b3e2...
----------------	--------------------------

Tech Support Bundles

 To include data from UCS, please enter your UCS Manager Credentials

to the platform installer with either with an SSH client or via console, you can run the given command to generate a tech support file. Later, it can be copied with SFTP client.

```
<#root>
```

```
root@Cisco-HX-Data-Platform-Installer:/var/support#
```

```
deployment-support
```

```
/var/support
```

```
2012-12-07 19:59:52,857 - Storfs-Support - INFO -
2012-12-07 19:59:52,858 - Storfs-Support - INFO -
2012-12-07 19:59:52,858 - Storfs-Support - INFO - Initiating support generation...
2012-12-07 19:59:52,860 - Storfs-Support - INFO -
2012-12-07 19:59:52,860 - Storfs-Support - INFO -
2012-12-07 19:59:52,860 - Storfs-Support - INFO - Generating support archive. This can take some time..
2012-12-07 19:59:52,860 - Storfs-Support - INFO -
2012-12-07 19:59:52,860 - Storfs-Support - INFO -
2012-12-07 19:59:52,860 - Storfs-Support - INFO - STORFS_RUNTIMEDIR: /tmp
2012-12-07 19:59:52,860 - Storfs-Support - INFO - STORFS_SOURCEDIR:
2012-12-07 19:59:52,860 - Storfs-Support - INFO - STORFS_SUPPORT_TARGETDIR: /var/support
2012-12-07 19:59:52,860 - Storfs-Support - INFO - STORFS_INSTALLDIR: /opt/springpath/storfs
2012-12-07 19:59:52,860 - Storfs-Support - INFO - STORFS_LOGDIR: /var/log
2012-12-07 19:59:52,860 - Storfs-Support - INFO - STORFS_ASUPDIR: /var/log/asup
2012-12-07 19:59:52,861 - Storfs-Support - INFO - STORFS_COREDIR: /var/core
```

This CLI scrolls until all files are gathered.

CLI shows the output like this when the tech support bundle is finished:

```
<#root>
```

```
2012-12-07 19:59:52,994 - Storfs-Support - INFO -
```

```
Support archive generated at:
```

```
/var/support/storfs-support_2012-12-07--19-59-52_Cisco-HX-Data-Platform-Installer.tar.gz
```

```
2012-12-07 19:59:52,994 - Storfs-Support - INFO - Removing directory... /var/support/cmds_output
2012-12-07 19:59:52,994 - Storfs-Support - INFO -
2012-12-07 19:59:52,994 - Storfs-Support - INFO -
2012-12-07 19:59:52,995 - Storfs-Support - INFO - Adding file...
/var/support/storfs_support-20121207-195952.out
2012-12-07 19:59:52,996 - Storfs-Support - INFO - Removing file...
/var/support/storfs_support-20121207-195952.out
root@Cisco-HX-Data-Platform-Installer:/var/support#
```

Support bundle is saved to /var/support.

```
<#root>
```

```
root@Cisco-HX-Data-Platform-Installer:~# ls -lh /var/support/
```

```
total 204K
```

```
-rw-rw-rw- 1 root root 203K Dec 7 19:59
```

```
storfs-support_2012-12-07--19-59-52_Cisco-HX-Data-Platform-Installer.tar.gz
```

root@Cisco-HX-Data-Platform-Installer:~#

Capturing VMware ESXi Logs

To collect VMware ESXi related logs, reference the VMware Knowledge Base articles:

Via GUI client: <https://kb.vmware.com/kb/653>

Via CLI session: <https://kb.vmware.com/kb/1010705>

Capturing VMware vCenter Logs

Full bundle: <https://kb.vmware.com/s/article/2032892>

Virgo logs: <https://docs.vmware.com/en/VMware-vSphere/6.5/com.vmware.vsphere.monitoring.doc/GUID-7E10C58F-16EA-44AB-8AA0-8D4A66399879.html>

EAM logs: <https://kb.vmware.com/s/article/2110014>

Capturing UCS Logs

Visual Guide to Collect UCS Tech Support Files - B, C and S Series:

<https://www.cisco.com/c/en/us/support/docs/servers-unified-computing/ucs-infrastructure-ucs-manager-software/211587-Visual-Guide-to-collect-UCS-Tech-Support.html>

Bias-Free Language

The documentation set for this product strives to use bias-free language. For purposes of this documentation set, bias-free is defined as language that does not imply discrimination based on age, disability, gender, racial identity, ethnic identity, sexual orientation, socioeconomic status, and intersectionality. Exceptions can be present in the documentation due to language that is hardcoded in the user interfaces of the product software, language used based on standards documentation, or language that is used by a referenced third-party product.