

# Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Restrictions](#)

[Components Used](#)

[Conventions](#)

[Background Information](#)

[Configure](#)

[Network Diagram](#)

[Full Tunnel Configuration](#)

[ASA Configuration Using Adaptive Security Device Manager \(ASDM\)](#)

[ASA Configuration Using CLI](#)

[Windows 8 L2TP/IPsec Client Configuration](#)

[Split Tunnel Configuration](#)

[Configuration on ASA](#)

[Configuration on L2TP/IPsec client](#)

[Verify](#)

[Troubleshoot](#)

[Related Information](#)

## Introduction

This document describes how to configure Layer 2 Tunneling Protocol (L2TP) over IPsec using pre-shared key between Cisco Adaptive Security Appliance (ASA) and Windows 8 native client.

L2TP over Internet Protocol security (IPsec) provides the capability to deploy and administer an L2TP Virtual Private Network (VPN) solution alongside the IPsec VPN and firewall services in a single platform.

## Prerequisites

### Requirements

Cisco recommends that you have knowledge of these topics:

- IP connectivity from the client machine to the ASA. To test connectivity, try to ping the IP address of the ASA from client endpoint and vice versa
- Ensure that UDP port 500 and 4500 and Encapsulating Security Payload (ESP) protocol is not blocked anywhere along the path of the connection

### Restrictions

- L2TP over IPsec supports only IKEv1. IKEv2 is not supported.
- L2TP with IPsec on the ASA allows the LNS to interoperate with native VPN clients integrated in such operating systems as Windows, MAC OS X, Android, and Cisco IOS. Only L2TP with IPsec is supported, native L2TP itself is not supported on ASA.
- The minimum IPsec security association lifetime supported by the Windows client is 300 seconds. If the lifetime on the ASA is set to less than 300 seconds, the Windows client ignores it and replaces it with a 300 second lifetime.
- The ASA only supports the Point-to-Point Protocol (PPP) authentications Password Authentication Protocol (PAP) and Microsoft Challenge-Handshake Authentication Protocol (CHAP), Versions 1 and 2, on the local database. Extensible Authentication Protocol (EAP) and CHAP are performed by proxy authentication servers. Therefore, if a remote user belongs to a tunnel group configured with the **authentication eap-proxy** or **authentication chap** commands, and the ASA is configured to use the local database, that user cannot connect.

### Supported PPP Authentication Types

L2TP over IPsec connections on the ASA support only the PPP authentication types shown in Table

#### *AAA Server Support and PPP Authentication Types*

<b>AAA Server Type</b>	<b>Supported PPP Authentication Types</b>
LOCAL	PAP, MSCHAPv1, MSCHAPv2
RADIUS	PAP, CHAP, MSCHAPv1, MSCHAPv2, EAP-Proxy
TACACS+	PAP, CHAP, MSCHAPv1
LDAP	PAP
NT	PAP
Kerberos	PAP
SDI	SDI

#### PPP Authentication Type Characteristics

<b>Keyword</b>	<b>Authentication Type</b>	<b>Characteristics</b>
<b>chap</b>	CHAP	In response to the server challenge, the client returns the encrypted [challenge plus password] with a clear text username. This protocol is more secure than the PAP, but it does not encrypt data.
<b>eap-proxy</b>	EAP	Enables EAP which permits the security appliance to proxy the PPP authentication process to an external RADIUS authentication server.
<b>ms-chap-v1</b>	Microsoft CHAP, Version 1	Similar to CHAP but more secure in that the server stores and compares only encrypted passwords rather than clear text passwords as in CHAP.
<b>ms-chap-v2</b>	Microsoft CHAP, Version, 2	This protocol also generates a key for data encryption by MPPE.
<b>pap</b>	PAP	Passes clear text username and password during authentication and is not secure.

### Components Used

The information in this document is based on these software and hardware versions:

- Cisco 5515 Series ASA that runs the software version 9.4(1)

- L2TP/IPSec client (Windows 8)

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, ensure that you understand the potential impact of any command.

## Related Products

This configuration can also be used with Cisco ASA 5500 series Security Appliance 8.3(1) or later.

## Conventions

Refer to [Cisco Technical Tips Conventions](#) for more information on document conventions

## Background Information

Layer 2 Tunneling Protocol (L2TP) is a VPN tunneling protocol that allows remote clients to use the public IP network to securely communicate with private corporate network servers. L2TP uses PPP over UDP (port 1701) to tunnel the data.

L2TP protocol is based on the client/server model. The function is divided between the L2TP Network Server (LNS), and the L2TP Access Concentrator (LAC). The LNS typically runs on a network gateway such as the ASA in this case, while the LAC can be a dial-up Network Access Server (NAS) or an endpoint device with a bundled L2TP client such as Microsoft Windows, Apple iPhone, or Android.


## Configure

This section is presented with the information to configure the features described in this document.

**Note:** Use the [Command Lookup Tool](#) ([registered](#) customers only) to find more information on the commands used in this document.

**Note:** The IP addressing schemes used in this configuration are not legally routable on the Internet. They are RFC 1918 addresses that have been used in a lab environment.

## Network Diagram

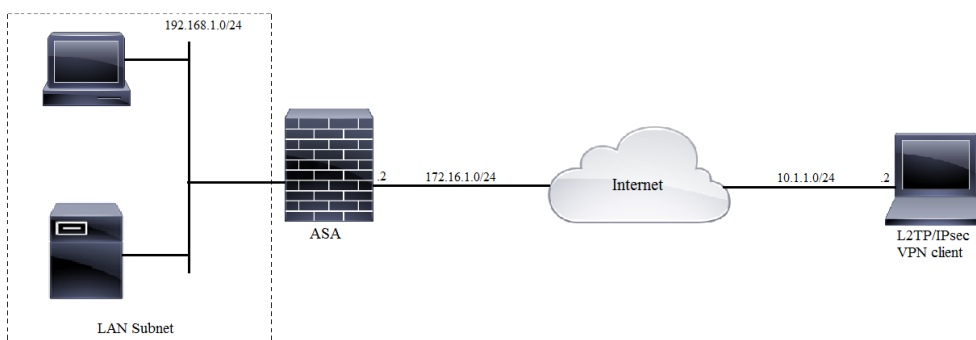


# Full Tunnel Configuration


## ASA Configuration Using Adaptive Security Device Manager (ASDM)

Complete these steps:


Step 1. Log in to the ASDM, and navigate to **Wizards > VPN Wizards > Ipsec (IKEv1) Remote Access VPN Wizard**.

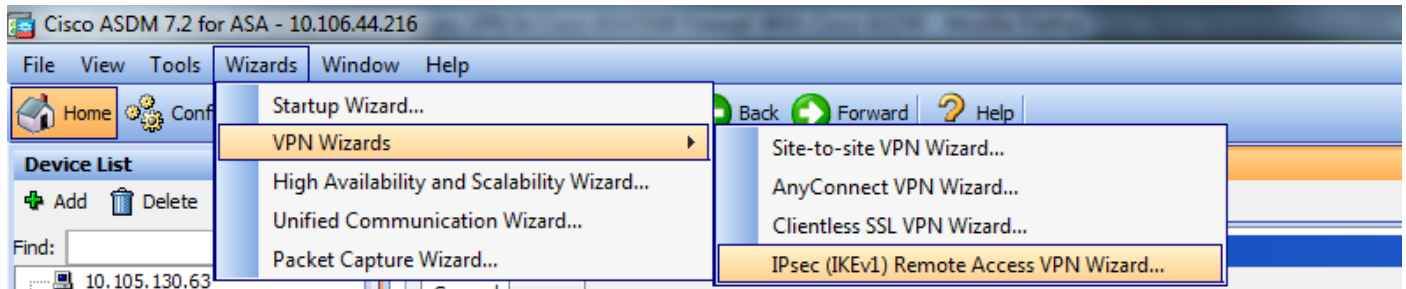


Step 2. A Remote Access VPN setup window appears. From the drop-down list, choose the interface on which VPN tunnel has to be terminated. In this example outside interface is connected to WAN and so terminating VPN tunnels on this interface. Keep the box **Enable inbound IPsec sessions to bypass interface access lists. Group policy and per-user authorization access lists still apply to the traffic** checked so that new access-list need not to be configured on outside interface to allow the clients to access internal resources. Click **Next**.

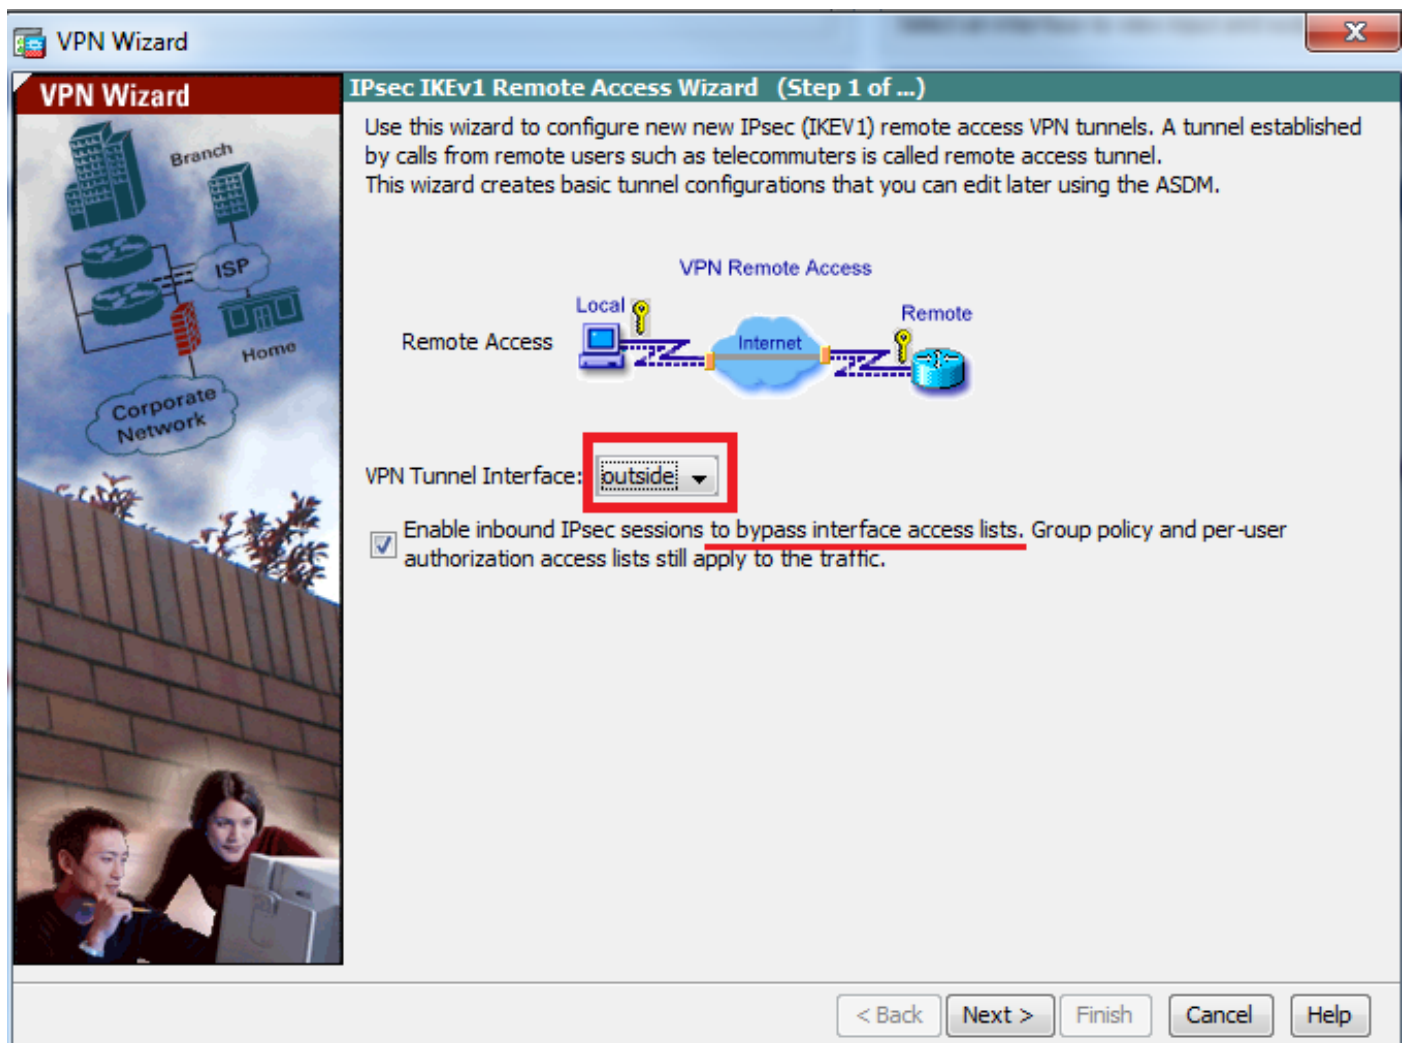

Step 3. As shown in this image, choose the client type as **Microsoft Windows client using L2TP over IPsec** and **MS-CHAP-V1** and **MS-CHAP-V2** as PPP authentication protocol since PAP is not secure and other authentication types are not supported with LOCAL database as authentication server and Click **Next**.

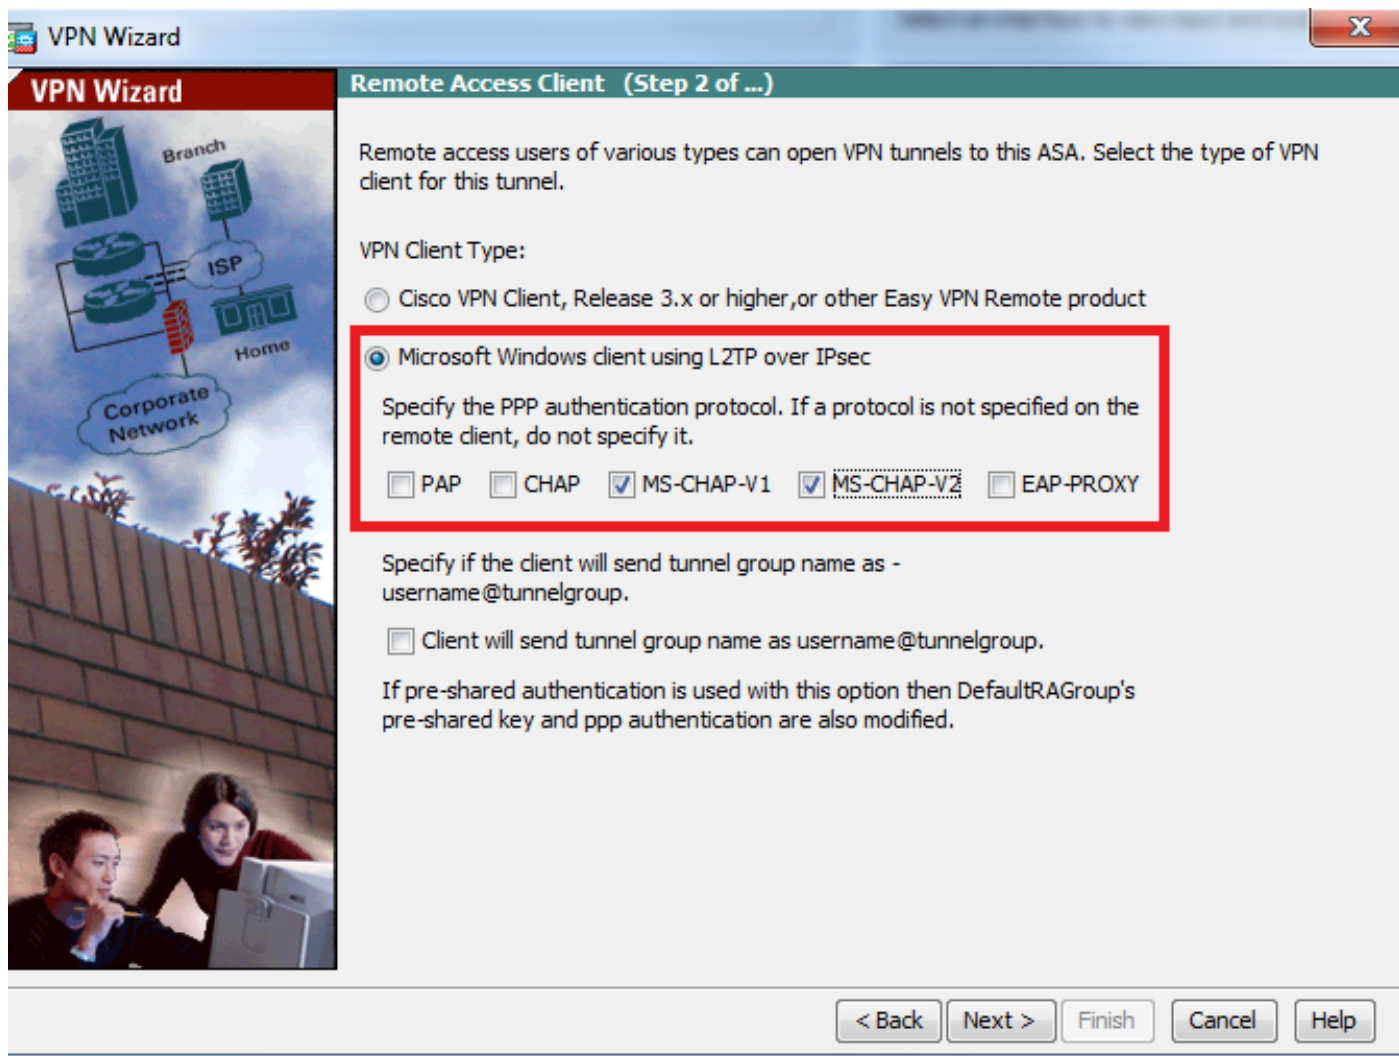


Step 4. Choose the authentication method as **Pre-shared-key** and type the pre-shared-key which must be same on the client side as well and click **Next**, as shown in this image.

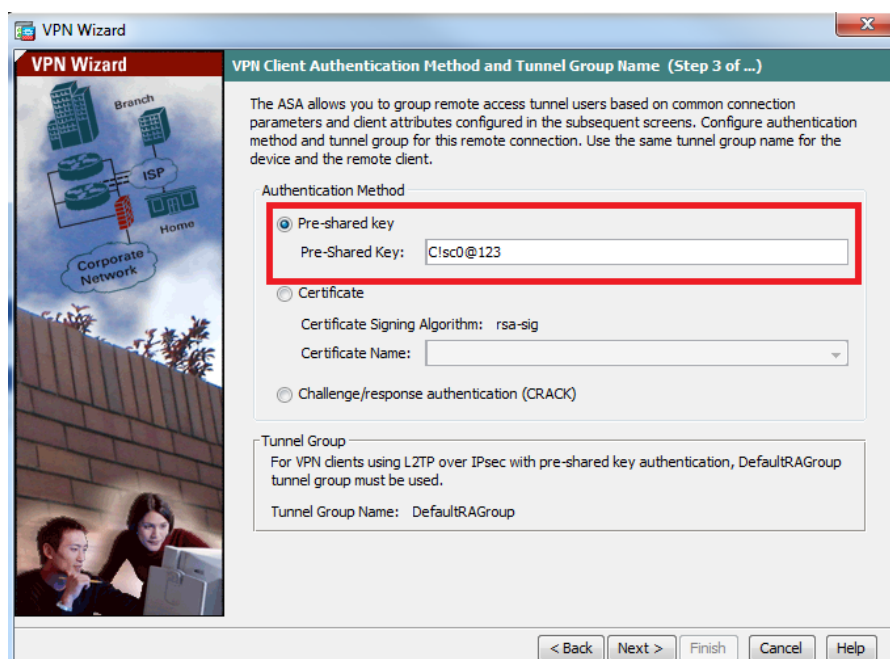


Step 5. Specify a method to authenticate users who attempt L2TP over IPsec connections. Either an external AAA authentication server or its own local database can be used. Choose **Authenticate using the local user database** if you want to authenticate the clients against local database of ASA and Click **Next**.


**Note:** Please refer [Configure RADIUS Authentication for VPN users](#) to authenticate the users using external AAA server.

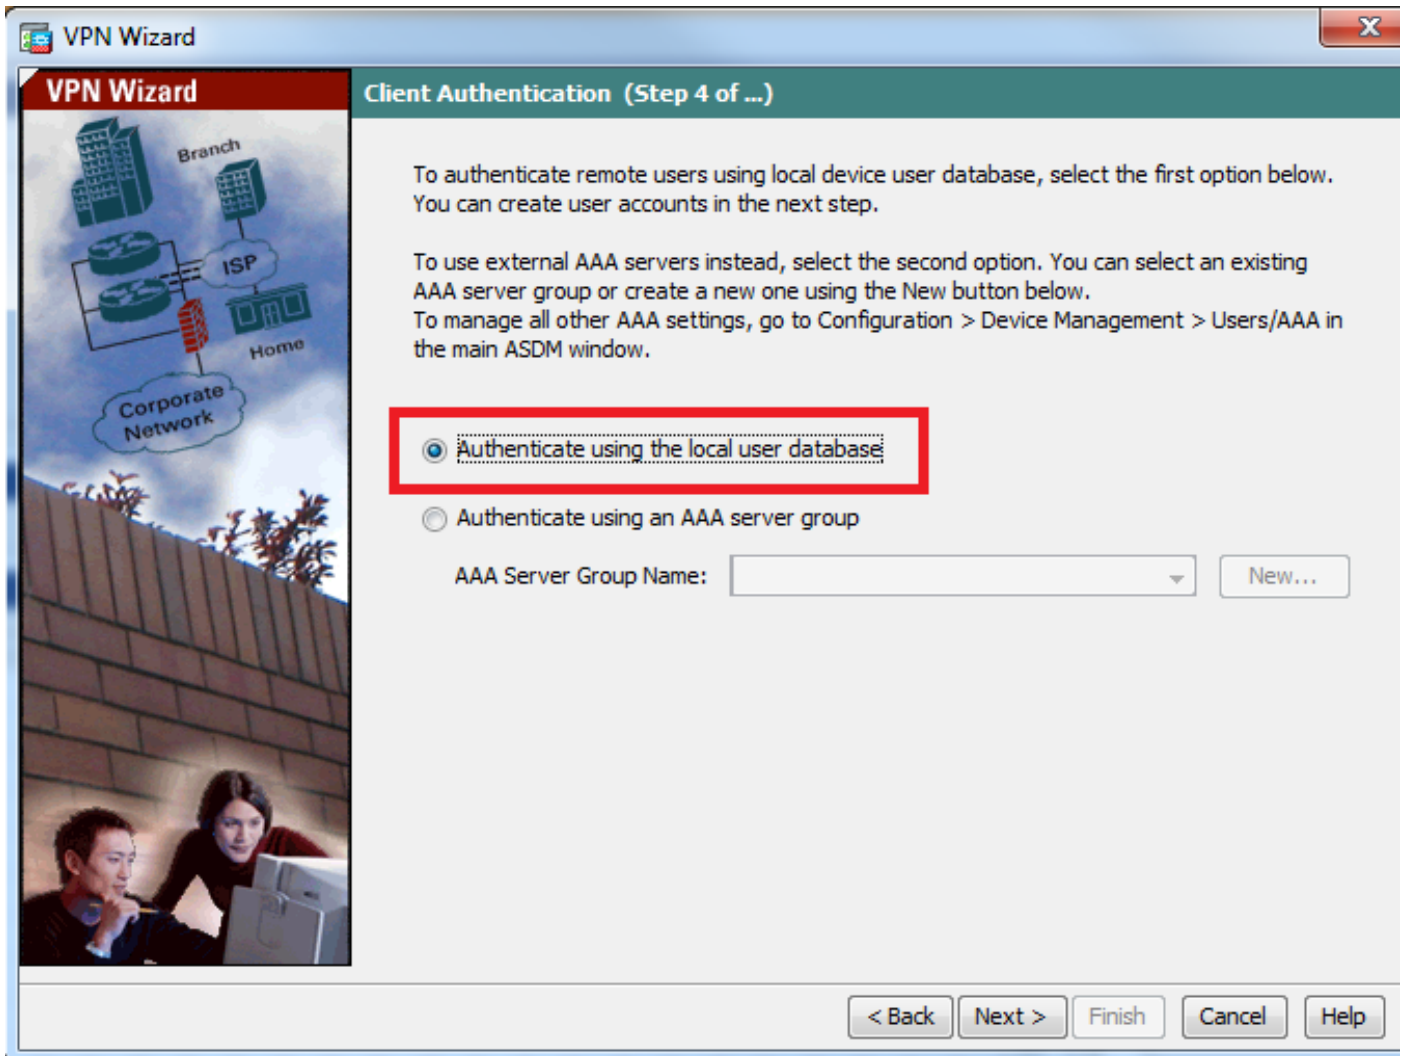

Step 6. To add new users to the local database for user authentication, enter the username and password and then click **ADD** or else existing user accounts in the database can be used, as shown in this image. Click **Next**.

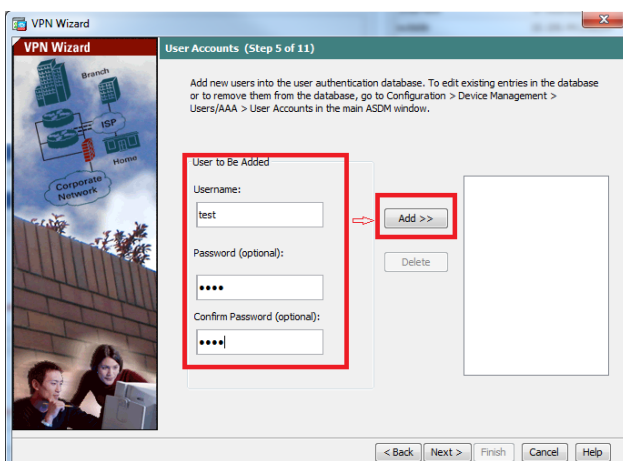


Step 7. From the drop-down list, choose the address pool to be used for assigning IP address to the clients. To create new address pool, click **New**, as shown in this image.

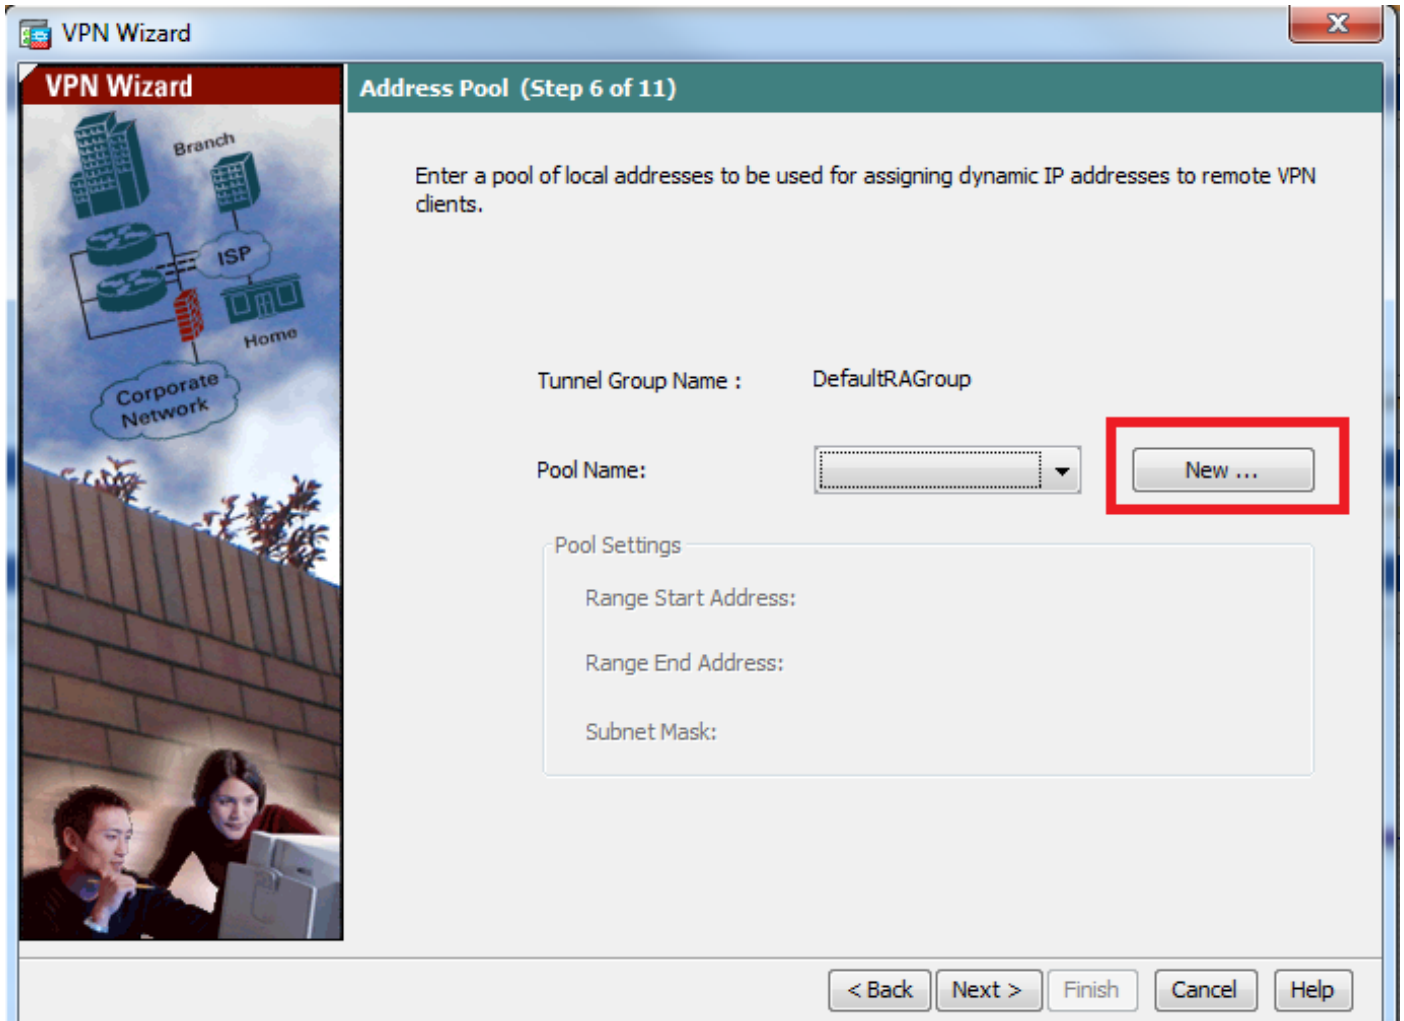

Step 8. The **Add IPv4 Pool** dialog box appears.

1. Enter the name of the new IP address pool.
2. Enter the starting and ending IP addresses.
3. Enter the subnet mask and click **OK**.

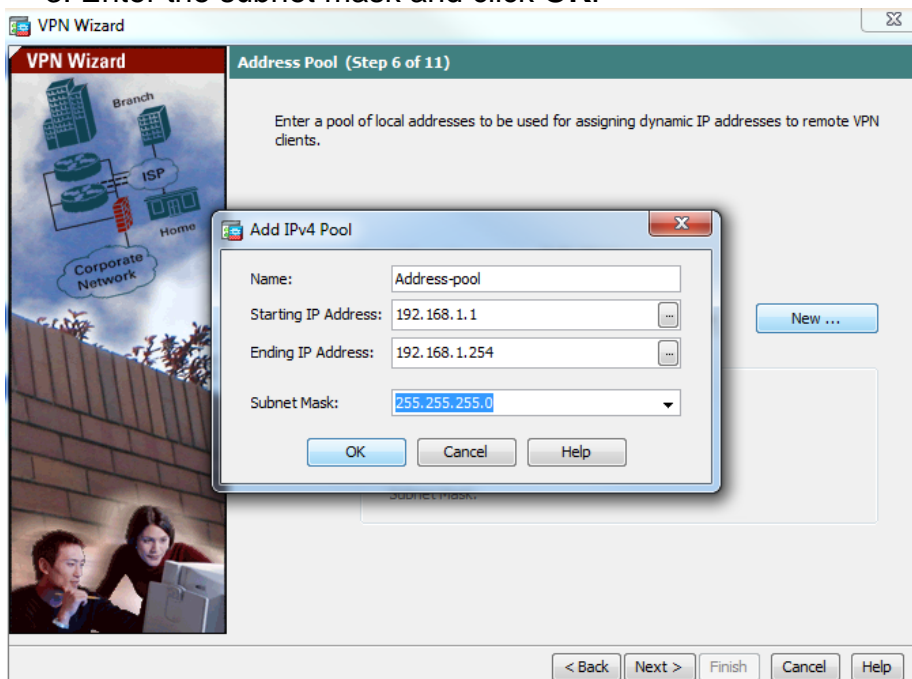

Step 9. Verify the pool settings and click **Next**.

The screenshot shows the 'Address Pool (Step 6 of 11)' configuration window in the VPN Wizard. The window title is 'VPN Wizard'. On the left, there is a diagram of a network topology with 'Branch', 'ISP', 'Home', and 'Corporate Network' components. The main area contains the following fields and settings:

- Tunnel Group Name: DefaultRAGroup
- Pool Name: Address-pool (with a 'New ...' button)
- Pool Settings (highlighted with a red box):
  - Range Start Address: 192.168.1.1
  - Range End Address: 192.168.1.254
  - Subnet Mask: 255.255.255.0

At the bottom, there are navigation buttons: '< Back', 'Next >', 'Finish', 'Cancel', and 'Help'. The 'Next >' button is highlighted with a red box.

Step 10. Configure the attributes to be pushed to the clients or leave it empty and click **Next**.


The screenshot shows the 'Attributes Pushed to Client (Optional) (Step 7 of 11)' configuration window in the VPN Wizard. The window title is 'VPN Wizard'. On the left, there is a diagram of a network topology with 'Branch', 'ISP', 'Home', and 'Corporate Network' components. The main area contains the following fields and settings:

- Tunnel Group: DefaultRAGroup
- Primary DNS Server: 8.8.8.8
- Secondary DNS Server: 4.4.4.2
- Primary WINS Server: (empty field)
- Secondary WINS Server: (empty field)
- Default Domain Name: cisco.com


At the bottom, there are navigation buttons: '< Back', 'Next >', 'Finish', 'Cancel', and 'Help'.



Step 11: Ensure that **Enable Perfect Forwarding Secrecy (PFS)** box is unchecked as some client platforms do not support this feature. **Enable split tunneling to let remote users have simultaneous encrypted access to the resources defined above, and unencrypted access to the internet** box is unchecked which means the full tunneling is enabled in which all traffic (including internet traffic) from the client machine will be sent to the ASA over the VPN tunnel. Click **Next**.

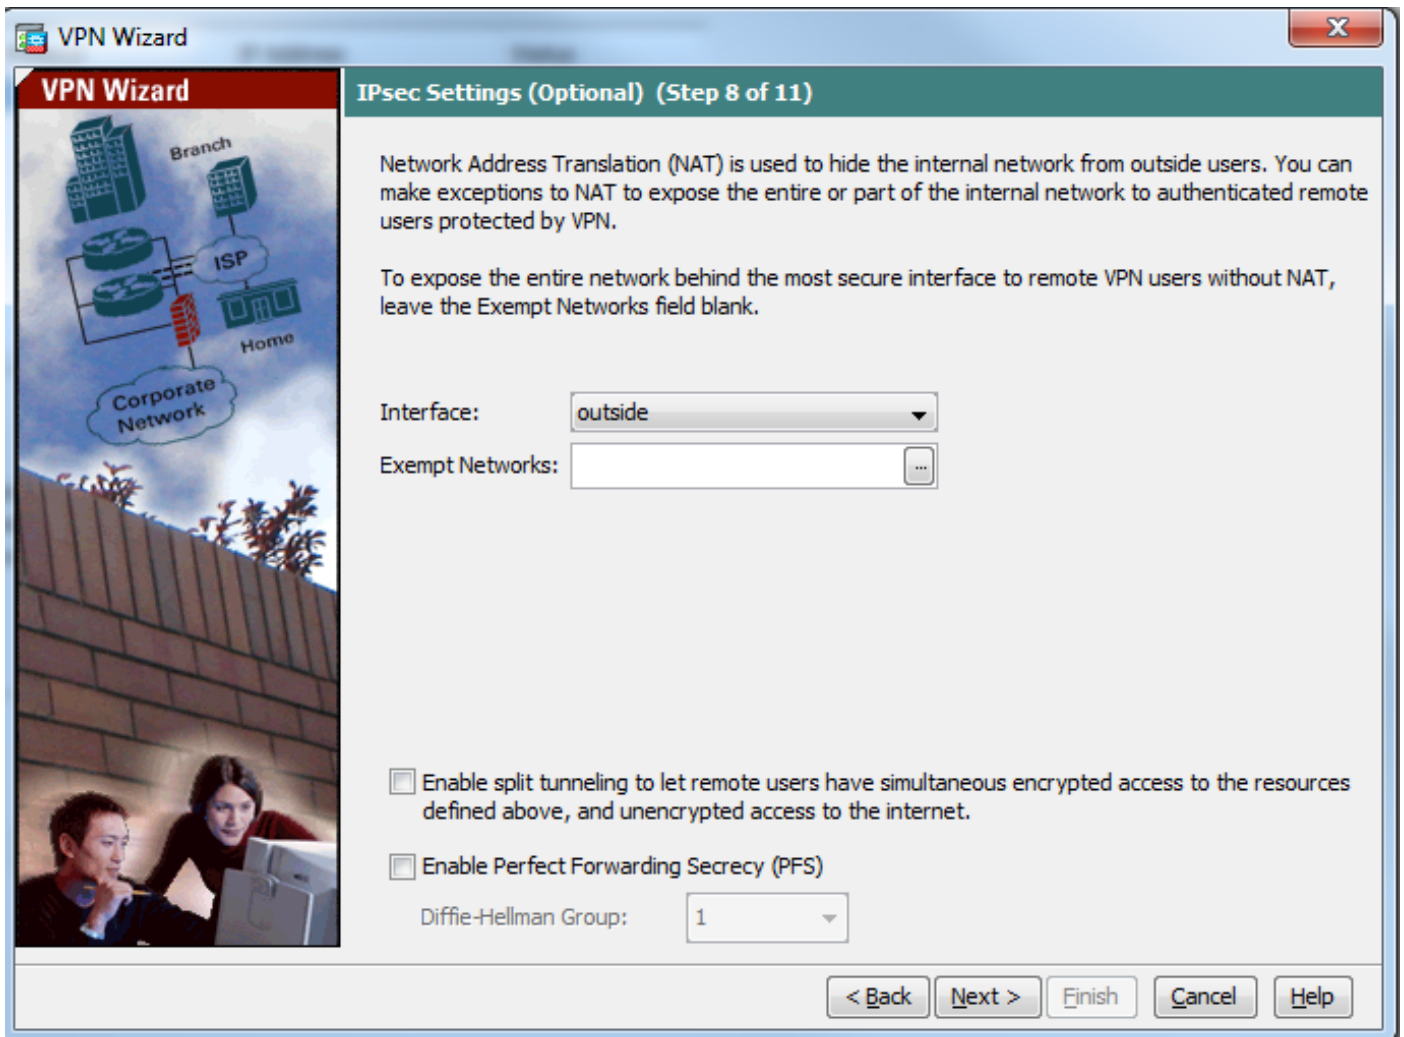

Step 12. Review the summary information and then click **Finish**.

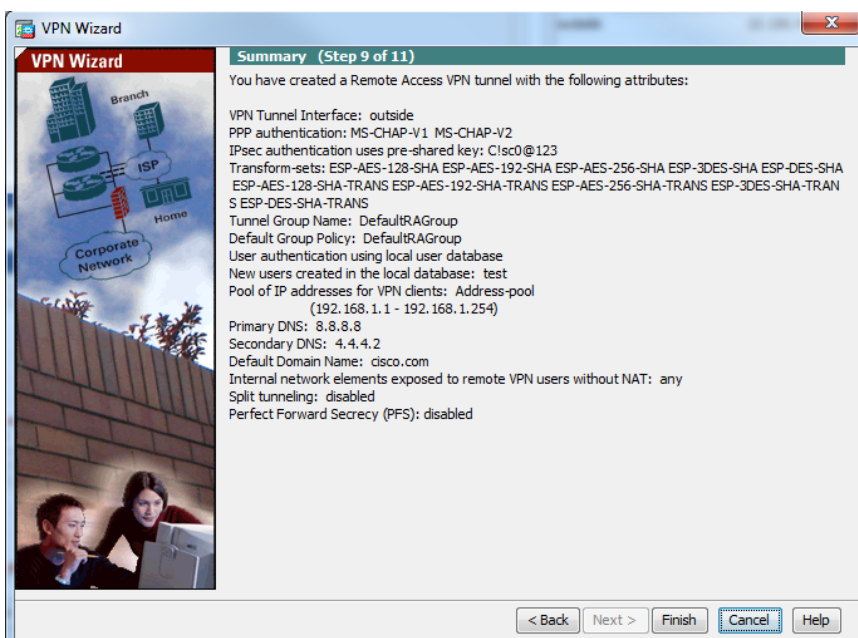

## ASA Configuration Using CLI

### Step 1. Configure IKE Phase 1 policy parameters.

This policy is used to protect control traffic between the peers (that is, it protects pre-shared key and phase 2 negotiations)

```
ciscoasa(config)#crypto ikev1 policy 10
ciscoasa(config-ikev1-policy)#authentication pre-share
ciscoasa(config-ikev1-policy)#encryption 3des
ciscoasa(config-ikev1-policy)#hash sha
ciscoasa(config-ikev1-policy)#group 2
ciscoasa(config-ikev1-policy)#lifetime 86400
ciscoasa(config-ikev1-policy)#exit
```

### Step 2. Configure Transform-set.

It contains IKE Phase 2 policy parameters which are used to protect the data traffic. Since the Windows L2TP/IPsec client uses IPsec transport mode, set the mode to transport. The default is tunnel mode

```
ciscoasa(config)#crypto ipsec ikev1 transform-set TRANS-ESP-3DES-SHA esp-3des esp-sha-hmac
ciscoasa(config)#crypto ipsec ikev1 transform-set TRANS-ESP-3DES-SHA mode transport
```

### Step 3. Configure dynamic map.

As windows clients get dynamic IP address from ISP or local DHCP server (example modem), ASA is not aware about the peer IP address and this poses a problem in the configuration of a static peer on the ASA end. So dynamic crypto configuration has to be approached in which all the parameters are not necessarily defined and the missing parameters are later dynamically learned, as the result of IPsec negotiation from the client.

```
ciscoasa(config)#crypto dynamic-map outside_dyn_map 10 set ikev1 transform-set TRANS-ESP-3DES-SHA
```

### Step 4. Bind dynamic map to static crypto map and apply the crypto map and enable IKEv1 on outside interface

Dynamic crypto map cannot be applied on an interface and so bind it to static crypto map. Dynamic crypto sets should be the lowest priority crypto maps in the crypto map set (that is, they should have the highest sequence numbers) so that the ASA evaluates other crypto maps first. It examines the dynamic crypto map set only when the other (static) map entries do not match.

```
ciscoasa(config)#crypto map outside_map 65535 ipsec-isakmp dynamic outside_dyn_map
ciscoasa(config)#crypto map outside_map interface outside
ciscoasa(config)#crypto ikev1 enable outside
```

### Step 5. Create IP address pool

Create a pool of addresses from which IP addresses are assigned dynamically to the remote VPN Clients. Ignore this step to use existing pool on ASA.

```
ciscoasa(config)#ip local pool Address-pool 192.168.1.1-192.168.1.254 mask 255.255.255.0
```

### Step 6. Configure group-policy

Identify the group policy as internal which means the attributes is pulled from local database.

```
ciscoasa(config)#group-policy L2TP-VPN internal
```

**Note:** L2TP/IPsec connections can be configured with either default group policy (DfltGrpPolicy) or a user-defined group policy. In either case, the group policy must be configured to use the L2TP/IPsec tunneling protocol. configure l2tp-ipsec on the VPN protocol attribute on the default group-policy which will get inherited to the user-defined

group policy if the vpn-protocol attribute is not configured on it.

Configure the attributes such as vpn tunnel protocol (in our case, it is l2tp-ipsec), domain name, DNS and WINS server IP address and new user accounts

```
ciscoasa(config)#group-policy L2TP-VPN attributes
ciscoasa(config-group-policy)#dns-server value 8.8.8.8 4.4.4.2
ciscoasa(config-group-policy)#vpn-tunnel-protocol l2tp-ipsec
ciscoasa(config-group-policy)#default-domain value cisco.com
```

Configure usernames and passwords on the device in addition to using AAA. If the user is an L2TP client that uses Microsoft CHAP version 1 or version 2, and the ASA is configured to authenticate against the local database, mschap keyword must be included. For example, username <username> password <password> mschap.

```
ciscoasa(config-group-policy)# username test password test mschap
```

#### Step 7. Configure tunnel-group

Create a tunnel group with the **tunnel-group** command, and specify the local address pool name used to allocate the IP address to the client. If authentication method is pre-shared-key, tunnel group name must be DefaultRAGroup as there is no option on the client to specify the tunnel group and so it lands on default tunnel-group only. Bind the group policy to tunnel-group using the default-group-policy command

```
ciscoasa(config)#tunnel-group DefaultRAGroup general-attributes
ciscoasa(config-tunnel-general)#address-pool Address-pool
ciscoasa(config-tunnel-general)#default-group-policy L2TP-VPN
ciscoasa(config-tunnel-general)#exit
```

**Note:** The default connection profile (tunnel group), DefaultRAGroup has to be configured, if pre-shared key based authentication is performed. If certificate-based authentication is performed, a user-defined connection profile can be chosen based on certificate identifiers

Use the **tunnel-group ipsec-attributes** command to enter the ipsec-attribute configuration mode in order to set the pre-shared key.

```
ciscoasa(config)# tunnel-group DefaultRAGroup ipsec-attributes
ciscoasa(config-tunnel-ipsec)# ikev1 pre-shared-key C!sc0@123
ciscoasa(config-tunnel-ipsec)#exit
```

Configure the PPP authentication protocol with the **authentication type** command from tunnel group ppp-attributes mode. Disable CHAP which is enabled by default as it is not supported if AAA server is configured as local database.

```
ciscoasa(config)#tunnel-group DefaultRAGroup ppp-attributes
ciscoasa(config-ppp)#no authentication chap
ciscoasa(config-ppp)#authentication ms-chap-v2
ciscoasa(config-ppp)#exit
```

#### Step 8. Configure NAT-Exemption

Configure NAT-Exemption so that the clients can access internal resources connected to internal interfaces (In this example, internal resources are connected to inside interface).

```
ciscoasa(config)#object network L2TP-Pool
ciscoasa(config-network-object)#subnet 192.168.1.0 255.255.255.0
ciscoasa(config-network-object)#exit
ciscoasa(config)# nat (inside,outside) source static any any destination static L2TP-Pool L2TP-Pool no-proxy-arp route-lookup
```

## Complete Sample Configuration

```
crypto ikev1 policy 10
authentication pre-share
encryption 3des
hash sha
group 2
lifetime 86400
exit

crypto ipsec ikev1 transform-set TRANS-ESP-3DES-SHA esp-3des esp-sha-hmac
crypto ipsec ikev1 transform-set TRANS-ESP-3DES-SHA mode transport

crypto dynamic-map outside_dyn_map 10 set ikev1 transform-set TRANS-ESP-3DES-SHA

crypto map outside_map 65535 ipsec-isakmp dynamic outside_dyn_map
crypto map outside_map interface outside
crypto ikev1 enable outside

ip local pool Address-pool 192.168.1.1-192.168.1.254 mask 255.255.255.0

group-policy L2TP-VPN internal
group-policy L2TP-VPN attributes
vpn-tunnel-protocol l2tp-ipsec
default-domain value cisco.com
username test password test mschap
exit

tunnel-group DefaultRAGroup general-attributes
address-pool Address-pool
default-group-policy L2TP-VPN
exit


tunnel-group DefaultRAGroup ipsec-attributes
ikev1 pre-shared-key C!sc0@123
exit

tunnel-group DefaultRAGroup ppp-attributes
no authentication chap
authentication ms-chap-v2
exit


object network L2TP-Pool
subnet 192.168.1.0 255.255.255.0
exit
nat(inside,outside) source static any any destination static L2TP-Pool L2TP-Pool no-proxy-arp
route-lookup
```

## Windows 8 L2TP/IPsec Client Configuration


1. Open Control panel and select Network and Sharing center.

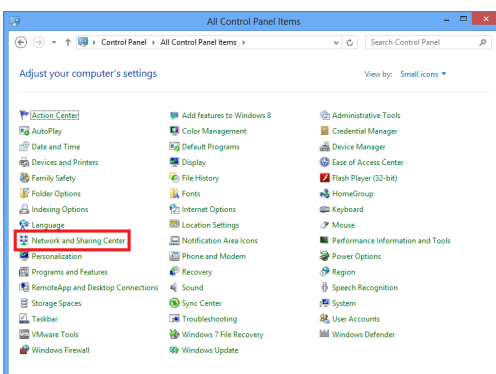


2. Choose **Set up a new connection or network** option.

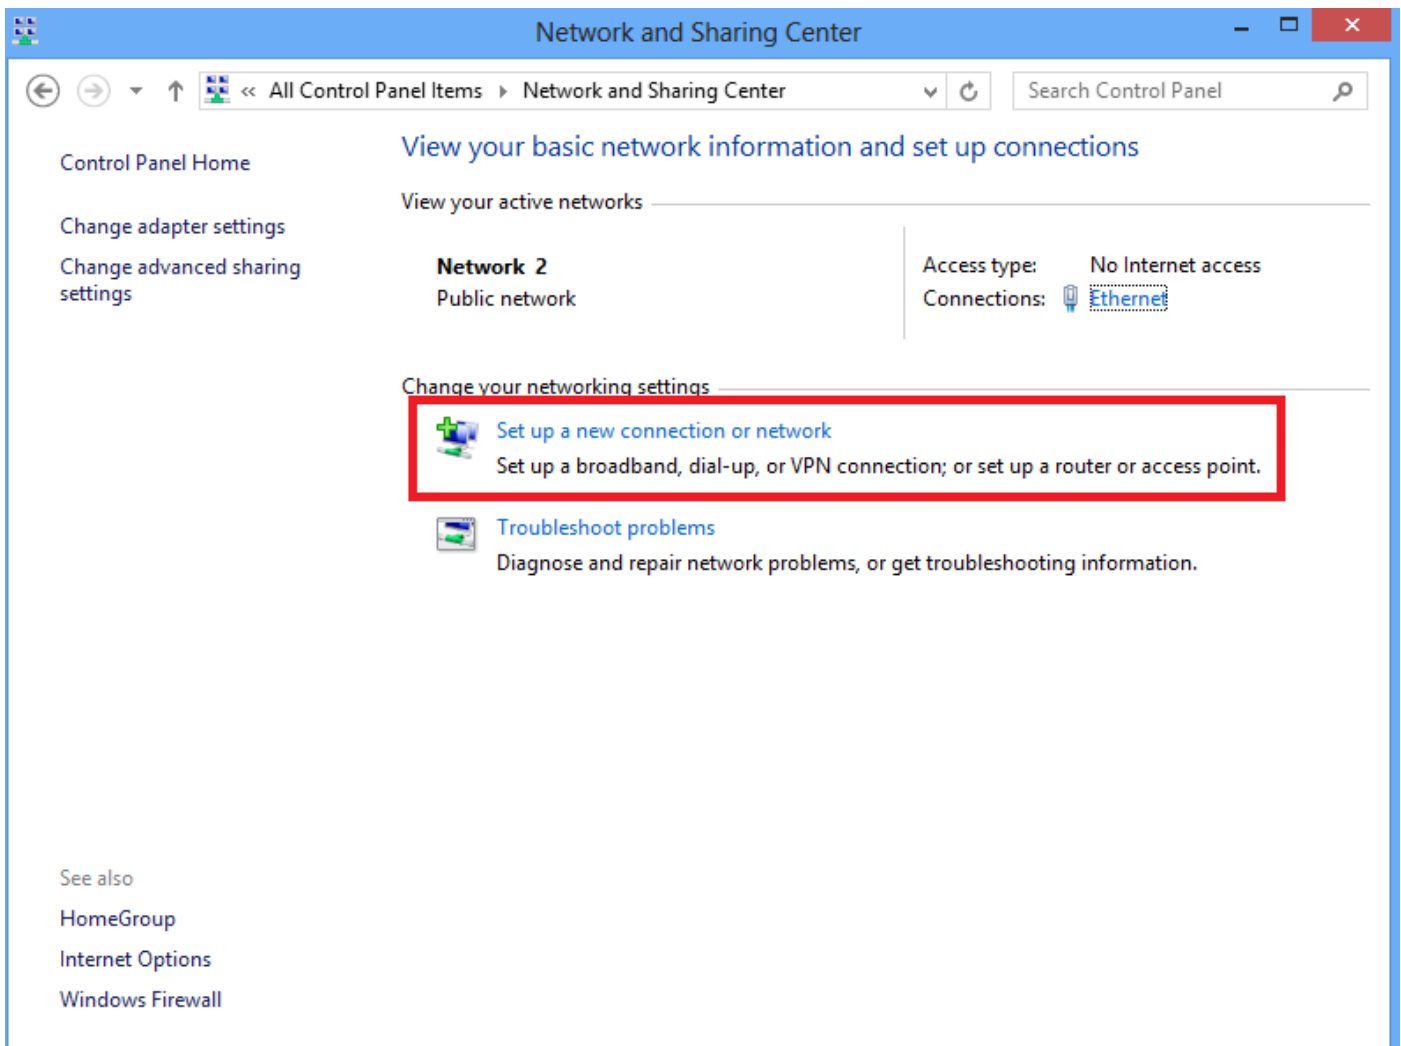


3. Choose **Connect to a workplace** option and click **Next**.

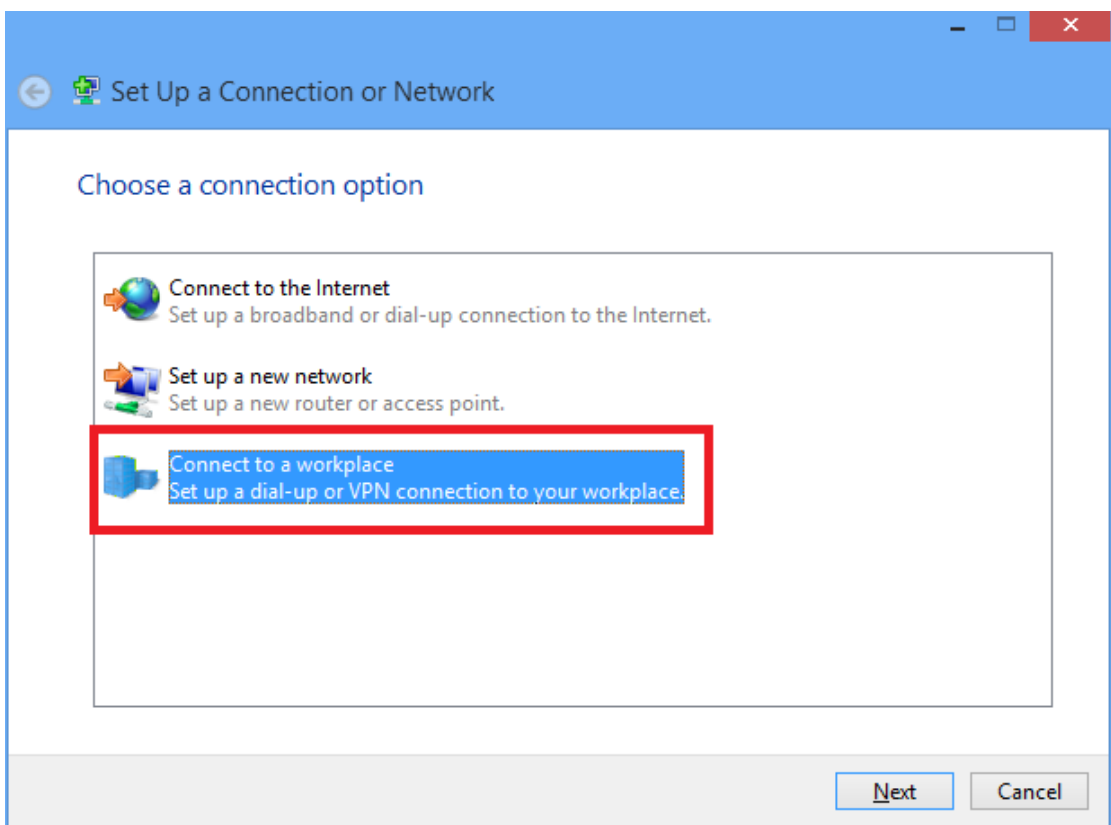


4. Click **Use my Internet connection (VPN)** option.

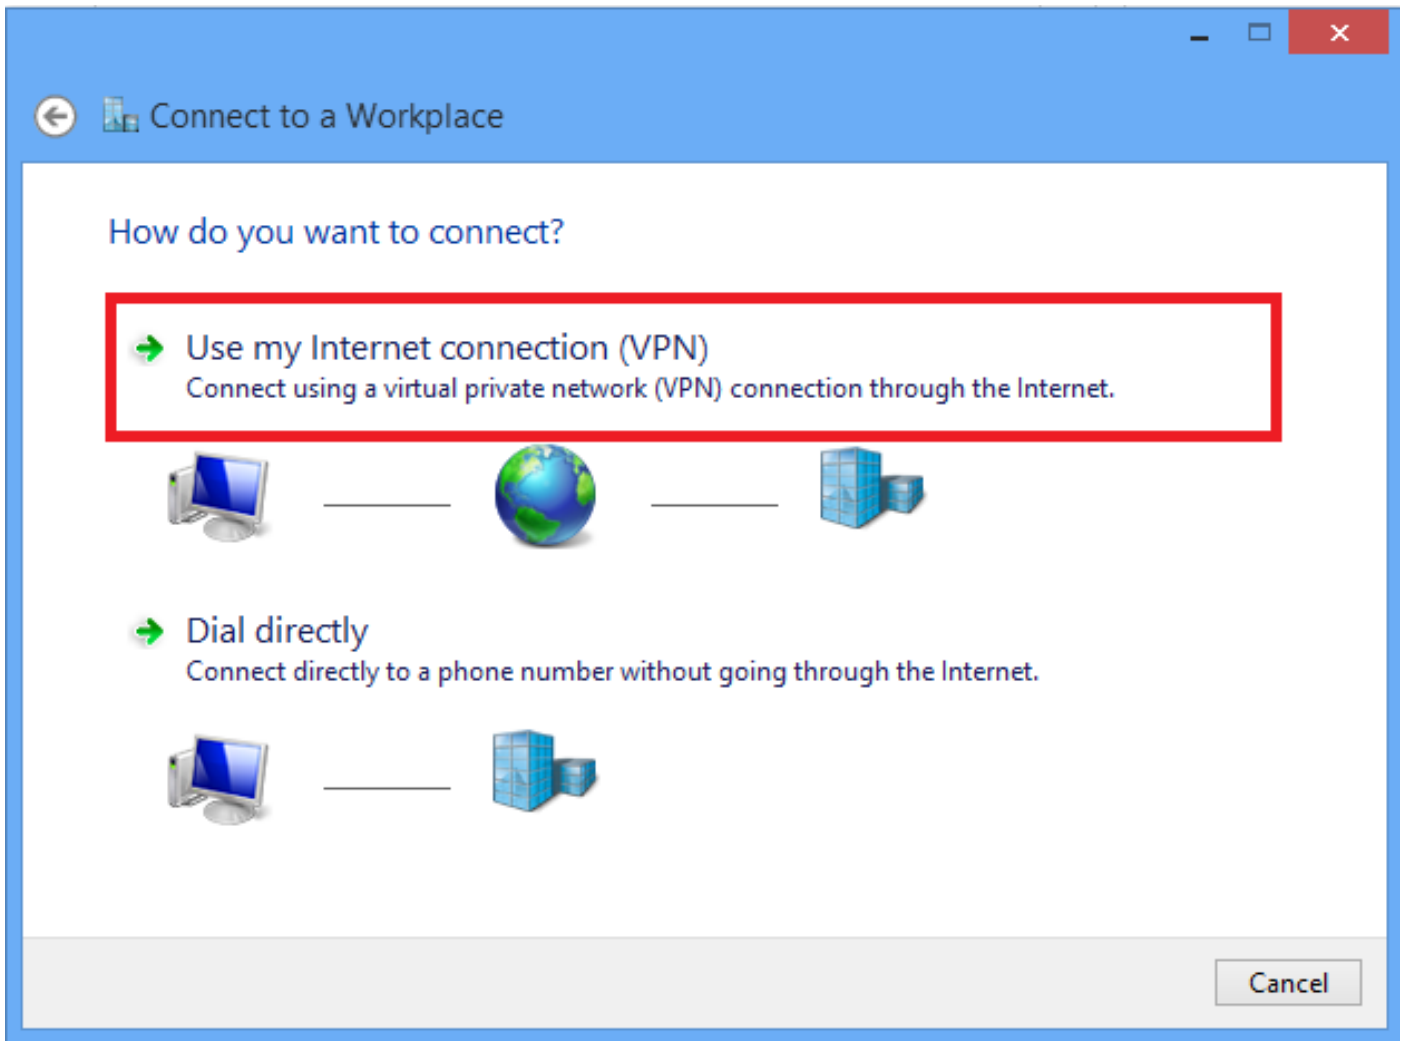


5. Enter IP address of ASA's WAN interface or FQDN and any name for VPN adapter which is locally significant and click **Create**.

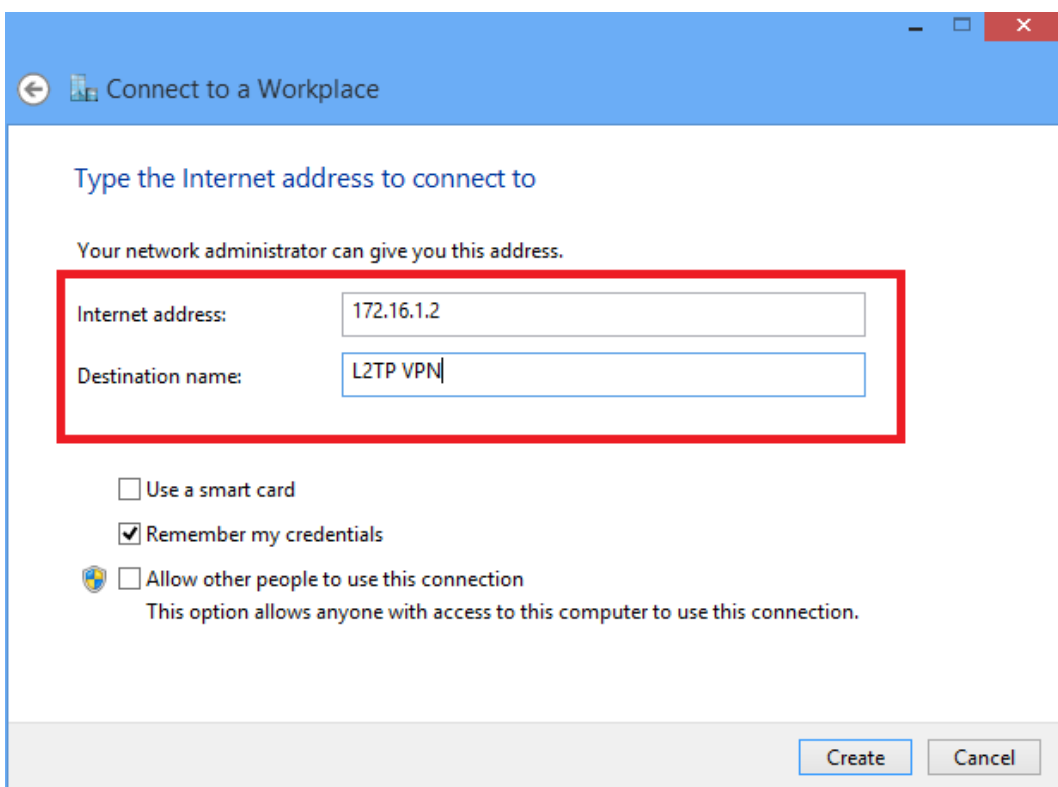


6. On Network and Sharing Center, choose **Change adapter settings** option on the left pane of the window.

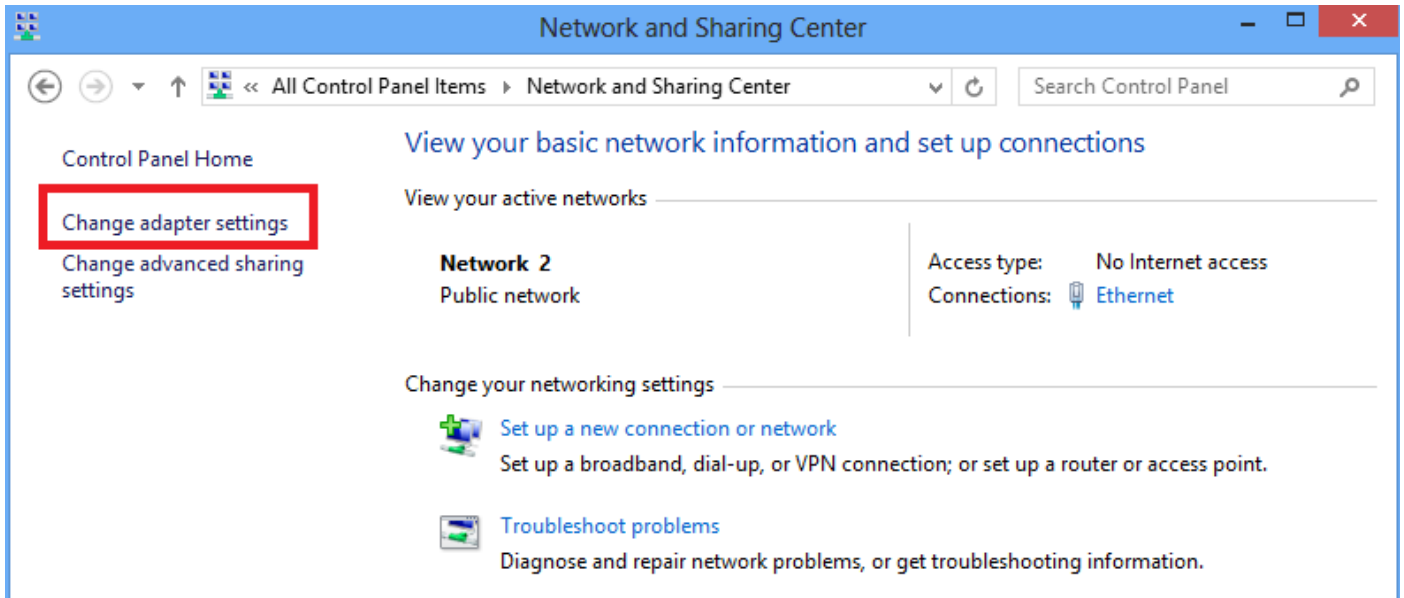


7. Right click the recently created adapter for L2TP VPN and choose **Properties**.

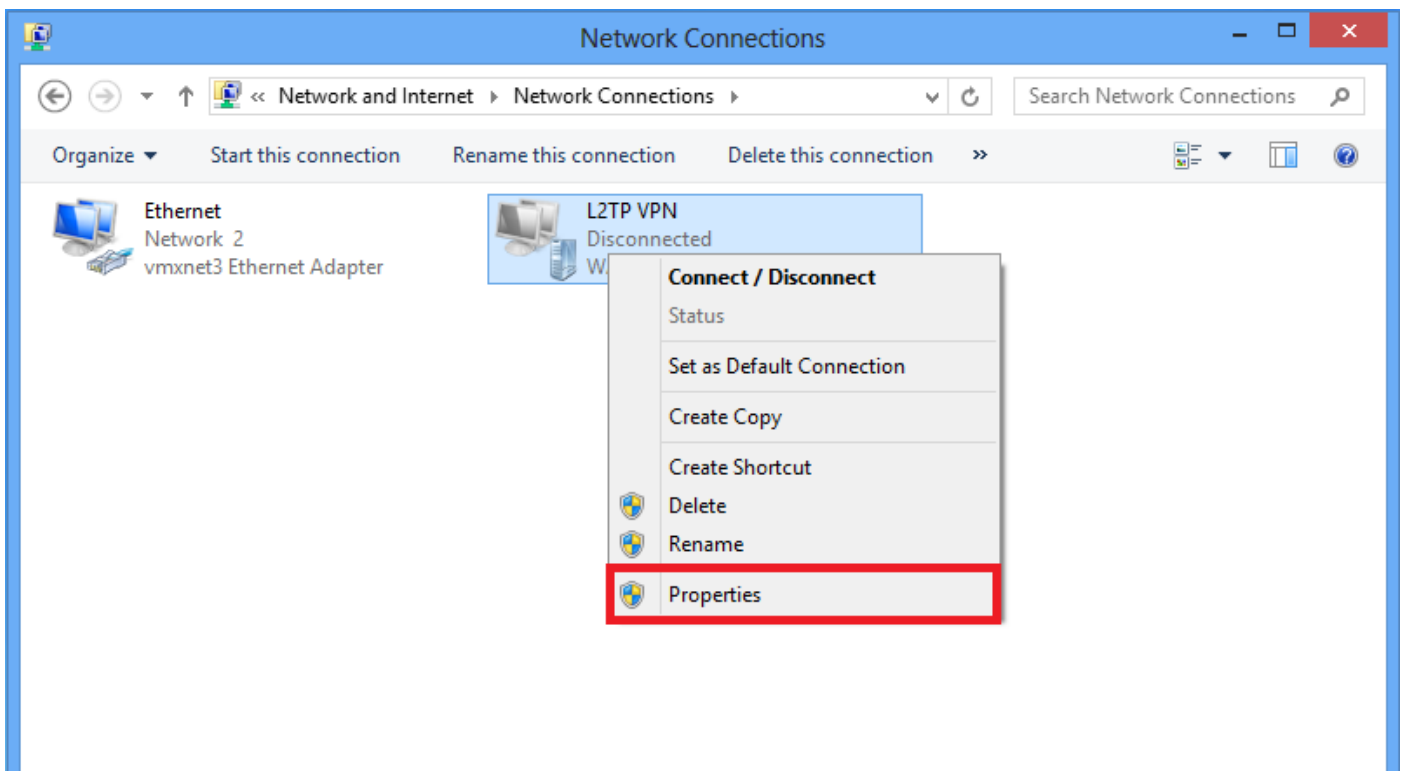


8. Navigate to **Security** tab, choose the Type of VPN as **Layer 2 Tunneling Protocol with IPsec (L2TP/IPsec)** and then click on **Advanced settings**.



9. Enter the preshared key as the same mentioned in tunnel-group **DefaultRAGroup** and click **OK**. In this example, C!sc0@123 is used as the pre-shared key.

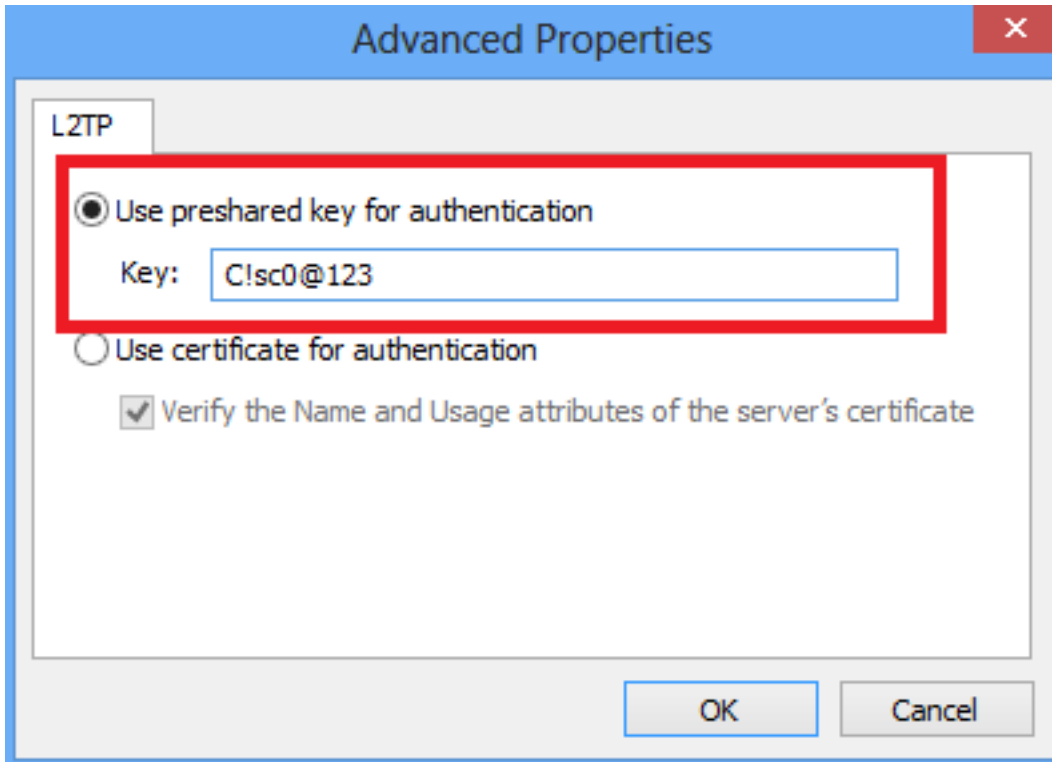


10. Choose the authentication method as Allow these protocols and ensure that only "**Microsoft CHAP Version 2 (MS-CHAP v2)**" checkbox is checked and click **OK**.

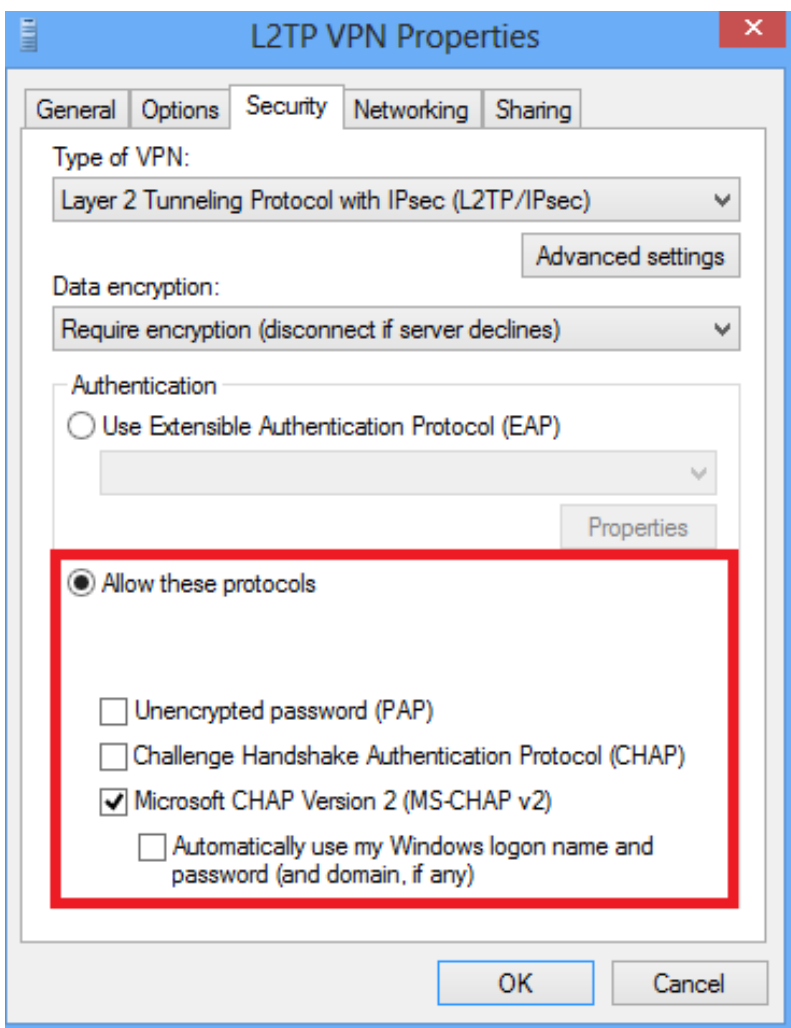





11. Under network connections, right click on L2TP VPN adapter and choose **Connect/Disconnect**.

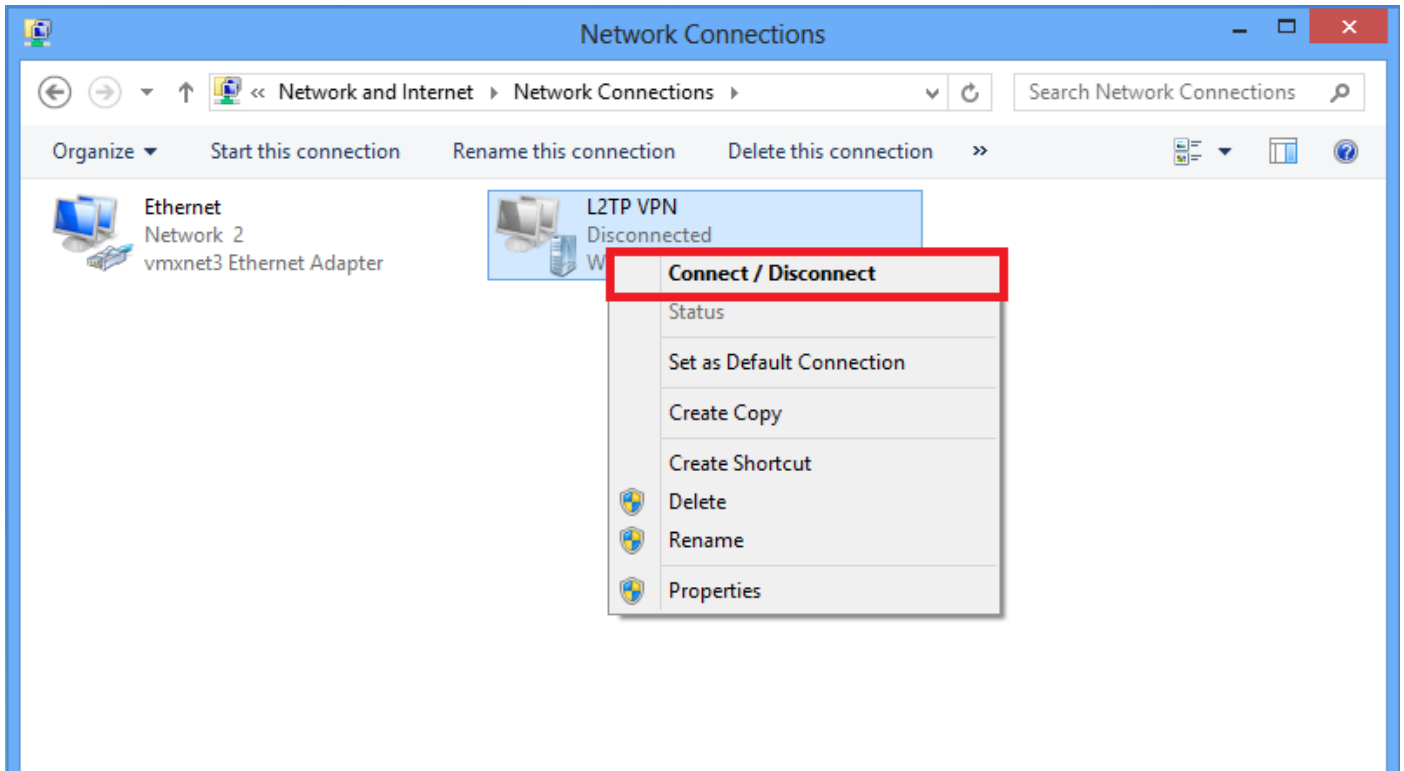


12. Networks icon will pop up and click **Connect** on L2TP VPN connection.

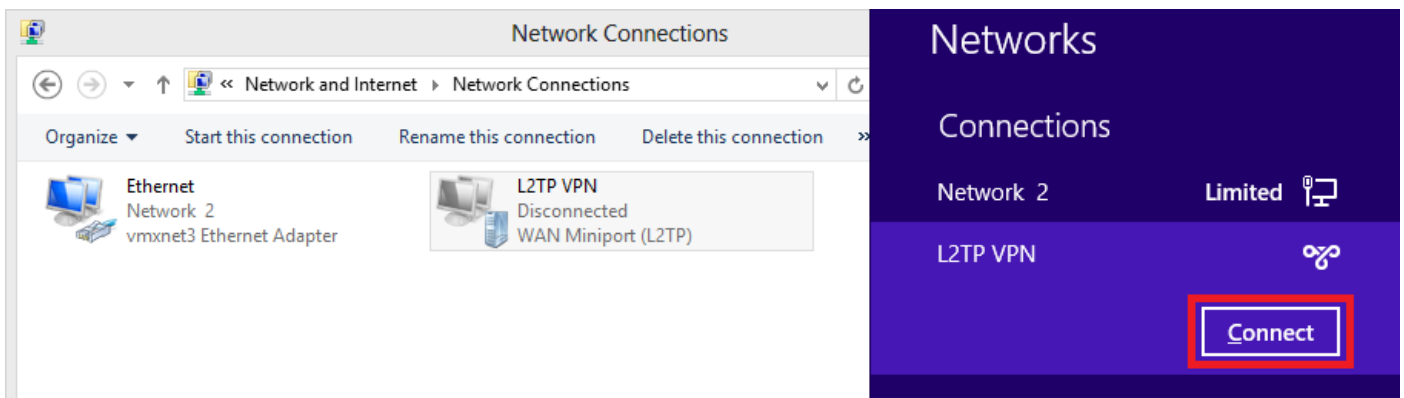

13. Enter the user credentials and click **OK**.

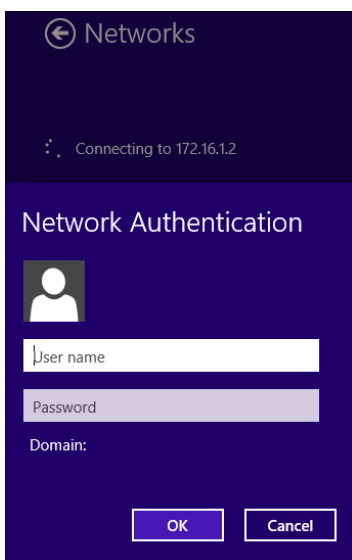

If the required parameters are matched on both the ends, L2TP/IPsec connection will be established.

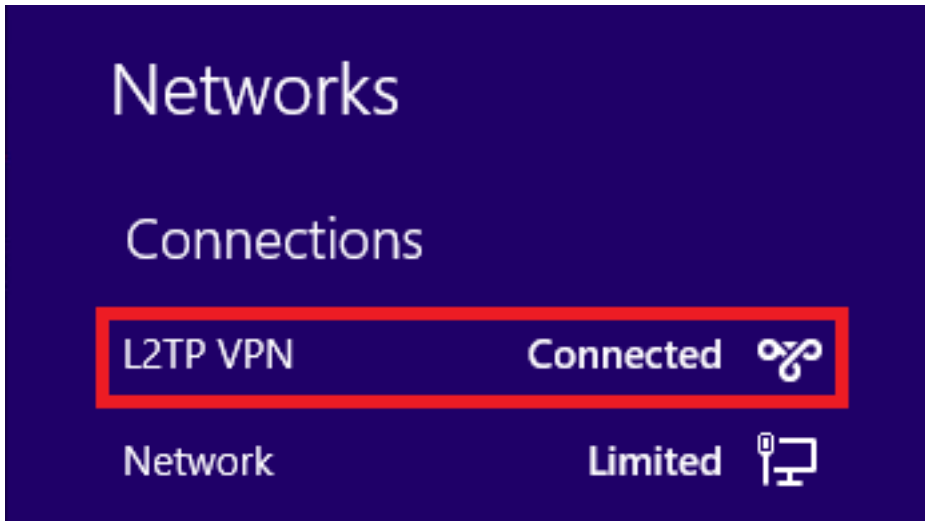

## Split Tunnel Configuration

Split tunnelling is a feature that you can use in order to define the traffic for the subnets or hosts that must be encrypted. This involves the configuration of an Access Control List (ACL) that is associated with this feature. The traffic for the subnets or hosts that is defined on this ACL gets encrypted over the tunnel from the client-end, and the routes for these subnets are installed on the PC routing table. ASA intercepts DHCPINFORM message from a client and responds with the subnet mask, domain name, and classless static routes.


## Configuration on ASA

```
ciscoasa(config)# access-list SPLIT standard permit 10.1.1.0 255.255.255.0
```


```
ciscoasa(config)# group-policy DefaultRAGroup attributes
ciscoasa(config-group-policy)# split-tunnel-policy tunnelspecified
ciscoasa(config-group-policy)# split-tunnel-network-list value SPLIT
ciscoasa(config-group-policy)# intercept-dhcp 255.255.255.255 enable
```

## Configuration on L2TP/IPsec client


1. Right click on the L2TP VPN adapter and choose **Properties**.

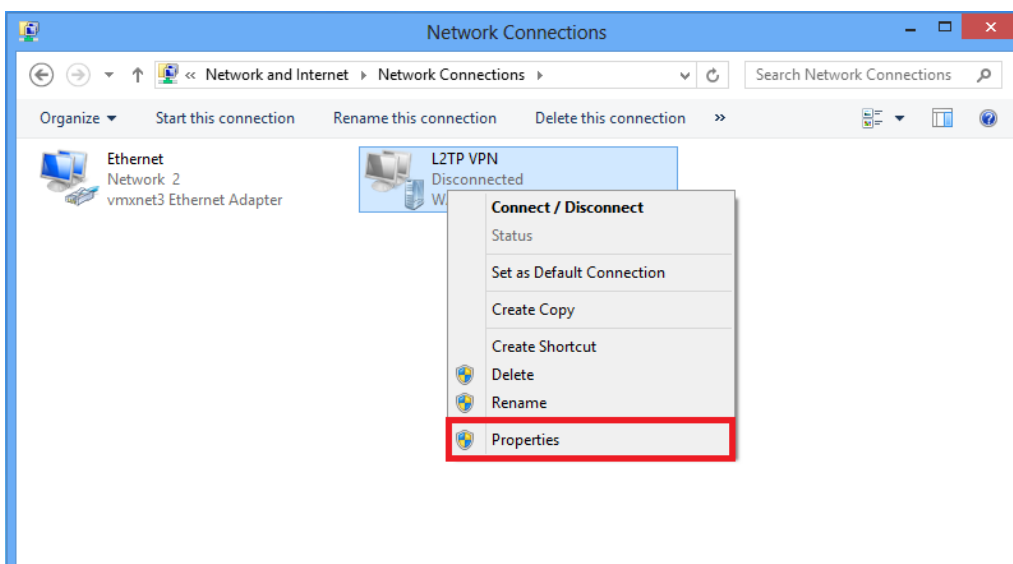


2. Navigate to Networking tab, choose Internet Protocol Version 4 (TCP/IPv4) and then click on **Properties**.

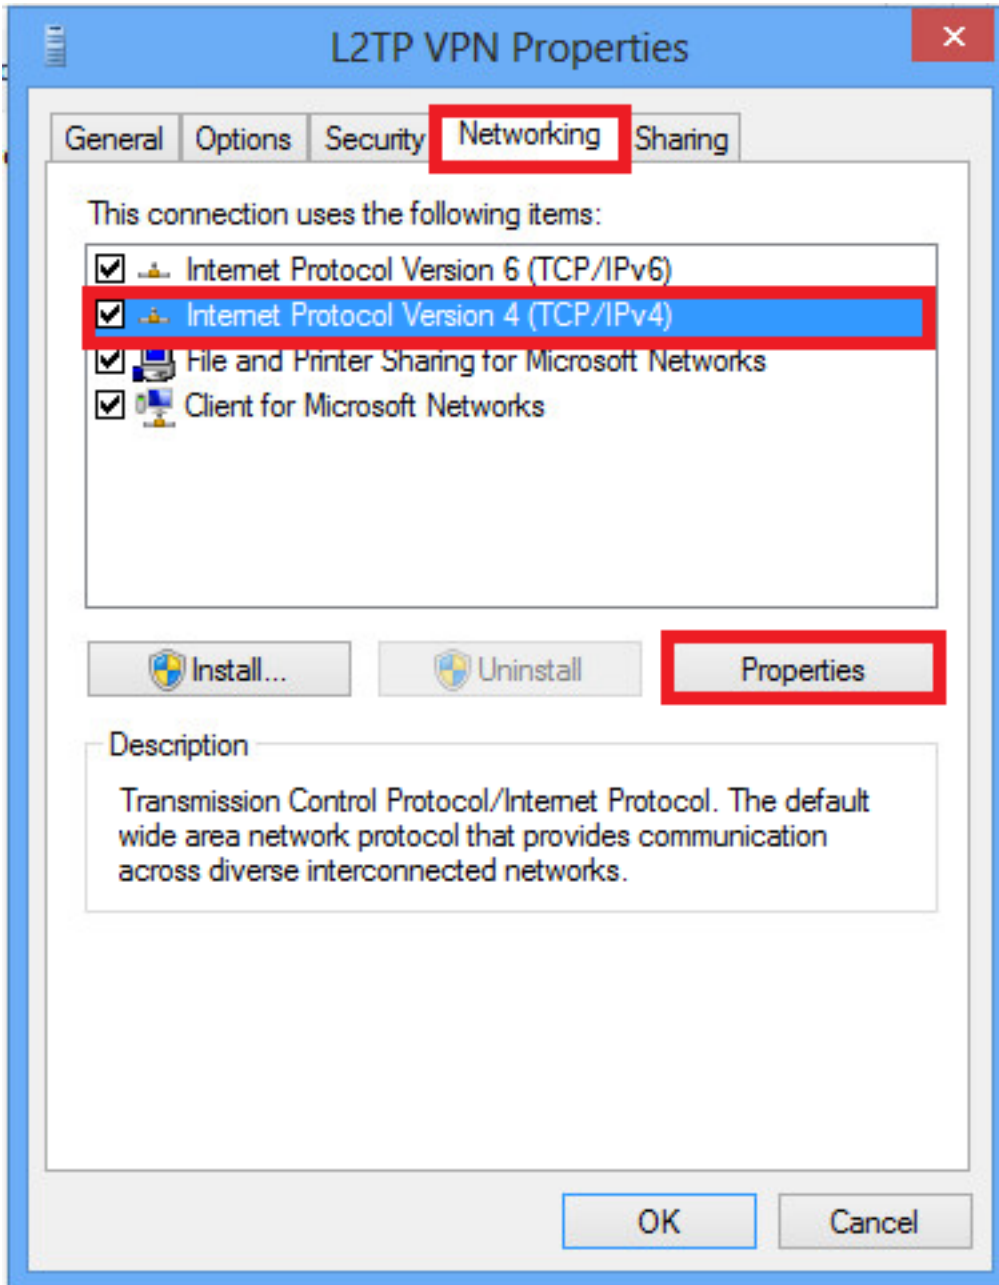

3. Click **Advanced** option.

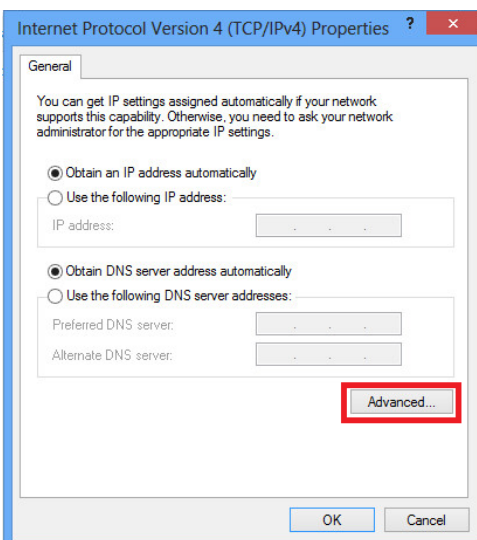

4. Uncheck **Use default gateway on remote network** option and click **OK**.

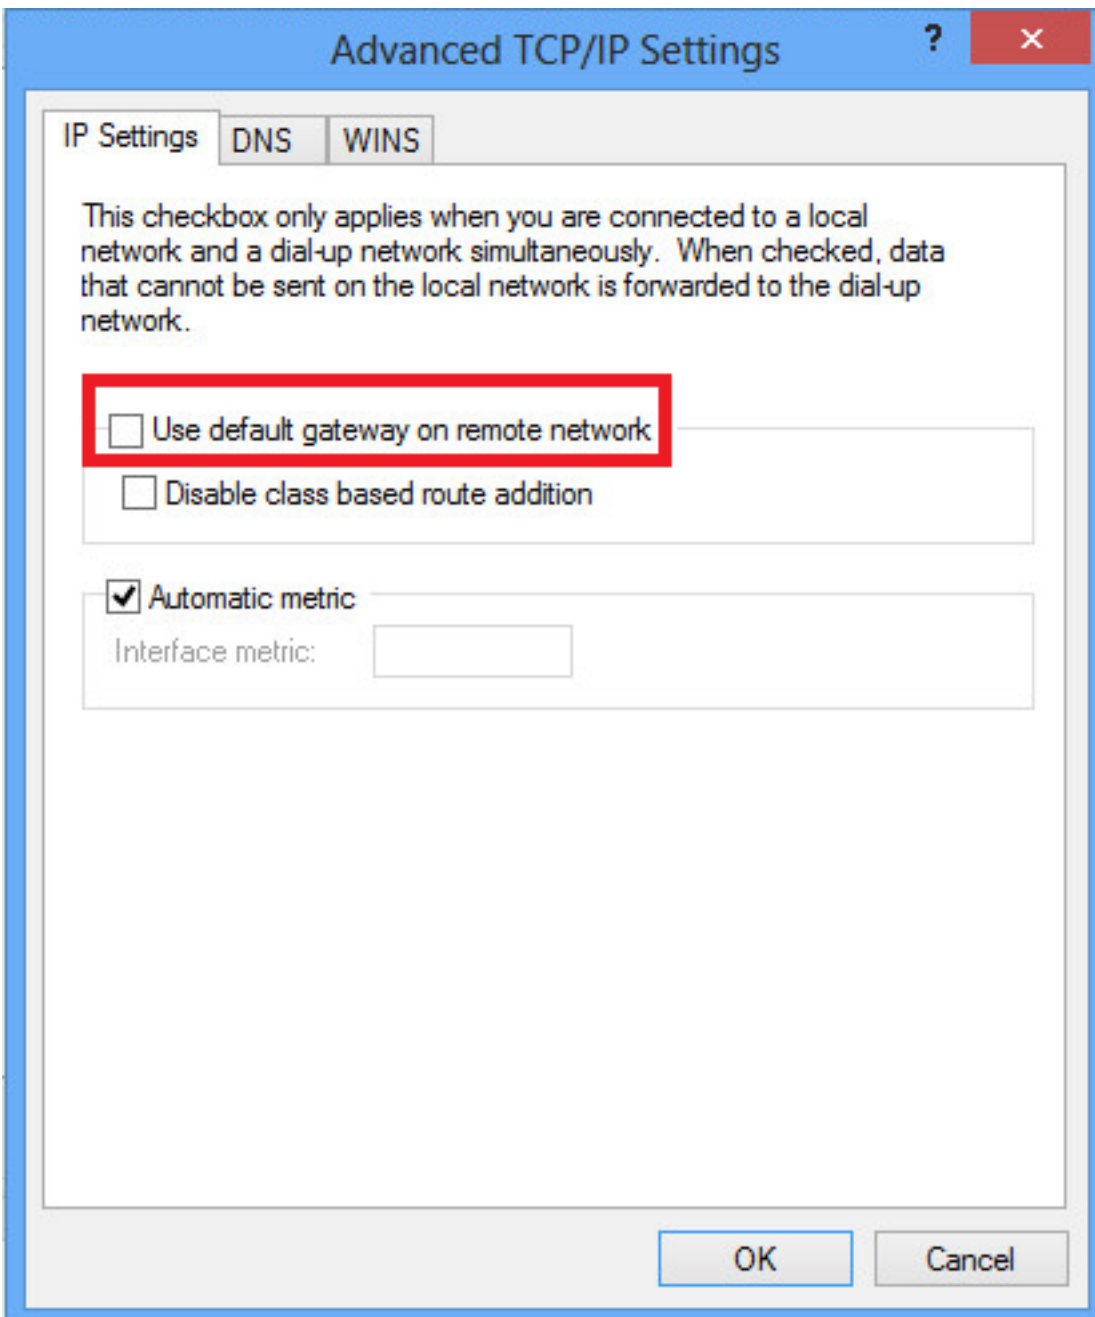

## Verify

Use this section in order to confirm that your configuration works properly.

**Note:** The [Output Interpreter Tool](#) ([registered](#) customers only) supports certain **show** commands. Use the Output Interpreter Tool in order to view an analysis of **show** command output.

- **show crypto ikev1 sa** - Shows all current IKE SAs at a peer.

```
ciscoasa# show crypto ikev1 sa
```

```
IKEv1 SAs:
```

```
Active SA: 1
```

Rekey SA: 0 (A tunnel will report 1 Active and 1 Rekey SA during rekey)  
Total IKE SA: 1

1 IKE Peer: **10.1.1.2**

Type : user Role : responder  
Rekey : no State : **MM\_ACTIVE**

- **show crypto ipsec sa** - Shows all current IPsec SAs at a peer.

ciscoasa# show crypto ipsec sa

interface: outside

Crypto map tag: **outside\_dyn\_map**, seq num: 10, local addr: 172.16.1.2

local ident (addr/mask/prot/port): (172.16.1.2/255.255.255.255/ **17/1701**)

remote ident (addr/mask/prot/port): (10.1.1.2/255.255.255.255/ **17/1701**)

**current\_peer: 10.1.1.2, username: test**

**dynamic allocated peer ip: 192.168.1.1**

dynamic allocated peer ip(ipv6): 0.0.0.0

**#pkts encaps: 29, #pkts encrypt: 29, #pkts digest: 29**

**#pkts decaps: 118, #pkts decrypt: 118, #pkts verify: 118**

#pkts compressed: 0, #pkts decompressed: 0

#pkts not compressed: 29, #pkts comp failed: 0, #pkts decomp failed: 0

#post-frag successes: 0, #post-frag failures: 0, #fragments created: 0

#PMTUs sent: 0, #PMTUs rcvd: 0, #decapsulated frgs needing reassembly: 0

#TFC rcvd: 0, #TFC sent: 0

#Valid ICMP Errors rcvd: 0, #Invalid ICMP Errors rcvd: 0

#send errors: 0, #recv errors: 0

local crypto endpt.: 172.16.1.2/0, remote crypto endpt.: 10.1.1.2/0

path mtu 1500, ipsec overhead 58(36), media mtu 1500

PMTU time remaining (sec): 0, DF policy: copy-df

ICMP error validation: disabled, TFC packets: disabled

current outbound spi: E8AF927A

current inbound spi : 71F346AB

inbound esp sas:

spi: 0x71F346AB (1911768747)

transform: esp-3des esp-sha-hmac no compression

in use settings =(RA, Transport, IKEv1, }

slot: 0, conn\_id: 4096, crypto-map: outside\_dyn\_map

sa timing: remaining key lifetime (kB/sec): (237303/3541)

IV size: 8 bytes

replay detection support: Y

Anti replay bitmap:

0x00000000 0x00000003

outbound esp sas:

spi: 0xE8AF927A (3903820410)

transform: esp-3des esp-sha-hmac no compression

in use settings =(RA, Transport, IKEv1, }

slot: 0, conn\_id: 4096, crypto-map: outside\_dyn\_map

sa timing: remaining key lifetime (kB/sec): (237303/3541)

IV size: 8 bytes

replay detection support: Y

Anti replay bitmap:

0x00000000 0x00000001

- **show vpn-sessiondb detail ra-ikev1-ipsec filter protocol l2tpOverIpSec** - Shows detailed information about L2TP over IPsec connections.

ciscoasa# show vpn-sessiondb detail ra-ikev1-ipsec filter protocol l2tpOverIpSec

Session Type: IKEv1 IPsec Detailed

**Username : test** Index : 1

**Assigned IP : 192.168.1.1**                      **Public IP : 10.1.1.2**  
 Protocol : IKEv1 IPsec L2TPOverIPsec  
 License : Other VPN  
 Encryption : IKEv1: (1)3DES IPsec: (1)3DES L2TPOverIPsec: (1)none  
 Hashing : IKEv1: (1)SHA1 IPsec: (1)SHA1 L2TPOverIPsec: (1)none  
 Bytes Tx : 1574                                      Bytes Rx : 12752  
 Pkts Tx : 29    Pkts Rx : 118  
 Pkts Tx Drop : 0                                      Pkts Rx Drop : 0  
**Group Policy : L2TP-VPN**                      **Tunnel Group : DefaultRAGroup**  
 Login Time : 23:32:48 UTC Sat May 16 2015  
 Duration : 0h:04m:05s  
 Inactivity : 0h:00m:00s  
 VLAN Mapping : N/A                                      VLAN : none  
 Audt Sess ID : 0a6a2577000010005557d3a0  
 Security Grp : none

IKEv1 Tunnels: 1  
 IPsec Tunnels: 1  
 L2TPOverIPsec Tunnels: 1

**IKEv1:**

Tunnel ID : 1.1  
 UDP Src Port : 500                                      UDP Dst Port : 500  
 IKE Neg Mode : Main                                      Auth Mode : preSharedKeys  
 Encryption : 3DES                                      Hashing : SHA1  
 Rekey Int (T): 28800 Seconds                      Rekey Left(T): 28555 Seconds  
 D/H Group : 2  
 Filter Name :


**IPsec:**

Tunnel ID : 1.2  
 Local Addr : 172.16.1.2/255.255.255.255/17/1701  
 Remote Addr : 10.1.1.2/255.255.255.255/17/1701  
 Encryption : 3DES                                      Hashing : SHA1  
 Encapsulation: Transport  
 Rekey Int (T): 3600 Seconds                      Rekey Left(T): 3576 Seconds  
 Rekey Int (D): 250000 K-Bytes                      Rekey Left(D): 250000 K-Bytes  
 Idle Time Out: 30 Minutes                      Idle TO Left : 29 Minutes  
 Bytes Tx : 1574                                      Bytes Rx : 12752  
 Pkts Tx : 29    Pkts Rx : 118

**L2TPOverIPsec:**

Tunnel ID : 1.3  
**Username : test**  
**Assigned IP : 192.168.1.1**                      **Public IP : 10.1.1.2**  
 Encryption : none                                      Hashing : none  
**Auth Mode : msCHAPV2**  
 Idle Time Out: 30 Minutes                      Idle TO Left : 27 Minutes  
 Client OS : Microsoft  
 Client OS Ver: 6.2  
 Bytes Tx : 475                                      Bytes Rx : 9093  
 Pkts Tx : 18    Pkts Rx : 105

On ASDM, under **Monitoring > VPN > VPN Statistics > Sessions** the general information regarding the VPN session can be seen. L2TP over IPsec sessions can be filtered by **IPsec (IKEv1) Remote Access > Protocol > L2TP Over IPsec**.

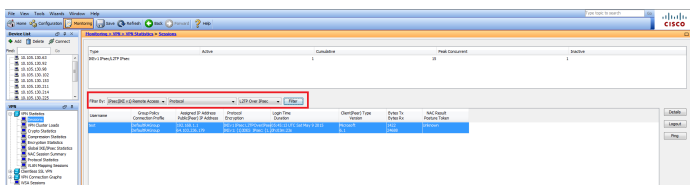

# Troubleshoot

This section provides information you can use in order to troubleshoot your configuration.

**Note:** Refer to [Important Information on Debug Commands](#) before you use **debug** commands.

**Caution:** On the ASA, you can set various debug levels; by default, level 1 is used. If you change the debug level, the verbosity of the debugs might increase. Do this with caution, especially in production environments!

Use the following **debug commands with caution** in order to troubleshoot the problems with VPN tunnel

- **debug crypto ikev1** - displays debug information about IKE
- **debug crypto ipsec** - displays debug information about IPsec

Here is the debug output for a successful L2TP over IPsec connection:

```
May 18 04:17:18 [IKEv1]IKE Receiver: Packet received on 172.16.1.2:500 from 10.1.1.2:500
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, IKE_DECODE RECEIVED Message (msgid=0) with payloads : HDR
+ SA (1) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13) +
VENDOR (13) + VENDOR (13) + NONE (0) total length : 408
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing SA payload
May 18 04:17:18 [IKEv1]Phase 1 failure: Mismatched attribute types for class Group
Description: Rcv'd: Unknown Cfg'd: Group 2
May 18 04:17:18 [IKEv1]Phase 1 failure: Mismatched attribute types for class Group
Description: Rcv'd: Unknown Cfg'd: Group 2
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, Oakley proposal is acceptable
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing VID payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing VID payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing VID payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, Received NAT-Traversal RFC VID
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing VID payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, Received NAT-Traversal ver 02 VID
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing VID payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, Received Fragmentation VID
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing VID payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing VID payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing VID payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing IKE SA payload
May 18 04:17:18 [IKEv1]Phase 1 failure: Mismatched attribute types for class Group
Description: Rcv'd: Unknown Cfg'd: Group 2
May 18 04:17:18 [IKEv1]Phase 1 failure: Mismatched attribute types for class Group
Description: Rcv'd: Unknown Cfg'd: Group 2
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, IKE SA Proposal # 1, Transform # 5 acceptable
Matches global IKE entry # 2
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing ISAKMP SA payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing NAT-Traversal VID ver RFC payload
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing Fragmentation VID + extended
capabilities payload
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, IKE_DECODE SENDING Message (msgid=0) with payloads : HDR +
SA (1) + VENDOR (13) + VENDOR (13) + NONE (0) total length : 124
May 18 04:17:18 [IKEv1]IKE Receiver: Packet received on 172.16.1.2:500 from 10.1.1.2:500
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, IKE_DECODE RECEIVED Message (msgid=0) with payloads : HDR
+ KE (4) + NONCE (10) + NAT-D (20) + NAT-D (20) + NONE (0) total length : 260
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing ke payload
```

May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing ISA\_KE payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing nonce payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing NAT-Discovery payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, computing NAT Discovery hash  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, processing NAT-Discovery payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, computing NAT Discovery hash  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing ke payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing nonce payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing Cisco Unity VID payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing xauth V6 VID payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, Send IOS VID  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, Constructing ASA spoofing IOS Vendor ID payload  
(version: 1.0.0, capabilities: 20000001)  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing VID payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, Send Altiga/Cisco VPN3000/Cisco ASA GW VID  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing NAT-Discovery payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, computing NAT Discovery hash  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, constructing NAT-Discovery payload  
May 18 04:17:18 [IKEv1 DEBUG]IP = 10.1.1.2, computing NAT Discovery hash  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, **Connection landed on tunnel\_group DefaultRAGroup**  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, Generating keys for Responder...  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, IKE\_DECODE SENDING Message (msgid=0) with payloads : HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) + VENDOR (13) + VENDOR (13) + NAT-D (20) + NAT-D (20) + NONE (0) total length : 304  
May 18 04:17:18 [IKEv1]IKE Receiver: Packet received on 172.16.1.2:500 from 10.1.1.2:500  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, IKE\_DECODE RECEIVED Message (msgid=0) with payloads : HDR + ID (5) + HASH (8) + NONE (0) total length : 64  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, processing ID payload  
May 18 04:17:18 [IKEv1 DECODE]Group = DefaultRAGroup, IP = 10.1.1.2, ID\_IPV4\_ADDR ID received 10.1.1.2  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, processing hash payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, Computing hash for ISAKMP  
May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, **Automatic NAT Detection**  
**Status: Remote end is NOT behind a NAT device This end is NOT behind a NAT device**  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, Connection landed on tunnel\_group DefaultRAGroup  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, constructing ID payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, constructing hash payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, Computing hash for ISAKMP  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, constructing dpd vid payload  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, IKE\_DECODE SENDING Message (msgid=0) with payloads : HDR + ID (5) + HASH (8) + VENDOR (13) + NONE (0) total length : 84  
May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, **PHASE 1 COMPLETED**  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, Keep-alive type for this connection: None  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, Keep-alives configured on but peer does not support keep-alives (type = None)  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, Starting P1 rekey timer: 21600 seconds.  
May 18 04:17:18 [IKEv1]IKE Receiver: Packet received on 172.16.1.2:500 from 10.1.1.2:500  
May 18 04:17:18 [IKEv1 DECODE]IP = 10.1.1.2, IKE Responder starting QM: msg id = 00000001  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, IKE\_DECODE RECEIVED Message (msgid=1) with payloads : HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NONE (0) total length : 300  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, processing hash payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, processing SA payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, processing nonce payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, processing ID payload  
May 18 04:17:18 [IKEv1 DECODE]Group = DefaultRAGroup, IP = 10.1.1.2, ID\_IPV4\_ADDR ID received 10.1.1.2  
May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, **Received remote Proxy Host data in ID Payload: Address 10.1.1.2, Protocol 17, Port 1701**  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, processing ID payload  
May 18 04:17:18 [IKEv1 DECODE]Group = DefaultRAGroup, IP = 10.1.1.2, ID\_IPV4\_ADDR ID received 172.16.1.2  
May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, **Received local Proxy Host data in**



**ID Payload: Address 172.16.1.2, Protocol 17, Port 1701**

May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, **L2TP/IPSec session detected.**  
May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, QM IsRekeyed old sa not found by  
addr  
May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, **Static Crypto Map check, map  
outside\_dyn\_map, seq = 10 is a successful match**  
May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, IKE Remote Peer configured for  
crypto map: outside\_dyn\_map  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, processing IPSec SA payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, **IPSec SA Proposal # 2,  
Transform # 1 acceptable** Matches global IPSec SA entry # 10  
May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, IKE: requesting SPI!  
IPSEC: New embryonic SA created @ 0x00007ffffe13ab260,  
SCB: 0xE1C00540,  
Direction: inbound  
SPI : 0x7AD72E0D  
Session ID: 0x00001000  
VPIF num : 0x00000002  
Tunnel type: ra  
Protocol : esp  
Lifetime : 240 seconds  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, IKE got SPI from key engine:  
SPI = 0x7ad72e0d  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, oakley constructing quick  
mode  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, constructing blank hash  
payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, constructing IPSec SA  
payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, constructing IPSec nonce  
payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, constructing proxy ID  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, **Transmitting Proxy Id:  
Remote host: 10.1.1.2 Protocol 17 Port 1701  
Local host: 172.16.1.2 Protocol 17 Port 1701**  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, constructing qm hash payload  
May 18 04:17:18 [IKEv1 DECODE]Group = DefaultRAGroup, IP = 10.1.1.2, IKE Responder sending 2nd  
QM pkt: msg id = 00000001  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, IKE\_DECODE SENDING Message (msgid=1) with payloads : HDR +  
HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) + NONE (0) total length : 160  
May 18 04:17:18 [IKEv1]IKE Receiver: Packet received on 172.16.1.2:500 from 10.1.1.2:500  
May 18 04:17:18 [IKEv1]IP = 10.1.1.2, IKE\_DECODE RECEIVED Message (msgid=1) with payloads : HDR  
+ HASH (8) + NONE (0) total length : 52  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, processing hash payload  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, loading all IPSEC SAs  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, Generating Quick Mode Key!  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, NP encrypt rule look up for  
crypto map outside\_dyn\_map 10 matching ACL Unknown: returned cs\_id=e148a8b0;  
encrypt\_rule=00000000; tunnelFlow\_rule=00000000  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, Generating Quick Mode Key!  
IPSEC: New embryonic SA created @ 0x00007ffffe1c75c00,  
SCB: 0xE13ABD20,  
Direction: outbound  
SPI : 0x8C14FD70  
Session ID: 0x00001000  
VPIF num : 0x00000002  
Tunnel type: ra  
Protocol : esp  
Lifetime : 240 seconds  
IPSEC: Completed host OBSA update, SPI 0x8C14FD70  
IPSEC: Creating outbound VPN context, SPI 0x8C14FD70  
Flags: 0x00000205  
SA : 0x00007ffffe1c75c00

SPI : 0x8C14FD70  
MTU : 1500 bytes  
VCID : 0x00000000  
Peer : 0x00000000  
SCB : 0x0AC609F9  
Channel: 0x00007fffed817200  
IPSEC: Completed outbound VPN context, SPI 0x8C14FD70  
VPN handle: 0x00000000000028d4  
IPSEC: New outbound encrypt rule, SPI 0x8C14FD70  
Src addr: 172.16.1.2  
Src mask: 255.255.255.255  
Dst addr: 10.1.1.2  
Dst mask: 255.255.255.255  
**Src ports**  
**Upper: 1701**  
**Lower: 1701**  
Op : equal  
**Dst ports**  
**Upper: 1701**  
**Lower: 1701**  
Op : equal  
**Protocol: 17**  
Use protocol: true  
SPI: 0x00000000  
Use SPI: false  
IPSEC: Completed outbound encrypt rule, SPI 0x8C14FD70  
Rule ID: 0x00007ffffe1c763d0  
IPSEC: New outbound permit rule, SPI 0x8C14FD70  
Src addr: 172.16.1.2  
Src mask: 255.255.255.255  
Dst addr: 10.1.1.2  
Dst mask: 255.255.255.255  
Src ports  
Upper: 0  
Lower: 0  
Op : ignore  
Dst ports  
Upper: 0  
Lower: 0  
Op : ignore  
Protocol: 50  
Use protocol: true  
SPI: 0x8C14FD70  
Use SPI: true  
IPSEC: Completed outbound permit rule, SPI 0x8C14FD70  
Rule ID: 0x00007ffffe1c76a00  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, NP encrypt rule look up for  
crypto map outside\_dyn\_map 10 matching ACL Unknown: returned cs\_id=e148a8b0;  
encrypt\_rule=00000000; tunnelFlow\_rule=00000000  
May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, Security negotiation complete for  
User () Responder, Inbound SPI = 0x7ad72e0d, Outbound SPI = 0x8c14fd70  
May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, IKE got a KEY\_ADD msg for  
SA: SPI = 0x8c14fd70  
IPSEC: New embryonic SA created @ 0x00007ffffe13ab260,  
SCB: 0xE1C00540,  
Direction: inbound  
SPI : 0x7AD72E0D  
Session ID: 0x00001000  
VPIF num : 0x00000002  
Tunnel type: ra  
Protocol : esp  
Lifetime : 240 seconds  
IPSEC: Completed host IBSA update, SPI 0x7AD72E0D

IPSEC: Creating inbound VPN context, SPI 0x7AD72E0D  
Flags: 0x00000206  
SA : 0x00007ffffe13ab260  
SPI : 0x7AD72E0D  
MTU : 0 bytes  
VCID : 0x00000000  
Peer : 0x000028D4  
SCB : 0x0AC5BD5B  
Channel: 0x00007ffffed817200

IPSEC: Completed inbound VPN context, SPI 0x7AD72E0D  
VPN handle: 0x0000000000004174

IPSEC: Updating outbound VPN context 0x000028D4, SPI 0x8C14FD70  
Flags: 0x00000205  
SA : 0x00007ffffe1c75c00  
SPI : 0x8C14FD70  
MTU : 1500 bytes  
VCID : 0x00000000  
Peer : 0x00004174  
SCB : 0x0AC609F9  
Channel: 0x00007ffffed817200

IPSEC: Completed outbound VPN context, SPI 0x8C14FD70  
VPN handle: 0x00000000000028d4

IPSEC: Completed outbound inner rule, SPI 0x8C14FD70  
Rule ID: 0x00007ffffe1c763d0

IPSEC: Completed outbound outer SPD rule, SPI 0x8C14FD70  
Rule ID: 0x00007ffffe1c76a00

IPSEC: New inbound tunnel flow rule, SPI 0x7AD72E0D  
Src addr: 10.1.1.2  
Src mask: 255.255.255.255  
Dst addr: 172.16.1.2  
Dst mask: 255.255.255.255  
Src ports  
Upper: 1701  
Lower: 1701  
Op : equal  
Dst ports  
Upper: 1701  
Lower: 1701  
Op : equal  
Protocol: 17  
Use protocol: true  
SPI: 0x00000000  
Use SPI: false

IPSEC: Completed inbound tunnel flow rule, SPI 0x7AD72E0D  
Rule ID: 0x00007ffffe13aba90

IPSEC: New inbound decrypt rule, SPI 0x7AD72E0D  
Src addr: 10.1.1.2  
Src mask: 255.255.255.255  
Dst addr: 172.16.1.2  
Dst mask: 255.255.255.255  
Src ports  
Upper: 0  
Lower: 0  
Op : ignore  
Dst ports  
Upper: 0  
Lower: 0  
Op : ignore  
Protocol: 50  
Use protocol: true  
SPI: 0x7AD72E0D  
Use SPI: true

IPSEC: Completed inbound decrypt rule, SPI 0x7AD72E0D  
Rule ID: 0x00007ffffe1c77420

IPSEC: New inbound permit rule, SPI 0x7AD72E0D

Src addr: 10.1.1.2  
Src mask: 255.255.255.255  
Dst addr: 172.16.1.2  
Dst mask: 255.255.255.255  
Src ports  
Upper: 0  
Lower: 0  
Op : ignore  
Dst ports  
Upper: 0  
Lower: 0  
Op : ignore  
Protocol: 50  
Use protocol: true  
SPI: 0x7AD72E0D  
Use SPI: true

IPSEC: Completed inbound permit rule, SPI 0x7AD72E0D

Rule ID: 0x00007ffffe13abb80

May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, Pitcher: received  
KEY\_UPDATE, spi 0x7ad72e0d

May 18 04:17:18 [IKEv1 DEBUG]Group = DefaultRAGroup, IP = 10.1.1.2, Starting P2 rekey timer:  
3420 seconds.

May 18 04:17:18 [IKEv1]Group = DefaultRAGroup, IP = 10.1.1.2, **PHASE 2 COMPLETED** (msgid=00000001)

May 18 04:17:18 [IKEv1]IKEQM\_Active() Add L2TP classification rules: ip <10.1.1.2> mask  
<0xFFFFFFFF> port <1701>

May 18 04:17:21 [IKEv1]Group = DefaultRAGroup, **Username = test, IP = 10.1.1.2, Adding static  
route for client address: 192.168.1.1**

Some of the commonly seen VPN related errors on Windows client are shown in this table

Error Code	Possible Solution
691	Ensure the username and password entered was correct
789,835	Ensure pre-shared-key configured on client machine was same as on ASA
800	1. Make sure that the VPN type is set to "Layer 2 Tunneling Protocol (L2TP)" 2. Ensure pre-shared-key was configured correctly configured
809	Make sure UDP port 500, 4500 ( in case either client or server is behind NAT device) and ESP was not blocked

## Related Information

- [Cisco ASA 5500 Series Adaptive Security Appliances](#)
- [Most Common L2L and Remote Access IPsec VPN Troubleshooting Solutions](#)
- [Technical Support & Documentation - Cisco Systems](#)