

# Time of Day Access for an SSID on the RV110W

## Objective


On the RV110W, an administrator can allow an Security Set ID (SSID) to access the network on during specific times. This helps to increase network security. This article explains how to configure the Time of Day Access settings on the RV110W.

## Applicable Devices

- RV110W

## Steps of Procedure

Step 1. Use the web configuration utility to choose **Wireless > Basic Settings**. The *Basic Settings* page opens.

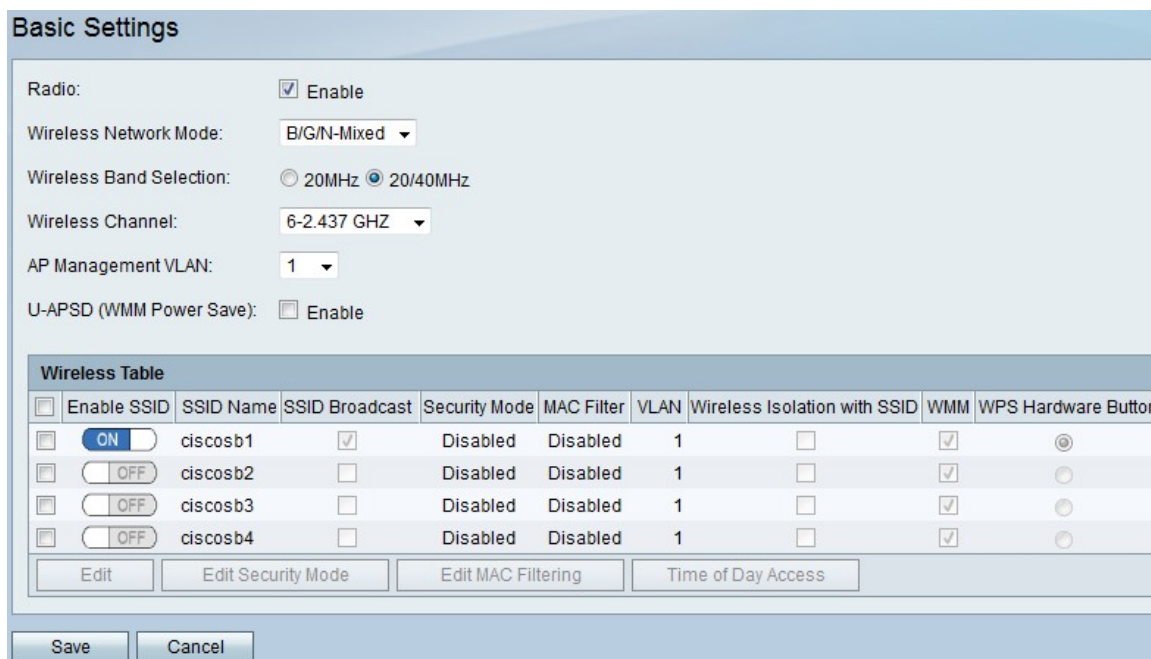

The screenshot shows the 'Basic Settings' page. The 'Radio' section is checked 'Enable'. 'Wireless Network Mode' is set to 'B/G/N-Mixed'. 'Wireless Band Selection' has '20/40MHz' selected. 'Wireless Channel' is '6-2.437 GHZ'. 'AP Management VLAN' is '1'. 'U-APSD (WMM Power Save)' is unchecked. Below is the 'Wireless Table' with the following data:

<input type="checkbox"/>	Enable SSID	SSID Name	SSID Broadcast	Security Mode	MAC Filter	VLAN	Wireless Isolation with SSID	WMM	WPS Hardware Button
<input checked="" type="checkbox"/>	ON	ciscosb1	<input checked="" type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="radio"/>
<input type="checkbox"/>	OFF	ciscosb2	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="radio"/>
<input type="checkbox"/>	OFF	ciscosb3	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="radio"/>
<input type="checkbox"/>	OFF	ciscosb4	<input type="checkbox"/>	Disabled	Disabled	1	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="radio"/>

Buttons at the bottom: Edit, Edit Security Mode, Edit MAC Filtering, Time of Day Access, Save, Cancel.

Step 2. In the Wireless Table, check the checkbox of an SSID in which you want to edit the Time of Day Access settings.

Step 3. Click **Time of Day Access**. A new page opens.

### Time of Day Access

**Add / Edit Access Point Configuration**

Active Time:  Enable

Start Time:  Hours  Minutes

Stop Time:  Hours  Minutes

Step 4. To the right of Active Time, check the **Enable** checkbox to allow access for the SSID to network only during specific times.

Step 5. To the right of Start Time, use the Hours, Minutes, and AM/PM drop-down menus to set the start time of when an SSID can access the network.

Step 6. To the right of Stop Time, use the Hours, Minutes, and AM/PM drop-down menus to set the stop time of when an SSID can access the network.

Step 7. Click **Save** to save changes, **Cancel** to discard them, or **Back** to return to the previous page.