



## Optionality in Cisco NX-OS Software

---

This chapter describes optionality in Cisco NX-OS software.

- [Optionality in Cisco NX-OS Software, on page 1](#)
- [Guidelines for Cisco NX-OS Patchable Packages/RPM Installation, on page 3](#)
- [Using Modular Packages, on page 3](#)
- [Booting the NX-OS Image in Base or Full Mode, on page 4](#)
- [Information About RPMs, on page 4](#)
- [Information About YUM Commands, on page 19](#)
- [Configuring an FTP server and Setting up a Local FTP YUM Repository, on page 37](#)
- [Creating User Roles for Install Operation, on page 40](#)
- [Compacting Cisco NX-OS Software Images, on page 41](#)

## Optionality in Cisco NX-OS Software

Beginning with Cisco NXOS Release 9.2(1), Cisco NX-OS software image supports modular package management. Cisco NX-OS software now provides flexibility to add, remove, and upgrade the features selectively without changing the base NX-OS software.


The advantages for using modular Cisco NX-OS software are:

- Lean NX-OS software
- Asynchronous delivery of the features and the fixes: Quick fixes are provided that are independent of the releases, including new features.
- Reduced footprint of binaries and libraries at run time

Cisco NX-OS software is provisioned to boot the NX-OS software in two modes as described in the following illustration:

- Base NX-OS mode
- Full NX-OS mode

Figure 1: Optionality in Cisco NX-OS Software

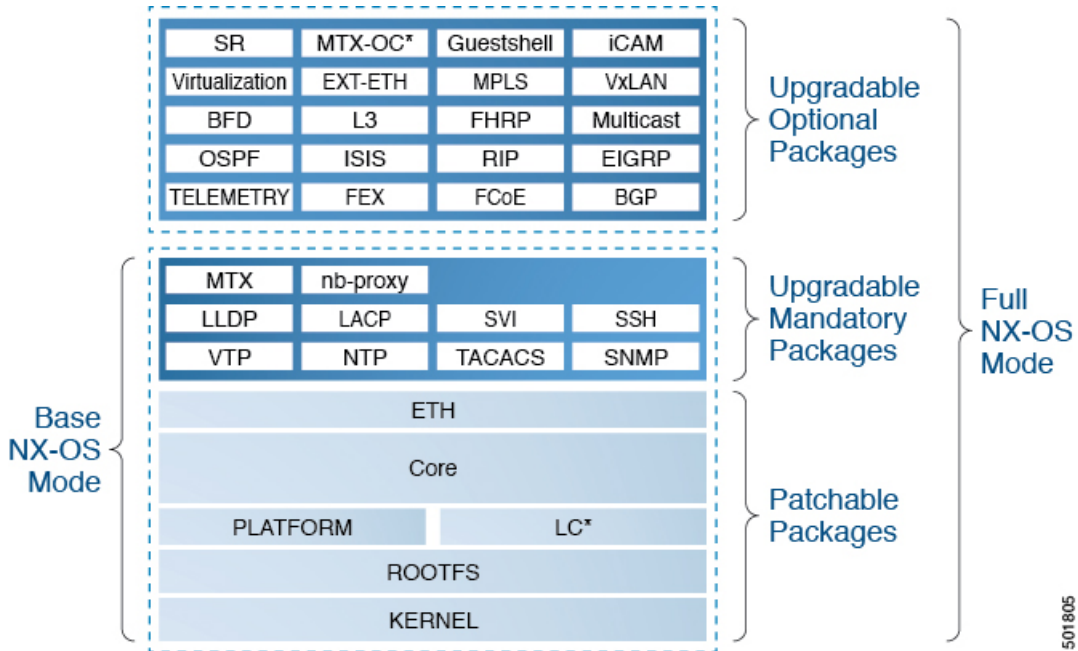

501805

- Base NX-OS mode contains:
  - Upgradable mandatory packages
  - Patchable packages
- Full NX-OS mode contains:
  - Upgradable optional packages
  - Upgradable mandatory packages
  - Patchable packages



**Note** The default mode is full NX-OS mode.

In base NX-OS mode, basic Layer 2 and Layer 3 features are available. All dynamic routing features (for example, BGP, OSPF, EIGRP, RIP, and ISIS ) and other optional feature RPMs are not available by default. You have to install the optional feature RPMs on top of the base image.

In full NX-OS mode, all feature RPMs are installed during boot time when Ethernet plugin is activated by the plugin manager. There is no change in the user behavior as compared to the previous releases.

# Guidelines for Cisco NX-OS Patchable Packages/RPM Installation

For guidelines on Cisco NX-OS patchable packages/RPM installation (Release 7.x feature), see the Performing Software Maintenance Upgrades section in the [Cisco Nexus 9000 Series NX-OS System Management Configuration Guide](#).

## Using Modular Packages

The Cisco NX-OS software image is traditionally constructed with the packaging that forms a Cisco Linux distribution. It makes upgrading certain packages difficult as each package is large in size.

This section describes a new package management for the Cisco NX-OS software image. Beginning with Cisco NX-OS Release 9.2(1), some NXOS features are considered as optional, for example, BGP, OSPF, VXLAN, MPLS, Segment Routing.

Each modular package has the following important characteristics:

- Upgrade functionality: The modular packages can be independently upgraded. The modular packages should be used from the same release as performing upgrades on these packages across multiple releases is not supported.
- Optionality: The modular packages are optional, for example, these packages can be removed or uninstalled at run time. The removal of the modular packages does not affect bringing-up the system and it does not affect any other functionality of the switches.



---

**Note** All APIs exported by the modular package should be used only after the installation of the feature.

---

### RPM and YUM

RPM (Red Hat Package Manager) is the package management system used for packaging in the Linux Standard Base (LSB). The RPM command options are grouped into three subgroups for:

- Querying and verifying packages
- Installing, upgrading, and removing packages
- Performing miscellaneous functions

**rpm** is the command name for the main command that is used with RPM, whereas **.rpm** is the extension that is used for the RPM files.

YUM (Yellowdog Updater, Modified) is an open source command-line tool for RPM based Linux systems. It allows users and system administrators to easily install, update, remove, or search software packages on the systems. YUM adds the automatic updates and the package management, including dependency management, to the RPM systems. In addition to understanding the installed packages on a system, YUM works with the repositories that are collections of the packages and they are typically accessible over a network connection.

## Booting the NX-OS Image in Base or Full Mode

You can now boot the NX-OS image in base or full mode. The full boot mode installs the complete NX-OS software which is similar to the software of the previous releases. This is the default boot mode. The base boot mode has no optional RPMs installed.

To use the command line option, see the following steps:

- Use the **install reset nxos base** option to install the NX-OS image in the base boot mode using the VSH prompt. After reload, the switch is in the base mode with no optional packages installed.
- Use the **install reset nxos full** option to install the NX-OS image in the full boot mode using the VSH prompt. After reload, the switch is in the full mode with the optional packages automatically installed.

For more information, see Using Install CLIs for Feature RPM Operation section.

## Information About RPMs

RPMs can be upgraded or downgraded to a new software version using NXOS install commands or by using YUM commands. An upgradable RPM can be optional or mandatory.

See the following sections for more information about optional and mandatory RPMs.

## Format of the RPM

The general format of a RPM is <name>-<version>-<release>.<arch>.rpm. The same format is followed for NXOS feature RPMS.

- Name: package name, for example, BGP
- Version in <x.y.x.b> format: <major.minor.patch.build\_number>, for example, 2.0.1.0
- Release: The branch from which the RPM is created, for example, 9.2.1
- Arch: The architecture type of the RPM, for example, lib32\_n9000

See the following table for more information on the naming convention, for example, fex-2.0.0.0-9.2.1.lib32\_n9000.rpm:

**Table 1: RPM Naming Convention**

RPM Naming Convention	Description
<b>Example: fex-2.0.0.0-9.2.1.lib32_n9000.rpm</b>	
fex	Indicates the name of the component.
2	Indicates that the RPM is not backward compatible. Configuration loss takes place during an upgrade.

RPM Naming Convention Example: fex-2.0.0.0-9.2.1.lib32_n9000.rpm	Description
0	Indicates the incremental API changes/CLI changes/Schema changes with backward compatibility. It is applicable to the new features on top of the existing capabilities. No configuration is lost during an upgrade.
0	Indicates a bug fix without any functionality change. No configuration is lost during an upgrade.
0	This number tracks how many times the component has changed during the development cycle of a release. This value will be 0 for all the release images.
9.2.1	Indicates the release number or the distribution version for the RPM. It aligns to the NVR format. Since the feature RPM is only applicable to a NXOS release, this field has NXOS release version number present.
lib32_n9000	Indicates the architecture type of the RPM.

## Optional RPMs and Their Associated Features

The optional RPMs are the RPMs that can be installed to enable the features without affecting the native NXOS behavior or they can be removed using the **install deactivate** command from the switch.

Optional RPMs, for example, EIGRP are not a part of the base software. They can be added, upgraded, and removed as required using either **yum** or **install** CLI commands from the switch.

See the following list of the optional RPMs and their associated features:

**Table 2: List of Optional RPMs and Their Associated Features**

Package Name	Associated Features
BGP	feature bgp
BFD	feature bfd
Container-tracker	feature container-tracker
EIGRP	feature eigrp

Package Name	Associated Features
Ext-Eth	<ul style="list-style-type: none"> <li>• feature openflow</li> <li>• feature evb</li> <li>• feature imp</li> <li>• feature netflow</li> <li>• feature sla_sender</li> <li>• feature sla_responder</li> <li>• feature sla_twamp-server</li> <li>• feature sflow</li> </ul>
FCoE	<ul style="list-style-type: none"> <li>• feature-set fcoe</li> <li>• feature-set fcoe-npv</li> </ul>
FEX	feature-set fex
FHRP	<ul style="list-style-type: none"> <li>• feature hsrp</li> <li>• feature vrrpv3</li> </ul>
iCAM	feature icam
ISIS	feature isis
MPLS	<ul style="list-style-type: none"> <li>• feature mpls segment-routing</li> <li>• feature mpls evpn</li> </ul>
Multicast	<ul style="list-style-type: none"> <li>• feature pim</li> <li>• feature pim6</li> <li>• feature msdp</li> <li>• feature ngmvpn</li> </ul>
OSPF	<ul style="list-style-type: none"> <li>• feature ospf</li> <li>• feature ospfv3</li> </ul>
RIP	feature rip
Services	feature catena
SR	feature mpls segment-routing traffic-engineering
TELEMETRY	feature telemetry

Package Name	Associated Features
Virtualization	NA
VXLAN	<ul style="list-style-type: none"> <li>• feature nv overlay</li> <li>• feature fabric forwarding</li> </ul>

## Guidelines for NX-OS Feature RPM Installation

See the following NX-OS system RPM repositories that are present in the Cisco NX-OS Series switches for the RPM management.



**Note** Avoid manually copying the RPMs to system repositories. Instead use the install or YUM commands.

**Table 3: RPM Repositories That Are Present in the Switches**

Repository Name	Repository Path	Description
groups-repo	/rpms	Part of the bundled NX-OS image. It is used to keep all the RPMs that are bundled as part of the NX-OS image. All RPMs based in this repository are known as base RPMs.

Repository Name	Repository Path	Description
localdb	/bootflash/.rpmstore/patching/localrepo	Used for RPM persistency. When a user adds a NX-OS feature RPM as part of <b>install add</b> command, the RPM is copied to this location and it is persisted during the reloads. User has the responsibility to clean the repository.  To add a RPM to this repository, use <b>install add</b> command.  To remove a RPM from this repository, use <b>install remove</b> command.  YUM commands can be used to populate the repository too.  The maximum space for the repository is 200Mb along with the patching repository for Cisco Nexus 9000 Series switches except Cisco Nexus 3000 Series switches. For Cisco Nexus 3000 Series switches, the maximum space for the repository is 20 Mb only.
patching	/bootflash/.rpmstore/patching/patchrepo	Used for RPM persistency. When a user adds a NX-OS patch RPM to the switch, the patch RPM is copied to this repository.
thirdparty	/bootflash/.rpmstore/thirdparty	Used for RPM persistency when a user adds a third party RPM.

The **groups-repo** and **localdb** repositories hold the NX-OS feature RPMs that should be installed during the system boot or during activation. YUM commands or **install** command can be used for the installation or the removal of these RPMs.

The following rules are applied to the feature RPM installation procedure during boot or install time:

- Only RPMs with the same NX-OS release number should be selected for the installation.
- Base RPMs cannot be added to the **localdb** repository.

## Guidelines for Third-Party RPM Installation

Currently, any third-party package that is not provided by Cisco is allowed to be installed on the device, even when it is not signed by Cisco.

Starting with release 10.1(x) any third-party package that is not signed by Cisco is not allowed to be installed on the device. However, if you wish to bypass this and install the software, you can configure the device to enable the third-party software installation. The configuration will persist as a normal configuration and can



be verified by using the **running-config** command. Following this configuration, you can install any third-party software with the known risks.

## Using Install CLIs for Feature or Third-Party RPM Operation

See the following reference table for using install CLIs for the feature RPM operations:

**Table 4: Reference for Install CLIs for the Feature RPM Operations**

CLI	Description
<b>install reset</b>	<p>This operation removes all the patches, persisted configurations, upgraded packages, third-party installed packages, unsaved configurations, and reloads the switch's previous mode (Full/Base) with the default packages.</p> <p>The <b>install reset</b> command also performs write erase operation. The following message is displayed at the prompt:</p> <pre>switch(config)# install reset</pre> <hr/> <pre>WARNING!!This operation will remove all patches, upgraded packages, persisted etc configs, third party packages installed, startup configuration(write erase) and reload the switch with default packages.</pre> <hr/> <pre>Do you want to proceed with reset operation? (y/n)? [n]</pre>
<b>install reset nxos base</b>	<p>This operation installs NXOS in base mode by removing all patches, upgraded packages, persisted etc configurations, third-party packages installed, startup configuration (write erase), and reloads the switch with the default packages.</p>
<b>install reset nxos full</b>	<p>This operation installs NXOS with full mode by removing all patches, upgraded packages, persisted etc configs, third-party packages installed, startup configuration (write erase), and reloads the switch with the default packages (with mandatory and optional RPMs).</p>
<b>install add &lt;&gt;</b>	<p>Adds an RPM file to the respective repository and updates the repository (<b>patch/feature/third-party</b>).</p>
<b>install activate &lt;rpm name&gt;</b>	<p>Installs an RPM that is present in the repository.</p>
<b>install commit &lt;rpm name&gt;</b>	<p>Used for the patch RPMs. Makes the patch persist during the reload.</p>

CLI	Description
<b>install deactivate</b> <i>&lt;rpm name&gt;</i>	Un-installs an RPM.  Beginning with Cisco NX-OS Release 10.1(1), when you use this command to deactivate RPMs, the options to either downgrade to the base version of RPM or to uninstall RPM appear. You can select the option that you desire and the operation will proceed.
<b>install remove</b> <i>&lt;rpm name&gt;</i>	Removes an RPM file from the repository and updates the repository.
<b>sh install active</b>	Displays the list of the installed RPMs in the system apart from base rootfs RPMs. (features/patch/third-party).
<b>sh install inactive</b>	Displays the list of the RPMs that are present in the repository but they are not installed.
<b>sh install packages</b>	Lists all the RPMs that are installed including rootfs RPMs.

CLI	Description
<p><b>[no] system software allow third-party</b></p>	<p>Beginning with Cisco NX-OS Release 10.1(1) the third-party RPM installations are not allowed to be installed on the device by default. This command bypasses this restriction and configures the device to enable the third-party software installation.</p> <p>The following command shows the error message when you activate third-party RPM without applying the third-party configuration:</p> <pre>switch(config)# install activate pbwMonitor-1.0-1.5.0.x86_64.rpm  Install operation 193 failed because package is not signed by Cisco.Enable TPS installation using 'system software allow third-party' CLI at Tue Nov 17 04:23:10 2020</pre> <p>The following command shows activating third-party RPM installations after applying the configuration:</p> <pre>switch(config)# system software allow third-party switch(config)# 2020 Nov 17 04:25:41 switch %\$ VDC-1 %\$ %USER-2-SYSTEM_MSG: &lt;&lt;%PATCH-INSTALLER-2-TPS_FEATURE_ENABLED&gt;&gt; User has enabled TPS installation - patch_installer  switch(config)# install activate pbwMonitor-1.0-1.5.0.x86_64.rpm [#####] 100% Install operation 194 completed successfully at Tue Nov 17 04:25:58 2020</pre> <p>The following command shows disabling the third-party configuration:</p> <pre>switch(config)# no system software allow third-party switch(config)# 2020 Nov 17 04:27:17 switch %\$ VDC-1 %\$ %USER-2-SYSTEM_MSG: &lt;&lt;%PATCH-INSTALLER-2-TPS_FEATURE_DISABLED&gt;&gt; User has disabled TPS installation - patch_installer</pre>



**Note** If you are using ISSU or upgrading to Cisco NX-OS Release 10.1.1 release from an earlier version, you must manually apply the third-party configuration within the first 30 minutes after the upgrade to ensure the third-party RPMs get installed.

## Using Install CLIs for Digital Signature Support

Use the following CLI commands to install CLIs for digital signature support:

## SUMMARY STEPS

1. switch#install add bootflash:<keyfile> gpg-key
2. switch#install verify package <package-name>
3. OR switch#install verify bootflash:<RPM file>

## DETAILED STEPS

	Command or Action	Purpose
Step 1	switch#install add bootflash:<keyfile> gpg-key <b>Example:</b> <pre>install add bootflash:RPM-GPG-KEY-puppetlabs gpg-key [#####] 100% Install operation 304 completed successfully at Thu Jun 19 16:40:28 2018</pre>	Cisco release RPMs are signed with Cisco GPG (GNU Privacy Guard) key. The public GPG key is present at <b>/etc/pki/rpm-gpg/arm-Nexus9k-rel.gpg</b> . To add other public keys from different sources, use the steps in this section.
Step 2	switch#install verify package <package-name>	Verifies the package.
Step 3	OR switch#install verify bootflash:<RPM file> <b>Example:</b> <pre>switch# install verify bootflash:vxlan-2.0.0.0-9.2.1.1ib32_n9000.rpm  RSA signed switch#</pre>	Use step 2 or 3 to verify whether the RPM file is a signed or non-signed file.

## Querying All Installed RPMs

Complete the following step to query all the installed RPMs:

## SUMMARY STEPS

1. show install packages

## DETAILED STEPS

	Command or Action	Purpose
Step 1	show install packages <b>Example:</b> <pre>switch# show install packages  Boot Image: NXOS Image: bootflash:/nxos.9.2.1.bin  ----- Installed Packages attr.x86_64 2.4.47-r0.0 installed Unsigned</pre>	Queries all the installed RPMs.

	Command or Action	Purpose
	<pre> aufs-util.x86_64 3.14+git0+b59a2167a1-r0.0 installed Unsigned base-files.n9000 3.0.14-r89.0 installed Unsigned base-passwd.lib32_x86 3.5.29-r0.1.0 installed Unsigned bash.lib32_x86 4.3.30-r0.0 installed Unsigned bfd.lib32_n9000 2.0.0.0-9.2.1 installed Signed bgp.lib32_n9000 2.0.0.0-9.2.1 installed Signed binutils.x86_64 2.25.1-r0.0 installed Unsigned bridge-utils.x86_64 1.5-r0.0 installed Unsigned busybox.x86_64 1.23.2-r0.0 installed Unsigned busybox-udhcpc.x86_64 1.23.2-r0.0 installed Unsigned bzip2.x86_64 1.0.6-r5.0 installed Unsigned ca-certificates.all 20150426-r0.0 installed Unsigned cgrouplite.x86_64 1.1-r0.0 installed Unsigned chkconfig.x86_64 1.3.58-r7.0 installed Unsigned container-tracker.lib32_n9000 2.0.0.0-9.2.1 installed Signed containerd-docker.x86_64 0.2.3+gitaa8187dbd3b7ad67d8e5e3a15115d3eef43a7ed1-r0.0 installed Unsigned core.lib32_n9000 2.0.0.0-9.2.1 installed Signed coreutils.lib32_x86 8.24-r0.0 installed Unsigned cpio.x86_64 2.12-r0.0 installed Unsigned cracklib.lib32_x86 2.9.5-r0.0 installed Unsigned cracklib.x86_64 2.9.5-r0.0 installed Unsigned createrepo.x86_64 0.4.11-r9.0 installed Unsigned cronie.x86_64 1.5.0-r0.0 installed Unsigned curl.lib32_x86 7.60.0-r0.0 installed Unsigned db.x86_64 6.0.30-r0.0 installed Unsigned dbus-1.lib32_x86 1.8.20-r0.0 installed Unsigned dhcp-client.x86_64 4.3.2-r0.0 installed Unsigned dhcp-server.x86_64 4.3.2-r0.0 installed Unsigned switch# </pre>	

## Installing the RPMs Using One Step Procedure

The CLIs for both install and upgrade RPMs are the same. See the following step to install the RPMs using one step procedure:

### Procedure

	Command or Action	Purpose
Step 1	<pre> <b>install add</b> &lt;rpm&gt; <b>activate</b>  <b>Example:</b>  switch# <b>install add</b> bootflash:chef.rpm <b>activate</b> Adding the patch (/chef.rpm) [#####] 100% Install operation 868 completed successfully at Tue May 8 11:20:10 2018  Activating the patch (/chef.rpm) </pre>	Installs and activates the RPM.

	Command or Action	Purpose
	<pre>[#####] 100% Install operation 869 completed successfully at Tue May 8 11:20:20 2018</pre>	

### Example

```
switch# show install active
Boot Image:
    NXOS Image: bootflash:/nxos.9.2.1.bin

Active Packages:
bgp-2.0.1.0-9.2.1.lib32_n9000
chef-12.0.0alpha.2+20150319234423.git.1608.b6eb10f-1.e15.x86_64

Active Base Packages:
lACP-2.0.0.0-9.2.1.lib32_n9000
lldp-2.0.0.0-9.2.1.lib32_n9000
mtx-device-2.0.0.0-9.2.1.lib32_n9000
mtx-grpc-agent-2.0.0.0-9.2.1.lib32_n9000
mtx-infra-2.0.0.0-9.2.1.lib32_n9000
mtx-netconf-agent-2.0.0.0-9.2.1.lib32_n9000
mtx-restconf-agent-2.0.0.0-9.2.1.lib32_n9000
mtx-telemetry-2.0.0.0-9.2.1.lib32_n9000
ntp-2.0.0.0-9.2.1.lib32_n9000
nxos-ssh-2.0.0.0-9.2.1.lib32_n9000
snmp-2.0.0.0-9.2.1.lib32_n9000
svi-2.0.0.0-9.2.1.lib32_n9000
tacacs-2.0.0.0-9.2.1.lib32_n9000
vtp-2.0.0.0-9.2.1.lib32_n9000
switch(config)#
```

## Installing the RPMs Using Two Steps Procedure

The CLIs for both install and upgrade RPMs are the same. See the following steps to install the RPMs using two steps procedure:

### SUMMARY STEPS

1. **install add** *<rpm>*
2. **install activate** *<rpm>*

### DETAILED STEPS

	Command or Action	Purpose
Step 1	<pre>install add &lt;rpm&gt;  Example:  switch# install add bootflash:vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm</pre>	Installs the RPM.

	Command or Action	Purpose
	<pre>[#####] 100% Install operation 892 completed successfully at Thu Jun  7 13:56:38 2018  switch(config)# sh install inactive   grep vxlan  vxlan-2.0.1.0-9.2.1.lib32_n9000</pre>	
<b>Step 2</b>	<b>install activate &lt;rpm&gt;</b> <b>Example:</b>	Activates the RPM.

### Example

```
switch#install activate vxlan

[#####] 100%
Install operation 891 completed successfully at Thu Jun  7 13:53:07 2018

switch# show install active | grep vxlan

vxlan-2.0.0.0-9.2.1.lib32_n9000

switch# sh install inactive | grep vxlan

switch#
```

## Upgrading the RPMs Using One Step

The CLIs for both install and upgrade RPMs are the same. See the following steps to upgrade the RPMs:

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<b>install add &lt;rpm&gt;activate upgrade</b> <b>Example:</b> <pre>switch(config)# install add bootflash:bgp-2.0.2.0-9.2.1.lib32_n9000.rpm activate upgrade  Adding the patch (/bgp-2.0.2.0-9.2.1.lib32_n9000.rpm) [#####] 100% Install operation 870 completed successfully at Tue May 8 11:22:30 2018</pre>	Installs the RPM.

	Command or Action	Purpose
	<pre> Activating the patch (/bgp-2.0.2.0-9.2.1.lib32_n9000.rpm) [#####] 100% Install operation 871 completed successfully at Tue May 8 11:22:40 2018 </pre>	

### Example

```
switch(config)# show install active
```

```

Boot Image:
  NXOS Image: bootflash:/nxos.9.2.1.bin

```

```

Active Packages:
bgp-2.0.2.0-9.2.1.lib32_n9000
chef-12.0.0.alpha.2+20150319234423.git.1608.b6eb10f-1.e15.x86_64

```

```

Active Base Packages:
  lACP-2.0.0.0-9.2.1.lib32_n9000
  lldp-2.0.0.0-9.2.1.lib32_n9000
  mtX-device-2.0.0.0-9.2.1.lib32_n9000
  mtX-grpc-agent-2.0.0.0-9.2.1.lib32_n9000
  mtX-infra-2.0.0.0-9.2.1.lib32_n9000
  mtX-netconf-agent-2.0.0.0-9.2.1.lib32_n9000
  mtX-restconf-agent-2.0.0.0-9.2.1.lib32_n9000
  mtX-telemetry-2.0.0.0-9.2.1.lib32_n9000
  ntp-2.0.0.0-9.2.1.lib32_n9000
  nxos-ssh-2.0.0.0-9.2.1.lib32_n9000
  snmp-2.0.0.0-9.2.1.lib32_n9000
  svi-2.0.0.0-9.2.1.lib32_n9000
  tacacs-2.0.0.0-9.2.1.lib32_n9000
  vtp-2.0.0.0-9.2.1.lib32_n9000

```

## Downgrading the RPMs

The downgrade procedure needs a special CLI attribute. See the following step to downgrade the RPMs using the one step procedure:

### Procedure

	Command or Action	Purpose
<b>Step 1</b>	<pre> <b>install add &lt;rpm&gt;activate downgrade</b> </pre> <p><b>Example:</b></p> <pre> switch(config)# <b>install add</b> <b>bootflash:bgp-2.0.1.0-9.2.1.lib32_n9000.rpm</b> <b>activate downgrade</b> </pre> <p>Adding the patch</p>	Downgrades the RPM.



	Command or Action	Purpose
	<pre>(/bgp-2.0.1.0-9.2.1.lib32_n9000.rpm) [#####] 100% Install operation 872 completed successfully at Tue May 8 11:24:43 2018  Activating the patch (/bgp-2.0.1.0-9.2.1.lib32_n9000.rpm) [#####] 100% Install operation 873 completed successfully at Tue May 8 11:24:52 2018</pre>	

### Example

```
switch(config)# show install active
Boot Image:
  NXOS Image: bootflash:/nxos.9.2.1.bin

Active Packages:
  bgp-2.0.1.0-9.2.1.lib32_n9000
  chef-12.0.0alpha.2+20150319234423.git.1608.b6eb10f-1.e15.x86_64

Active Base Packages:
  lacp-2.0.0.0-9.2.1.lib32_n9000
  lldp-2.0.0.0-9.2.1.lib32_n9000
  mtx-device-2.0.0.0-9.2.1.lib32_n9000
  mtx-grpc-agent-2.0.0.0-9.2.1.lib32_n9000
  mtx-infra-2.0.0.0-9.2.1.lib32_n9000
  mtx-netconf-agent-2.0.0.0-9.2.1.lib32_n9000
  mtx-restconf-agent-2.0.0.0-9.2.1.lib32_n9000
  mtx-telemetry-2.0.0.0-9.2.1.lib32_n9000
  ntp-2.0.0.0-9.2.1.lib32_n9000
  nxos-ssh-2.0.0.0-9.2.1.lib32_n9000
  snmp-2.0.0.0-9.2.1.lib32_n9000
  svi-2.0.0.0-9.2.1.lib32_n9000
  tacacs-2.0.0.0-9.2.1.lib32_n9000
  vtp-2.0.0.0-9.2.1.lib32_n9000
switch(config)#
```

## Uninstalling the RPMs

See the following steps to uninstall the RPMs:

### SUMMARY STEPS

1. **install deactivate** *<rpm>*

## DETAILED STEPS

	Command or Action	Purpose
Step 1	<p><b>install deactivate</b> &lt;rpm&gt;</p> <p><b>Example:</b></p> <pre>switch(config)# install deactivate bgp Base RPM found. Do you want to downgrade to base version(y/n) [n] y Downgrading to the base version [#####] 100% Install operation 190 completed successfully at Tue Nov 17 04:10:40 2020</pre> <p><b>Example:</b></p> <pre>switch(config)# install deactivate bgp Base RPM found. Do you want to downgrade to base version(y/n) [n] n</pre> <hr/> <p>WARNING!! This operation will remove 'bgp-3.0.0.0-9.4.1.lib32_n9000' related configuration from running-configuration on successful completion. Update startup-configuration accordingly.</p> <hr/> <pre>[#####] 100% Install operation 9 completed successfully at Tue Nov 17 05:05:59 2020</pre>	<p>Downgrades to the base version of RPM, if one exists in the groups-repo (/rpms), or uninstalls the RPM completely from the switch.</p> <p>To downgrade to the base version, enter <b>y</b>. To completely uninstall the RPM, enter <b>n</b> in the command prompt.</p>

## Removing the RPMs

See the following steps to remove the RPMs:

## SUMMARY STEPS

1. **install remove** <rpm>

## DETAILED STEPS

	Command or Action	Purpose
Step 1	<p><b>install remove</b> &lt;rpm&gt;</p> <p><b>Example:</b></p> <pre>switch(config)# show install inactive   grep vxlan  vxlan-2.0.0.0-9.2.1.lib32_n9000 switch(config)# install remove vxlan  Proceed with removing vxlan? (y/n)? [n] y [#####] 100%</pre>	Removes the RPM from the repository.

Command or Action	Purpose
Install operation 890 Removal of base rpm package is not permitted at Thu Jun 7 13:52:15 2018	

## Information About YUM Commands

See the following sections for more information about YUM commands.



**Note** YUM commands do not support ctrl+c. Install commands do support ctrl+c. If YUM commands are aborted using ctrl+c, manual cleanup must be performed using "/isan/bin/patching\_utils.py --unlock".

## Performing Package Operations Using the YUM Commands

See the following sections for performing package operations using the YUM commands:



**Note** YUM commands are accessed only from the BASH shell on the box and they are not allowed from the NXOS VSH terminal.



**Note** Make sure that as a sudo user, you have access to the super user privileges.

## Finding the Base Version RPM of the Image

Use the **ls /rpms** command to find the base version RPM of the image. The base RPM version is the pre-installed RPM that is archived in the system image.

```
#ls /rpms
```

```
bfd-2.0.0.0-9.2.1.lib32_n9000.rpm
ins_tor_sdk_t2-1.0.0.0-9.2.0.77.lib32_n9000.rpm
mtx-netconf-agent-2.0.0.0-9.2.1.lib32_n9000.rpm      snmp-2.0.0.0-9.2.1.lib32_n9000.rpm
bgp-2.0.0.0-9.2.1.lib32_n9000.rpm
ins_tor_sdk_t3-1.0.0.0-9.2.0.77.lib32_n9000.rpm
mtx-restconf-agent-2.0.0.0-9.2.1.lib32_n9000.rpm   sr-2.0.0.0-9.2.1.lib32_n9000.rpm
container-tracker-2.0.0.0-9.2.1.lib32_n9000.rpm   isis-2.0.0.0-9.2.1.lib32_n9000.rpm
          mtx-telemetry-2.0.0.0-9.2.1.lib32_n9000.rpm   svi-2.0.0.0-9.2.1.lib32_n9000.rpm
eigrp-2.0.0.0-9.2.1.lib32_n9000.rpm                lacp-2.0.0.0-9.2.1.lib32_n9000.rpm
          nbproxy-2.0.0.0-9.2.1.lib32_n9000.rpm
tacacs-2.0.0.0-9.2.1.lib32_n9000.rpm
ext-eth-2.0.0.0-9.2.1.lib32_n9000.rpm              lldp-2.0.0.0-9.2.1.lib32_n9000.rpm
          ntp-2.0.0.0-9.2.1.lib32_n9000.rpm
telemetry-2.3.4.0-9.2.1.lib32_n9000.rpm
fcoe-2.0.0.0-9.2.1.lib32_n9000.rpm                mcast-2.0.0.0-9.2.1.lib32_n9000.rpm
          nxos-ssh-2.0.0.0-9.2.1.lib32_n9000.rpm
virtualization-2.0.0.0-9.2.1.lib32_n9000.rpm
```

## Checking the List of the Installed RPMs

```
fex-2.0.0.0-9.2.1.lib32_n9000.rpm
ospf-2.0.0.0-9.2.1.lib32_n9000.rpm
fhrp-2.0.0.0-9.2.1.lib32_n9000.rpm
  repodata
vxlan-2.0.0.0-9.2.1.lib32_n9000.rpm
guestshell-2.0.0.0-9.2.1.lib32_n9000.rpm
  rip-2.0.0.0-9.2.1.lib32_n9000.rpm
icam-2.0.0.0-9.2.1.lib32_n9000.rpm
  services-2.0.0.0-9.2.1.lib32_n9000.rpm
mpls-2.0.0.0-9.2.1.lib32_n9000.rpm
  vtp-2.0.0.0-9.2.1.lib32_n9000.rpm
mtx-device-2.0.0.0-9.2.1.lib32_n9000.rpm
mtx-grpc-agent-2.0.0.0-9.2.1.lib32_n9000.rpm
mtx-infra-2.0.0.0-9.2.1.lib32_n9000.rpm
```

## Checking the List of the Installed RPMs

Use the **yum list installed** command to query the feature and third party RPMs and grep a specific RPM. See the following example for feature RPMs:

```
bash-4.2# yum list installed | grep lib32_n9000

bfd.lib32_n9000                2.0.0.0-9.2.1          @groups-repo
core.lib32_n9000              2.0.0.0-9.2.1          installed
eth.lib32_n9000               2.0.0.0-9.2.1          installed
guestshell.lib32_n9000        2.0.0.0-9.2.1          @groups-repo
lacp.lib32_n9000              2.0.0.0-9.2.1          installed
linecard2.lib32_n9000         2.0.0.0-9.2.1          installed
lldp.lib32_n9000              2.0.0.0-9.2.1          installed
mcast.lib32_n9000             2.0.0.0-9.2.1          @groups-repo
mtx-device.lib32_n9000        2.0.0.0-9.2.1          installed
mtx-grpc-agent.lib32_n9000    2.0.0.0-9.2.1          installed
mtx-infra.lib32_n9000         2.0.0.0-9.2.1          installed
mtx-netconf-agent.lib32_n9000 2.0.0.0-9.2.1          installed
mtx-restconf-agent.lib32_n9000 2.0.0.0-9.2.1          installed
mtx-telemetry.lib32_n9000    2.0.0.0-9.2.1          installed
nbproxy.lib32_n9000          2.0.0.0-9.2.1          installed
ntp.lib32_n9000               2.0.0.0-9.2.1          installed
nxos-ssh.lib32_n9000         2.0.0.0-9.2.1          installed
ospf.lib32_n9000              2.0.0.0-9.2.1          @groups-repo
platform.lib32_n9000         2.0.0.0-9.2.1          installed
snmp.lib32_n9000              2.0.0.0-9.2.1          installed
svi.lib32_n9000               2.0.0.0-9.2.1          installed
tacacs.lib32_n9000           2.0.0.0-9.2.1          installed
tor.lib32_n9000               2.0.0.0-9.2.0.77       installed
virtualization.lib32_n9000    2.0.1.0-9.2.1          @localdb
vtp.lib32_n9000               2.0.0.0-9.2.1          installed
vxlan.lib32_n9000             2.0.0.0-9.2.1          @groups-repo
...
```

## Getting Details of the Installed RPMs

The **yum info <rpmname>** command lists out the detailed info of the installed RPM.

```
yum info vxlan
```

```
Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
groups-repo
```

```

| 1.1 kB      00:00 ...
localdb
| 951 B       00:00 ...
```

```

patching
| 951 B    00:00 ...
thirdparty
| 951 B    00:00 ...

Installed Packages
Name       : vxlan
Arch      : lib32_n9000
Version   : 2.0.0.0
Release   : 9.2.1
Size      : 6.4 M
Repo      : installed
From repo : groups-repo
Summary   : Cisco NXOS VxLAN
URL       : http://cisco.com/
License   : Proprietary
Description : Provides VxLAN support

```

## Installing the RPMs

Installing the RPMs downloads the RPMs and copies the respective program to the switches. See the following example for installing the RPMs from a remote server (that is reachable in the network):

```

bash-4.3# yum install
http://10.0.0.2/modularity/rpms/vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm

Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
groups-repo
| 1.1 kB    00:00 ...
localdb
| 951 B     00:00 ...
localdb/primary
| 886 B     00:00 ...
localdb
| 1/1
patching
| 951 B     00:00 ...
thirdparty
| 951 B     00:00 ...

Setting up Install Process
vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm
| 1.6 MB    00:00
Examining /var/tmp/yum-root-RaANgb/vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm:
vxlan-2.0.1.0-9.2.1.lib32_n9000
Marking /var/tmp/yum-root-RaANgb/vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm to be installed
Resolving Dependencies
--> Running transaction check
---> Package vxlan.lib32_n9000 0:2.0.1.0-9.2.1 will be installed
--> Finished Dependency Resolution

Dependencies Resolved

```

Package	Repository	Arch	Version	Size
Installing:				
vxlan		lib32_n9000	2.0.1.0-9.2.1	6.4 M
	/vxlan-2.0.1.0-9.2.1.lib32_n9000			

## Transaction Summary

```

=====
Install          1 Package

Total size: 6.4 M
Installed size: 6.4 M
Is this ok [y/N]: y
Downloading Packages:
Running Transaction Check
Running Transaction Test
Transaction Test Succeeded
Running Transaction
  Installing : vxlan-2.0.1.0-9.2.1.lib32_n9000                1/1

starting pre-install package version mgmt for vxlan
pre-install for vxlan complete
starting post-install package version mgmt for vxlan
post-install for vxlan complete

Installed:
  vxlan.lib32_n9000 0:2.0.1.0-9.2.1

```

Complete!

See the following example for installing the RPMs from local bootflash:

```
sudo yum install /bootflash/vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm
```

```

Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
groups-repo

```

```

localdb                | 1.1 kB    00:00 ...
patching                | 951 B     00:00 ...
thirdparty              | 951 B     00:00 ...
                        | 951 B     00:00 ...

```

```

Setting up Install Process
Examining /bootflash/vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm: vxlan-2.0.1.0-9.2.1.lib32_n9000
Marking /bootflash/vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm as an update to
vxlan-2.0.0.0-9.2.1.lib32_n9000
Resolving Dependencies
--> Running transaction check
---> Package vxlan.lib32_n9000 0:2.0.0.0-9.2.1 will be updated
---> Package vxlan.lib32_n9000 0:2.0.1.0-9.2.1 will be an update
--> Finished Dependency Resolution

```

Dependencies Resolved

```

=====
Package                Arch                Repository
Version                Size
=====
Updating:
  vxlan                  lib32_n9000
  2.0.1.0-9.2.1          /vxlan-2.0.1.0-9.2.1.lib32_n9000

```

6.4 M

## Transaction Summary

Upgrade 1 Package

Total size: 6.4 M

Is this ok [y/N]: y

Downloading Packages:

Running Transaction Check

Running Transaction Test

Transaction Test Succeeded

Running Transaction

Updating : vxlan-2.0.1.0-9.2.1.lib32\_n9000

1/2

starting pre-install package version mgmt for vxlan

pre-install for vxlan complete

starting post-install package version mgmt for vxlan

post-install for vxlan complete

Cleanup : vxlan-2.0.0.0-9.2.1.lib32\_n9000

2/2

Updated:

vxlan.lib32\_n9000 0:2.0.1.0-9.2.1

Complete!

See the following example for installing the RPM if it is available in a repository:

**yum install eigrp**

## Upgrading the RPMs

See the following example for upgrading the RPMs from a remote server (that is reachable in the network):

bash-4.3# **yum upgrade****http://10.0.0.2/modularity/rpms/vxlan-2.0.1.0-9.2.1.lib32\_n9000.rpm**Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,  
protect-packages  
groups-repo

localdb | 1.1 kB 00:00 ...

patching | 951 B 00:00 ...

thirdparty | 951 B 00:00 ...

vxlan-2.0.1.0-9.2.1.lib32\_n9000 | 951 B 00:00 ...

Setting up Upgrade Process

vxlan-2.0.1.0-9.2.1.lib32\_n9000.rpm

| 1.6 MB 00:00

Examining /var/tmp/yum-root-RaANgb/vxlan-2.0.1.0-9.2.1.lib32\_n9000.rpm:

vxlan-2.0.1.0-9.2.1.lib32\_n9000

Marking /var/tmp/yum-root-RaANgb/vxlan-2.0.1.0-9.2.1.lib32\_n9000.rpm as an update to

vxlan-2.0.0.0-9.2.1.lib32\_n9000

Resolving Dependencies

--&gt; Running transaction check

```

---> Package vxlan.lib32_n9000 0:2.0.0.0-9.2.1 will be updated
---> Package vxlan.lib32_n9000 0:2.0.1.0-9.2.1 will be an update
--> Finished Dependency Resolution

```

Dependencies Resolved

Package	Repository	Arch	Version	Size
Updating:				
vxlan		lib32_n9000	2.0.1.0-9.2.1	
	/vxlan-2.0.1.0-9.2.1.lib32_n9000			6.4 M
Transaction Summary				

Upgrade 1 Package

Total size: 6.4 M

Is this ok [y/N]: y

Downloading Packages:

Running Transaction Check

Running Transaction Test

Transaction Test Succeeded

Running Transaction

\*\* Found 1 pre-existing rpmdb problem(s), 'yum check' output follows:

busybox-1.23.2-r0.0.x86\_64 has missing requires of busybox-syslog

Updating : vxlan-2.0.1.0-9.2.1.lib32\_n9000

1/2

starting pre-install package version mgmt for vxlan

pre-install for vxlan complete

starting post-install package version mgmt for vxlan

post-install for vxlan complete

Cleanup : vxlan-2.0.0.0-9.2.1.lib32\_n9000

2/2

Updated:

vxlan.lib32\_n9000 0:2.0.1.0-9.2.1

Complete!

See the following example for upgrading the RPMs from local bootflash:

```
sudo yum upgrade /bootflash/vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm
```

```

Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
groups-repo

```

```

localdb          | 1.1 kB    00:00 ...

```

```

patching        | 951 B     00:00 ...

```

```

thirdparty      | 951 B     00:00 ...

```

```

                | 951 B     00:00 ...

```

Setting up Upgrade Process

Examining /bootflash/vxlan-2.0.1.0-9.2.1.lib32\_n9000.rpm: vxlan-2.0.1.0-9.2.1.lib32\_n9000



```

Marking /bootflash/vxlan-2.0.1.0-9.2.1.lib32_n9000.rpm as an update to
vxlan-2.0.0.0-9.2.1.lib32_n9000
Resolving Dependencies
--> Running transaction check
---> Package vxlan.lib32_n9000 0:2.0.0.0-9.2.1 will be updated
---> Package vxlan.lib32_n9000 0:2.0.1.0-9.2.1 will be an update
--> Finished Dependency Resolution

```

Dependencies Resolved

Package Version	Arch	Repository
	Size	
Updating:		
vxlan 2.0.1.0-9.2.1	lib32_n9000	/vxlan-2.0.1.0-9.2.1.lib32_n9000
	6.4 M	

Transaction Summary

Upgrade 1 Package

Total size: 6.4 M

Is this ok [y/N]: y

Downloading Packages:

Running Transaction Check

Running Transaction Test

Transaction Test Succeeded

Running Transaction

Updating : vxlan-2.0.1.0-9.2.1.lib32\_n9000

1/2

starting pre-install package version mgmt for vxlan

pre-install for vxlan complete

starting post-install package version mgmt for vxlan

post-install for vxlan complete

Cleanup : vxlan-2.0.0.0-9.2.1.lib32\_n9000

2/2

Updated:

vxlan.lib32\_n9000 0:2.0.1.0-9.2.1

Complete!

See the following example for upgrading the RPMs if it is available in any repository:

```
yum upgrade eigrp
```

## Downgrading the RPMs

See the following example for downgrading the RPMs from a remote server (that is reachable in the network):

```
sudo yum downgrade vxlan-2.0.0.0-9.2.1.lib32_n9000
```

```
Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
Setting up Downgrade Process
groups-repo
```

```
localdb          | 1.1 kB    00:00 ...
localdb/primary  | 951 B    00:00 ...
localdb          | 1.3 kB    00:00 ...
patching                2/2
thirdparty          | 951 B    00:00 ...
                    | 951 B    00:00 ...
```

```
Resolving Dependencies
--> Running transaction check
---> Package vxlan.lib32_n9000 0:2.0.0.0-9.2.1 will be a downgrade
---> Package vxlan.lib32_n9000 0:2.0.1.0-9.2.1 will be erased
--> Finished Dependency Resolution
```

Dependencies Resolved

Package	Version	Size	Arch	Repository
Downgrading:				
vxlan	2.0.0.0-9.2.1	1.6 M	lib32_n9000	groups-repo

Transaction Summary

Downgrade 1 Package

```
Total download size: 1.6 M
Is this ok [y/N]: y
Downloading Packages:
Running Transaction Check
Running Transaction Test
Transaction Test Succeeded
Running Transaction
  Installing : vxlan-2.0.0.0-9.2.1.lib32_n9000
```

```
1/2
starting pre-install package version mgmt for vxlan
pre-install for vxlan complete
starting post-install package version mgmt for vxlan
post-install for vxlan complete
Cleanup      : vxlan-2.0.1.0-9.2.1.lib32_n9000
```

2/2

```
Removed:
vxlan.lib32_n9000 0:2.0.1.0-9.2.1
```

```
Installed:
  vxlan.lib32_n9000 0:2.0.0.0-9.2.1
```

```
Complete!
```

See the following example for downgrading the RPMs from local bootflash:

```
yum downgrade /bootflash/eigrp-2.0.0-9.2.1.lib32_n9000.rpm
```

See the following example for downgrading the RPMs if it is available in any repository:

```
yum downgrade eigrp
```

## Deleting the RPMs

Deleting the RPMs de-installs the RPMs and removes any configuration CLI of the feature. Use the **yum erase** *<rpm>* command to delete the RPMs.

```
bash-4.2# sudo yum erase vxlan
```

```
Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
Setting up Remove Process
Resolving Dependencies
--> Running transaction check
---> Package vxlan.lib32_n9000 0:2.0.1.0-9.2.1 will be erased
--> Finished Dependency Resolution
```

```
Dependencies Resolved
```

Package	Arch	Repository	Version	Size
Removing:				
vxlan	lib32_n9000	@/vxlan-2.0.1.0-9.2.1.lib32_n9000	2.0.1.0-9.2.1	6.4 M

```
Transaction Summary
```

```
Remove      1 Package
```

```
Installed size: 6.4 M
Is this ok [y/N]: y
Downloading Packages:
Running Transaction Check
Running Transaction Test
Transaction Test Succeeded
Running Transaction
  Erasing      : vxlan-2.0.1.0-9.2.1.lib32_n9000

                               1/1
starting pre-remove package version mgmt for vxlan
```

```
pre-remove for vxlan complete

Removed:
  vxlan.lib32_n9000 0:2.0.1.0-9.2.1

Complete!
```

## Support for YUM Groups

The support for YUM groups is part of the package management. It simplifies the management of the packages for the administrators and it provides greater flexibility.

The administrators can group a list of packages (RPMs) into a logical group and they can perform various operations. YUM supports the following group commands:

- grouplist
- groupinfo
- groupinstall
- groupremove
- groupupdate

YUM groups can be broadly classified as L2, L3, routing, and management.

### Using the grouplist Command

In Linux, number of packages are bundled to particular group. Instead of installing individual packages with yum, you can install particular group that will install all the related packages that belongs to the group. For example to list all the available groups, use the **yum grouplist** command:

```
bash-4.2# sudo yum grouplist

Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
Setting up Group Process
groups-repo

localdb          | 1.1 kB    00:00 ...
patching        | 951 B    00:00 ...
thirdparty      | 951 B    00:00 ...
groups-repo/group | 951 B    00:00 ...

Installed Groups:
  L2
  L3
  management
Available Groups:
```

```

    routing
  Done

bash-4.3$

```

### Using the groupmembers Command

Use **yum groupinfo** command to display the description and the contents of a package group. The command lists out the feature members of the group.

```
bash-4.2# sudo yum groupinfo l2
```

```

Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
Setting up Group Process
groups-repo

```

```

localdb          | 1.1 kB    00:00 ...
patching         | 951 B     00:00 ...
thirdparty       | 951 B     00:00 ...
                 | 951 B     00:00 ...

```

```

Group: L2
Mandatory Packages:
  lacp
  lldp
  svi
  vtp

```

### Using the groupinstall Command

This command is for both install & upgrade of the members RPM. If the member is not installed, it will install the highest version available. If the member is already installed and higher RPM is available, it will upgrade that member.

```
bash-4.2# sudo yum groupinstall routing
```

```

Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
groups-repo

```

```

localdb          | 1.1 kB    00:00 ...
patching         | 951 B     00:00 ...
thirdparty       | 951 B     00:00 ...
                 | 951 B     00:00 ...

```

```

Setting up Group Process
Package ospf-2.0.0.0-9.2.1.lib32_n9000 already installed and latest version
Resolving Dependencies
--> Running transaction check
----> Package bgp.lib32_n9000 0:2.0.0.0-9.2.1 will be installed
----> Package eigrp.lib32_n9000 0:2.0.0.0-9.2.1 will be installed
----> Package isis.lib32_n9000 0:2.0.0.0-9.2.1 will be installed
----> Package rip.lib32_n9000 0:2.0.0.0-9.2.1 will be installed
--> Finished Dependency Resolution

```

Dependencies Resolved

Package	Arch	Repository	Version Size
Installing:			
bgp	lib32_n9000	groups-repo	2.0.0.0-9.2.1 2.4 M
eigrp	lib32_n9000	groups-repo	2.0.0.0-9.2.1 428 k
isis	lib32_n9000	groups-repo	2.0.0.0-9.2.1 1.2 M
rip	lib32_n9000	groups-repo	2.0.0.0-9.2.1 214 k

Transaction Summary

Install 4 Packages

Total download size: 4.2 M

Installed size: 19 M

Is this ok [y/N]: y

Downloading Packages:

Total

132 MB/s | 4.2 MB 00:00

Running Transaction Check

Running Transaction Test

Transaction Test Succeeded

Running Transaction

Installing : rip-2.0.0.0-9.2.1.lib32\_n9000

1/4

starting pre-install package version mgmt for rip

pre-install for rip complete

starting post-install package version mgmt for rip

post-install for rip complete

Installing : isis-2.0.0.0-9.2.1.lib32\_n9000

2/4

starting pre-install package version mgmt for isis

pre-install for isis complete

starting post-install package version mgmt for isis

post-install for isis complete

Installing : eigrp-2.0.0.0-9.2.1.lib32\_n9000

3/4

starting pre-install package version mgmt for eigrp

pre-install for eigrp complete

starting post-install package version mgmt for eigrp

post-install for eigrp complete

Installing : bgp-2.0.0.0-9.2.1.lib32\_n9000

```

                                4/4
starting pre-install package version mgmt for bgp
pre-install for bgp complete
starting post-install package version mgmt for bgp
post-install for bgp complete

Installed:
  bgp.lib32_n9000 0:2.0.0.0-9.2.1          eigrp.lib32_n9000 0:2.0.0.0-9.2.1
      isis.lib32_n9000 0:2.0.0.0-9.2.1      rip.lib32_n9000
0:2.0.0.0-9.2.1

Complete!

```

## Using the groupupdate Command

Use the **yum groupupdate** command to update any existing installed group packages.

```

bash-4.3# yum groupupdate routing

Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
groups-repo

localdb | 1.1 kB 00:00 ...
localdb/primary | 951 B 00:00 ...
localdb | 1.9 kB 00:00 ...
patching 6/6
thirdparty | 951 B 00:00 ...
thirdparty | 951 B 00:00 ...

Setting up Group Process
Resolving Dependencies
--> Running transaction check
---> Package bgp.lib32_n9000 0:2.0.0.0-9.2.1 will be updated
---> Package bgp.lib32_n9000 0:2.0.1.0-9.2.1 will be an update
---> Package eigrp.lib32_n9000 0:2.0.0.0-9.2.1 will be updated
---> Package eigrp.lib32_n9000 0:2.0.1.0-9.2.1 will be an update
---> Package isis.lib32_n9000 0:2.0.0.0-9.2.1 will be updated
---> Package isis.lib32_n9000 0:2.0.1.0-9.2.1 will be an update
---> Package ospf.lib32_n9000 0:2.0.0.0-9.2.1 will be updated
---> Package ospf.lib32_n9000 0:2.0.1.0-9.2.1 will be an update
---> Package rip.lib32_n9000 0:2.0.0.0-9.2.1 will be updated
---> Package rip.lib32_n9000 0:2.0.1.0-9.2.1 will be an update
--> Finished Dependency Resolution

Dependencies Resolved

```

---

Package	Arch	Version
---------	------	---------

		Repository	Size	
Updating:				
bgp	lib32_n9000	localdb	2.4 M	2.0.1.0-9.2.1
eigrp	lib32_n9000	locald	428 k	2.0.1.0-9.2.1
isis	lib32_n9000	local	1.2 M	2.0.1.0-9.2.1
ospf	lib32_n9000	localdb	2.8 M	2.0.1.0-9.2.1
rip	lib32_n9000	localdb	214 k	2.0.1.0-9.2.1

## Transaction Summary

Upgrade 5 Packages

Total download size: 7.0 M

Is this ok [y/N]: y

Downloading Packages:

Total

```

                269 MB/s | 7.0 MB      00:00
Running Transaction Check
Running Transaction Test
Transaction Test Succeeded
Running Transaction
  Updating   : eigrp-2.0.1.0-9.2.1.lib32_n9000

                    1/10
starting pre-install package version mgmt for eigrp
pre-install for eigrp complete
starting post-install package version mgmt for eigrp
post-install for eigrp complete
  Updating   : ospf-2.0.1.0-9.2.1.lib32_n9000

                    2/10
starting pre-install package version mgmt for ospf
pre-install for ospf complete
starting post-install package version mgmt for ospf
post-install for ospf complete
  Updating   : rip-2.0.1.0-9.2.1.lib32_n9000

                    3/10
starting pre-install package version mgmt for rip
pre-install for rip complete
starting post-install package version mgmt for rip
post-install for rip complete
  Updating   : isis-2.0.1.0-9.2.1.lib32_n9000

                    4/10
starting pre-install package version mgmt for isis
pre-install for isis complete
starting post-install package version mgmt for isis
post-install for isis complete
  Updating   : bgp-2.0.1.0-9.2.1.lib32_n9000

                    5/10
starting pre-install package version mgmt for bgp
pre-install for bgp complete
starting post-install package version mgmt for bgp
post-install for bgp complete
  Cleanup    : bgp-2.0.0.0-9.2.1.lib32_n9000

```



```

        6/10
Cleanup   : isis-2.0.0.0-9.2.1.lib32_n9000

        7/10
Cleanup   : rip-2.0.0.0-9.2.1.lib32_n9000

        8/10
Cleanup   : ospf-2.0.0.0-9.2.1.lib32_n9000

        9/10
Cleanup   : eigrp-2.0.0.0-9.2.1.lib32_n9000

        10/10

Updated:
  bgp.lib32_n9000 0:2.0.1.0-9.2.1      eigrp.lib32_n9000 0:2.0.1.0-9.2.1
  isis.lib32_n9000 0:2.0.1.0-9.2.1    ospf.lib32_n9000 0:2.0.1.0-9.2.1    rip.lib32_n9000
  0:2.0.1.0-9.2.1

Complete!

```

## Using the grouperase Command

Use the **yum grouperase** command to delete the groups or all the RPM members of the group.

```
bash-4.3$ sudo yum grouperase routing
```

```

Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
Setting up Group Process
groups-repo

```

```

localdb          | 1.1 kB    00:00 ...
patching         | 951 B     00:00 ...
thirdparty      | 951 B     00:00 ...

```

```

Resolving Dependencies
--> Running transaction check
---> Package bgp.lib32_n9000 0:2.0.0.0-9.2.1 will be erased
---> Package eigrp.lib32_n9000 0:2.0.0.0-9.2.1 will be erased
---> Package isis.lib32_n9000 0:2.0.0.0-9.2.1 will be erased
---> Package ospf.lib32_n9000 0:2.0.0.0-9.2.1 will be erased
---> Package rip.lib32_n9000 0:2.0.0.0-9.2.1 will be erased
--> Finished Dependency Resolution

```

Dependencies Resolved

Package	Arch	Repository	Size	Version
Removing:				
bgp	lib32_n9000	@groups-repo	11 M	2.0.0.0-9.2.1
eigrp	lib32_n9000			2.0.0.0-9.2.1

isis	lib32_n9000	@groups-repo	2.0 M	2.0.0.0-9.2.1
ospf	lib32_n9000	@groups-repo	5.7 M	2.0.0.0-9.2.1
rip	lib32_n9000	@groups-repo	15 M	2.0.0.0-9.2.1
		@groups-repo	1.0 M	

## Transaction Summary

---



---

Remove            5 Packages

Installed size: 34 M

Is this ok [y/N]: y

Downloading Packages:

Running Transaction Check

Running Transaction Test

Transaction Test Succeeded

Running Transaction

Erasing        : isis-2.0.0.0-9.2.1.lib32\_n9000

1/5

starting pre-remove package version mgmt for isis

pre-remove for isis complete

Erasing        : ospf-2.0.0.0-9.2.1.lib32\_n9000

2/5

starting post-remove package version mgmt for isis

post-remove for isis complete

starting pre-remove package version mgmt for ospf

pre-remove for ospf complete

Erasing        : eigrp-2.0.0.0-9.2.1.lib32\_n9000

3/5

starting post-remove package version mgmt for ospf

post-remove for ospf complete

starting pre-remove package version mgmt for eigrp

pre-remove for eigrp complete

Erasing        : rip-2.0.0.0-9.2.1.lib32\_n9000

4/5

starting post-remove package version mgmt for eigrp

post-remove for eigrp complete

starting pre-remove package version mgmt for rip

pre-remove for rip complete

Erasing        : bgp-2.0.0.0-9.2.1.lib32\_n9000

5/5

starting post-remove package version mgmt for rip

post-remove for rip complete

starting pre-remove package version mgmt for bgp

pre-remove for bgp complete

Removed:

bgp.lib32_n9000 0:2.0.0.0-9.2.1	eigrp.lib32_n9000 0:2.0.0.0-9.2.1	
isis.lib32_n9000 0:2.0.0.0-9.2.1	ospf.lib32_n9000 0:2.0.0.0-9.2.1	rip.lib32_n9000
0:2.0.0.0-9.2.1		

Complete!

## Finding Repositories

This command lists the repositories that the switch has along with the number of RPMs it has to those repositories.

```
bash-4.3# yum repolist all

Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching,
protect-packages
groups-repo

localdb          | 1.1 kB    00:00 ...
patching         | 951 B     00:00 ...
thirdparty      | 951 B     00:00 ...
repo id         | 951 B     00:00 ...
repo id        repo name                status
groups-repo    Groups-RPM Database      enabled: 37
localdb        Local RPM Database       enabled: 6
patching       Patch-RPM Database       enabled: 0
thirdparty     Thirdparty RPM Database  enabled: 0
open-nxos      open-nxos                disabled
repolist: 43
```

## Finding the Installed YUM Version

See the following example for listing the installed YUM version:

```
yum --version

3.4.3
  Installed: rpm-5.4.14-r0.0.x86_64 at 2018-06-02 13:04
  Built      : Wind River <info@windriver.com> at 2018-04-27 08:36
  Committed: Wind River <info@windriver.com> at 2018-04-27

  Installed: yum-3.4.3-r9.0.x86_64 at 2018-06-02 13:05
  Built      : Wind River <info@windriver.com> at 2018-04-27 08:36
  Committed: Wind River <info@windriver.com> at 2018-04-27
```

## Mapping the NX-OS CLI to the YUM Commands

See the following table for mapping the NX-OS CLI to the YUM commands:

*Table 5: Patching Command Reference*


NX-OS CLI Commands	YUM Commands
show install inactive	yum list --patch-only available
show install active	yum list --patch-only installed
show install committed	yum list --patch-only committed
show install packages	yum list --patch-only
show install pkg-info	yum info --patch-only
show install log	<p>yum history --show-patch-log</p> <p>where log_cmd:</p> <ul style="list-style-type: none"> <li>• opid= - Log that is specific to an operation ID.</li> <li>• last - Shows the latest operation log.</li> <li>• reverse – Shows the log in reverse order.</li> <li>• detail – Show detailed log.</li> <li>• from= - Shows logging from a specific operation ID.</li> </ul>
clear install log	<p>yum history --clear-patch-log=</p> <p>where clear_log_cmd:</p> <ul style="list-style-type: none"> <li>• all - Clears the complete log.</li> <li>• - Clears the logs above this operation ID.</li> </ul>
install add	yum install --add bootflash:/
install remove	yum install --remove
install remove inactive	yum install --remove all
install activate	<p>yum install --no-persist --nocommit</p> <p><b>Note</b> By default, all packages are activated and committed.</p>
install deactivate	<p>yum erase --nocommit</p> <p><b>Note</b> By default, all packages are de-activated and committed.</p>

NX-OS CLI Commands	YUM Commands
install commit	yum install --commit
Install commit	yum install --commit all

## Configuring an FTP server and Setting up a Local FTP YUM Repository

For setting up a local FTP YUM repository, you have to first create an FTP server, create a local FTP YUM repository, and configure the Cisco NX-OS switch to reach the FTP server as outlined in the following illustration.

*Figure 2: Configuring an FTP server and Setting up a Local FTP YUM Repository*

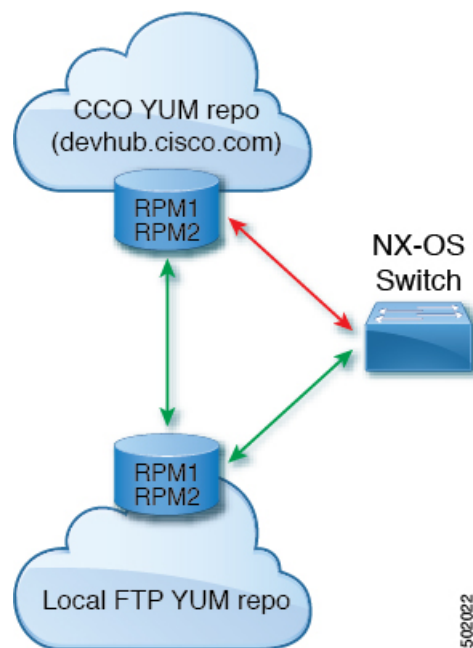

**Note** For Cisco NX-OS Release 10.1(1), visit <https://devhub.cisco.com/artifactory/open-nxos/10.1.1/> for Cisco **open-nxos** repository.

## Creating an FTP Server on Red Hat Enterprise Linux 7 (RHEL7) Virtual Machine

Complete the following steps to create an FTP server on Red Hat Enterprise Linux 7 (RHEL7) Virtual Machine (VM):

**SUMMARY STEPS**

1. `yum install vsftpd`
2. `systemctl start vsftpd`
3. `systemctl status vsftpd`
4. `firewall-cmd --zone=public --permanent --add-port=21/tcp`
5. `firewall-cmd --zone=public --permanent --add-service=ftp`
6. `firewall-cmd --reload`
7. `wget ftp:// <ip of FTP server> /test.txt`

**DETAILED STEPS**

	Command or Action	Purpose
Step 1	<code>yum install vsftpd</code>	Installs vsftpd, an FTP server.
Step 2	<code>systemctl start vsftpd</code>	Starts the FTP Server.
Step 3	<code>systemctl status vsftpd</code>	Checks the status of the FTP Server.
Step 4	<code>firewall-cmd --zone=public --permanent --add-port=21/tcp</code>	Allows access to the FTP services from the external systems and opens port 21.
Step 5	<code>firewall-cmd --zone=public --permanent --add-service=ftp</code>	Adds the FTP service.
Step 6	<code>firewall-cmd --reload</code>	Reloads the server.
Step 7	<code>wget ftp:// &lt;ip of FTP server&gt; /test.txt</code>	Hosts a file in the FTP server (for example, test.txt) and attempts Wget of that file.  <b>Note</b> Note that <code>/var/ftp/</code> is the default home directory of the FTP server.

**Creating a Local FTP YUM Repository**

Complete the following steps to synchronize the external repository RPMs to the FTP server and create a local FTP YUM repository:

**SUMMARY STEPS**

1. `cat /etc/yum.repos.d/local.repo`
2. `bash-4.3#yum repolist`
3. `nohup reposync -r <repo-name mentioned in the local.repo> -p <directory path to sync>&`
4. `tail -f nouhup.out`

## DETAILED STEPS

	Command or Action	Purpose
Step 1	<p><b>cat /etc/yum.repos.d/local.repo</b></p> <p><b>Example:</b></p> <pre>bash-4.3#cat /etc/yum.repos.d/local.repo  [localrepo] name=localrepo baseurl= https://devhub.cisco.com/artifactory/open-nxos/7.0-3-I2-1/x86_64/ enabled=1 gpgcheck=0 ssilverify=0</pre>	Creates a repository file under <b>/etc/yum.repos.d/</b> , for example, creates <b>local.repo</b> repository and adds the base URL.
Step 2	<p><b>bash-4.3#yum repolist</b></p> <p><b>Example:</b></p> <pre>bash-4.3# yum repolist Loaded plugins: fastestmirror, langpacks Loading mirror speeds from cached hostfile * base: mirror.dhakacom.com * extras: mirror.dhakacom.com * updates: mirror.dhakacom.com repo id repo name status base/7/x86_64 CentOS-7 - Base 9,911 extras/7/x86_64 CentOS-7 - Extras 313 localrepo localrepo 687 updates/7/x86_64 CentOS-7 - Updates 711 repolist: 11,622</pre>	Checks the reachability of the repository.
Step 3	<p><b>nohup reposync -r &lt;repo-name mentioned in the local.repo&gt; -p &lt;directory path to sync&gt;&amp;</b></p> <p><b>Example:</b></p> <pre>nohup reposync -r localrepo -p /var/ftp/ &amp;</pre> <p>This command creates a directory with the name <b>local.repo</b> inside <b>/var/ftp/</b> and downloads all the packages from <b>devhub.cisco.com</b> to the directory.</p>	Synchronizes all the packages from the external repository to the FTP server home directory.
Step 4	<b>tail -f nouhup.out</b>	Checks the status of the synchronization.

## Configuring a Switch to Reach an FTP Server

Complete the following steps to configure a switch to reach an FTP server:

## SUMMARY STEPS

1. **run bash sudo su**
2. **ip netns exec management ping <ip\_address>**
3. **cat /etc/yum/repos.d/ftp.repo**
4. **ip netns exec management bash**
5. **yum repolist**

## 6. yum list available

### DETAILED STEPS

	Command or Action	Purpose
Step 1	run bash sudo su	Logs in as a sudo user.
Step 2	ip netns exec management ping <ip_address>	Checks the reachability of the FTP server address from the switch using the <b>ping</b> command.
Step 3	<b>cat /etc/yum/repos.d/ftp.repo</b>  <b>Example:</b> <pre>bash-4.3# cat /etc/yum/repos.d/ftp.repo [ftp] name=ftp baseurl=ftp://10.232.44.34/localrepo/ enabled=1 gpgcheck=0 sslverify=0</pre>	Creates a repository file on the switch with the FTP server address as the URL.
Step 4	ip netns exec management bash	Uses the Bash shell prompt.
Step 5	<b>yum repolist</b>  <b>Example:</b> <pre>bash-4.3# yum repolist Loaded plugins: downloadonly, importpubkey, localrpmDB, patchaction, patching, : protect-packages groups-repo   1.1 kB 00:00 ... localdb   951 B 00:00 ... patching   951 B 00:00 ... thirdparty   951 B 00:00 ... thirdparty/primary   758 B 00:00 ... thirdparty 1/1 repo id repo name status groups-repo Groups-RPM Database 37 localdb Local RPM Database 0 patching Patch-RPM Database 0 thirdparty Thirdparty RPM Database 1 ftp ftp 686 repolist: 724</pre>	Checks the reachability of newly created repository.
Step 6	yum list available	Lists the available packages in the new repository.

## Creating User Roles for Install Operation

The **install** command is only available to the users of admin role. The **install** command can be available to a user by RBAC. See *Guidelines and Limitations for User Accounts and RBAC* for the same in the *Cisco Nexus 3600 NX-OS Security Configuration Guide*.



# Compacting Cisco NX-OS Software Images

Cisco NX-OS software image compaction reduces the size of the image file before completing a copy request. Use SCP, HTTP, or HTTPS as the source and bootflash or USB as the destination. The following example uses SCP and bootflash:

```
switch# copy scp://user@scpserver.cisco.com//download/nxos64.10.1.1.bin  
bootflash:nxos64.10.1.1.bin compact vrf management use-kstack
```

```
user1@10.65.42.196's password:  
nxos64.10.1.1.bin 100% 1501MB 8.4MB/s 02:58  
Copy complete, now saving to disk (please wait)...  
Copy complete.
```

The **compact** keyword compacts the NX-OS image before copying the file to the supervisor module.



---

**Note** Software image compaction is only supported on SCP, HTTP, or HTTPS. If you attempt compaction with any other protocol, the system returns the following error:

```
Compact option is allowed only with source as scp/http/https and destination  
as bootflash or usb
```



---

**Note** Compacted images are not supported with LXC boot mode.



---

**Note** Software image compaction is only supported on Cisco Nexus 9300-series platform switches.

---

