

# Configuración de Cisco Secure PIX Firewall 6.0 y Cisco VPN Clients Usando IPSec

## Contenido

[Introducción](#)  
[Prerequisites](#)  
[Requirements](#)  
[Componentes Utilizados](#)  
[Convenciones](#)  
[Configurar](#)  
[Diagrama de la red](#)  
[Configure el PIX](#)  
[Configuración de Cisco VPN Client](#)  
[Verificación](#)  
[Troubleshoot](#)  
[Comandos para resolución de problemas](#)  
[Ejemplo de resultado del comando debug](#)  
[Información Relacionada](#)

## [Introducción](#)

Las versiones 6.0 y posteriores de Cisco Secure PIX Firewall Software soportan conexiones de Cisco VPN Client 3.x y 4.x. Esta configuración de ejemplo muestra dos versiones diferentes de los Clientes VPN que se conectan y cifran el tráfico con el PIX como el punto final del túnel. En esta configuración, se configura un conjunto de direcciones para asignarlo a Seguridad IP (IPSec).

## [Prerequisites](#)

### [Requirements](#)

Esta configuración de ejemplo asume que el PIX ya opera con las listas de acceso, conductos o estáticas apropiadas. Este documento no pretende ilustrar estos conceptos básicos, sino mostrar la conectividad con el PIX desde un Cisco VPN Client.

## [Componentes Utilizados](#)

La información que contiene este documento se basa en las siguientes versiones de software y hardware.

- Software PIX versión 6.2(1)**Nota:** Esta configuración se probó en la versión 6.2(1) del software PIX, pero debería funcionar en versiones anteriores de regreso a 6.0(1) así como en

versiones posteriores.

- Cisco VPN Client versión 3.6 RelNota: Esta configuración se probó en VPN Client v4.0 Rel, pero debería funcionar en versiones anteriores de nuevo a 3.0 y hasta la versión actual.

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

## Convenciones


Consulte [Convenciones de Consejos TécnicosCisco](#) para obtener más información sobre las convenciones del documento.

## Configurar

En esta sección encontrará la información para configurar las funciones descritas en este documento.

### Diagrama de la red

En este documento, se utiliza esta configuración de red:

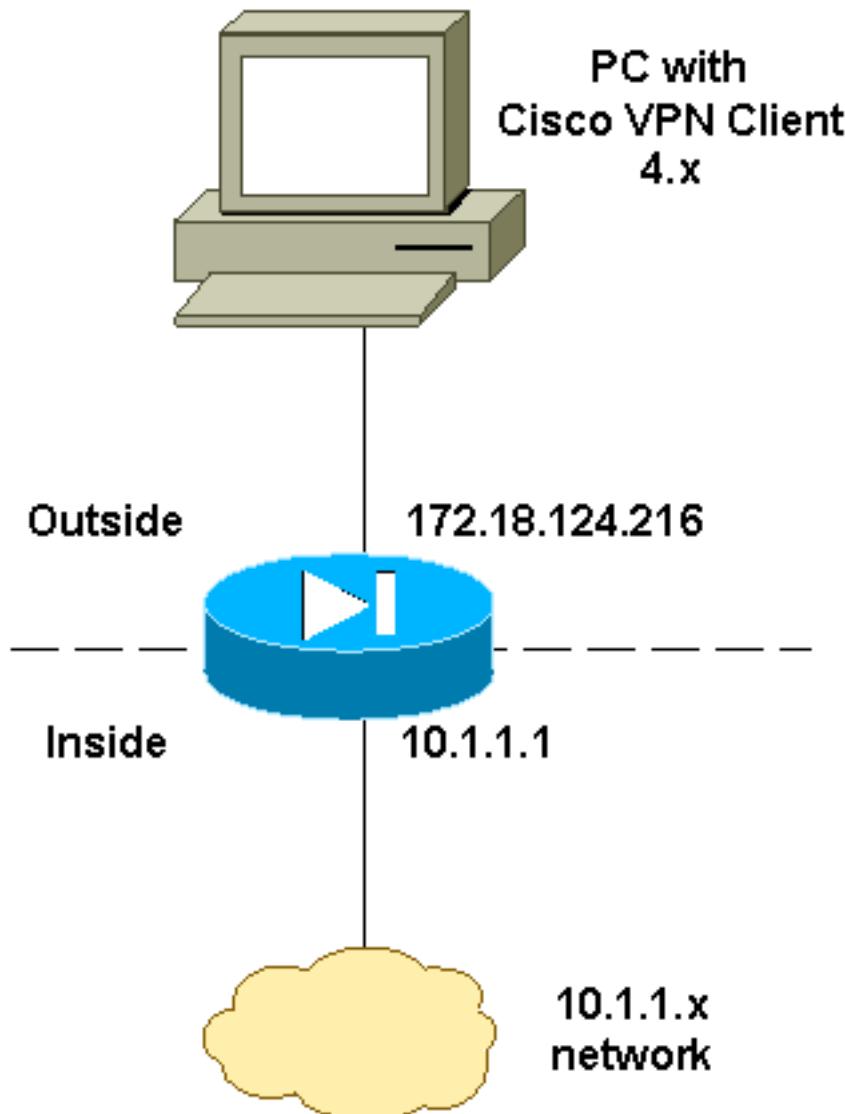

## Configure el PIX

**Nota:** Use la [Command Lookup Tool](#) (sólo [clientes registrados](#)) para obtener más información sobre los comandos utilizados en este documento.

### PIX

```
PIX Version 6.2(1)
nameif ethernet0 outside security0
nameif ethernet1 inside security100
enable password OnTrBUG1Tp0edmkr encrypted
passwd 2KFQnbNIdI.2KYOU encrypted
hostname goss-d3-pix515b
domain-name rtp.cisco.com
fixup protocol ftp 21
fixup protocol http 80
fixup protocol h323 1720
fixup protocol rsh 514
fixup protocol smtp 25
fixup protocol sqlnet 1521
fixup protocol sip 5060
fixup protocol skinny 2000
names
!
!--- Access list to avoid Network Address Translation
(NAT) !--- on the IPSec packets. access-list 101 permit
ip 10.1.1.0 255.255.255.0 10.1.2.0 255.255.255.0
pager lines 24
interface ethernet0 auto
interface ethernet1 auto
mtu outside 1500
mtu inside 1500
!
!--- IP addresses on the interfaces ip address outside
172.18.124.216 255.255.255.0 ip address inside 10.1.1.1
255.255.255.0 ip audit info action alarm ip audit attack
action alarm ip local pool ippool 10.1.2.1-10.1.2.254
no failover
failover timeout 0:00:00
failover poll 15
failover ip address outside 0.0.0.0
failover ip address inside 0.0.0.0
pdm history enable
arp timeout 14400
!
!--- Binding ACL 101 to the NAT statement to avoid NAT
!--- on the IPSec packets. nat (inside) 0 access-list
101
!
!--- Default route to the Internet. route outside
0.0.0.0 0.0.0.0 172.18.124.1 1 timeout xlate 3:00:00
timeout conn 1:00:00 half-closed 0:10:00 udp 0:02:00 rpc
0:10:00 h323 0:05:00 sip 0:30:00 sip_media 0:02:00
timeout uauth 0:05:00 absolute aaa-server TACACS+
protocol tacacs+ aaa-server RADIUS protocol radius http
server enable http 1.2.3.5 255.255.255.255 inside no
snmp-server location no snmp-server contact snmp-server
community public no snmp-server enable traps floodguard
enable ! !--- The sysopt command avoids conduit !--- on
the IPSec encrypted traffic.
```

```


sysopt connection permit-ipsec
no sysopt route dnat
!
!--- Phase 2 encryption type crypto ipsec transform-set
myset esp-des esp-md5-hmac
crypto dynamic-map dynmap 10 set transform-set myset
crypto map mymap 10 ipsec-isakmp dynamic dynmap
!
!--- Binding the IPSec engine on the outside interface.
crypto map mymap interface outside
!
!--- Enabling Internet Security Association and !--- Key
Management Protocol (ISAKMP) key exchange. isakmp enable
outside
isakmp identity address
!
!--- ISAKMP policy for VPN Client running 3.x or 4.x
code. isakmp policy 10 authentication pre-share
isakmp policy 10 encryption des
isakmp policy 10 hash md5
isakmp policy 10 group 2
isakmp policy 10 lifetime 86400
!
!--- IPsec group configuration for either VPN Client.
vpngroup vpn3000 address-pool ippool
vpngroup vpn3000 dns-server 10.1.1.2
vpngroup vpn3000 wins-server 10.1.1.2
vpngroup vpn3000 default-domain cisco.com
vpngroup vpn3000 idle-time 1800
vpngroup vpn3000 password *****
!--- To allow simultaneous access to the !--- internal
network and to the Internet. vpngroup vpn3000 split-
tunnel 101
telnet timeout 5
ssh timeout 5
terminal width 80
Cryptochecksum:94da63fc0bb8ce167407b3ea21c6642c
: end
[OK]

```


## Configuración de Cisco VPN Client

Complete estos pasos para crear una nueva conexión usando VPN Client.

1. Inicie el cliente VPN y luego haga clic en New (Nuevo) para crear una nueva conexión.

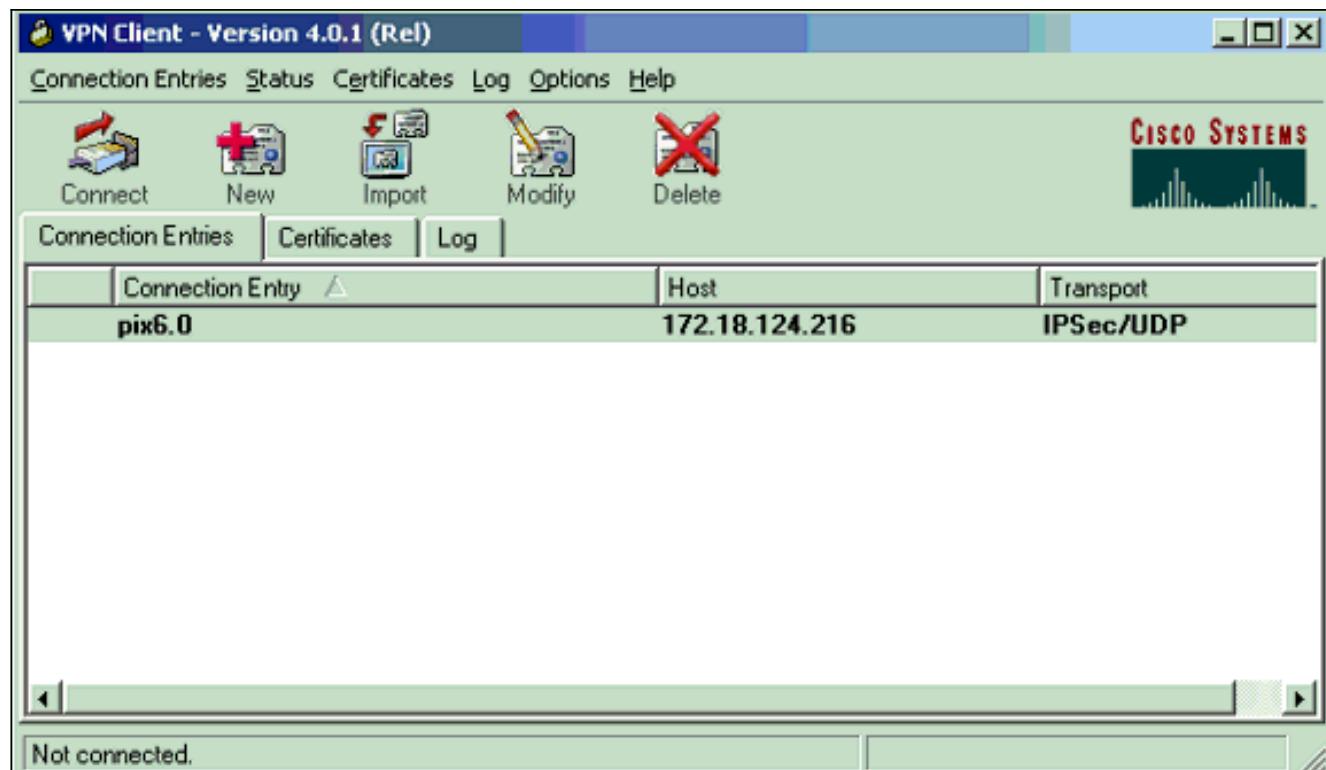


2. Ingrese la información de configuración para la nueva conexión. En el campo Connection Entry (Entrada de conexión), asigne un nombre a la entrada. En el campo Host, ingrese la dirección IP de la interfaz pública del PIX. Elija la pestaña Autenticación y luego ingrese el grupo y la contraseña (dos veces - para confirmación). Cuando haya terminado, haga clic en

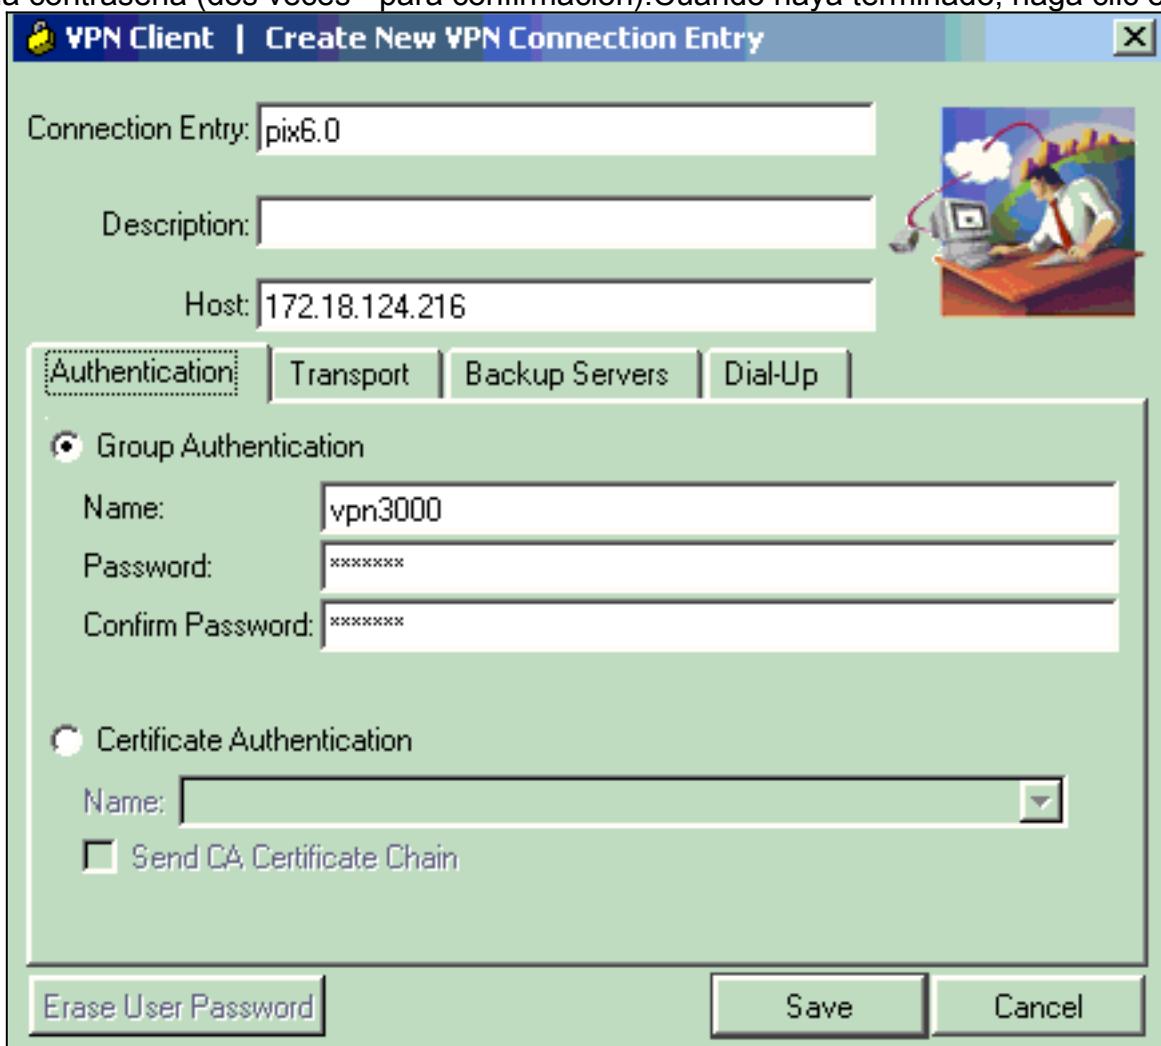

Guardar.

3. Haga clic en Connect (Conectar) para conectar con el

PIX.

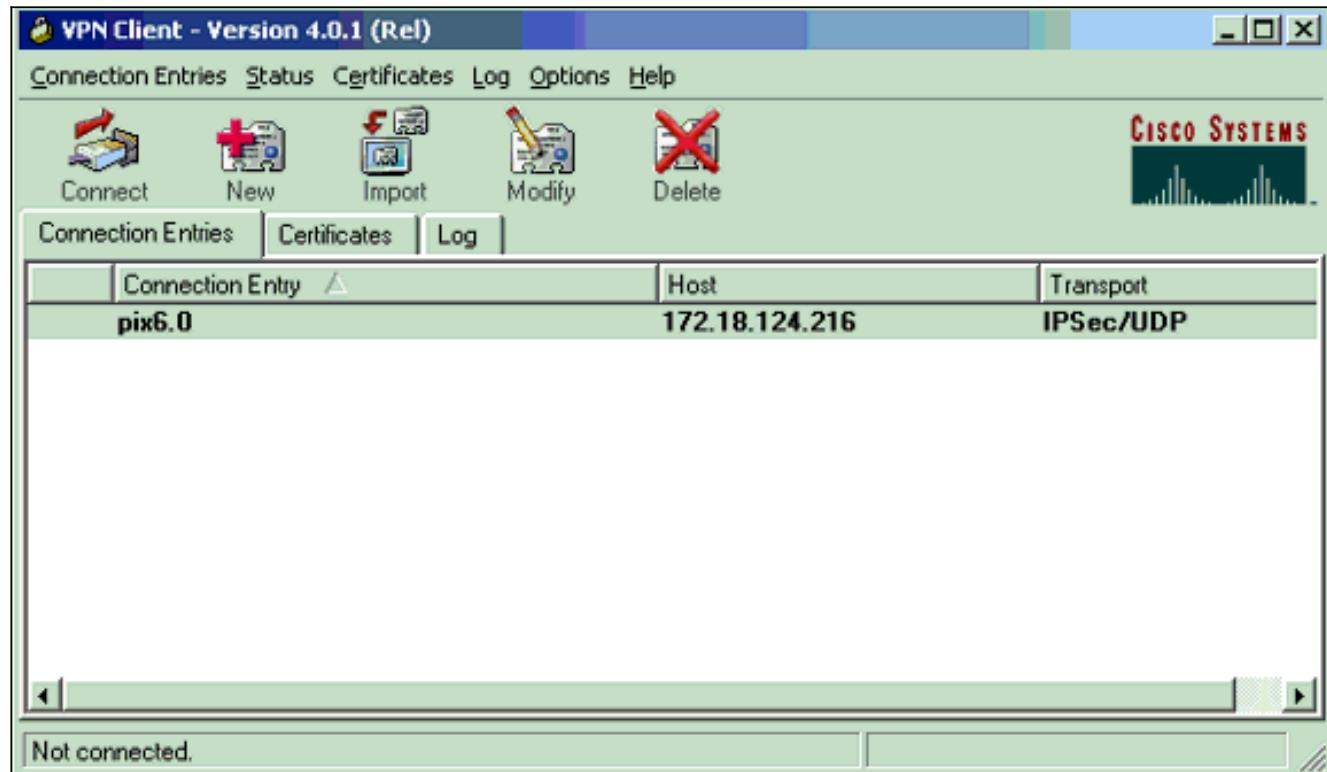

## Verificación

Use esta sección para confirmar que su configuración funciona correctamente.

[La herramienta Output Interpreter Tool \(clientes registrados solamente\) \(OIT\) soporta ciertos comandos show.](#) Utilice la OIT para ver un análisis del resultado del comando show.

- **show crypto isakmp sa:** vea todas las asociaciones de seguridad (SA) de Internet Key Exchange (IKE) actuales en un par.
- **show crypto ipsec sa:** vea la configuración utilizada por las SA actuales.

## Troubleshoot

Use esta sección para resolver problemas de configuración.

### Comandos para resolución de problemas

**Nota:** Consulte [Información Importante sobre Comandos Debug](#) antes de utilizar los comandos debug.

- **debug crypto ipsec:** se utiliza para ver las negociaciones IPSec de la fase 2.
- **debug crypto isakmp** —Utilícelo para ver las negociaciones ISAKMP de la fase 1.
- **debug crypto engine** — muestra el tráfico codificado.

### Ejemplo de resultado del comando debug

Este es un ejemplo de una depuración buena generada con el VPN 3.0.x Client de Cisco:

```
goss-d3-pix515b#debug crypto isakmp
goss-d3-pix515b#debug crypto ipsec
goss-d3-pix515b#debug crypto engine
goss-d3-pix515b#show debug
debug crypto ipsec 1
debug crypto isakmp 1
debug crypto engine
debug fover status
    tx      Off
    rx      Off
    open    Off
    cable   Off
    txdmp   Off
    rxdmp   Off
    ifc     Off
    rxip    Off
    txip    Off
    get     Off
    put     Off
    verify  Off
    switch  Off
    fail    Off
    fmsg    Off
goss-d3-pix515b# goss-d3-pix515b#
crypto_isakmp_process_block: src 172.18.124.96, dest 172.18.124.216
OAK_AG exchange
ISAKMP (0): processing SA payload. message ID = 0

ISAKMP (0): Checking ISAKMP transform 1 against priority 10 policy
ISAKMP:      encryption 3DES-CBC
ISAKMP:      hash SHA
ISAKMP:      default group 2
ISAKMP:      extended auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 2 against priority 10 policy
ISAKMP:      encryption 3DES-CBC
ISAKMP:      hash MD5
ISAKMP:      default group 2
ISAKMP:      extended auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 3 against priority 10 policy
ISAKMP:      encryption 3DES-CBC
ISAKMP:      hash SHA
ISAKMP:      default group 2
ISAKMP:      auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 4 against priority 10 policy
ISAKMP:      encryption 3DES-CBC
ISAKMP:      hash MD5
ISAKMP:      default group 2
ISAKMP:      auth pre-share
ISAKMP:      life type in seconds
ISAKMP:      life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 5 against priority 10 policy
ISAKMP:      encryption DES-CBC
```

```
ISAKMP: hash SHA
ISAKMP: default group 2
ISAKMP: extended auth pre-share
ISAKMP: life type in seconds
ISAKMP: life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 6 against priority 10 policy
ISAKMP: encryption DES-CBC
ISAKMP: hash MD5
ISAKMP: default group 2
ISAKMP: extended auth pre-share
ISAKMP: life type in seconds
ISAKMP: life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 7 against priority 10 policy
ISAKMP: encryption DES-CBC
ISAKMP: hash SHA
ISAKMP: default group 2
ISAKMP: auth pre-share
ISAKMP: life type in seconds
ISAKMP: life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are not acceptable. Next payload is 3
ISAKMP (0): Checking ISAKMP transform 8 against priority 10 policy
ISAKMP: encryption DES-CBC
ISAKMP: hash MD5
ISAKMP: default group 2
ISAKMP: auth pre-share
ISAKMP: life type in seconds
ISAKMP: life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are acceptable. Next payload is 0
ISAKMP (0): processing KE payload. message ID = 0

ISAKMP (0): processing NONCE payload. message ID = 0

ISAKMP (0): processing ID payload. message ID = 0
ISAKMP (0): processing vendor id payload

ISAKMP (0): processing vendor id payload

ISAKMP (0): remote peer supports dead peer detection

ISAKMP (0): processing vendor id payload

ISAKMP (0): speaking to a Unity client

ISAKMP: Created a peer node for 172.18.124.96
ISAKMP (0): ID payload
    next-payload : 10
    type         : 1
    protocol     : 17
    port          : 500
    length        : 8
ISAKMP (0): Total payload length: 12
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 172.18.124.96, dest 172.18.124.216
OAK_AG exchange
ISAKMP (0): processing HASH payload. message ID = 0
ISAKMP (0): processing NOTIFY payload 24578 protocol 1
    spi 0, message ID = 0
ISAKMP (0): processing notify INITIAL_CONTACT
IPSEC(key_engine): got a queue event...
IPSEC(key_engine_delete_sas): rec'd delete notify from ISAKMP
IPSEC(key_engine_delete_sas): delete all SAs shared
    with 172.18.124.96
```

```
ISAKMP (0): SA has been authenticated
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 172.18.124.96, dest 172.18.124.216
ISAKMP_TRANSACTION exchange
ISAKMP (0:0): processing transaction payload
    from 172.18.124.96. message ID = 0
ISAKMP: Config payload CFG_REQUEST
ISAKMP (0:0): checking request:
ISAKMP: attribute     IP4_ADDRESS (1)
ISAKMP: attribute     IP4_NETMASK (2)
ISAKMP: attribute     IP4_DNS (3)
ISAKMP: attribute     IP4_NBNS (4)
ISAKMP: attribute     ADDRESS_EXPIRY (5)
    Unsupported Attr: 5
ISAKMP: attribute     APPLICATION_VERSION (7)
    Unsupported Attr: 7
ISAKMP: attribute     UNKNOWN (28672)
    Unsupported Attr: 28672
ISAKMP: attribute     UNKNOWN (28673)
    Unsupported Attr: 28673
ISAKMP: attribute     UNKNOWN (28674)
ISAKMP: attribute     UNKNOWN (28676)
ISAKMP: attribute     UNKNOWN (28679)
    Unsupported Attr: 28679
ISAKMP (0:0): responding to peer config from 172.18.124.96.
    ID = 525416177
return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 172.18.124.96, dest 172.18.124.216
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_IDLE
ISAKMP (0): processing SA payload. message ID = 805890102

ISAKMP : Checking IPSec proposal 1

ISAKMP: transform 1, ESP_3DES
ISAKMP:   attributes in transform:
ISAKMP:     authenticator is HMAC-MD5
ISAKMP:     encaps is 1
ISAKMP:     SA life type in seconds
ISAKMP:     SA life duration (VPI) of 0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal (prot 3, trans 3,
    hmac_alg 1) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP (0): skipping next ANDed proposal (1)
ISAKMP : Checking IPSec proposal 2

ISAKMP: transform 1, ESP_3DES
ISAKMP:   attributes in transform:
ISAKMP:     authenticator is HMAC-SHA
ISAKMP:     encaps is 1
ISAKMP:     SA life type in seconds
ISAKMP:     SA life duration (VPI) of 0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal (prot 3, trans 3,
    hmac_alg 2) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP (0): skipping next ANDed proposal (2)
ISAKMP : Checking IPSec proposal 3

ISAKMP: transform 1, ESP_3DES
ISAKMP:   attributes in transform:
```

```
ISAKMP: authenticator is HMAC-MD5
ISAKMP: encaps is 1
ISAKMP: SA life type in seconds
ISAKMP: SA life duration (VPI) of 0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal (prot 3, trans 3,
    hmac_alg 1) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP : Checking IPSec proposal 4

ISAKMP: transform 1, ESP_3DES
ISAKMP: attributes in transform:
ISAKMP: authenticator is HMAC-SHA
ISAKMP: encaps is 1
ISAKMP: SA life type in seconds
ISAKMP: SA life duration (VPI) of 0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal (prot 3, trans 3,
    hmac_alg 2) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP : Checking IPSec proposal 5

ISAKMP: transform 1, ESP_DES
ISAKMP: attributes in transform:
ISAKMP: authenticator is HMAC-MD5
ISAKMP: encaps is 1
ISAKMP: SA life type in seconds
ISAKMP: SA life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are acceptable.
ISAKMP (0): bad SPI size of 2 octets!
ISAKMP : Checking IPSec proposal 6

ISAKMP: transform 1, ESP_DES
ISAKMP: attributes in transform:
ISAKMP: authenticator is HMAC-SHA
ISAKMP: encaps is 1
ISAKMP: SA life type in seconds
ISAKMP: SA life duration (VPI) of 0x0 0x20 0xc4 0x9b
IPSEC(validate_proposal): transform proposal (prot 3, trans 2,
    hmac_alg 2) not supported

ISAKMP (0): atts not acceptable. Next payload is 0
ISAKMP (0): skipping next ANDed proposal (6)
ISAKMP : Checking IPSec proposal 7

ISAKMP: transform 1, ESP_DES
ISAKMP: attributes in transform:
ISAKMP: authenticator is HMAC-MD5
ISAKMP: encaps is 1
ISAKMP: SA life type in seconds
ISAKMP: SA life duration (VPI) of 0x0 0x20 0xc4 0x9b
ISAKMP (0): atts are acceptable.
IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) dest= 172.18.124.216, src= 172.18.124.96,
dest_proxy= 172.18.124.216/255.255.255.255/0/0 (type=1),
src_proxy= 10.1.2.1/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4

ISAKMP (0): processing NONCE payload. message ID = 805890102
ISAKMP (0): processing ID payload. message ID = 805890102
ISAKMP (0): ID_IPV4_ADDR src 10.1.2.1 prot 0 port 0
```

```
ISAKMP (0): processing ID payload. message ID = 805890102
ISAKMP (0): ID_IPV4_ADDR dst 172.18.124.216 prot 0 port 0
IPSEC(key_engine): got a queue event...
IPSEC(spi_response): getting spi 0x13b00d31(330304817) for SA
    from 172.18.124.96 to 172.18.124.216 for prot 3

return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 172.18.124.96, dest 172.18.124.216
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_IDLE
ISAKMP (0): processing SA payload. message ID = 935083707

ISAKMP : Checking IPSec proposal 1

ISAKMP: transform 1, ESP_3DES
ISAKMP: attributes in transform:
ISAKMP: authenticator is HMAC-MD5
crypto_isakmp_process_block: src 172.18.124.96, dest 172.18.124.216
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_AUTH_WAITmap_alloc_entry: allocating entry 1
map_alloc_entry: allocating entry 2
ISAKMP (0): Creating IPsec SAs
    inbound SA from 172.18.124.96 to 172.18.124.216
(proxy      10.1.2.1 to 172.18.124.216)
    has spi 330304817 and conn_id 1 and flags 4
    lifetime of 2147483 seconds
    outbound SA from 172.18.124.216 to 172.18.124.96
(proxy 172.18.124.216 to          10.1.2.1)
    has spi 2130279708 and conn_id 2 and flags 4
    lifetime of 2147483 seconds
IPSEC(key_engine): got a queue event...
IPSEC(initialize_sas): ,
(key eng. msg.) dest= 172.18.124.216, src= 172.18.124.96,
    dest_proxy= 172.18.124.216/0.0.0.0/0/0 (type=1),
    src_proxy= 10.1.2.1/0.0.0.0/0/0 (type=1),
    protocol= ESP, transform= esp-des esp-md5-hmac ,
    lifedur= 2147483s and 0kb,
    spi= 0x13b00d31(330304817), conn_id= 1, keysiz= 0, flags= 0x4
IPSEC(initialize_sas): ,
(key eng. msg.) src= 172.18.124.216, dest= 172.18.124.96,
    src_proxy= 172.18.124.216/0.0.0.0/0/0 (type=1),
    dest_proxy= 10.1.2.1/0.0.0.0/0/0 (type=1),
    protocol= ESP, transform= esp-des esp-md5-hmac ,
    lifedur= 2147483s and 0kb,
    spi= 0x7ef97d1c(2130279708), conn_id= 2, keysiz= 0, flags= 0x4

return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 172.18.124.96, dest 172.18.124.216
OAK_QM exchange
oakley_process_quick_mode:
OAK_QM_AUTH_WAITmap_alloc_entry: allocating entry 3
map_alloc_entry: allocating entry 4

ISAKMP (0): Creating IPsec SAs
    inbound SA from 172.18.124.96 to 172.18.124.216
(proxy      10.1.2.1 to          0.0.0.0)
    has spi 4139858833 and conn_id 3 and flags 4
    lifetime of 2147483 seconds
    outbound SA from 172.18.124.216 to 172.18.124.96 (
proxy      0.0.0.0 to          10.1.2.1)
    has spi 1487433401 and conn_id 4 and flags 4
    lifetime of 2147483 seconds
IPSEC(key_engine): got a queue event...
```

```

IPSEC(initialize_sas):
(key eng. msg.) dest= 172.18.124.216, src= 172.18.124.96,
dest_proxy= 0.0.0.0/0.0.0.0/0/0 (type=4),
src_proxy= 10.1.2.1/0.0.0.0/0/0 (type=1),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 2147483s and 0kb,
spi= 0xf6IPSEC(initialize_sas):
(key eng. msg.) src= 172.18.124.216, dest= 172.18.124.96,
src_proxy= 0.0.0.0/0.0.0.0/0/0 (type=4),
dest_proxy= 10.1.2.1/0.0.0.0/0/0 (type=1),
protocol= ESP, transform= esp-des esp-md5-hmac ,
lifedur= 2147483s and 0kb,
spi= 0x58a86eb9(1487433401), conn_id= 4, keysize= 0, flags= 0x4

return status is IKMP_NO_ERROR
crypto_isakmp_process_block: src 172.18.124.96, dest 172.18.124.216
ISAKMP (0): processing NOTIFY payload 36136 protocol 1
    spi 0, message ID = 1617869510
ISAMKP (0): received DPD_R_U_THERE from peer 172.18.124.96
ISAKMP (0): sending NOTIFY message 36137 protocol 1
return status is IKMP_NO_ERR_NO_TRANS
goss-d3-pix515b#
goss-d3-pix515b#
goss-d3-pix515b#no debug crypto isakmp
goss-d3-pix515b#no debug crypto ipsec
goss-d3-pix515b#no debug crypto engine
goss-d3-pix515b#

```

## Información Relacionada

- [Páginas de Soporte de IPSec](#)
- [Referencias de Comandos de Cisco Secure PIX Firewall](#)
- [Página de Soporte de Cisco PIX 500 Series Security Appliances](#)
- [Solicitud de comentarios \(RFC\)](#)
- [Soporte Técnico y Documentación - Cisco Systems](#)