

Configuración de la inundación VXLAN y aprendizaje en Nexus 7K

Contenido

[Introducción](#)

[Prerequisites](#)

[Requirements](#)

[Componentes Utilizados](#)

[Configurar](#)

[Diagrama de la red](#)

[Configuraciones](#)

[VTEP-1](#)

[VTEP-2](#)

[Verificación](#)

[Ejemplos de resultados](#)

[VTEP-1](#)

[VTEP-2](#)

[Troubleshoot](#)

Introducción

Este documento describe la configuración de Inundación de LAN extensible virtual (VXLAN) y aprenda en switches Nexus serie 7000.

Prerequisites

Requirements

Cisco recomienda que tenga conocimiento sobre estos temas:

- Conceptos de routing multidifusión como punto de detección (RP, Rendezvous Point) y multidifusión independiente de la plataforma (PIM, Platform Independent Multicast).
- Conceptos de VXLAN

Nota: En este documento, se da por descontado que antes de la configuración de VXLAN se ha establecido el routing IP y el routing multidifusión.

Componentes Utilizados

La información que contiene este documento se basa en las siguientes versiones de software y hardware.

- N77-C7710


- N77-F348XP-23
- N77-F324FQ-25

Nota: N77K está ejecutando la versión de software 7.2(0)D1(1).

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Configurar

Diagrama de la red

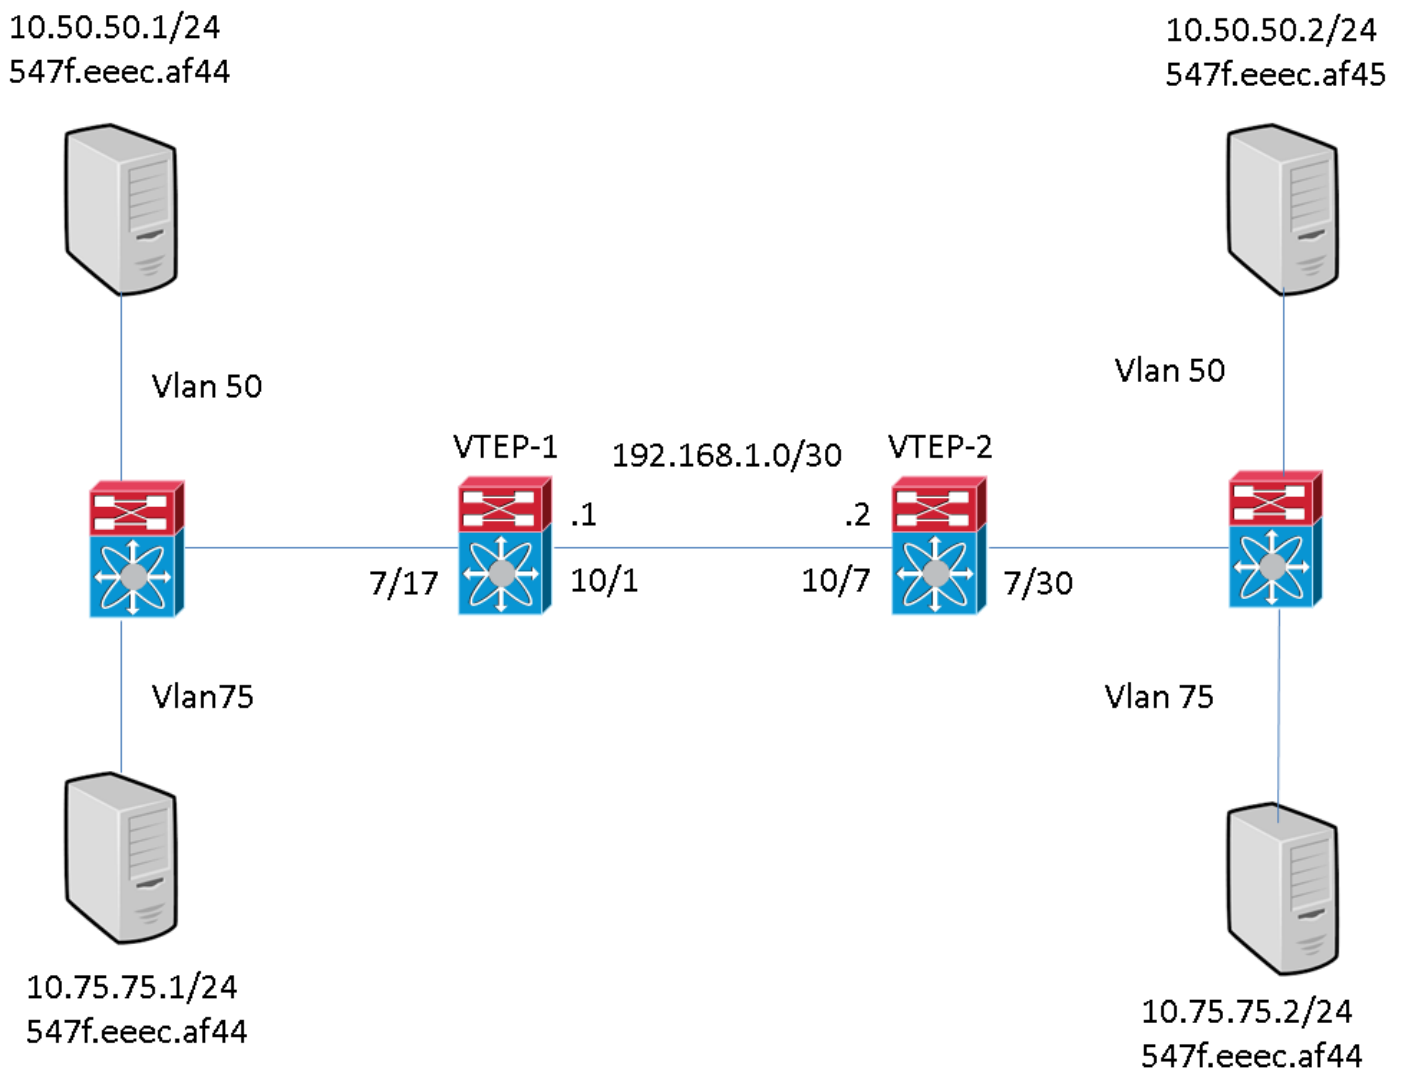

Configuraciones

Estas configuraciones son específicas para la parte de VXLAN de la configuración. Estas configuraciones dan por sentado que se puede llegar a todas las interfaces de L3 en la topología con el protocolo de routing que desee. En este ejemplo se utiliza el ruteo estático. También asume que el ruteo multicast se ha establecido sobre estas mismas interfaces L3

VTEP-1

```

feature pim
system bridge-domain 50,75
feature nv overlay
feature interface-vlan feature vni vni 5000
vni 7500 ip route 10.10.10.2/32 Ethernet10/1 192.168.1.2 ip pim rp-address 192.168.1.1 group-
list 224.0.0.0/4 bridge-domain 50
bridge-domain 75 encapsulation profile vni VSI_50_TO_5000 dot1q 50 vni 5000
encapsulation profile vni VSI_75_TO_7500
    dot1q 75 vni 7500 bridge-domain 50 member vni 5000
bridge-domain 75
    member vni 7500 interface nve1 no shutdown source-interface loopback10 member vni 5000 mcast-
group 225.1.1.1
member vni 7500 mcast-group 227.1.1.1

```

```

interface Bdi50
    no shutdown
    ip address 10.50.50.50/24

```

```

interface Bdi75
    no shutdown
    ip address 10.75.75.75/24 interface Ethernet7/17
no switchport no shutdown service instance 1 vni no shutdown encapsulation profile
VSI_50_TO_5000 default
    service instance 2 vni
        no shutdown
        encapsulation profile VSI_75_TO_7500 default interface Ethernet10/1
no switchport ip address 192.168.1.1/30 ip pim sparse-mode no shutdown interface loopback10 ip
address 10.10.10.1/32 ip pim sparse-mode

```

Es importante tener en cuenta que la interfaz interna en el VTEP (punto final del túnel Vxlan) está configurada como puerto de Capa 3 (sin puerto de switch). Sin embargo, no hay ninguna IP asignada. También es importante tener en cuenta que el valor BD definido en el VTEP no tiene que coincidir con el ID de vlan que se utiliza para enviar tráfico a este dispositivo. Sin embargo, el mapeo dot1q to VNI(Vxlan Network Identifier) definido en el perfil de encapsulación, al que se llama bajo la instancia de servicio en la interfaz interna, debe coincidir con el ID de VLAN.

VTEP-2

```

feature pim
system bridge-domain 50,75
feature nv overlay
feature interface-vlan feature vni vni 5000
vni 7500 ip route 10.10.10.1/32 Ethernet10/7 192.168.1.1 ip pim rp-address 192.168.1.1 group-
list 224.0.0.0/4 bridge-domain 50
bridge-domain 75 encapsulation profile vni VSI_50_TO_5000 dot1q 50 vni 5000
encapsulation profile vni VSI_75_TO_7500
    dot1q 75 vni 7500 bridge-domain 50 member vni 5000
bridge-domain 75
    member vni 7500 interface nve1 no shutdown source-interface loopback10 member vni 5000 mcast-
group 225.1.1.1
member vni 7500 mcast-group 227.1.1.1

```

```

interface Bdi50
    no shutdown
    ip address 10.50.50.51/24

```

```

interface Bdi75
    no shutdown
    ip address 10.75.75.76/24 interface Ethernet7/30
no switchport no shutdown service instance 1 vni no shutdown encapsulation profile

```

```
VSI_50_TO_5000 default
  service instance 2 vni
    no shutdown
    encapsulation profile VSI_75_TO_7500 default interface Ethernet10/7
no switchport ip address 192.168.1.2/30 ip pim sparse-mode no shutdown interface loopback10 ip
address 10.10.10.2/32 ip pim sparse-mode
```

Es importante tener en cuenta que la interfaz interna en el VTEP está configurada como puerto de Capa 3 (sin switchport). Sin embargo, no hay ninguna IP asignada. También es importante tener en cuenta que el valor BD definido en el VTEP no tiene que coincidir con el ID de VLAN que se utiliza para enviar tráfico a este dispositivo. Sin embargo, el mapeo de dot1q a VNI definido en el perfil de encapsulación, al que se llama bajo la instancia de servicio en la interfaz interna, debe coincidir con el ID de VLAN.

Verificación

Utilice esta sección para confirmar que su configuración funcione correctamente.

Ejemplos de resultados

Estos resultados son en un estado constante. Los pares VTEP se han descubierto y han intercambiado tráfico en la dirección de encapsulamiento y la de desencapsulamiento.

VTEP-1

```
VTEP-1# show nve vni
```

```
Codes: CP - Control Plane      DP - Data Plane
       UC - Unconfigured      SA - Suppress ARP
```

Interface	VNI	Multicast-group	State	Mode	Type [BD/VRF]	Flags
nve1	5000	225.1.1.1	Up	DP	L2 [50]	
nve1	7500	227.1.1.1	Up	DP	L2 [75]	

```
VTEP-1# show running-config interface nve 1
```

```
interface nve1
  no shutdown
  source-interface loopback10
  member vni 5000 mcast-group 225.1.1.1
  member vni 7500 mcast-group 227.1.1.1
```

```
VTEP-1# show service instance vni detail
```

```
VSI: VSI-Ethernet7/17.1
If-index: 0x35310001
Admin Status: Up
Oper Status: Up
Auto-configuration Mode: No
encapsulation profile vni VSI_50_TO_5000
  dot1q 50 vni 5000
Dot1q  VNI    BD
-----
50     5000   50
```

```
VSI: VSI-Ethernet7/17.2
If-index: 0x35310002
```

```

Admin Status: Up
Oper Status: Up
Auto-configuration Mode: No
encapsulation profile vni TEST
  dot1q 100 vni 7500
Dot1q  VNI      BD
-----
100    7500     75

```

```
VTEP-1# show bridge-domain
```

```
Bridge-domain 50 (2 ports in all)
```

```
Name:: Bridge-Domain50
```

```

Administrative State: UP           Operational State: UP
      VSI-Eth7/17.1
      vni5000
      nve1

```

```
Bridge-domain 75 (2 ports in all)
```

```
Name:: Bridge-Domain75
```

```

Administrative State: UP           Operational State: UP
      VSI-Eth7/17.2
      vni7500
      nve1

```

```
VTEP-1# show mac address-table dynamic
```

```

Note: MAC table entries displayed are getting read from software.
Use the 'hardware-age' keyword to get information related to 'Age'

```

```
Legend:
```

```

* - primary entry, G - Gateway MAC, (R) - Routed MAC, O - Overlay MAC
age - seconds since last seen,+ - primary entry using vPC Peer-Link, E -

```

```
EVPN entry
```

```
(T) - True, (F) - False , ~~~ - use 'hardware-age' keyword to retrieve
```

```
age info
```

```

VLAN/BD  MAC Address      Type      age      Secure NTFY Ports/SWID.SSID.LIID -----+-----
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
nve1/10.10.10.2 * 50 547f.eeec.af44 dynamic ~~~ F F VSI-Eth7/17.1 * 50 547f.eeec.af45 dynamic
~~~ F F nve1/10.10.10.2 * 75 547f.eeec.af44 dynamic ~~~ F F VSI-Eth7/17.2 * 75 547f.eeec.af45
dynamic ~~~ F F nve1/10.10.10.2 VTEP-1# show ip mroute detail IP Multicast Routing Table for VRF
"default" Total number of routes: 7 Total number of (*,G) routes: 2 Total number of (S,G)
routes: 4 Total number of (*,G-prefix) routes: 1 (*, 225.1.1.1/32), uptime: 19:51:28, nve(1)
ip(0) pim(1) Data Created: No VXLAN Flags VXLAN Encap Stats: 0/0 [Packets/Bytes], 0.000 bps
Incoming interface: Ethernet10/1, RPF nbr: 1.1.1.1 Outgoing interface list: (count: 2)
Ethernet10/1, uptime: 19:51:09, pim, (RPF) nve1, uptime: 19:51:28, nve (10.10.10.1/32,
225.1.1.1/32), uptime: 19:51:28, nve(0) mrib(0) ip(0) pim(1) Data Created: No Received Register
stop VXLAN Flags VXLAN Encap Stats: 19/2274 [Packets/Bytes], 0.000 bps Incoming interface:
loopback10, RPF nbr: 10.10.10.1, internal Outgoing interface list: (count: 1) Ethernet10/1,
uptime: 19:51:09, pim (10.10.10.2/32, 225.1.1.1/32), uptime: 18:10:06, pim(1) mrib(1) ip(0) Data
Created: Yes VXLAN Flags VXLAN Decap Stats: 9/846 [Packets/Bytes], 0.000 bps Incoming interface:
Ethernet10/1, RPF nbr: 1.1.1.2, internal Outgoing interface list: (count: 2) Ethernet10/1,
uptime: 01:00:32, pim, (RPF) nve1, uptime: 18:10:06, mrib (*, 227.1.1.1/32), uptime: 12:52:13,
nve(1) ip(0) pim(1) Data Created: No VXLAN Flags VXLAN Encap Stats: 0/0 [Packets/Bytes], 0.000
bps Incoming interface: Ethernet10/1, RPF nbr: 1.1.1.1 Outgoing interface list: (count: 2)
Ethernet10/1, uptime: 12:51:52, pim, (RPF) nve1, uptime: 12:52:13, nve (10.10.10.1/32,
227.1.1.1/32), uptime: 12:52:13, nve(0) mrib(0) ip(0) pim(1) Data Created: No Received Register
stop VXLAN Flags VXLAN Encap Stats: 300/39850 [Packets/Bytes], 0.000 bps Incoming interface:
loopback10, RPF nbr: 10.10.10.1, internal Outgoing interface list: (count: 1) Ethernet10/1,
uptime: 12:51:52, pim (10.10.10.2/32, 227.1.1.1/32), uptime: 12:51:34, pim(1) mrib(1) ip(0) Data
Created: Yes VXLAN Flags VXLAN Decap Stats: 22/1928 [Packets/Bytes], 0.000 bps Incoming
interface: Ethernet10/1, RPF nbr: 1.1.1.2, internal Outgoing interface list: (count: 2)
Ethernet10/1, uptime: 00:52:14, pim, (RPF) nve1, uptime: 12:51:34, mrib (*, 232.0.0.0/8),
uptime: 20:56:33, pim(0) ip(0) Data Created: No Stats: 0/0 [Packets/Bytes], 0.000 bps Incoming
interface: Null, RPF nbr: 0.0.0.0 Outgoing interface list: (count: 0) VTEP-1# show ip arp Flags:

```

```

* - Adjacencies learnt on non-active FHRP router + - Adjacencies synced via CFSOE # -
Adjacencies Throttled for Glean D - Static Adjacencies attached to down interface IP ARP Table
for context default Total number of entries: 4 Address Age MAC Address Interface 10.50.50.1
00:11:32 547f.eeec.af44 Bdi50
10.50.50.2 00:11:14 547f.eeec.af44 Bdi50 10.75.75.1 00:10:45 547f.eeec.af44 Bdi75 10.75.75.2
00:15:04 547f.eeec.af45 Bdi75 192.168.1.2 00:05:39 547f.eeec.af43 Ethernet10/1 VTEP-1# show ip
route IP Route Table for VRF "default" '*' denotes best ucast next-hop '**' denotes best mcast
next-hop '[x/y]' denotes [preference/metric] '%<string>' in via output denotes VRF <string>
192.168.1.0/30, ubest/mbest: 1/0, attached *via 1.1.1.1, Eth10/1, [0/0], 20:25:13, direct
192.168.1.1/32, ubest/mbest: 1/0, attached *via 1.1.1.1, Eth10/1, [0/0], 20:25:13, local
10.10.10.1/32, ubest/mbest: 2/0, attached *via 10.10.10.1, Lo10, [0/0], 20:25:45, local *via
10.10.10.1, Lo10, [0/0], 20:25:45, direct 10.10.10.2/32, ubest/mbest: 1/0 *via 1.1.1.2, Eth10/1,
[1/0], 20:23:42, static 50.50.50.0/24, ubest/mbest: 1/0, attached *via 50.50.50.50, Bdi50,
[0/0], 01:18:47, direct 50.50.50.50/32, ubest/mbest: 1/0, attached *via 50.50.50.50, Bdi50,
[0/0], 01:18:47, local 75.75.75.0/24, ubest/mbest: 1/0, attached *via 75.75.75.75, Bdi75, [0/0],
01:10:05, direct 75.75.75.75/32, ubest/mbest: 1/0, attached *via 75.75.75.75, Bdi75, [0/0],
01:10:05, local

```

Nota: Todas estas salidas se recopilaron con una malla completa de tráfico que fluye entre todos los hosts de la topología.

VTEP-2

```
VTEP-2# show nve vni
```

```

Codes: CP - Control Plane          DP - Data Plane
       UC - Unconfigured           SA - Suppress ARP

```

Interface	VNI	Multicast-group	State	Mode	Type	[BD/VRF]	Flags
nve1	5000	225.1.1.1	Up	DP	L2	[50]	
nve1	7500	227.1.1.1	Up	DP	L2	[75]	

```
VTEP-2# show running-config interface nve 1
```

```

interface nve1
  no shutdown
  source-interface loopback10
  member vni 5000 mcast-group 225.1.1.1
  member vni 7500 mcast-group 227.1.1.1

```

```
VTEP-2# show service instance vni detail
```

```

VSI: VSI-Ethernet7/30.1
If-index: 0x3531d001
Admin Status: Up
Oper Status: Up
Auto-configuration Mode: No
encapsulation profile vni VSI_50_TO_5000
  dot1q 50 vni 5000
Dot1q  VNI      BD
-----
50      5000     50

```

```

VSI: VSI-Ethernet7/30.2
If-index: 0x3531d002
Admin Status: Up
Oper Status: Up
Auto-configuration Mode: No
encapsulation profile vni TEST
  dot1q 100 vni 7500

```

```

Dot1q  VNI    BD
-----
100    7500   75

```

VTEP-2# show bridge-domain

Bridge-domain 50 (2 ports in all)

Name:: Bridge-Domain50

```

Administrative State: UP           Operational State: UP
      vni5000
      VSI-Eth7/30.1
      nve1

```

Bridge-domain 75 (2 ports in all)

Name:: Bridge-Domain75

```

Administrative State: UP           Operational State: UP
      vni7500
      VSI-Eth7/30.2
      nve1

```

VTEP-2# show mac address-table dynamic

Note: MAC table entries displayed are getting read from software.
 Use the 'hardware-age' keyword to get information related to 'Age'

Legend:

* - primary entry, G - Gateway MAC, (R) - Routed MAC, O - Overlay MAC
 age - seconds since last seen, + - primary entry using vPC Peer-Link, E -
 EVPN entry
 (T) - True, (F) - False , ~~~ - use 'hardware-age' keyword to retrieve

age info

```

VLAN/BD  MAC Address      Type      age      Secure NTFY Ports/SWID.SSID.LID -----+-----
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
nve1/10.10.10.1 * 50 547f.eeec.af45 dynamic ~~~ F F VSI-Eth7/30.1 * 75 547f.eeec.af45 dynamic
~~~ F F VSI-Eth7/30.2 * 75 547f.eeec.af48 dynamic ~~~ F F nve1/10.10.10.1 VTEP-2# show ip mroute
detail IP Multicast Routing Table for VRF "default" Total number of routes: 5 Total number of
(*,G) routes: 2 Total number of (S,G) routes: 2 Total number of (*,G-prefix) routes: 1 (*,
225.1.1.1/32), uptime: 19:56:19, nve(1) ip(0) pim(0) Data Created: No VXLAN Flags VXLAN Encap
Stats: 8/748 [Packets/Bytes], 0.000 bps Incoming interface: Ethernet10/7, RPF nbr: 1.1.1.1
Outgoing interface list: (count: 1) nve1, uptime: 19:56:19, nve (10.10.10.2/32, 225.1.1.1/32),
uptime: 19:56:19, nve(0) mrib(0) pim(1) ip(0) Data Created: No Received Register stop VXLAN
Flags VXLAN Encap Stats: 9/834 [Packets/Bytes], 0.000 bps Incoming interface: loopback10, RPF
nbr: 10.10.10.2 Outgoing interface list: (count: 1) Ethernet10/7, uptime: 18:15:17, pim (*,
227.1.1.1/32), uptime: 12:57:03, nve(1) ip(0) pim(0) Data Created: No VXLAN Flags VXLAN Encap
Stats: 10/864 [Packets/Bytes], 0.000 bps Incoming interface: Ethernet10/7, RPF nbr: 1.1.1.1
Outgoing interface list: (count: 1) nve1, uptime: 12:57:03, nve (10.10.10.2/32, 227.1.1.1/32),
uptime: 12:57:03, nve(0) mrib(0) ip(0) pim(1) Data Created: No Received Register stop VXLAN
Flags VXLAN Encap Stats: 30/2648 [Packets/Bytes], 0.000 bps Incoming interface: loopback10, RPF
nbr: 10.10.10.2 Outgoing interface list: (count: 1) Ethernet10/7, uptime: 12:56:45, pim (*,
232.0.0.0/8), uptime: 18:20:36, pim(0) ip(0) Data Created: No Stats: 0/0 [Packets/Bytes], 0.000
bps Incoming interface: Null, RPF nbr: 0.0.0.0 Outgoing interface list: (count: 0) VTEP-2# show
ip arp Flags: * - Adjacencies learnt on non-active FHRP router + - Adjacencies synced via CFSOE
# - Adjacencies Throttled for Glean D - Static Adjacencies attached to down interface IP ARP
Table for context default Total number of entries: 4 Address Age MAC Address Interface
10.50.50.1 00:11:30 547f.eeec.af44 Bdi50 10.50.50.2 00:17:07 547f.eeec.af45 Bdi50
10.75.75.1 00:04:14 547f.eeec.af45 Bdi75 10.75.75.2 00:03:24 547f.eeec.af45 Bdi75 192.168.1.1
00:10:52 547f.eeec.af48 Ethernet10/7 VTEP-2# show ip route IP Route Table for VRF "default" '*'
denotes best ucast next-hop '**' denotes best mcast next-hop '[x/y]' denotes [preference/metric]
'%<string>' in via output denotes VRF <string> 192.168.1.0/30, ubest/mbest: 1/0, attached *via
1.1.1.2, Eth10/7, [0/0], 20:30:24, direct 192.168.1.2/32, ubest/mbest: 1/0, attached *via
1.1.1.2, Eth10/7, [0/0], 20:30:24, local 10.10.10.1/32, ubest/mbest: 1/0 *via 1.1.1.1, Eth10/7,
[1/0], 20:29:48, static 10.10.10.2/32, ubest/mbest: 2/0, attached *via 10.10.10.2, Lo10, [0/0],
20:29:39, local *via 10.10.10.2, Lo10, [0/0], 20:29:39, direct 50.50.50.0/24, ubest/mbest: 1/0,
attached *via 50.50.50.51, Bdi50, [0/0], 01:22:50, direct 50.50.50.51/32, ubest/mbest: 1/0,
attached *via 50.50.50.51, Bdi50, [0/0], 01:22:50, local 75.75.75.0/24, ubest/mbest: 1/0,

```

attached *via 75.75.75.76, Bdi75, [0/0], 01:14:50, direct 75.75.75.76/32, ubest/mbest: 1/0,
attached *via 75.75.75.76, Bdi75, [0/0], 01:14:50, local

Nota: Todas estas salidas se recopilaron con una malla completa de tráfico que fluye entre todos los hosts de la topología.

Troubleshoot

Actualmente, no hay información específica de troubleshooting disponible para esta configuración.