

# LAN-to-LAN IPsec tunnelheid tussen twee routers en configuratievoorbeeld

## Inhoud

[Inleiding](#)

[Voorwaarden](#)

[Vereisten](#)

[Gebruikte componenten](#)

[Conventies](#)

[Configureren](#)

[Netwerkdigram](#)

[Configuraties](#)

[Verifiëren](#)

[Problemen oplossen](#)

[Opdrachten voor probleemoplossing](#)

[Monster debug-uitvoer](#)

[router](#)

[Gerelateerde informatie](#)

## Inleiding

Dit document biedt een voorbeeldconfiguratie voor hoe u VPN-gebruikers toegang tot het internet kunt geven terwijl u verbinding maakt via een IPsec LAN-to-LAN (L2L)-tunnel naar een andere router. Deze configuratie wordt bereikt als u splitsingen voor tunneling mogelijk maakt. Split-tunneling maakt het voor VPN-gebruikers mogelijk om toegang te krijgen tot bedrijfsmiddelen via de IPsec-tunnel en tegelijkertijd toegang tot internet te verlenen.

## Voorwaarden

### Vereisten

Er zijn geen specifieke vereisten van toepassing op dit document.

### Gebruikte componenten

De informatie in dit document is gebaseerd op een Cisco 3640 router met Cisco IOS<sup>®</sup> softwarerelease 12.4.

De informatie in dit document is gebaseerd op de apparaten in een specifieke laboratoriumomgeving. Alle apparaten die in dit document worden beschreven, hadden een opgeschoonde (standaard)configuratie. Als uw netwerk live is, moet u de potentiële impact van elke opdracht begrijpen.

### Conventies


Raadpleeg de [Cisco Technical Tips Convention](#) voor meer informatie over documentconventies.

## Configureren

Deze sectie bevat informatie over het configureren van de functies die in dit document worden beschreven.

## Netwerkdigram

Het netwerk in dit document is als volgt opgebouwd:

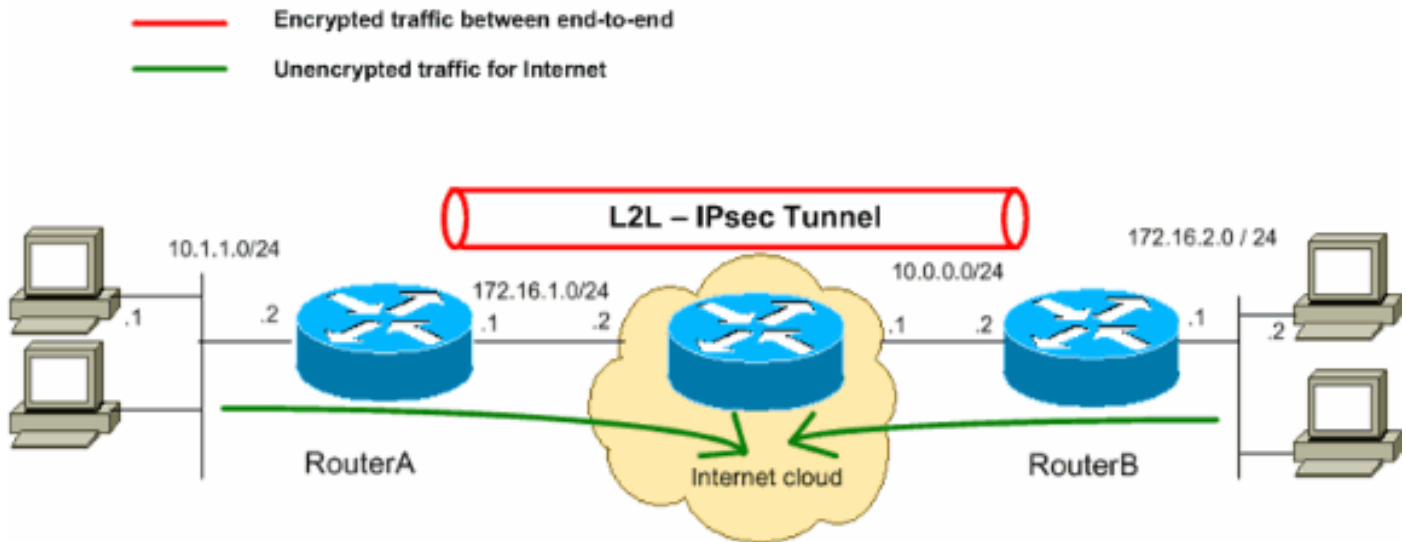

**Opmerking:** de IP-adresseringsschema's die in deze configuratie worden gebruikt, zijn niet wettelijk routeerbaar op het internet. Het zijn [RFC 1918](#) adressen die in een labomgeving gebruikt zijn.

## Configuraties

Dit document gebruikt deze configuraties:

- [router A](#)
- [router B](#)

### router A

```
RouterA#show running-config
Building configuration...
```

```
Current configuration : 1132 bytes
!
version 12.4
service timestamps debug datetime msec
service timestamps log datetime msec
no service password-encryption
!
hostname R9
!
boot-start-marker
boot-end-marker
```

```

!
!
no aaa new-model
!
resource policy
!
!
!--- Create an ISAKMP policy for Phase 1
!--- negotiations for the L2L tunnels. crypto isakmp policy 10 hash md5 authentication pre-share !--- S
the pre-shared key and the remote peer address
!--- to match for the L2L tunnel. crypto isakmp key vpnuser address 10.0.0.2 ! !--- Create the Phase 2
for actual data encryption. crypto ipsec transform-set myset esp-des esp-md5-hmac ! !--- Create the act
crypto map. Specify
!--- the peer IP address, transform
!--- set, and an access control list (ACL) for the split tunneling. crypto map mymap 10 ipsec-isakmp se
10.0.0.2 set transform-set myset match address 100 ! ! ! ! interface Ethernet0/0 ip address 10.1.1.2
255.255.255.0 half-duplex ! !--- Apply the crypto map on the outside interface. interface Serial2/0 ip
address 172.16.1.1 255.255.255.0 crypto map mymap ! ip http server no ip http secure-server ! ip route
0.0.0.0 0.0.0.0 172.16.1.2 ! !--- Create an ACL for the traffic to
!--- be encrypted. In this example,
!--- the traffic from 10.1.1.0/24 to 172.16.2.0/24
!--- is encrypted. The traffic which does not match the access list
!--- is unencrypted for the Internet. access-list 100 permit ip 10.1.1.0 0.0.0.255 172.16.2.0 0.0.0.255
control-plane ! line con 0 line aux 0 line vty 0 4 ! ! end

```

## router B

```

RouterB#show running-config
Building configuration...

```

```

Current configuration : 835 bytes

```

```

!
version 12.4
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname R2
!
!
ip subnet-zero
!
!
!--- Create an ISAKMP policy for Phase 1
!--- negotiations for the L2L tunnels. crypto isakmp policy 10 hash md5 authentication pre-share !--- S
the pre-shared key and the remote peer address
!--- to match for the L2L tunnel. crypto isakmp key vpnuser address 172.16.1.1 ! !--- Create the Phase
policy for actual data encryption. crypto ipsec transform-set myset esp-des esp-md5-hmac ! !--- Create
actual crypto map. Specify
!--- the peer IP address, transform
!--- set, and an ACL for the split tunneling. ! crypto map mymap 10 ipsec-isakmp set peer 172.16.1.1 se
transform-set myset match address 100 ! ! ! ! interface Ethernet0 ip address 172.16.2.1 255.255.255.0 !
Apply the crypto map on the outside interface. interface Ethernet1 ip address 10.0.0.2 255.255.255.0 cr
map mymap ! interface Serial0 no ip address shutdown no fair-queue ! interface Serial1 no ip address sh
! ip classless ip route 0.0.0.0 0.0.0.0 10.0.0.1 ip http server ! !--- Create an ACL for the traffic to
!--- be encrypted. In this example,
!--- the traffic from 172.16.2.0/24 to 10.1.1.0/24
!--- is encrypted. The traffic which does not match the access list
!--- is unencrypted for the Internet. access-list 100 permit ip 172.16.2.0 0.0.0.255 10.1.1.0 0.0.0.255
line con 0 line aux 0 line vty 0 4 ! end

```

# Verifiëren

Deze sectie verschaft informatie die u kunt gebruiken om te bevestigen dat uw configuratie correct werkt.

De [Cisco CLI Analyzer](#) (alleen geregistreerde klanten) ondersteunt bepaalde **show**-opdrachten. Gebruik de Cisco CLI Analyzer om een analyse van de opdrachtoutput te bekijken.

- **toon crypto ipsec sa** - toont de instellingen die worden gebruikt door huidige Security Associations (SAs).

```
RouterA#show crypto ipsec sa
```

```
interface: Serial2/0
  Crypto map tag: mymap, local addr 172.16.1.1

protected vrf: (none)
local ident (addr/mask/prot/port): (10.1.1.0/255.255.255.0/0/0)
remote ident (addr/mask/prot/port): (172.16.2.0/255.255.255.0/0/0)
current_peer 10.0.0.2 port 500
  PERMIT, flags={origin_is_acl,}
#pkts encaps: 43, #pkts encrypt: 43, #pkts digest: 43
#pkts decaps: 43, #pkts decrypt: 43, #pkts verify: 43
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0
#pkts not decompressed: 0, #pkts decompress failed: 0
#send errors 4, #recv errors 0

local crypto endpt.: 172.16.1.1, remote crypto endpt.: 10.0.0.2
path mtu 1500, ip mtu 1500, ip mtu idb Serial2/0
current outbound spi: 0x267BC43(40352835)

inbound esp sas:
  spi: 0xD9F4BC76(3656694902)
    transform: esp-des esp-md5-hmac ,
    in use settings ={Tunnel, }
    conn id: 2001, flow_id: SW:1, crypto map: mymap
    sa timing: remaining key lifetime (k/sec): (4558868/3550)
    IV size: 8 bytes
    replay detection support: Y
    Status: ACTIVE

inbound ah sas:

inbound pcp sas:

outbound esp sas:
  spi: 0x267BC43(40352835)
    transform: esp-des esp-md5-hmac ,
    in use settings ={Tunnel, }
    conn id: 2002, flow_id: SW:2, crypto map: mymap
    sa timing: remaining key lifetime (k/sec): (4558868/3548)
    IV size: 8 bytes
    replay detection support: Y
    Status: ACTIVE

outbound ah sas:

outbound pcp sas:
```

- **toon crypto isakmp sa** - laat alle huidige IKE SA's bij een peer zien.

```
RouterA#show crypto isakmp sa
```

dst	src	state	conn-id	slot	status
10.0.0.2	172.16.1.1	QM_IDLE	1	0	ACTIVE

## Problemen oplossen

Deze sectie bevat informatie waarmee u problemen met de configuratie kunt oplossen. Ook wordt een voorbeelduitvoer van debug-uitvoer weergegeven.

### Opdrachten voor probleemoplossing

De [Cisco CLI Analyzer](#) ([alleen geregistreerde](#) klanten) ondersteunt bepaalde **show**-opdrachten. Gebruik de Cisco CLI Analyzer om een analyse van de opdrachtoutput te bekijken.

**Opmerking:** Raadpleeg [Belangrijke informatie over debug Commands](#) voordat u debug-opdrachten gebruikt.

- **debug crypto isakmp** - Hiermee geeft u de ISAKMP-onderhandelingen van fase 1 weer.
- **debug crypto ipsec** - Hiermee geeft u de IPsec-onderhandelingen van fase 2 weer.

### Monster debug-uitvoer

router

```
RouterA#debug crypto isakmp
*Sep 29 22:50:35.511: ISAKMP: received ke message (1/1)
*Sep 29 22:50:35.511: ISAKMP:(0:0:N/A:0): SA request profile is (NULL)
*Sep 29 22:50:35.511: ISAKMP: Created a peer struct for 10.0.0.2, peer port 500
*Sep 29 22:50:35.511: ISAKMP: New peer created peer = 0x64C0EF54 peer_handle = 0
x8000000C
*Sep 29 22:50:35.515: ISAKMP: Locking peer struct 0x64C0EF54, IKE refcount 1 for
isakmp_initiator
*Sep 29 22:50:35.515: ISAKMP: local port 500, remote port 500
*Sep 29 22:50:35.515: ISAKMP: set new node 0 to QM_IDLE
*Sep 29 22:50:35.515: ISAKMP: Find a dup sa in the avl tree during calling isadb
_insert sa = 64CDBF3C
*Sep 29 22:50:35.515: ISAKMP:(0:0:N/A:0):Can not start Aggressive mode, trying M
ain mode.
*Sep 29 22:50:35.515: ISAKMP:(0:0:N/A:0):found peer pre-shared key matching 10.0
.0.2
*Sep 29 22:50:35.515: ISAKMP:(0:0:N/A:0): constructed NAT-T vendor-07 ID
*Sep 29 22:50:35.519: ISAKMP:(0:0:N/A:0): constructed NAT-T vendor-03 ID
*Sep 29 22:50:35.519: ISAKMP:(0:0:N/A:0): constructed NAT-T vendor-02 ID
*Sep 29 22:50:35.519: ISAKMP:(0:0:N/A:0):Input = IKE_MSG_FROM_IPSEC, IKE_SA_REQ
_MM
*Sep 29 22:50:35.519: ISAKMP:(0:0:N/A:0):Old State = IKE_READY New State = IKE_
I_MM1

*Sep 29 22:50:35.519: ISAKMP:(0:0:N/A:0): beginning Main Mode exchange
*Sep 29 22:50:35.519: ISAKMP:(0:0:N/A:0): sending packet to 10.0.0.2 my_port 500
peer_port 500 (I) MM_NO_STATE
*Sep 29 22:50:38.451: ISAKMP (0:0): received packet from 10.0.0.2 dport 500 spor
t 500 Global (I) MM_NO_STATE
*Sep 29 22:50:38.451: ISAKMP:(0:0:N/A:0):Input = IKE_MSG_FROM_PEER, IKE_MM_EXCH
*Sep 29 22:50:38.451: ISAKMP:(0:0:N/A:0):Old State = IKE_I_MM1 New State = IKE_
I_MM2
```

\*Sep 29 22:50:38.455: ISAKMP:(0:0:N/A:0): processing SA payload. message ID = 0  
\*Sep 29 22:50:38.455: ISAKMP:(0:0:N/A:0):found peer pre-shared key matching 10.0.0.2  
\*Sep 29 22:50:38.455: ISAKMP:(0:0:N/A:0): local preshared key found  
\*Sep 29 22:50:38.455: ISAKMP : Scanning profiles for xauth ...  
\*Sep 29 22:50:38.455: ISAKMP:(0:0:N/A:0):Checking ISAKMP transform 1 against priority 10 policy  
\*Sep 29 22:50:38.455: ISAKMP: encryption DES-CBC  
\*Sep 29 22:50:38.455: ISAKMP: hash MD5  
\*Sep 29 22:50:38.455: ISAKMP: default group 1  
\*Sep 29 22:50:38.455: ISAKMP: auth pre-share  
\*Sep 29 22:50:38.459: ISAKMP: life type in seconds  
\*Sep 29 22:50:38.459: ISAKMP: life duration (VPI) of 0x0 0x1 0x51 0x80  
\*Sep 29 22:50:38.459: ISAKMP:(0:0:N/A:0):atts are acceptable. Next payload is 0  
\*Sep 29 22:50:38.547: ISAKMP:(0:4:SW:1):Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE  
\*Sep 29 22:50:38.547: ISAKMP:(0:4:SW:1):Old State = IKE\_I\_MM2 New State = IKE\_I\_MM2  
  
\*Sep 29 22:50:38.551: ISAKMP:(0:4:SW:1): sending packet to 10.0.0.2 my\_port 500 peer\_port 500 (I) MM\_SA\_SETUP  
\*Sep 29 22:50:38.551: ISAKMP:(0:4:SW:1):Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
\*Sep 29 22:50:38.551: ISAKMP:(0:4:SW:1):Old State = IKE\_I\_MM2 New State = IKE\_I\_MM3  
  
\*Sep 29 22:50:42.091: ISAKMP (0:134217732): received packet from 10.0.0.2 dport 500 sport 500 Global (I) MM\_SA\_SETUP  
\*Sep 29 22:50:42.095: ISAKMP:(0:4:SW:1):Input = IKE\_MSG\_FROM\_PEER, IKE\_MM\_EXCH  
\*Sep 29 22:50:42.095: ISAKMP:(0:4:SW:1):Old State = IKE\_I\_MM3 New State = IKE\_I\_MM4  
  
\*Sep 29 22:50:42.095: ISAKMP:(0:4:SW:1): processing KE payload. message ID = 0  
\*Sep 29 22:50:42.203: ISAKMP:(0:4:SW:1): processing NONCE payload. message ID = 0  
\*Sep 29 22:50:42.203: ISAKMP:(0:4:SW:1):found peer pre-shared key matching 10.0.0.2  
\*Sep 29 22:50:42.207: ISAKMP:(0:4:SW:1):SKEYID state generated  
\*Sep 29 22:50:42.207: ISAKMP:(0:4:SW:1): processing vendor id payload  
\*Sep 29 22:50:42.207: ISAKMP:(0:4:SW:1): speaking to another IOS box!  
\*Sep 29 22:50:42.207: ISAKMP:(0:4:SW:1):Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_MAIN\_MODE  
\*Sep 29 22:50:42.207: ISAKMP:(0:4:SW:1):Old State = IKE\_I\_MM4 New State = IKE\_I\_MM4  
  
\*Sep 29 22:50:42.211: ISAKMP:(0:4:SW:1):Send initial contact  
\*Sep 29 22:50:42.215: ISAKMP:(0:4:SW:1):SA is doing pre-shared key authentication using id type ID\_IPV4\_ADDR  
\*Sep 29 22:50:42.215: ISAKMP (0:134217732): ID payload  
    next-payload : 8  
    type : 1  
    address : 172.16.1.1  
    protocol : 17  
    port : 500  
    length : 12  
\*Sep 29 22:50:42.215: ISAKMP:(0:4:SW:1):Total payload length: 12  
\*Sep 29 22:50:42.215: ISAKMP:(0:4:SW:1): sending packet to 10.0.0.2 my\_port 500 peer\_port 500 (I) MM\_KEY\_EXCH  
\*Sep 29 22:50:42.219: ISAKMP:(0:4:SW:1):Input = IKE\_MSG\_INTERNAL, IKE\_PROCESS\_COMPLETE  
\*Sep 29 22:50:42.219: ISAKMP:(0:4:SW:1):Old State = IKE\_I\_MM4 New State = IKE\_I\_MM5

```

*Sep 29 22:50:42.783: ISAKMP (0:134217732): received packet from 10.0.0.2 dport
500 sport 500 Global (I) MM_KEY_EXCH
*Sep 29 22:50:42.783: ISAKMP:(0:4:SW:1): processing ID payload. message ID = 0
*Sep 29 22:50:42.783: ISAKMP (0:134217732): ID payload
    next-payload : 8
    type          : 1
    address       : 10.0.0.2
    protocol      : 17
    port          : 500
    length        : 12
*Sep 29 22:50:42.783: ISAKMP:(0:4:SW:1):: peer matches *none* of the profiles
*Sep 29 22:50:42.787: ISAKMP:(0:4:SW:1): processing HASH payload. message ID = 0
*Sep 29 22:50:42.787: ISAKMP:(0:4:SW:1):SA authentication status:
    authenticated
*Sep 29 22:50:42.787: ISAKMP:(0:4:SW:1):SA has been authenticated with 10.0.0.2
*Sep 29 22:50:42.787: ISAKMP: Trying to insert a peer 172.16.1.1/10.0.0.2/500/,
and inserted successfully 64C0EF54.
*Sep 29 22:50:42.787: ISAKMP:(0:4:SW:1):Input = IKE_MESG_FROM_PEER, IKE_MM_EXCH
*Sep 29 22:50:42.787: ISAKMP:(0:4:SW:1):Old State = IKE_I_MM5 New State = IKE_I
_MM6

*Sep 29 22:50:42.791: ISAKMP:(0:4:SW:1):Input = IKE_MESG_INTERNAL, IKE_PROCESS_M
AIN_MODE
*Sep 29 22:50:42.791: ISAKMP:(0:4:SW:1):Old State = IKE_I_MM6 New State = IKE_I
_MM6

*Sep 29 22:50:42.795: ISAKMP:(0:4:SW:1):Input = IKE_MESG_INTERNAL, IKE_PROCESS_C
OMplete
*Sep 29 22:50:42.795: ISAKMP:(0:4:SW:1):Old State = IKE_I_MM6 New State = IKE_P
1_COMPLETE

*Sep 29 22:50:42.799: ISAKMP:(0:4:SW:1):beginning Quick Mode exchange, M-ID of -
966196463
*Sep 29 22:50:42.803: ISAKMP:(0:4:SW:1): sending packet to 10.0.0.2 my_port 500
peer_port 500 (I) QM_IDLE
*Sep 29 22:50:42.803: ISAKMP:(0:4:SW:1):Node -966196463, Input = IKE_MESG_INTERN
AL, IKE_INIT_QM
*Sep 29 22:50:42.803: ISAKMP:(0:4:SW:1):Old State = IKE_QM_READY New State = IK
E_QM_I_QM1

!--- IKE Phase 1 is completed successfully. *Sep 29 22:50:42.803: ISAKMP:(0:4:SW:1):Input =
IKE_MESG_INTERNAL, IKE_PHASE1_CO
MPLETE
*Sep 29 22:50:42.803: ISAKMP:(0:4:SW:1):Old State = IKE_P1_COMPLETE New State =
IKE_P1_COMPLETE

*Sep 29 22:50:43.907: ISAKMP (0:134217732): received packet from 10.0.0.2 dport
500 sport 500 Global (I) QM_IDLE
*Sep 29 22:50:43.911: ISAKMP:(0:4:SW:1): processing HASH payload. message ID = -
966196463
*Sep 29 22:50:43.911: ISAKMP:(0:4:SW:1): processing SA payload. message ID = -96
6196463
*Sep 29 22:50:43.911: ISAKMP:(0:4:SW:1):Checking IPsec proposal 1
*Sep 29 22:50:43.911: ISAKMP: transform 1, ESP_DES
*Sep 29 22:50:43.911: ISAKMP:   attributes in transform:
*Sep 29 22:50:43.915: ISAKMP:     encaps is 1 (Tunnel)
*Sep 29 22:50:43.915: ISAKMP:     SA life type in seconds
*Sep 29 22:50:43.915: ISAKMP:     SA life duration (basic) of 3600
*Sep 29 22:50:43.915: ISAKMP:     SA life type in kilobytes
*Sep 29 22:50:43.915: ISAKMP:     SA life duration (VPI) of 0x0 0x46 0x50 0x0
*Sep 29 22:50:43.915: ISAKMP:     authenticator is HMAC-MD5
*Sep 29 22:50:43.915: ISAKMP:(0:4:SW:1):atts are acceptable.
*Sep 29 22:50:43.915: ISAKMP:(0:4:SW:1): processing NONCE payload. message ID =
-966196463

```

```
*Sep 29 22:50:43.919: ISAKMP:(0:4:SW:1): processing ID payload. message ID = -96
6196463
*Sep 29 22:50:43.919: ISAKMP:(0:4:SW:1): processing ID payload. message ID = -96
6196463
*Sep 29 22:50:43.923: ISAKMP: Locking peer struct 0x64C0EF54, IPSEC refcount 1 f
or for stuff_ke
*Sep 29 22:50:43.923: ISAKMP:(0:4:SW:1): Creating IPsec SAs
*Sep 29 22:50:43.923: inbound SA from 10.0.0.2 to 172.16.1.1 (f/i) 0/0
(proxy 172.16.2.0 to 10.1.1.0)
*Sep 29 22:50:43.923: has spi 0x84E11317 and conn_id 0 and flags 2
*Sep 29 22:50:43.923: lifetime of 3600 seconds
*Sep 29 22:50:43.923: lifetime of 4608000 kilobytes
*Sep 29 22:50:43.923: has client flags 0x0
*Sep 29 22:50:43.923: outbound SA from 172.16.1.1 to 10.0.0.2 (f/i) 0/0
(proxy 10.1.1.0 to 172.16.2.0)
*Sep 29 22:50:43.923: has spi -65483228 and conn_id 0 and flags A
*Sep 29 22:50:43.923: lifetime of 3600 seconds
*Sep 29 22:50:43.923: lifetime of 4608000 kilobytes
*Sep 29 22:50:43.923: has client flags 0x0
*Sep 29 22:50:43.927: ISAKMP:(0:4:SW:1): sending packet to 10.0.0.2 my_port 500
peer_port 500 (I) QM_IDLE
*Sep 29 22:50:43.927: ISAKMP:(0:4:SW:1):deleting node -966196463 error FALSE rea
son "No Error"
*Sep 29 22:50:43.927: ISAKMP:(0:4:SW:1):Node -966196463, Input = IKE_MSG_FROM_P
EER, IKE_QM_EXCH
```

```
!--- IKE Phase 2 is completed successfully. *Sep 29 22:50:43.927: ISAKMP:(0:4:SW:1):Old State =
IKE_QM_I_QM1 New State = IK
E_QM_PHASE2_COMPLETE
```

```
*Sep 29 22:50:43.931: ISAKMP: Locking peer struct 0x64C0EF54, IPSEC refcount 2 f
or from create_transforms
*Sep 29 22:50:43.931: ISAKMP: Unlocking IPSEC struct 0x64C0EF54 from create_tran
sforms, count 1
```

RouterA#**debug crypto ipsec**

```
*Sep 29 22:46:06.699: IPSEC(sa_request): ,
(key eng. msg.) OUTBOUND local= 172.16.1.1, remote= 10.0.0.2,
local_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
remote_proxy= 172.16.2.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac (Tunnel),
lifedur= 3600s and 4608000kb,
spi= 0xD9F4BC76(3656694902), conn_id= 0, keysize= 0, flags= 0x400A
*Sep 29 22:46:12.631: IPSEC(validate_proposal_request): proposal part #1,
(key eng. msg.) INBOUND local= 172.16.1.1, remote= 10.0.0.2,
local_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
remote_proxy= 172.16.2.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac (Tunnel),
lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x2
*Sep 29 22:46:12.631: Crypto mapdb : proxy_match
src addr : 10.1.1.0
dst addr : 172.16.2.0
protocol : 0
src port : 0
dst port : 0
*Sep 29 22:46:12.639: IPSEC(key_engine): got a queue event with 2 kei messages
*Sep 29 22:46:12.639: IPSEC(initialize_sas): ,
(key eng. msg.) INBOUND local= 172.16.1.1, remote= 10.0.0.2,
local_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),
remote_proxy= 172.16.2.0/255.255.255.0/0/0 (type=4),
protocol= ESP, transform= esp-des esp-md5-hmac (Tunnel),
lifedur= 3600s and 4608000kb,
spi= 0xD9F4BC76(3656694902), conn_id= 0, keysize= 0, flags= 0x2
*Sep 29 22:46:12.639: IPSEC(initialize_sas): ,
```



```
(key eng. msg.) OUTBOUND local= 172.16.1.1, remote= 10.0.0.2,  
  local_proxy= 10.1.1.0/255.255.255.0/0/0 (type=4),  
  remote_proxy= 172.16.2.0/255.255.255.0/0/0 (type=4),  
  protocol= ESP, transform= esp-des esp-md5-hmac (Tunnel),  
  lifedur= 3600s and 4608000kb,  
  spi= 0x267BC43(40352835), conn_id= 0, keysize= 0, flags= 0xA  
*Sep 29 22:46:12.639: Crypto mapdb : proxy_match  
  src addr      : 10.1.1.0  
  dst addr      : 172.16.2.0  
  protocol      : 0  
  src port      : 0  
  dst port      : 0  
*Sep 29 22:46:12.643: IPSEC(crypto_ipsec_sa_find_ident_head): reconnecting with  
the same proxies and 10.0.0.2  
*Sep 29 22:46:12.643: IPsec: Flow_switching Allocated flow for sibling 80000006  
*Sep 29 22:46:12.643: IPSEC(policy_db_add_ident): src 10.1.1.0, dest 172.16.2.0  
dest_port 0  
  
*Sep 29 22:46:12.643: IPSEC(create_sa): sa created,  
(sa) sa_dest= 172.16.1.1, sa_proto= 50,  
  sa_spi= 0xD9F4BC76(3656694902),  
  sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2001  
*Sep 29 22:46:12.643: IPSEC(create_sa): sa created,  
(sa) sa_dest= 10.0.0.2, sa_proto= 50,  
  sa_spi= 0x267BC43(40352835),  
  sa_trans= esp-des esp-md5-hmac , sa_conn_id= 2002
```

## Gerelateerde informatie

- [IPsec-onderhandeling/IKE-protocollen](#)
- [Technische ondersteuning en documentatie – Cisco Systems](#)