

# LAN-to-LAN tunnelband tussen ASA 5505 en ASA/PIX-configuratie voorbeeld

## Inhoud

[Inleiding](#)  
[Voorwaarden](#)  
[Vereisten](#)  
[Gebruikte componenten](#)  
[Verwante producten](#)  
[Conventies](#)  
[Configureren](#)  
[Netwerkdiagram](#)  
[Configuraties](#)  
[Verifiëren](#)  
[Problemen oplossen](#)  
[Gerelateerde informatie](#)

## [Inleiding](#)

Dit document biedt een voorbeeldconfiguratie voor de LAN-to-LAN (Site-to-Site) IPsec-tunnel tussen Cisco security applicaties (ASA/PIX) en de adaptieve security applicatie (ASA) 5505.

## [Voorwaarden](#)

### [Vereisten](#)

Er zijn geen specifieke vereisten van toepassing op dit document.

### [Gebruikte componenten](#)

De informatie in dit document is gebaseerd op de volgende software- en hardware-versies:

- Cisco 5500 Series ASA die versie 7.x en hoger uitvoeren
- Cisco 5505 ASA die versie 7.x en hoger uitvoert

De informatie in dit document is gebaseerd op de apparaten in een specifieke laboratoriumomgeving. Alle apparaten die in dit document worden beschreven, hadden een opgeschoonde (standaard)configuratie. Als uw netwerk live is, moet u de potentiële impact van elke opdracht begrijpen.

### [Verwante producten](#)

Deze configuratie kan ook worden gebruikt in combinatie met deze hardware- en softwareversies:

- Cisco 500 Series PIX security applicatie die de softwareversie 7.x en hoger uitvoert
- Cisco 5505 ASA die versie 7.x en hoger uitvoert

## Conventies

Raadpleeg de [Cisco Technical Tips Convention](#) voor meer informatie over documentconventies.


## Configureren

Deze sectie bevat informatie over het configureren van de functies die in dit document worden beschreven.

**Opmerking:** Gebruik het [Opname Gereedschap](#) (alleen geregistreerde klanten) om meer informatie te verkrijgen over de opdrachten die in deze sectie worden gebruikt.

## Netwerkdiagram

Het netwerk in dit document is als volgt opgebouwd:

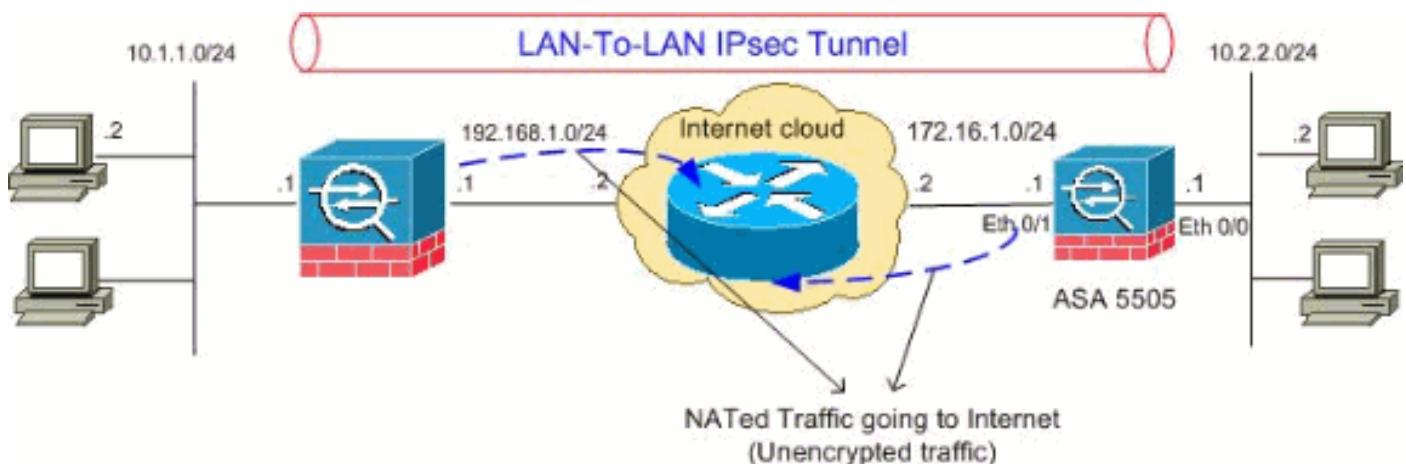

## Configuraties

Dit document gebruikt deze configuraties:

- [Cisco 5505 ASA configuratie](#)
- [Cisco ASA 5510 ASA-configuratie](#)

### Cisco 5505 ASA configuratie

```
ASA5505#show running-config
:
:
ASA Version 8.0(2)
!
hostname ASA5505
enable password 8Ry2YjIyt7RRXU24 encrypted
names
```

```

!
interface Vlan1
  no nameif
  no security-level
  no ip address
!
interface Vlan2
  nameif outside
  security-level 0
  ip address 172.16.1.1 255.255.255.0
!
interface Vlan3
  nameif inside
  security-level 100
  ip address 10.2.2.1 255.255.255.0
!
interface Ethernet0/0
  switchport access vlan 3
!
interface Ethernet0/1
  switchport access vlan 2
!
interface Ethernet0/2
  shutdown
!
interface Ethernet0/3
  shutdown
!
interface Ethernet0/4
  shutdown
!
interface Ethernet0/5
  shutdown
!
interface Ethernet0/6
  shutdown
!
interface Ethernet0/7
  shutdown
!
passwd 2KFQnbNIdI.2KYOU encrypted
boot system disk0:/asa802-k8.bin
ftp mode passive
access-list 100 extended permit ip 10.2.2.0
255.255.255.0 10.1.1.0 255.255.255.0

!--- Access-list for interesting traffic (Site to Site)
to be !--- encrypted between ASA 5505 and ASA/PIX
networks. access-list nonat extended permit ip 10.2.2.0
255.255.255.0 10.1.1.0 255.255.255.0

!--- Access-list for traffic to bypass the network
address !--- translation (NAT) process. pager lines 24
mtu inside 1500 mtu outside 1500 no failover icmp
unreachable rate-limit 1 burst-size 1 asdm image
disk0:/asdm-602.bin no asdm history enable arp timeout
14400 nat-control global (outside) 1 interface
nat (inside) 0 access-list nonat
nat (inside) 1 0.0.0.0 0.0.0.0

!--- Specify the NAT configuration. !--- NAT 0 prevents
NAT for the ACL defined in this configuration. !--- The
nat 1 command specifies NAT for all other traffic.

```

```

route outside 10.1.1.0 255.255.255.0 172.16.1.2 1
route outside 192.168.1.0 255.255.255.0 172.16.1.2 1
timeout xlate 3:00:00
timeout conn 1:00:00 half-closed 0:10:00 udp 0:02:00
icmp 0:00:02
timeout sunrpc 0:10:00 h323 0:05:00 h225 1:00:00 mgcp
0:05:00 mgcp-pat 0:05:00
timeout sip 0:30:00 sip_media 0:02:00 sip-invite 0:03:00
sip-disconnect 0:02:0
timeout uauth 0:05:00 absolute
dynamic-access-policy-record DfltAccessPolicy
no snmp-server location
no snmp-server contact
snmp-server enable traps snmp authentication linkup
linkdown coldstart

!--- PHASE 2 CONFIGURATION !--- The encryption types for
Phase 2 are defined here. crypto ipsec transform-set
myset esp-3des esp-sha-hmac

!--- Define the transform set for Phase 2. crypto map
outside_map 20 match address 100

!--- Define which traffic can be sent to the IPsec peer.
crypto map outside_map 20 set peer 192.168.1.1

!--- Sets the IPsec peer. crypto map outside_map 20 set
transform-set myset

!--- Sets the IPsec transform set "myset" !--- to be
used with the crypto map entry "outside_map" crypto map
outside_map interface outside

!--- Crypto map applied to the outside interface of the
ASA crypto isakmp enable outside
crypto isakmp policy 10
authentication pre-share
encryption 3des
hash sha
group 2
lifetime 86400

!--- PHASE 1 CONFIGURATION ---! !--- This configuration
uses isakmp policy 10. !--- These configuration commands
!--- define the Phase 1 policies that are used. telnet
timeout 5 ssh timeout 5 console timeout 0 threat-
detection basic-threat threat-detection statistics
access-list ! class-map inspection_default match
default-inspection-traffic ! ! policy-map type inspect
dns preset_dns_map parameters message-length maximum 512
policy-map global_policy class inspection_default
inspect dns preset_dns_map inspect ftp inspect h323 h225
inspect h323 ras inspect netbios inspect rsh inspect
rtsp inspect skinny inspect esmtp inspect sqlnet inspect
sunrpc inspect tftp inspect sip inspect xdmcp ! service-
policy global_policy global tunnel-group 192.168.1.1
type ipsec-121

!--- In order to create and manage the database of
connection-specific records !--- for ipsec-121-IPsec
( LAN-to-LAN ) tunnels, use the tunnel-group !--- command
in global configuration mode. !--- For L2L connections
the name of the tunnel group MUST be the IP !--- address

```

of the IPsec peer.

```
tunnel-group 192.168.1.1 ipsec-attributes
pre-shared-key *

--- Enter the pre-shared-key in order to configure the
authentication method. prompt hostname context
Cryptochecksum:68eba159fd8e4c893f24185ffb40bb6f : end
ASA5505#
```

## Cisco ASA 5510 ASA-configuration

```
ASA5510#show running-config
:
:
ASA Version 8.0(2)
!
hostname ASA5510
enable password 8Ry2YjIyt7RRXU24 encrypted
names
!
interface Ethernet0/0
  nameif inside
  security-level 100
  ip address 10.1.1.1 255.255.255.0
!
interface Ethernet0/1
  nameif outside
  security-level 0
  ip address 192.168.1.1 255.255.255.0
!
interface Ethernet0/2
  shutdown
  no nameif
  no security-level
  no ip address
!
interface Ethernet0/3
  shutdown
  no nameif
  no security-level
  no ip address
!
interface Management0/0
  shutdown
  no nameif
  no security-level
  no ip address
!
passwd 2KFQnbNIdI.2KYOU encrypted
ftp mode passive
access-list 100 extended permit ip 10.1.1.0
255.255.255.0 10.2.2.0 255.255.255.0

--- Access-list for interesting traffic (Site to Site)
to be !--- encrypted between ASA 5505 and ASA/PIX
networks. access-list nonat extended permit ip 10.1.1.0
255.255.255.0 10.2.2.0 255.255.255.0

--- Access-list for traffic to bypass the network
address !--- translation (NAT) process. pager lines 24
```

```

mtu inside 1500 mtu outside 1500 no failover icmp
unreachable rate-limit 1 burst-size 1 asdm image
disk0:/asdm-522.bin no asdm history enable arp timeout
14400 nat-control global (outside) 1 interface
nat (inside) 0 access-list nonat
nat (inside) 1 0.0.0.0 0.0.0.0

!--- Specify the NAT configuration. !--- NAT 0 prevents
NAT for the ACL defined in this configuration. !--- The
nat 1 command specifies NAT for all other traffic.

route outside 10.2.2.0 255.255.255.0 192.168.1.2 1
route outside 172.16.1.0 255.255.255.0 192.168.1.2 1
timeout xlate 3:00:00
timeout conn 1:00:00 half-closed 0:10:00 udp 0:02:00
icmp 0:00:02
timeout sunrpc 0:10:00 h323 0:05:00 h225 1:00:00 mgcp
0:05:00 mgcp-pat 0:05:00
timeout sip 0:30:00 sip_media 0:02:00 sip-invite 0:03:00
sip-disconnect 0:02:00
timeout uauth 0:05:00 absolute
dynamic-access-policy-record DfltAccessPolicy
no snmp-server location
no snmp-server contact
snmp-server enable traps snmp authentication linkup
linkdown coldstart

!--- PHASE 2 CONFIGURATION !--- The encryption types for
Phase 2 are defined here. crypto ipsec transform-set
myset esp-3des esp-sha-hmac

!--- Define the transform set for Phase 2. crypto map
outside_map 20 match address 100

!--- Define which traffic can be sent to the IPsec peer.
crypto map outside_map 20 set peer 172.16.1.1

!--- Sets the IPsec peer. crypto map outside_map 20 set
transform-set myset

!--- Sets the IPsec transform set "myset" !--- to be
used with the crypto map entry "outside_map" crypto map
outside_map interface outside

!--- Crypto map applied to the outside interface of the
ASA crypto isakmp enable outside
crypto isakmp policy 10
authentication pre-share
encryption 3des
hash sha
group 2
lifetime 86400

!--- PHASE 1 CONFIGURATION ---! !--- This configuration
uses isakmp policy 10. !--- These configuration commands
!--- define the Phase 1 policies that are used. crypto
isakmp policy 65535 authentication pre-share encryption
3des hash sha group 2 lifetime 86400 telnet timeout 5
ssh timeout 5 console timeout 0 threat-detection basic-
threat threat-detection statistics access-list ! class-
map inspection_default match default-inspection-traffic
! ! policy-map type inspect dns preset_dns_map
parameters message-length maximum 512 policy-map

```

```
global_policy class inspection_default inspect dns
preset_dns_map inspect ftp inspect h323 h225 inspect
h323 ras inspect netbios inspect rsh inspect rtsp
inspect skinny inspect esmtp inspect sqlnet inspect
sunrpc inspect tftp inspect sip inspect xdmcp ! service-
policy global_policy global tunnel-group 172.16.1.1 type
ipsec-121
```

```
!--- In order to create and manage the database of
connection-specific records !--- for ipsec-121-IPsec
( LAN-to-LAN ) tunnels, use the tunnel-group !--- command
in global configuration mode. !--- For L2L connections
the name of the tunnel group MUST be the IP !--- address
of the IPsec peer.
```

```
tunnel-group 172.16.1.1 ipsec-attributes
pre-shared-key *
!--- Enter the pre-shared-key in order to configure the
authentication method. prompt hostname context
Cryptochecksum:d41d8cd98f00b204e9800998ecf8427e : end
ASA5510#
```

## Verifiëren

Gebruik dit gedeelte om te bevestigen dat de configuratie correct werkt.

Het [Uitvoer Tolk \(uitsluitend geregistreerde klanten\)](#) (OIT) ondersteunt bepaalde **show** opdrachten.  
Gebruik de OIT om een analyse van **tonen** opdrachtoutput te bekijken.

- **toon crypto isakmp sa**-Toont alle huidige IKE security associates (SAs) bij een peer.
- **Laat crypto ipsec sa-displays** alle huidige IPsec SA's zien.

In dit deel worden voorbeelden van controleconfiguraties voor:

- [Cisco 5505 ASA 505](#)
- [Cisco 5510 ASA-software](#)

### **Cisco 5505 ASA configuratie**

```
ASA5505#show crypto isakmp sa

Active SA: 1
    Rekey SA: 0 (A tunnel will report 1 Active and 1
    Rekey SA during rekey)
Total IKE SA: 1
```

```
1   IKE Peer: 192.168.1.1
    Type      : L2L          Role      : initiator
    Rekey     : no           State    : MM_ACTIVE
```

```
ASA5505#show crypto ipsec sa
interface: outside
    Crypto map tag: outside_map, seq num: 20, local
    addr: 172.16.1.1
```

```
        access-list 100 permit ip 10.2.2.0 255.255.255.0
        10.1.1.0 255.255.255.0
```

```

local ident (addr/mask/prot/port):
(10.2.2.0/255.255.255.0/0/0)
    remote ident (addr/mask/prot/port):
(10.1.1.0/255.255.255.0/0/0)
        current_peer: 192.168.1.1

#pkts encaps: 4, #pkts encrypt: 4, #pkts digest: 4
#pkts decaps: 4, #pkts decrypt: 4, #pkts verify: 4
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 4, #pkts comp failed: 0,
#pkts decomp failed: 0
#pre-frag successes: 0, #pre-frag failures: 0,
#fragments created: 0
    #PMTUs sent: 0, #PMTUs rcvd: 0, #decapsulated frgs
needing reassembly: 0
    #send errors: 0, #recv errors: 0

    local crypto endpt.: 172.16.1.1, remote crypto
endpt.: 192.168.1.1

    path mtu 1500, ipsec overhead 58, media mtu 1500
    current outbound spi: A0411DE6

    inbound esp sas:
        spi: 0x8312C39C (2199045020)
            transform: esp-3des esp-sha-hmac none
            in use settings ={L2L, Tunnel, }
            slot: 0, conn_id: 8192, crypto-map: outside_map
            sa timing: remaining key lifetime (kB/sec):
(3824999/27807)
            IV size: 8 bytes
            replay detection support: Y
    outbound esp sas:
        spi: 0xA0411DE6 (2688622054)
            transform: esp-3des esp-sha-hmac none
            in use settings ={L2L, Tunnel, }
            slot: 0, conn_id: 8192, crypto-map: outside_map
            sa timing: remaining key lifetime (kB/sec):
(3824999/27807)
            IV size: 8 bytes
            replay detection support: Y

```

## Cisco ASA 5510 ASA-configuratie

```

ASA5510#show crypto isakmp sa

Active SA: 1
    Rekey SA: 0 (A tunnel will report 1 Active and 1
Rekey SA during rekey)
Total IKE SA: 1

1   IKE Peer: 172.16.1.1
    Type      : L2L           Role      : responder
    Rekey     : no            State     : MM_ACTIVE

ASA5510#show crypto ipsec sa
interface: outside
    Crypto map tag: outside_map, seq num: 20, local
    addr: 192.168.1.1

        access-list 100 permit ip 10.1.1.0 255.255.255.0
10.2.2.0 255.255.255.0
        local ident (addr/mask/prot/port):

```

```

(10.1.1.0/255.255.255.0/0/0)
    remote ident (addr/mask/prot/port):
(10.2.2.0/255.255.255.0/0/0)
    current_peer: 172.16.1.1

#pkts encaps: 4, #pkts encrypt: 4, #pkts digest: 4
#pkts decaps: 4, #pkts decrypt: 4, #pkts verify: 4
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 4, #pkts comp failed: 0,
#pkts decomp failed: 0
#pre-frag successes: 0, #pre-frag failures: 0,
#fragments created: 0
#PMTUs sent: 0, #PMTUs rcvd: 0, #decapsulated frgs
needing reassembly: 0
#send errors: 0, #recv errors: 0

local crypto endpt.: 192.168.1.1, remote crypto
endpt.: 172.16.1.1

path mtu 1500, ipsec overhead 58, media mtu 1500
current outbound spi: 8312C39C

inbound esp sas:
    spi: 0xA0411DE6 (2688622054)
        transform: esp-3des esp-sha-hmac none
        in use settings ={L2L, Tunnel, }
        slot: 0, conn_id: 8192, crypto-map: outside_map
        sa timing: remaining key lifetime (kB/sec):
(4274999/27844)
        IV size: 8 bytes
        replay detection support: Y
outbound esp sas:
    spi: 0x8312C39C (2199045020)
        transform: esp-3des esp-sha-hmac none
        in use settings ={L2L, Tunnel, }
        slot: 0, conn_id: 8192, crypto-map: outside_map
        sa timing: remaining key lifetime (kB/sec):
(4274999/27844)
        IV size: 8 bytes
        replay detection support: Y

```

## Problemen oplossen

Deze sectie bevat informatie waarmee u problemen met de configuratie kunt oplossen.

Gebruik deze opdrachten zoals wordt weergegeven:

- **duidelijke crypto isakmp sa** — ontslaat de fase 1 SA's. **Waarschuwing: de duidelijke crypto isakmp sa** opdracht is opdringerig, wat alle actieve VPN-tunnels zal wissen. Om te beginnen met de 8.0(3) versie van PIX/ASA-software kan een individuele IKE SA worden gewist met behulp van de **duidelijke crypto isakmp sa <peer ip-adres>** opdracht. Vóór softwareversie 8.0(3) kan de opdracht **vpn-sessiondb tunnel-groep <tunnel-groep-name>** worden gebruikt om IKE en IPsec SA's te wissen voor één tunnel.

```

ASA5505#vpn-sessiondb logoff tunnel-group 192.168.1.1
Do you want to logoff the VPN session(s)? [confirm] y
INFO: Number of sessions from TunnelGroup "192.168.1.1" logged off : 1

```

```

ASA5505# Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, P
itcher: received key delete msg, spi 0xaal57573

```

```

Jan 19 13:58:43 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, Connection terminated for peer 192.168.1.1. Reason: Administrator Reset Remote Proxy 10.1.1.0, Local Proxy 10.2.2.0
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, IKE SA MM: 116f1ccf rcv'd Terminate: state MM_ACTIVE flags 0x0021c042, refcnt 1, tuncnt 1
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, sending delete/delete with reason message
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructing blank hash payload
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructing IPSec delete payload
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructing qm hash payload
Jan 19 13:58:43 [IKEv1]: IP = 192.168.1.1, IKE_DECODE SENDING Message (msgid=c1746fb4) with payloads : HDR + HASH (8) + DELETE (12) + NONE (0) total length : 68
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, Active unit receives a delete event for remote peer 192.168.1.1.

Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, IKE Deleting SA: Remote Proxy 10.1.1.0, Local Proxy 10.2.2.0
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, IKE SA MM: 116f1ccf terminating: flags 0x0121c002, refcnt 0, tuncnt 0
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, sending delete/delete with reason message
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructing blank hash payload
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructing IKE delete payload
Jan 19 13:58:43 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructing qm hash payload
Jan 19 13:58:43 [IKEv1]: IP = 192.168.1.1, IKE_DECODE SENDING Message (msgid=a7e78fac) with payloads : HDR + HASH (8) + DELETE (12) + NONE (0) total length : 80
Jan 19 13:58:43 [IKEv1 DEBUG]: Pitcher: received key delete msg, spi 0xaal57573
Jan 19 13:58:43 [IKEv1 DEBUG]: Pitcher: received key delete msg, spi 0x746fe476
Jan 19 13:58:43 [IKEv1]: IP = 192.168.1.1, Received encrypted packet with no matching SA, dropping

```

- **duidelijke crypto ipsec als peer <peer IP adres>**—ontslaat de vereiste fase 2 SA.

```

ASA5505(config)#clear ipsec sa peer 192.168.1.1
ASA5505(config)# IPSEC: Deleted inbound decrypt rule, SPI 0x8030618F
    Rule ID: 0xD4E56A18
IPSEC: Deleted inbound permit rule, SPI 0x8030618F
    Rule ID: 0xD4DF4110
IPSEC: Deleted inbound tunnel flow rule, SPI 0x8030618F
    Rule ID: 0xD4DAE1F0
IPSEC: Deleted inbound VPN context, SPI 0x8030618F
    VPN handle: 0x00058FBC
IPSEC: Deleted outbound encrypt rule, SPI 0x0D6CDDEB
    Rule ID: 0xD4DA4348
IPSEC: Deleted outbound permit rule, SPI 0x0D6CDDEB
    Rule ID: 0xD4DAE7A8
IPSEC: Deleted outbound VPN context, SPI 0x0D6CDDEB
    VPN handle: 0x0005633C

```

- **debug crypto isakmp sa <debug level>**—Debugs ISAKMP SA onderhandelingen.

```

ASA5505(config)#debug crypto isakmp 7
ASA5505(config)# Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, IKE_DECODE RECEIVED Message (msgid=0) with payloads : HDR + SA (1) + VENDOR (13) + VENDOR (13) + VENDOR (13) + NONE (0) total length : 188
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing SA payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Oakley proposal is acceptable
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing VID payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Received NAT-Traversal ver 02 V ID

```

```
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing VID payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Received NAT-Traversal ver 03 V
ID
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing VID payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Received Fragmentation VID
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, IKE Peer included IKE fragmenta
tion capability flags: Main Mode: True Aggressive Mode: True
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing IKE SA payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, IKE SA Proposal # 1, Transform
# 1 acceptable Matches global IKE entry # 2
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing ISAKMP SA payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing NAT-Traversal VID
ver 02 payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing Fragmentation VID
+ extended capabilities payload
Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, IKE_DECODE SENDING Message (msgid=0)
with payloads : HDR + SA (1) + VENDOR (13) + VENDOR (13) + NONE (0) total length
: 128
Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, IKE_DECODE RECEIVED Message (msgid=0)
with payloads : HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) + VENDOR
(13) + VENDOR (13) + NAT-D (130) + NAT-D (130) + NONE (0) total length : 304
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing ke payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing ISA_KE payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing nonce payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing VID payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Received Cisco Unity client VID
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing VID payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Received xauth V6 VID
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing VID payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Processing VPN3000/ASA spoofing
IOS Vendor ID payload (version: 1.0.0, capabilities: 20000001)
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing VID payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Received Altiga/Cisco VPN3000/C
isco ASA GW VID
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing NAT-Discovery paylo
ad
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, computing NAT Discovery hash
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, processing NAT-Discovery paylo
ad
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, computing NAT Discovery hash
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing ke payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing nonce payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing Cisco Unity VID pa
yload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing xauth V6 VID paylo
ad
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Send IOS VID
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Constructing ASA spoofing IOS V
endor ID payload (version: 1.0.0, capabilities: 20000001)
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing VID payload
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Send Altiga/Cisco VPN3000/Cisco
ASA GW VID
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing NAT-Discovery payl
oad
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, computing NAT Discovery hash
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, constructing NAT-Discovery payl
oad
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, computing NAT Discovery hash
Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, Connection landed on tunnel_group 192
.168.1.1
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, Generating
keys for Responder...
Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, IKE_DECODE SENDING Message (msgid=0)
with payloads : HDR + KE (4) + NONCE (10) + VENDOR (13) + VENDOR (13) + VENDOR (
```

13) + VENDOR (13) + NAT-D (130) + NAT-D (130) + NONE (0) total length : 304  
Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, IKE\_DECODE RECEIVED Message (msgid=0)  
with payloads : HDR + ID (5) + HASH (8) + IOS KEEPALIVE (128) + VENDOR (13) + N  
ONE (0) total length : 96  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing  
ID payload  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing  
hash payload  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, Computing  
hash for ISAKMP  
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Processing IOS keep alive paylo  
ad: proposal=32767/32767 sec.  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing  
VID payload  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, Received D  
PD VID  
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, Automatic NAT De  
tection Status: Remote end is NOT behind a NAT device This end is NOT  
behind a NAT device  
Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, Connection landed on tunnel\_group 192  
.168.1.1  
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, Freeing previous  
ly allocated memory for authorization-dn-attributes  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructi  
ng ID payload  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructi  
ng hash payload  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, Computing  
hash for ISAKMP  
Jan 19 13:39:49 [IKEv1 DEBUG]: IP = 192.168.1.1, Constructing IOS keep alive pay  
load: proposal=32767/32767 sec.  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructi  
ng dpd vid payload  
Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, IKE\_DECODE SENDING Message (msgid=0)  
with payloads : HDR + ID (5) + HASH (8) + IOS KEEPALIVE (128) + VENDOR (13) + NO  
NE (0) total length : 96  
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, PHASE 1 COMPLETE  
D  
Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, Keep-alive type for this connection:  
DPD  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, Starting P  
1 rekey timer: 73440 seconds.  
Jan 19 13:39:49 [IKEv1]: IP = 192.168.1.1, IKE\_DECODE RECEIVED Message (msgid=94  
21905f) with payloads : HDR + HASH (8) + SA (1) + NONCE (10) + ID (5) + ID (5) +  
NOTIFY (11) + NONE (0) total length : 196  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing  
hash payload  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing  
SA payload  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing  
nonce payload  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing  
ID payload  
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, Received remote  
IP Proxy Subnet data in ID Payload: Address 10.1.1.0, Mask 255.255.255.0, Prot  
ocol 0, Port 0  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing  
ID payload  
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, Received local I  
P Proxy Subnet data in ID Payload: Address 10.2.2.0, Mask 255.255.255.0, Proto  
col 0, Port 0  
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing  
notify payload  
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, QM IsRekeyed old

```

sa not found by addr
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, Static Crypto Ma
p check, checking map = outside_map, seq = 20...
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, Static Crypto Ma
p check, map outside_map, seq = 20 is a successful match
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, IKE Remote Peer
configured for crypto map: outside_map
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, processing
IPSec SA payload
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, IPSec SA P
roposal # 1, Transform # 1 acceptable Matches global IPSec SA entry # 20
Jan 19 13:39:49 [IKEv1]: Group = 192.168.1.1, IP = 192.168.1.1, IKE: requesting
SPI!
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, IKE got SP
I from key engine: SPI = 0x826ff027
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, oakley con
structing quick mode
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructi
ng blank hash payload
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructi
ng IPSec SA payload
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructi
ng IPSec nonce payload
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, constructi
ng proxy ID
Jan 19 13:39:49 [IKEv1 DEBUG]: Group = 192.168.1.1, IP = 192.168.1.1, Transmitti

```

- **debug crypto ipsec als <debug level>**—Debugs IPsec SA onderhandelingen.

```

ASA5505(config)#debug crypto ipsec 7
ASA5505(config)# IPSEC: New embryonic SA created @ 0xD4E56E18,
    SCB: 0xD4E56CF8,
    Direction: inbound
    SPI      : 0x8030618F
    Session ID: 0x00006000
    VPIF num  : 0x00000001
    Tunnel type: 121
    Protocol   : esp
    Lifetime   : 240 seconds
IPSEC: New embryonic SA created @ 0xD4E57AD8,
    SCB: 0xD4DAE608,
    Direction: outbound
    SPI      : 0x0D6CDEEB
    Session ID: 0x00006000
    VPIF num  : 0x00000001
    Tunnel type: 121
    Protocol   : esp
    Lifetime   : 240 seconds
IPSEC: Completed host OBSA update, SPI 0x0D6CDEEB
IPSEC: Creating outbound VPN context, SPI 0x0D6CDEEB
    Flags: 0x00000005
    SA     : 0xD4E57AD8
    SPI    : 0x0D6CDEEB
    MTU   : 1500 bytes
    VCID  : 0x00000000
    Peer   : 0x00000000
    SCB    : 0x015E69CB
    Channel: 0xD3D60A98
IPSEC: Completed outbound VPN context, SPI 0x0D6CDEEB
    VPN handle: 0x0005633C
IPSEC: New outbound encrypt rule, SPI 0x0D6CDEEB
    Src addr: 10.2.2.0
    Src mask: 255.255.255.0
    Dst addr: 10.1.1.0
    Dst mask: 255.255.255.0

```

```
Src ports
    Upper: 0
    Lower: 0
    Op   : ignore
Dst ports
    Upper: 0
    Lower: 0
    Op   : ignore
Protocol: 0
Use protocol: false
SPI: 0x00000000
Use SPI: false
IPSEC: Completed outbound encrypt rule, SPI 0x0D6CDEEB
    Rule ID: 0xD4DA4348
IPSEC: New outbound permit rule, SPI 0x0D6CDEEB
    Src addr: 172.16.1.1
    Src mask: 255.255.255.255
    Dst addr: 192.168.1.1
    Dst mask: 255.255.255.255
    Src ports
        Upper: 0
        Lower: 0
        Op   : ignore
    Dst ports
        Upper: 0
        Lower: 0
        Op   : ignore
Protocol: 50
Use protocol: true
SPI: 0x0D6CDEEB
Use SPI: true
IPSEC: Completed outbound permit rule, SPI 0x0D6CDEEB
    Rule ID: 0xD4DAE7A8
IPSEC: Completed host IBSA update, SPI 0x8030618F
IPSEC: Creating inbound VPN context, SPI 0x8030618F
    Flags: 0x00000006
    SA   : 0xD4E56E18
    SPI  : 0x8030618F
    MTU  : 0 bytes
    VCID : 0x00000000
    Peer : 0x0005633C
    SCB  : 0x015DD135
    Channel: 0xD3D60A98
IPSEC: Completed inbound VPN context, SPI 0x8030618F
    VPN handle: 0x00058FBC
IPSEC: Updating outbound VPN context 0x0005633C, SPI 0x0D6CDEEB
    Flags: 0x00000005
    SA   : 0xD4E57AD8
    SPI  : 0x0D6CDEEB
    MTU  : 1500 bytes
    VCID : 0x00000000
    Peer : 0x00058FBC
    SCB  : 0x015E69CB
    Channel: 0xD3D60A98
IPSEC: Completed outbound VPN context, SPI 0x0D6CDEEB
    VPN handle: 0x0005633C
IPSEC: Completed outbound inner rule, SPI 0x0D6CDEEB
    Rule ID: 0xD4DA4348
IPSEC: Completed outbound outer SPD rule, SPI 0x0D6CDEEB
    Rule ID: 0xD4DAE7A8
IPSEC: New inbound tunnel flow rule, SPI 0x8030618F
    Src addr: 10.1.1.0
    Src mask: 255.255.255.0
    Dst addr: 10.2.2.0
```

```
Dst mask: 255.255.255.0
Src ports
    Upper: 0
    Lower: 0
    Op   : ignore
Dst ports
    Upper: 0
    Lower: 0
    Op   : ignore
Protocol: 0
Use protocol: false
SPI: 0x00000000
Use SPI: false
IPSEC: Completed inbound tunnel flow rule, SPI 0x8030618F
    Rule ID: 0xD4DAE1F0
IPSEC: New inbound decrypt rule, SPI 0x8030618F
    Src addr: 192.168.1.1
    Src mask: 255.255.255.255
    Dst addr: 172.16.1.1
    Dst mask: 255.255.255.255
    Src ports
        Upper: 0
        Lower: 0
        Op   : ignore
    Dst ports
        Upper: 0
        Lower: 0
        Op   : ignore
    Protocol: 50
    Use protocol: true
    SPI: 0x8030618F
    Use SPI: true
IPSEC: Completed inbound decrypt rule, SPI 0x8030618F
    Rule ID: 0xD4E56A18
IPSEC: New inbound permit rule, SPI 0x8030618F
    Src addr: 192.168.1.1
```

## Gerelateerde informatie

- [Cisco ASA 5500 Series ondersteuningspagina voor adaptieve security applicaties](#)
- [Ondersteuning van Cisco PIX 500 Series security applicaties](#)
- [Populairste oplossingen voor IPsec gemeenschappelijk L2L en Remote Access IPsec VPN-probleemoplossing](#)
- [Ondersteuning van IPSec-onderhandeling/IKE-protocollen](#)