

VXLAN-overstromingen configureren en informatie over Nexus 7K

Inhoud

[Inleiding](#)

[Voorwaarden](#)

[Vereisten](#)

[Gebruikte componenten](#)

[Configureren](#)

[Netwerkdigram](#)

[Configuraties](#)

[VTEP-1](#)

[VTEP-2](#)

[Verifiëren](#)

[Uitgangen van voorbeeld](#)

[VTEP-1](#)

[VTEP-2](#)

[Problemen oplossen](#)

Inleiding

Dit document beschrijft de configuratie van Virtual Extensible LAN (VXLAN) Flood en Learn op Nexus 7000 Series-switches.

Voorwaarden

Vereisten

Cisco raadt kennis van de volgende onderwerpen aan:

- Multicast voor routing concepten zoals Rendezvous Point (RP) en Platform Independent Multicast (PIM).
- VXLAN-concepten

Opmerking: Dit document gaat ervan uit dat de IP-routing en multicast routing voorafgaand aan de VXLAN-configuratie zijn ingesteld.

Gebruikte componenten

De informatie in dit document is gebaseerd op de volgende software- en hardware-versies:

- N77-C7710
- N77-F348XP-23

- N77-F324FQ-25

Opmerking: N77K is actief op software release 7.2(0)D1(1).


De informatie in dit document is gebaseerd op de apparaten in een specifieke laboratoriumomgeving. Alle apparaten die in dit document worden beschreven, hadden een opgeschoonde (standaard)configuratie. Als uw netwerk live is, moet u de potentiële impact van elke opdracht begrijpen.

Configureren

Netwerkdigram

10.50.50.1/24
547f.eeec.af44

10.50.50.2/24
547f.eeec.af45

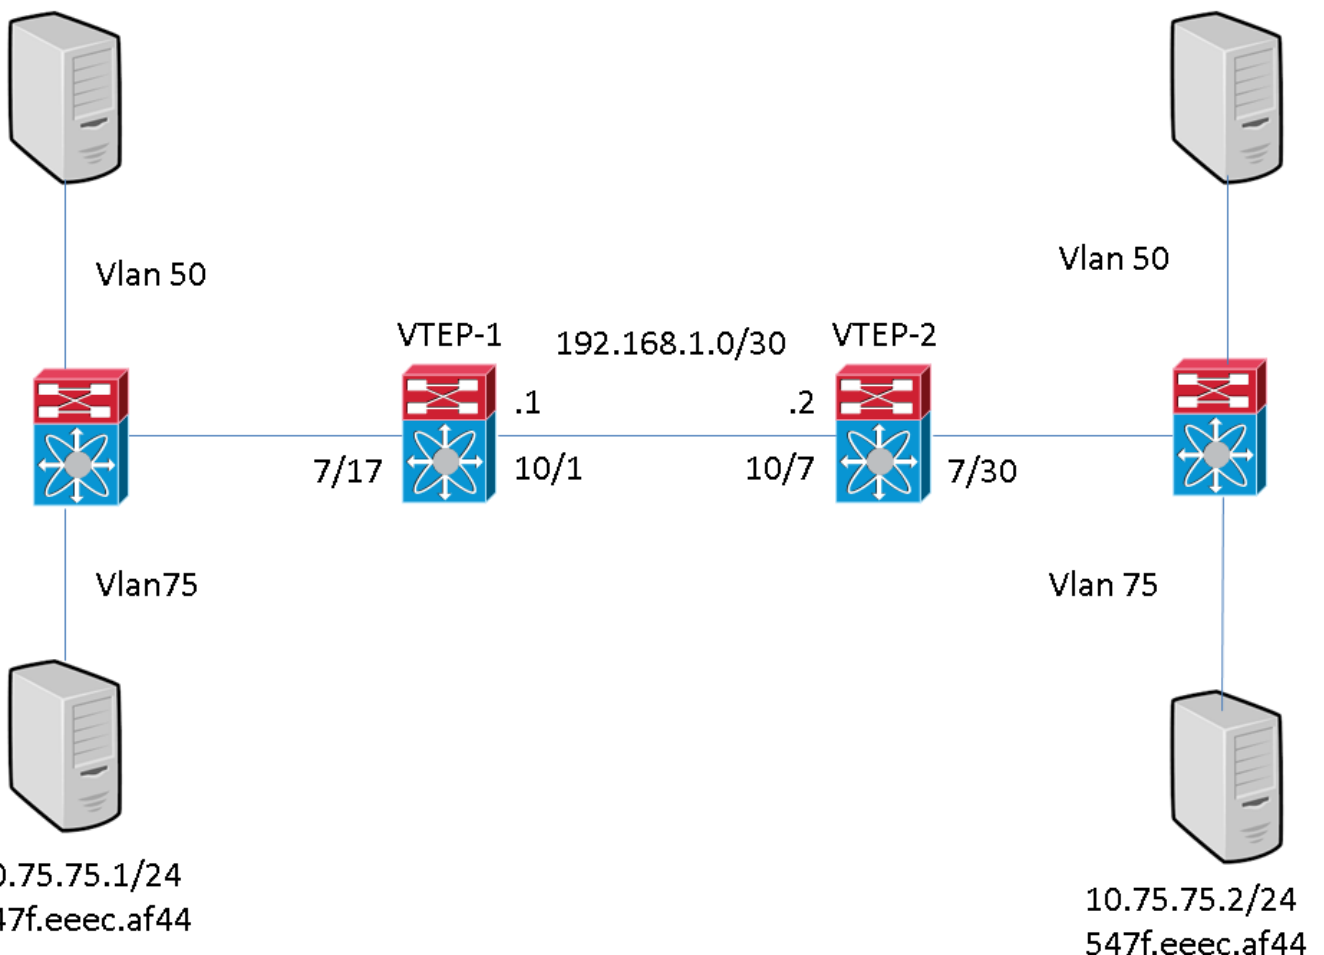

Configuraties

Deze configuraties zijn specifiek voor het VXLAN-gedeelte van de configuratie. Deze configuraties veronderstellen volledige bereikbaarheid aan alle L3 interfaces in de topologie met het routingsprotocol van uw keuze. De statische routing wordt in dit voorbeeld gebruikt. Het veronderstelt ook dat de multicast routing via deze zelfde L3 interfaces tot stand is gebracht

VTEP-1

```

feature pim
system bridge-domain 50,75
feature nv overlay
feature interface-vlan feature vni vni 5000
vni 7500 ip route 10.10.10.2/32 Ethernet10/1 192.168.1.2 ip pim rp-address 192.168.1.1 group-
list 224.0.0.0/4 bridge-domain 50
bridge-domain 75 encapsulation profile vni VSI_50_TO_5000 dot1q 50 vni 5000
encapsulation profile vni VSI_75_TO_7500
    dot1q 75 vni 7500 bridge-domain 50 member vni 5000
bridge-domain 75
    member vni 7500 interface nve1 no shutdown source-interface loopback10 member vni 5000 mcast-
group 225.1.1.1
member vni 7500 mcast-group 227.1.1.1

interface Bdi50
    no shutdown
    ip address 10.50.50.50/24

```

```

interface Bdi75
    no shutdown
    ip address 10.75.75.75/24 interface Ethernet7/17
no switchport no shutdown service instance 1 vni no shutdown encapsulation profile
VSI_50_TO_5000 default
    service instance 2 vni
        no shutdown
        encapsulation profile VSI_75_TO_7500 default interface Ethernet10/1
no switchport ip address 192.168.1.1/30 ip pim sparse-mode no shutdown interface loopback10 ip
address 10.10.10.1/32 ip pim sparse-mode

```

Het is belangrijk om op te merken dat de interne interface op het VTEP (Vxlan Tunnel eindpunt) als een Layer 3 poort (geen switchpoort) wordt gevormd. Er is echter geen IP toegewezen. Het is ook belangrijk op te merken dat de BD-waarde die op de VTEP is gedefinieerd, niet hoeft te overeenstemmen met de VLAN-ID die wordt gebruikt om verkeer naar dit apparaat te versturen. Echter, de dot1q aan VNI (VLAN Identifier) mapping, die in het insluitingsprofiel is gedefinieerd, en die onder de servicemonteur op de interne interface wordt opgeroepen, moet overeenkomen met de VLAN-id.

VTEP-2

```

feature pim
system bridge-domain 50,75
feature nv overlay
feature interface-vlan feature vni vni 5000
vni 7500 ip route 10.10.10.1/32 Ethernet10/7 192.168.1.1 ip pim rp-address 192.168.1.1 group-
list 224.0.0.0/4 bridge-domain 50
bridge-domain 75 encapsulation profile vni VSI_50_TO_5000 dot1q 50 vni 5000
encapsulation profile vni VSI_75_TO_7500
    dot1q 75 vni 7500 bridge-domain 50 member vni 5000
bridge-domain 75
    member vni 7500 interface nve1 no shutdown source-interface loopback10 member vni 5000 mcast-
group 225.1.1.1
member vni 7500 mcast-group 227.1.1.1

interface Bdi50
    no shutdown
    ip address 10.50.50.51/24

interface Bdi75
    no shutdown

```

```

ip address 10.75.75.76/24 interface Ethernet7/30
no switchport no shutdown service instance 1 vni no shutdown encapsulation profile
VSI_50_TO_5000 default
  service instance 2 vni
  no shutdown
  encapsulation profile VSI_75_TO_7500 default interface Ethernet10/7
no switchport ip address 192.168.1.2/30 ip pim sparse-mode no shutdown interface loopback10 ip
address 10.10.10.2/32 ip pim sparse-mode

```

Het is belangrijk om op te merken dat de interne interface op VTEP als een Layer 3 poort is geconfigureerd (geen schakelpoort). Er is echter geen IP toegewezen. Het is ook belangrijk op te merken dat de BD-waarde die op de VTEP is gedefinieerd, niet hoeft te overeenstemmen met de VLAN-ID die wordt gebruikt om verkeer naar dit apparaat te versturen. Echter, de dot1q aan VNI mapping, die in het insluitingsprofiel wordt gedefinieerd, die onder de serviceinstantie op de interne interface wordt opgeroepen, moet overeenkomen met de VLAN-ID.

Verifiëren

Gebruik dit gedeelte om te bevestigen dat de configuratie correct werkt.

Uitgangen van voorbeeld

Deze output is in een stabiele toestand. De VTEP-peers hebben elkaar ontdekt en er is verkeer tussen de zijanten en de naden.

VTEP-1

```
VTEP-1# show nve vni
```

```

Codes: CP - Control Plane      DP - Data Plane
       UC - Unconfigured       SA - Suppress ARP

```

Interface	VNI	Multicast-group	State	Mode	Type [BD/VRF]	Flags
nve1	5000	225.1.1.1	Up	DP	L2 [50]	
nve1	7500	227.1.1.1	Up	DP	L2 [75]	

```
VTEP-1# show running-config interface nve 1
```

```

interface nve1
  no shutdown
  source-interface loopback10
  member vni 5000 mcast-group 225.1.1.1
  member vni 7500 mcast-group 227.1.1.1

```

```
VTEP-1# show service instance vni detail
```

```

VSI: VSI-Ethernet7/17.1
If-index: 0x35310001
Admin Status: Up
Oper Status: Up
Auto-configuration Mode: No
encapsulation profile vni VSI_50_TO_5000
  dot1q 50 vni 5000
Dot1q   VNI   BD
-----
50      5000    50

```

```
VSI: VSI-Ethernet7/17.2
If-index: 0x35310002
Admin Status: Up
Oper Status: Up
Auto-configuration Mode: No
encapsulation profile vni TEST
  dot1q 100 vni 7500
Dot1q  VNI      BD
-----
100    7500    75
```

```
VTEP-1# show bridge-domain
```

```
Bridge-domain 50 (2 ports in all)
Name:: Bridge-Domain50
Administrative State: UP          Operational State: UP
      VSI-Eth7/17.1
      vni5000
      nve1
```

```
Bridge-domain 75 (2 ports in all)
Name:: Bridge-Domain75
Administrative State: UP          Operational State: UP
      VSI-Eth7/17.2
      vni7500
      nve1
```

```
VTEP-1# show mac address-table dynamic
```

```
Note: MAC table entries displayed are getting read from software.
Use the 'hardware-age' keyword to get information related to 'Age'
```

```
Legend:
```

```
* - primary entry, G - Gateway MAC, (R) - Routed MAC, O - Overlay MAC
age - seconds since last seen,+ - primary entry using vPC Peer-Link, E -
EVPN entry
(T) - True, (F) - False , ~~~ - use 'hardware-age' keyword to retrieve
```

```
age info
```

```
VLAN/BD  MAC Address      Type      age      Secure NTFY Ports/SWID.SSID.LID -----+-----
-----+-----+-----+-----+-----+----- * 50 547f.eeec.af43 dynamic ~~~ F F
nve1/10.10.10.2 * 50 547f.eeec.af44 dynamic ~~~ F F VSI-Eth7/17.1 * 50 547f.eeec.af45 dynamic
~~~ F F nve1/10.10.10.2 * 75 547f.eeec.af44 dynamic ~~~ F F VSI-Eth7/17.2 * 75 547f.eeec.af45
dynamic ~~~ F F nve1/10.10.10.2 VTEP-1# show ip mroute detail IP Multicast Routing Table for VRF
"default" Total number of routes: 7 Total number of (*,G) routes: 2 Total number of (S,G)
routes: 4 Total number of (*,G-prefix) routes: 1 (*, 225.1.1.1/32), uptime: 19:51:28, nve(1)
ip(0) pim(1) Data Created: No VXLAN Flags VXLAN Encap Stats: 0/0 [Packets/Bytes], 0.000 bps
Incoming interface: Ethernet10/1, RPF nbr: 1.1.1.1 Outgoing interface list: (count: 2)
Ethernet10/1, uptime: 19:51:09, pim, (RPF) nve1, uptime: 19:51:28, nve (10.10.10.1/32,
225.1.1.1/32), uptime: 19:51:28, nve(0) mrib(0) ip(0) pim(1) Data Created: No Received Register
stop VXLAN Flags VXLAN Encap Stats: 19/2274 [Packets/Bytes], 0.000 bps Incoming interface:
loopback10, RPF nbr: 10.10.10.1, internal Outgoing interface list: (count: 1) Ethernet10/1,
uptime: 19:51:09, pim (10.10.10.2/32, 225.1.1.1/32), uptime: 18:10:06, pim(1) mrib(1) ip(0) Data
Created: Yes VXLAN Flags VXLAN Decap Stats: 9/846 [Packets/Bytes], 0.000 bps Incoming interface:
Ethernet10/1, RPF nbr: 1.1.1.2, internal Outgoing interface list: (count: 2) Ethernet10/1,
uptime: 01:00:32, pim, (RPF) nve1, uptime: 18:10:06, mrib (*, 227.1.1.1/32), uptime: 12:52:13,
nve(1) ip(0) pim(1) Data Created: No VXLAN Flags VXLAN Encap Stats: 0/0 [Packets/Bytes], 0.000
bps Incoming interface: Ethernet10/1, RPF nbr: 1.1.1.1 Outgoing interface list: (count: 2)
Ethernet10/1, uptime: 12:51:52, pim, (RPF) nve1, uptime: 12:52:13, nve (10.10.10.1/32,
227.1.1.1/32), uptime: 12:52:13, nve(0) mrib(0) ip(0) pim(1) Data Created: No Received Register
stop VXLAN Flags VXLAN Encap Stats: 300/39850 [Packets/Bytes], 0.000 bps Incoming interface:
loopback10, RPF nbr: 10.10.10.1, internal Outgoing interface list: (count: 1) Ethernet10/1,
uptime: 12:51:52, pim (10.10.10.2/32, 227.1.1.1/32), uptime: 12:51:34, pim(1) mrib(1) ip(0) Data
Created: Yes VXLAN Flags VXLAN Decap Stats: 22/1928 [Packets/Bytes], 0.000 bps Incoming
interface: Ethernet10/1, RPF nbr: 1.1.1.2, internal Outgoing interface list: (count: 2)
Ethernet10/1, uptime: 00:52:14, pim, (RPF) nve1, uptime: 12:51:34, mrib (*, 232.0.0.0/8),
```

```

uptime: 20:56:33, pim(0) ip(0) Data Created: No Stats: 0/0 [Packets/Bytes], 0.000 bps Incoming
interface: Null, RPF nbr: 0.0.0.0 Outgoing interface list: (count: 0) VTEP-1# show ip arp Flags:
* - Adjacencies learnt on non-active FHRP router + - Adjacencies synced via CFSOE # -
Adjacencies Throttled for Glean D - Static Adjacencies attached to down interface IP ARP Table
for context default Total number of entries: 4 Address Age MAC Address Interface 10.50.50.1
00:11:32 547f.eeec.af44 Bdi50
10.50.50.2 00:11:14 547f.eeec.af44 Bdi50 10.75.75.1 00:10:45 547f.eeec.af44 Bdi75 10.75.75.2
00:15:04 547f.eeec.af45 Bdi75 192.168.1.2 00:05:39 547f.eeec.af43 Ethernet10/1 VTEP-1# show ip
route IP Route Table for VRF "default" '*' denotes best ucast next-hop '**' denotes best mcast
next-hop '[x/y]' denotes [preference/metric] '%<string>' in via output denotes VRF <string>
192.168.1.0/30, ubest/mbest: 1/0, attached *via 1.1.1.1, Eth10/1, [0/0], 20:25:13, direct
192.168.1.1/32, ubest/mbest: 1/0, attached *via 1.1.1.1, Eth10/1, [0/0], 20:25:13, local
10.10.10.1/32, ubest/mbest: 2/0, attached *via 10.10.10.1, Lo10, [0/0], 20:25:45, local *via
10.10.10.1, Lo10, [0/0], 20:25:45, direct 10.10.10.2/32, ubest/mbest: 1/0 *via 1.1.1.2, Eth10/1,
[1/0], 20:23:42, static 50.50.50.0/24, ubest/mbest: 1/0, attached *via 50.50.50.50, Bdi50,
[0/0], 01:18:47, direct 50.50.50.50/32, ubest/mbest: 1/0, attached *via 50.50.50.50, Bdi50,
[0/0], 01:18:47, local 75.75.75.0/24, ubest/mbest: 1/0, attached *via 75.75.75.75, Bdi75, [0/0],
01:10:05, direct 75.75.75.75/32, ubest/mbest: 1/0, attached *via 75.75.75.75, Bdi75, [0/0],
01:10:05, local

```

Opmerking: Al deze output werd verzameld met een volledig netwerk van verkeer dat tussen alle gastheren in de topologie stroomde.

VTEP-2

```
VTEP-2# show nve vni
```

```

Codes: CP - Control Plane          DP - Data Plane
       UC - Unconfigured           SA - Suppress ARP

```

Interface	VNI	Multicast-group	State	Mode	Type	[BD/VRF]	Flags
nve1	5000	225.1.1.1	Up	DP	L2	[50]	
nve1	7500	227.1.1.1	Up	DP	L2	[75]	

```
VTEP-2# show running-config interface nve 1
```

```

interface nve1
  no shutdown
  source-interface loopback10
  member vni 5000 mcast-group 225.1.1.1
  member vni 7500 mcast-group 227.1.1.1

```

```
VTEP-2# show service instance vni detail
```

```

VSI: VSI-Ethernet7/30.1
If-index: 0x3531d001
Admin Status: Up
Oper Status: Up
Auto-configuration Mode: No
encapsulation profile vni VSI_50_TO_5000
  dot1q 50 vni 5000
Dot1q  VNI      BD
-----
50      5000     50

```

```

VSI: VSI-Ethernet7/30.2
If-index: 0x3531d002
Admin Status: Up
Oper Status: Up
Auto-configuration Mode: No

```

```
encapsulation profile vni TEST
  dot1q 100 vni 7500
Dot1q  VNI      BD
-----
100    7500    75
```

VTEP-2# show bridge-domain

Bridge-domain 50 (2 ports in all)

Name:: Bridge-Domain50

```
Administrative State: UP          Operational State: UP
      vni5000
      VSI-Eth7/30.1
      nve1
```

Bridge-domain 75 (2 ports in all)

Name:: Bridge-Domain75

```
Administrative State: UP          Operational State: UP
      vni7500
      VSI-Eth7/30.2
      nve1
```

VTEP-2# show mac address-table dynamic

Note: MAC table entries displayed are getting read from software.

Use the 'hardware-age' keyword to get information related to 'Age'

Legend:

* - primary entry, G - Gateway MAC, (R) - Routed MAC, O - Overlay MAC
age - seconds since last seen, + - primary entry using vPC Peer-Link, E -

EVPN entry

(T) - True, (F) - False , ~~~ - use 'hardware-age' keyword to retrieve

age info

```
VLAN/BD  MAC Address      Type      age      Secure NTFY Ports/SWID.SSID.LID -----+-----
-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----+-----
nve1/10.10.10.1 * 50 547f.eeec.af45 dynamic ~~~ F F VSI-Eth7/30.1 * 75 547f.eeec.af45 dynamic
~~~ F F VSI-Eth7/30.2 * 75 547f.eeec.af48 dynamic ~~~ F F nve1/10.10.10.1 VTEP-2# show ip mroute
detail IP Multicast Routing Table for VRF "default" Total number of routes: 5 Total number of
(*,G) routes: 2 Total number of (S,G) routes: 2 Total number of (*,G-prefix) routes: 1 (*,
225.1.1.1/32), uptime: 19:56:19, nve(1) ip(0) pim(0) Data Created: No VXLAN Flags VXLAN Encap
Stats: 8/748 [Packets/Bytes], 0.000 bps Incoming interface: Ethernet10/7, RPF nbr: 1.1.1.1
Outgoing interface list: (count: 1) nve1, uptime: 19:56:19, nve (10.10.10.2/32, 225.1.1.1/32),
uptime: 19:56:19, nve(0) mrib(0) pim(1) ip(0) Data Created: No Received Register stop VXLAN
Flags VXLAN Encap Stats: 9/834 [Packets/Bytes], 0.000 bps Incoming interface: loopback10, RPF
nbr: 10.10.10.2 Outgoing interface list: (count: 1) Ethernet10/7, uptime: 18:15:17, pim (*,
227.1.1.1/32), uptime: 12:57:03, nve(1) ip(0) pim(0) Data Created: No VXLAN Flags VXLAN Encap
Stats: 10/864 [Packets/Bytes], 0.000 bps Incoming interface: Ethernet10/7, RPF nbr: 1.1.1.1
Outgoing interface list: (count: 1) nve1, uptime: 12:57:03, nve (10.10.10.2/32, 227.1.1.1/32),
uptime: 12:57:03, nve(0) mrib(0) ip(0) pim(1) Data Created: No Received Register stop VXLAN
Flags VXLAN Encap Stats: 30/2648 [Packets/Bytes], 0.000 bps Incoming interface: loopback10, RPF
nbr: 10.10.10.2 Outgoing interface list: (count: 1) Ethernet10/7, uptime: 12:56:45, pim (*,
232.0.0.0/8), uptime: 18:20:36, pim(0) ip(0) Data Created: No Stats: 0/0 [Packets/Bytes], 0.000
bps Incoming interface: Null, RPF nbr: 0.0.0.0 Outgoing interface list: (count: 0) VTEP-2# show
ip arp Flags: * - Adjacencies learnt on non-active FHRP router + - Adjacencies synced via CFSOE
# - Adjacencies Throttled for Glean D - Static Adjacencies attached to down interface IP ARP
Table for context default Total number of entries: 4 Address Age MAC Address Interface
10.50.50.1 00:11:30 547f.eeec.af44 Bdi50 10.50.50.2 00:17:07 547f.eeec.af45 Bdi50
10.75.75.1 00:04:14 547f.eeec.af45 Bdi75 10.75.75.2 00:03:24 547f.eeec.af45 Bdi75 192.168.1.1
00:10:52 547f.eeec.af48 Ethernet10/7 VTEP-2# show ip route IP Route Table for VRF "default" '*'
denotes best ucast next-hop '**' denotes best mcast next-hop '[x/y]' denotes [preference/metric]
'%<string>' in via output denotes VRF <string> 192.168.1.0/30, ubest/mbest: 1/0, attached *via
1.1.1.2, Eth10/7, [0/0], 20:30:24, direct 192.168.1.2/32, ubest/mbest: 1/0, attached *via
1.1.1.2, Eth10/7, [0/0], 20:30:24, local 10.10.10.1/32, ubest/mbest: 1/0 *via 1.1.1.1, Eth10/7,
[1/0], 20:29:48, static 10.10.10.2/32, ubest/mbest: 2/0, attached *via 10.10.10.2, Lo10, [0/0],
20:29:39, local *via 10.10.10.2, Lo10, [0/0], 20:29:39, direct 50.50.50.0/24, ubest/mbest: 1/0,
```

```
attached *via 50.50.50.51, Bdi50, [0/0], 01:22:50, direct 50.50.50.51/32, ubest/mbest: 1/0,  
attached *via 50.50.50.51, Bdi50, [0/0], 01:22:50, local 75.75.75.0/24, ubest/mbest: 1/0,  
attached *via 75.75.75.76, Bdi75, [0/0], 01:14:50, direct 75.75.75.76/32, ubest/mbest: 1/0,  
attached *via 75.75.75.76, Bdi75, [0/0], 01:14:50, local
```

Opmerking: Al deze output werd verzameld met een volledig netwerk van verkeer dat tussen alle gastheren in de topologie stroomde.

Problemen oplossen

Er is momenteel geen specifieke troubleshooting-informatie beschikbaar voor deze configuratie.