

Túnel IPsec entre o roteador IOS e o Cisco VPN Client 4.x para Windows com exemplo de configuração de autenticação de usuário TACACS+

Contents

[Introduction](#)

[Prerequisites](#)

[Requirements](#)

[Componentes Utilizados](#)

[Conventions](#)

[Configurar](#)

[Diagrama de Rede](#)

[Configurações](#)

[Verificar](#)

[Troubleshoot](#)

[Comandos para Troubleshooting](#)

[Registros de Roteador](#)

[Registros de Cliente](#)

[Informações Relacionadas](#)

Introduction

Este documento descreve como configurar uma conexão IPsec entre um roteador e o Cisco Virtual Private Network (VPN) Client 4.x com Terminal Access Controller Access Control System Plus (TACACS+) para a autenticação de usuários. O Cisco IOS[®] Software Release 12.2(8)T e versões posteriores suportam conexões do Cisco VPN Client 4.x. O VPN Client 4.x usa a política de grupo 2 Diffie-Hellman (D-H). O comando **isakmp policy # group 2** permite que os clientes 4.x se conectem.

Este documento mostra a autenticação no servidor TACACS+ com autorização, como atribuições do Windows Internet Naming Service (WINS) e do Domain Naming Service (DNS), executadas localmente pelo roteador.

Consulte [Configurando o Cisco VPN Client 3.x para Windows para IOS usando a autenticação estendida local](#) para saber mais sobre o cenário em que a autenticação de usuário ocorre localmente no roteador Cisco IOS.

Consulte [Configurando IPsec entre um Cisco IOS Router e um Cisco VPN Client 4.x para Windows usando RADIUS para autenticação de usuário](#) para saber mais sobre o cenário em que a autenticação de usuário ocorre externamente com o protocolo RADIUS.

Prerequisites

Requirements

Antes de você tentar esta configuração, verifique se estes requisitos são atendidos:

- Um conjunto de endereços a ser atribuído ao IPsec.
- Um grupo chamado "vpngroup" com uma senha "cisco123"
- Autenticação de usuário em um servidor TACACS+

Componentes Utilizados

As informações neste documento são baseadas nestas versões de software e hardware:

- Cisco VPN Client para Windows versão 4.0.2D (qualquer VPN Client 3.x ou posterior deve funcionar.)
- Cisco Secure para Windows versão 3.0 (qualquer servidor TACACS+ deve funcionar)
- Roteador Cisco IOS 1710 versão 12.2(8)T1 carregado com o conjunto de recursos IPsecA saída do comando **show version** no roteador é mostrada aqui.

```
1710#show version
Cisco Internetwork Operating System Software
IOS (tm) C1700 Software (C1710-K9O3SY-M),
  Version 12.2(8)T1, RELEASE SOFTWARE (fc2)
TAC Support: http://www.cisco.com/tac
Copyright (c) 1986-2002 by cisco Systems, Inc.
Compiled Sat 30-Mar-02 13:30 by ccai
Image text-base: 0x80008108, data-base: 0x80C1E054

ROM: System Bootstrap, Version 12.2(1r)XE1, RELEASE SOFTWARE (fc1)

1710 uptime is 1 week, 6 days, 22 hours, 30 minutes
System returned to ROM by reload
System image file is "flash:c1710-k9o3sy-mz.122-8.T1"

cisco 1710 (MPC855T) processor (revision 0x200)
  with 27853K/4915K bytes of memory.
Processor board ID JAD052706CX (3234866109), with hardware revision 0000
MPC855T processor: part number 5, mask 2
Bridging software.
X.25 software, Version 3.0.0.
1 Ethernet/IEEE 802.3 interface(s)
1 FastEthernet/IEEE 802.3 interface(s)
1 Virtual Private Network (VPN) Module(s)
32K bytes of non-volatile configuration memory.
16384K bytes of processor board System flash (Read/Write)

Configuration register is 0x2102
```

The information in this document was created from the devices in a specific lab environment. All of the devices used in this document started with a cleared (default) configuration. If your network is live, make sure that you understand the potential impact of any command.

Conventions

Consulte as [Convenções de Dicas Técnicas da Cisco para obter informações sobre convenções](#)

[de documentos.](#)


Configurar

Nesta seção, você encontrará informações para configurar os recursos descritos neste documento.

Observação: use a [Command Lookup Tool](#) ([somente](#) clientes [registrados](#)) para encontrar mais informações sobre os comandos usados neste documento.

Diagrama de Rede

Este documento utiliza a seguinte configuração de rede:

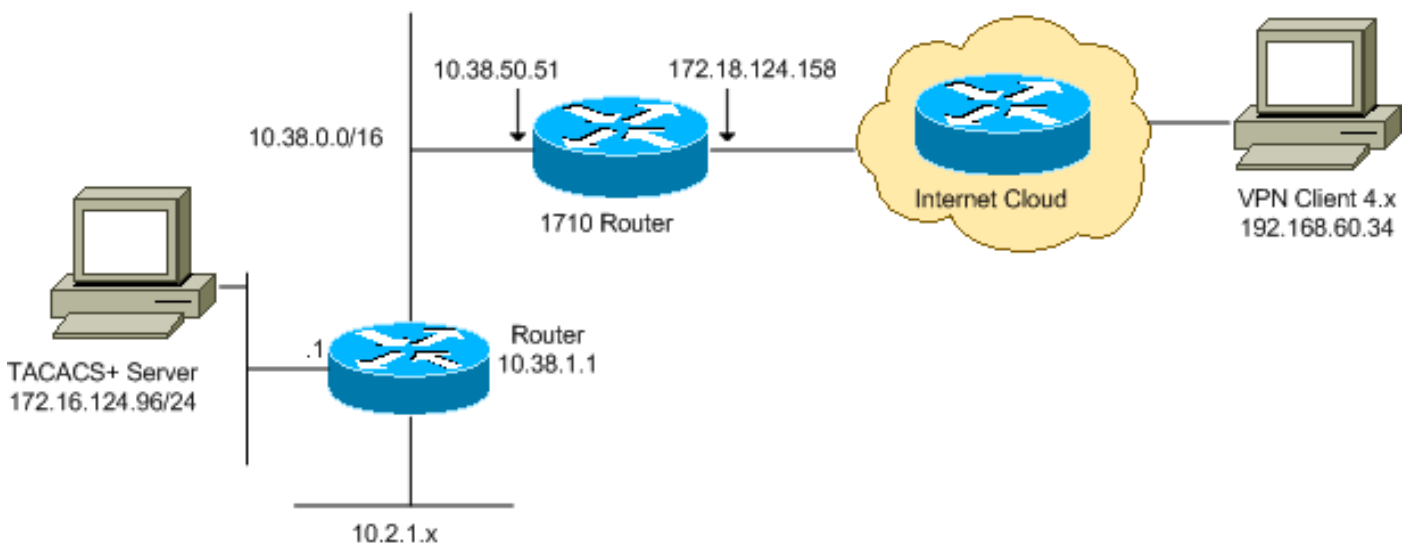

Observação: os esquemas de endereçamento IP usados nesta configuração não são legalmente roteáveis na Internet. São endereços [RFC 1918](#) que foram usados em um ambiente de laboratório.

Configurações

Este documento utiliza as seguintes configurações:

- [Cisco 1710 Router](#)
- [Servidor TACACS+](#)
- [VPN Client 4.x](#)
- [Encapsulamento dividido](#)

Cisco 1710 Router

Cisco 1710 Router

```
1710#show run
Building configuration...

Current configuration : 1884 bytes
!
```

```
version 12.2
service timestamps debug uptime
service timestamps log uptime
no service password-encryption
!
hostname 1710
!
!--- Enable authentication, authorization and accounting
(AAA) !--- for user authentication and group
authorization. aaa new-model
!
!--- In order to enable extended authentication (Xauth)
for user authentication, !--- enable the aaa
authentication commands. !--- The group TACACS+ command
specifies TACACS+ user authentication.

aaa authentication login userauthen group tacacs+
!--- In order to enable group authorization, !--- enable
the aaa authorization commands.

aaa authorization network groupauthor local
!
!
ip subnet-zero
!
!
!
ip audit notify log
ip audit po max-events 100
!
!--- Create an Internet Security Association and !---
Key Management Protocol (ISAKMP) policy for Phase 1
negotiations. crypto isakmp policy 3
encr 3des
authentication pre-share
group 2
!
!--- Create a group in order to specify the !--- WINS
and DNS server addresses to the VPN Client, !--- along
with the pre-shared key for authentication. crypto
isakmp client configuration group vpngroup
key cisco123
dns 10.2.1.10
wins 10.2.1.20
domain cisco.com
pool ippool
!
!--- Create the Phase 2 policy for actual data
encryption. crypto ipsec transform-set myset esp-3des
esp-sha-hmac
!
!--- Create a dynamic map, and !--- apply the transform
set that was previously created. crypto dynamic-map
dynmap 10
set transform-set myset
!
!--- Create the actual crypto map, !--- and apply the
AAA lists that were created earlier. crypto map
clientmap client authentication list userauthen
crypto map clientmap isakmp authorization list
groupauthor
crypto map clientmap client configuration address
respond
```

```

crypto map clientmap 10 ipsec-isakmp dynamic dynmap
!
!
fax interface-type fax-mail
mta receive maximum-recipients 0
!
!
!
!--- Apply the crypto map on the outside interface.
interface FastEthernet0
ip address 172.18.124.158 255.255.255.0
crypto map clientmap
!
interface Ethernet0
ip address 10.38.50.51 255.255.0.0
!
!--- Create a pool of addresses to be assigned to the
VPN Clients. ip local pool ippool 10.1.1.100 10.1.1.200
ip classless
ip route 0.0.0.0 0.0.0.0 172.18.124.1
ip route 172.16.124.0 255.255.255.0 10.38.1.1
ip route 10.2.1.0 255.255.255.0 10.38.1.1
ip http server
ip pim bidir-enable
!
!
!
!--- Specify the IP address of the TACACS+ server, !---
along with the TACACS+ shared secret key. tacacs-server
host 172.16.124.96 key cisco123
!
!
line con 0
  exec-timeout 0 0
line aux 0
line vty 0 4
!
!
end

```

Servidor TACACS+

Para configurar o servidor TACACS+, faça o seguinte:

1. Clique em **Add Entry** para adicionar uma entrada para o roteador no banco de dados do servidor TACACS+.

AAA Client Hostname	AAA Client IP Address	Authenticate Using
340	172.18.124.151	RADIUS (Cisco Aironet)
Aironet-340-Lab	10.36.1.99	RADIUS (Cisco Aironet)
others	<Default>	TACACS+ (Cisco IOS)

[Add Entry](#)

2. Na página Add AAA Client (Adicionar cliente AAA), insira as informações do roteador conforme mostrado nesta imagem:

AAA Client Hostname: 1710Router

AAA Client IP Address: 10.38.50.51

Key: cisco123

Authenticate Using: TACACS+ (Cisco IOS)

Single Connect TACACS+ AAA Client (Record stop in accounting on failure).

Log Update/Watchdog Packets from this AAA Client

Log RADIUS Tunneling Packets from this AAA Client

Submit Submit + Restart Cancel

No campo AAA Client Hostname, insira um nome para o roteador. No campo AAA Client IP Address (Endereço IP do cliente AAA), digite **10.38.50.51**. No campo Key (Chave), insira **cisco123** como a chave secreta compartilhada. Na lista suspensa Autenticar usando, escolha **TACACS+ (Cisco IOS)** e clique em **Enviar**.

3. No campo Usuário, insira o nome de usuário para o usuário VPN no banco de dados Cisco Secure e clique em **Adicionar/Editar**. Neste exemplo, o nome de usuário é *cisco*.

User: cisco

Find Add/Edit

List users beginning with letter/number:

c C d D e E f F g G h H i I j J k K l L m M n N o O p P q Q r R s S t T u U v V w W x X y Y z Z

List All Users

Get to Help

- [User Setup and External User Databases](#)
- [Finding a Specific User in the CiscoSecure User Database](#)
- [Adding a User to the CiscoSecure User Database](#)
- [Listing Usernames that Begin with a Particular Character](#)
- [Listing All Usernames in the CiscoSecure User Database](#)
- [Changing a Username in the CiscoSecure User Database](#)

User Setup enables you to configure individual user information, add users, and delete users in the database.

4. Na próxima página, digite e confirme a senha para o usuário *cisco*. Neste exemplo, a senha também é *cisco*.

Supplementary User Info

Real Name:

Description:

User Setup

Password Authentication:

CiscoSecure PAP (Also used for CHAP/MS-CHAP/ARAP, if the Separate field is not checked.)

Password:

Confirm Password:

Separate (CHAP/MS-CHAP/ARAP)

 Password:

 Confirm Password:

When using a Token Card server for authentication, supplying a separate CHAP password for a token card user allows CHAP authentication. This is especially useful when token caching is enabled.

Group to which the user is assigned:

- [Account Disabled](#)
- [Deleting a Username](#)
- [Supplementary User Info](#)
- [Password Authentication](#)
- [Group to which the user is assigned](#)
- [Callback](#)
- [Client IP Address Assignment](#)
- [Advanced Settings](#)
- [Network Access Restrictions](#)
- [Max Sessions](#)
- [Usage Quotas](#)
- [Account Disable](#)
- [Downloadable ACLs](#)
- [Advanced TACACS+ Settings](#)
- [TACACS+ Enable Control](#)
- [TACACS+ Enable Password](#)
- [TACACS+ Outbound Password](#)
- [TACACS+ Shell Command Authorization](#)
- [TACACS+ Unknown Services](#)
- [IETF RADIUS Attributes](#)
- [RADIUS Vendor-Specific Attributes](#)

Account Disabled Status

Select the Account Disabled check box to disable this account; clear the check box to enable the account.


[\[Back to Top\]](#)

5. Se desejar mapear a conta de usuário para um grupo, faça essa etapa agora. Quando terminar, clique em **Enviar**.

[VPN Client 4.x](#)

Para configurar o VPN Client 4.x, faça o seguinte:

1. Inicie o VPN Client e clique em **New** para criar uma nova conexão.

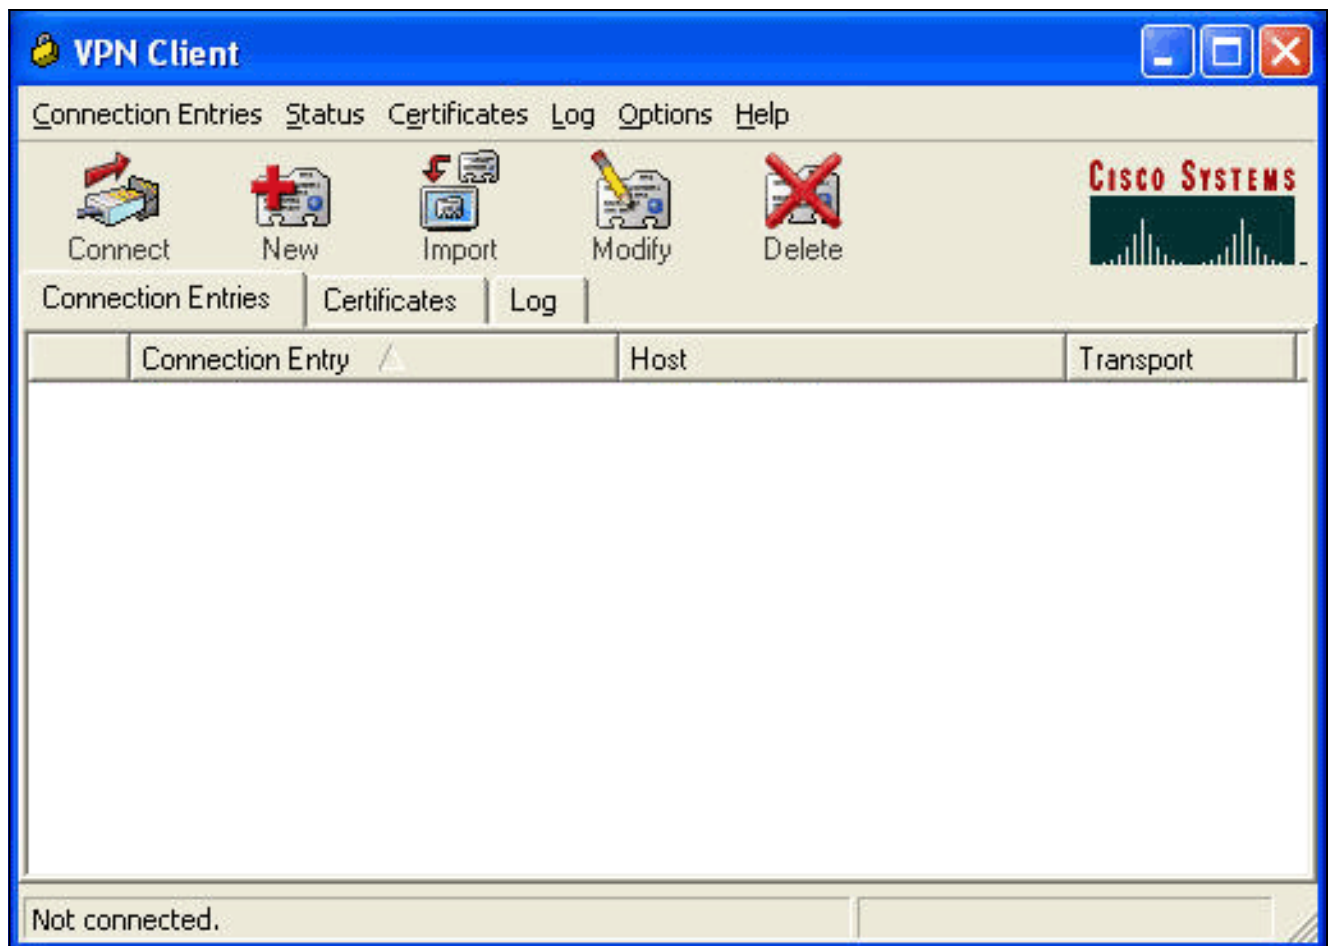

A caixa de diálogo Create New VPN Connection Entry do VPN Client é

VPN Client | Create New VPN Connection Entry

Connection Entry:

Description:

Host:

Authentication | Transport | Backup Servers | Dial-Up

Group Authentication Mutual Group Authentication

Name:

Password:

Confirm Password:

Certificate Authentication

Name:

Send CA Certificate Chain

Erase User Password | Save | Cancel

exibida.

2. Na caixa de diálogo Create New VPN Connection Entry (Criar nova conexão VPN), insira as informações de conexão conforme mostrado nesta

VPN Client | Create New VPN Connection Entry

Connection Entry:

Description:

Host:

Authentication | Transport | Backup Servers | Dial-Up

Group Authentication Mutual Group Authentication

Name:

Password:

Confirm Password:

Certificate Authentication


Name:

Send CA Certificate Chain

imagem:

o campo Entrada de conexão, insira um nome para a conexão. Nos campos Descrição e Host, insira uma descrição e o endereço IP do host para a entrada da conexão. Na guia Autenticação, clique no botão de opção **Autenticação de grupo** e insira o nome e a senha do usuário. Clique em **Salvar** para salvar a conexão.

3. Na janela VPN Client, selecione a entrada de conexão que você criou e clique em **Connect** para se conectar ao roteador.

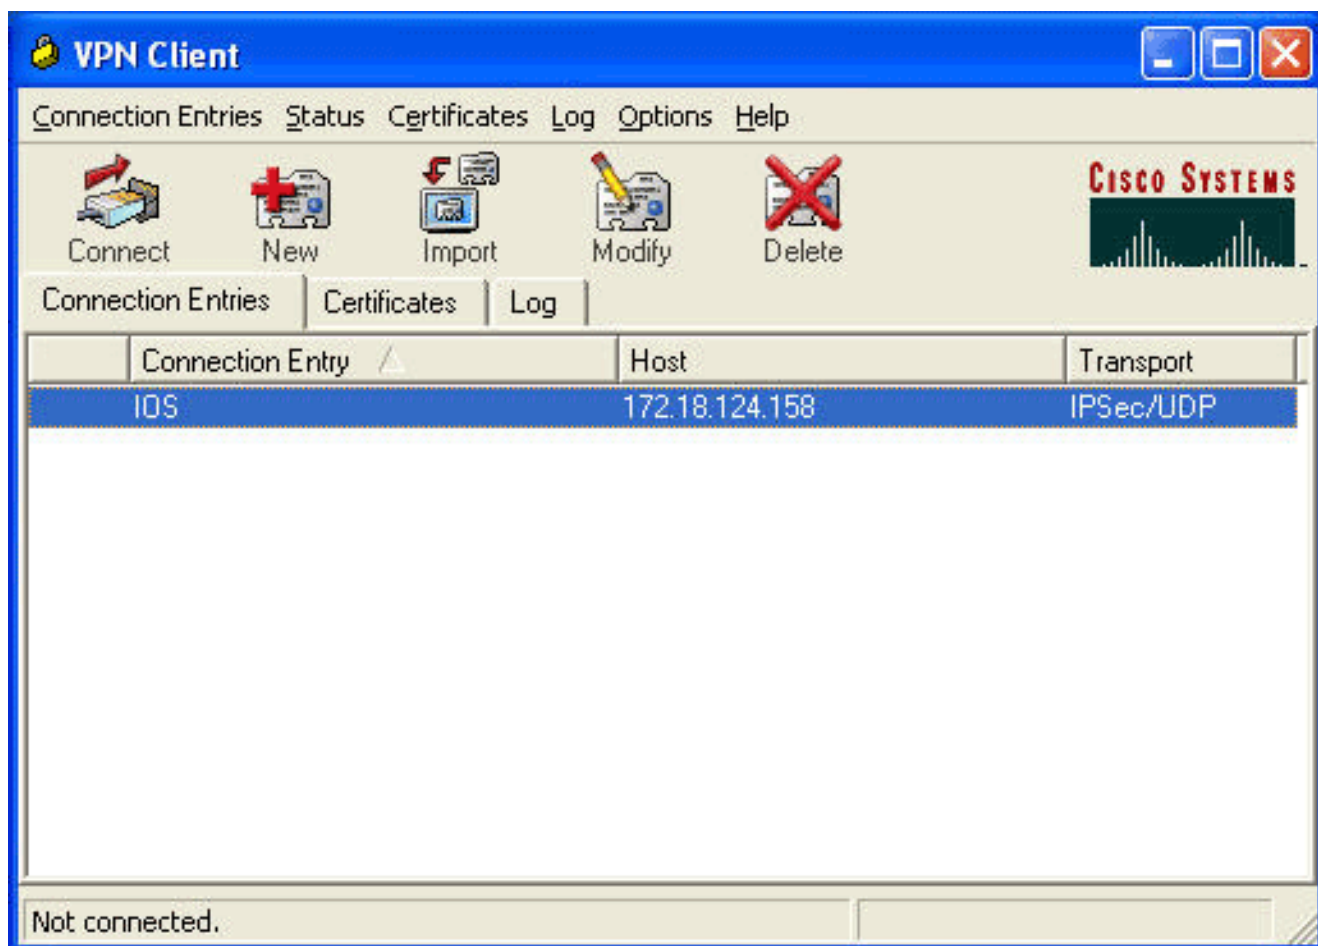

4. À medida que o IPsec negocia, você é solicitado a inserir um nome de usuário e uma senha. Insira um nome de usuário e uma senha. A janela exibe estas mensagens: "Negociando perfis de segurança." "Seu link agora está seguro."

Encapsulamento dividido

Para ativar o tunelamento dividido para as conexões VPN, certifique-se de configurar uma lista de controle de acesso (ACL) no roteador. Neste exemplo, o comando **access-list 102** é associado ao grupo para fins de tunelamento dividido e o túnel é formado para as redes 10.38.X.X /16 e 10.2.x.x. Fluxos de tráfego não criptografados para dispositivos que não estão na ACL 102 (por exemplo, a Internet).

```
access-list 102 permit ip 10.38.0.0 0.0.255.255 10.1.1.0 0.0.0.255
access-list 102 permit ip 10.2.0.0 0.0.255.255 10.1.1.0 0.0.0.255
```

Aplice o ACL em propriedades do grupo.

```
crypto isakmp client configuration group vpngroup
key cisco123
dns 10.2.1.10
wins 10.2.1.20
domain cisco.com
pool ippool
acl 102
```

Verificar

Esta seção fornece informações que você pode usar para verificar se sua configuração está funcionando adequadamente.

Determinados comandos show são suportados pela ferramenta [Output Interpreter \(clientes registrados somente\)](#). Esta ferramenta permite que você veja uma análise da saída do comando show.

```
1710#show crypto isakmp sa
```

dst	src	state	conn-id	slot
172.18.124.158	192.168.60.34	QM_IDLE	3	0

```
1710#show crypto ipsec sa
```

```
interface: FastEthernet0
```

```
Crypto map tag: clientmap, local addr. 172.18.124.158
```

```
local ident (addr/mask/prot/port): (172.18.124.158/255.255.255.255/0/0)
```

```
remote ident (addr/mask/prot/port): (10.1.1.114/255.255.255.255/0/0)
```

```
current_peer: 192.168.60.34
```

```
PERMIT, flags={}
```

```
#pkts encaps: 0, #pkts encrypt: 0, #pkts digest 0
```

```
#pkts decaps: 0, #pkts decrypt: 0, #pkts verify 0
```

```
#pkts compressed: 0, #pkts decompressed: 0
```

```
#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0
```

```
#send errors 0, #recv errors 0
```

```
local crypto endpt.: 172.18.124.158, remote crypto endpt.: 192.168.60.34
```

```
path mtu 1500, media mtu 1500
```

```
current outbound spi: 8F9BB05F
```

```
inbound esp sas:
```

```
spi: 0x61C53A64(1640315492)
```

```
transform: esp-3des esp-sha-hmac ,
```

```
in use settings ={Tunnel, }
```

```
slot: 0, conn id: 200, flow_id: 1, crypto map: clientmap
```

```
sa timing: remaining key lifetime (k/sec): (4608000/3294)
```

```
IV size: 8 bytes
```

```
replay detection support: Y
```

```
inbound ah sas:
```

```
inbound pcg sas:
```

```
outbound esp sas:
```

```
spi: 0x8F9BB05F(2409345119)
```

```
transform: esp-3des esp-sha-hmac ,
```

```
in use settings ={Tunnel, }
```

```
slot: 0, conn id: 201, flow_id: 2, crypto map: clientmap
```

```
sa timing: remaining key lifetime (k/sec): (4608000/3294)
```

```
IV size: 8 bytes
```

```
replay detection support: Y
```

```
outbound ah sas:
```

```
outbound pcg sas:
```

```
local ident (addr/mask/prot/port): (10.38.0.0/255.255.0.0/0/0)
remote ident (addr/mask/prot/port): (10.1.1.114/255.255.255.255/0/0)
current_peer: 192.168.60.34
PERMIT, flags={}
#pkts encaps: 3, #pkts encrypt: 3, #pkts digest 3
#pkts decaps: 3, #pkts decrypt: 3, #pkts verify 3
#pkts compressed: 0, #pkts decompressed: 0
#pkts not compressed: 0, #pkts compr. failed: 0, #pkts decompress failed: 0
#send errors 0, #recv errors 0
```

```
local crypto endpt.: 172.18.124.158, remote crypto endpt.: 192.168.60.34
path mtu 1500, media mtu 1500
current outbound spi: 8B57E45E
```

```
inbound esp sas:
spi: 0x89898D1A(2307493146)
transform: esp-3des esp-sha-hmac ,
in use settings ={Tunnel, }
slot: 0, conn id: 202, flow_id: 3, crypto map: clientmap
sa timing: remaining key lifetime (k/sec): (4607999/3452)
IV size: 8 bytes
replay detection support: Y
```

inbound ah sas:

inbound pcsp sas:

```
outbound esp sas:
spi: 0x8B57E45E(2337793118)
transform: esp-3des esp-sha-hmac ,
in use settings ={Tunnel, }
slot: 0, conn id: 203, flow_id: 4, crypto map: clientmap
sa timing: remaining key lifetime (k/sec): (4607999/3452)
IV size: 8 bytes
replay detection support: Y
```

outbound ah sas:

outbound pcsp sas:

1710#**show crypto engine connections active**

ID	Interface	IP-Address	State	Algorithm	Encrypt	Decrypt
2	FastEthernet0	172.18.124.158	set	HMAC_SHA+3DES_56_C	0	0
200	FastEthernet0	172.18.124.158	set	HMAC_SHA+3DES_56_C	0	0
201	FastEthernet0	172.18.124.158	set	HMAC_SHA+3DES_56_C	0	0
202	FastEthernet0	172.18.124.158	set	HMAC_SHA+3DES_56_C	0	3
203	FastEthernet0	172.18.124.158	set	HMAC_SHA+3DES_56_C	3	0

[Troubleshoot](#)

Esta seção fornece informações que podem ser usadas para o troubleshooting da sua configuração.

[Comandos para Troubleshooting](#)

A [Output Interpreter Tool \(somente clientes registrados\) \(OIT\)](#) oferece suporte a determinados [comandos show](#). Use a OIT para visualizar uma análise da saída do comando **show**.

Nota:Consulte Informações Importantes sobre Comandos de Depuração antes de usar comandos debug.

- **debug crypto ipsec** — Exibe informações de depuração sobre conexões de IPsec.
- **debug crypto isakmp** — Exibe informações de depuração sobre conexões IPsec e mostra o primeiro conjunto de atributos negados devido a incompatibilidades em ambas as extremidades.
- **debug crypto engine** — Exibe informações a partir do cripto mecanismo.
- **debug aaa authentication** — Exibe informações sobre autenticação AAA/TACACS+.
- **debug aaa authorization** — Exibe informações sobre autorização AAA/TACACS+.
- **debug tacacs** —Exibe informações que permitem que você solucione problemas de comunicação entre o servidor TACACS+ e o roteador.

[Registros de Roteador](#)

```
1710#show debug
```

```
General OS:
```

```
TACACS access control debugging is on
```

```
AAA Authentication debugging is on
```

```
AAA Authorization debugging is on
```

```
Cryptographic Subsystem:
```

```
Crypto ISAKMP debugging is on
```

```
Crypto Engine debugging is on
```

```
Crypto IPSEC debugging is on
```

```
1710#
```

```
1w6d: ISAKMP (0:0): received packet from 192.168.60.34 (N) NEW SA
```

```
1w6d: ISAKMP: local port 500, remote port 500
```

```
1w6d: ISAKMP (0:2): (Re)Setting client xauth list userauthen and state
```

```
1w6d: ISAKMP: Locking CONFIG struct 0x8158B894 from
```

```
crypto_ikmp_config_initialize_sa, count 2
```

```
1w6d: ISAKMP (0:2): processing SA payload. message ID = 0
```

```
1w6d: ISAKMP (0:2): processing ID payload. message ID = 0
```

```
1w6d: ISAKMP (0:2): processing vendor id payload
```

```
1w6d: ISAKMP (0:2): vendor ID seems Unity/DPD but bad major
```

```
1w6d: ISAKMP (0:2): vendor ID is XAUTH
```

```
1w6d: ISAKMP (0:2): processing vendor id payload
```

```
1w6d: ISAKMP (0:2): vendor ID is DPD
```

```
1w6d: ISAKMP (0:2): processing vendor id payload
```

```
1w6d: ISAKMP (0:2): vendor ID is Unity
```

```
1w6d: ISAKMP (0:2): Checking ISAKMP transform 1 against priority 3 policy
```

```
1w6d: ISAKMP: encryption 3DES-CBC
```

```
1w6d: ISAKMP: hash SHA
```

```
1w6d: ISAKMP: default group 2
```

```
1w6d: ISAKMP: auth XAUTHInitPreShared
```

```
1w6d: ISAKMP: life type in seconds
```

```
1w6d: ISAKMP: life duration (VPI) of 0x0 0x20 0xC4 0x9B
```

```
1w6d: ISAKMP (0:2): atts are acceptable. Next payload is 3
```

```
1w6d: CryptoEngine0: generate alg parameter
```

```
1w6d: CryptoEngine0: CRYPTO_ISA_DH_CREATE(hw) (ipsec)
```

```
1w6d: CRYPTO_ENGINE: Dh phase 1 status: 0
```

```
1w6d: ISAKMP (0:2): processing KE payload. message ID = 0
```

```
1w6d: CryptoEngine0: generate alg parameter
```

```
1w6d: CryptoEngine0: CRYPTO_ISA_DH_SHARE_SECRET(hw) (ipsec)
```

```
1w6d: ISAKMP (0:2): processing NONCE payload. message ID = 0
```

```
1w6d: ISAKMP (0:2): processing vendor id payload
```

```
1w6d: ISAKMP (0:2): processing vendor id payload
```

```
1w6d: ISAKMP (0:2): processing vendor id payload
1w6d: AAA: parse name=ISAKMP-ID-AUTH idb type=-1 tty=-1
1w6d: AAA/MEMORY: create_user (0x817F63F4) user='vpngroup' ruser='NULL' ds0=0
    port='ISAKMP-ID-AUTH' rem_addr='192.168.60.34' authen_type=NONE
    service=LOGIN priv=0 initial_task_id='0'
1w6d: ISAKMP (0:2): Input = IKE_MESG_FROM_PEER, IKE_AM_EXCH
Old State = IKE_READY New State = IKE_R_AM_AAA_AWAIT

1w6d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(1472763894):
    Port='ISAKMP-ID-AUTH' list='groupauthor' service=NET
1w6d: AAA/AUTHOR/CRYPTO AAA: ISAKMP-ID-AUTH(1472763894) user='vpngroup'
1w6d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(1472763894): send AV service=ike
1w6d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(1472763894): send AV protocol=ipsec
1w6d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(1472763894): found list "groupauthor"
1w6d: ISAKMP-ID-AUTH AAA/AUTHOR/CRYPTO AAA(1472763894): Method=LOCAL
1w6d: AAA/AUTHOR (1472763894): Post authorization status = PASS_ADD
1w6d: ISAKMP: got callback 1
AAA/AUTHOR/IKE: Processing AV service=ike
AAA/AUTHOR/IKE: Processing AV protocol=ipsec
AAA/AUTHOR/IKE: Processing AV tunnel-password=cisco123
AAA/AUTHOR/IKE: Processing AV default-domain*cisco.com
AAA/AUTHOR/IKE: Processing AV addr-pool*ippool
AAA/AUTHOR/IKE: Processing AV key-exchange=ike
AAA/AUTHOR/IKE: Processing AV timeout*0
AAA/AUTHOR/IKE: Processing AV idletime*0
AAA/AUTHOR/IKE: Processing AV inacl*102
AAA/AUTHOR/IKE: Processing AV dns-servers*10.1.1.10 0.0.0.0
AAA/AUTHOR/IKE: Processing AV wins-servers*10.1.1.20 0.0.0.0
1w6d: CryptoEngine0: create ISAKMP SKEYID for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_SA_CREATE(hw) (ipsec)
1w6d: ISAKMP (0:2): SKEYID state generated
1w6d: ISAKMP (0:2): SA is doing pre-shared key authentication plux
    XAUTH using id type ID_IPV4_ADDR
1w6d: ISAKMP (2): ID payload
next-payload : 10
type : 1
protocol : 17
port : 500
length : 8
1w6d: ISAKMP (2): Total payload length: 12
1w6d: CryptoEngine0: generate hmac context for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)
1w6d: ISAKMP (0:2): sending packet to 192.168.60.34 (R) AG_INIT_EXCH
1w6d: ISAKMP (0:2): Input = IKE_MESG_FROM_AAA, PRESHARED_KEY_REPLY
Old State = IKE_R_AM_AAA_AWAIT New State = IKE_R_AM2

1w6d: AAA/MEMORY: free_user (0x817F63F4) user='vpngroup'
    ruser='NULL' port='ISAK MP-ID-AUTH' rem_addr='192.168.60.34'
    authen_type=NONE service=LOGIN priv=0
1w6d: ISAKMP (0:2): received packet from 192.168.60.34 (R) AG_INIT_EXCH
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw) (ipsec)
1w6d: ISAKMP (0:2): processing HASH payload. message ID = 0
1w6d: CryptoEngine0: generate hmac context for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)
1w6d: ISAKMP (0:2): processing NOTIFY INITIAL_CONTACT protocol 1
    spi 0, message ID = 0, sa = 81673884
1w6d: ISAKMP (0:2): Process initial contact, bring down
    existing phase 1 and 2 SA's
1w6d: ISAKMP (0:2): returning IP addr to the address pool: 10.1.1.113
1w6d: ISAKMP (0:2): returning address 10.1.1.113 to pool
1w6d: ISAKMP (0:2): peer does not do paranoid keepalives.

1w6d: ISAKMP (0:2): SA has been authenticated with 192.168.60.34
1w6d: CryptoEngine0: clear dh number for conn id 1
```

1w6d: CryptoEngine0: CRYPTO_ISA_DH_DELETE(hw) (ipsec)
1w6d: IPSEC(key_engine): got a queue event...
1w6d: IPSEC(key_engine_delete_sas): rec'd delete notify from ISAKMP
1w6d: IPSEC(key_engine_delete_sas): delete all SAs shared with 192.168.60.34
1w6d: CryptoEngine0: generate hmac context for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw) (ipsec)
1w6d: ISAKMP (0:2): sending packet to 192.168.60.34 (R) QM_IDLE
1w6d: ISAKMP (0:2): purging node 1324880791
1w6d: ISAKMP: Sending phase 1 responder lifetime 86400

1w6d: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_AM_EXCH
Old State = IKE_R_AM2 New State = IKE_P1_COMPLETE

1w6d: ISAKMP (0:2): Need XAUTH
1w6d: AAA: parse name=ISAKMP idb type=-1 tty=-1
1w6d: AAA/MEMORY: create_user (0x812F79FC) user='NULL'
ruser='NULL' ds0=0 port='
ISAKMP' rem_addr='192.168.60.34' authn_type=ASCII service=LOGIN
priv=0 initial_task_id='0'
1w6d: ISAKMP (0:2): Input = IKE_MSG_INTERNAL, IKE_PHASE1_COMPLETE
Old State = IKE_P1_COMPLETE New State = IKE_XAUTH_AAA_START_LOGIN_AWAIT

1w6d: AAA/AUTHEN/START (2017610393): port='ISAKMP' list='userauthen'
action=LOGIN service=LOGIN
1w6d: AAA/AUTHEN/START (2017610393): found list userauthen
1w6d: AAA/AUTHEN/START (2017610393): Method=tacacs+ (tacacs+)
1w6d: TAC+: send AUTHEN/START packet ver=192 id=2017610393
1w6d: TAC+: Using default tacacs server-group "tacacs+" list.
1w6d: TAC+: Opening TCP/IP to 172.16.124.96/49 timeout=5
1w6d: TAC+: Opened TCP/IP handle 0x8183D638 to 172.16.124.96/49
1w6d: TAC+: 172.16.124.96 (2017610393) AUTHEN/START/LOGIN/ASCII queued
1w6d: TAC+: (2017610393) AUTHEN/START/LOGIN/ASCII processed
1w6d: TAC+: ver=192 id=2017610393 received AUTHEN status = GETUSER
1w6d: AAA/AUTHEN(2017610393): Status=GETUSER
1w6d: ISAKMP: got callback 1
1w6d: ISAKMP/xauth: request attribute XAUTH_TYPE_V2
1w6d: ISAKMP/xauth: request attribute XAUTH_MESSAGE_V2
1w6d: ISAKMP/xauth: request attribute XAUTH_USER_NAME_V2
1w6d: ISAKMP/xauth: request attribute XAUTH_USER_PASSWORD_V2
1w6d: CryptoEngine0: generate hmac context for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)
1w6d: ISAKMP (0:2): initiating peer config to 192.168.60.34. ID = 1641488057
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw) (ipsec)
1w6d: ISAKMP (0:2): sending packet to 192.168.60.34 (R) CONF_XAUTH
1w6d: ISAKMP (0:2): Input = IKE_MSG_FROM_AAA, IKE_AAA_START_LOGIN
Old State = IKE_XAUTH_AAA_START_LOGIN_AWAIT
New State = IKE_XAUTH_REQ_SENT

1w6d: ISAKMP (0:2): received packet from 192.168.60.34 (R) CONF_XAUTH
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw) (ipsec)
1w6d: ISAKMP (0:2): processing transaction payload from 192.168.60.34.
message ID = 1641488057
1w6d: CryptoEngine0: generate hmac context for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)
1w6d: ISAKMP: Config payload REPLY
1w6d: ISAKMP/xauth: reply attribute XAUTH_TYPE_V2 unexpected
1w6d: ISAKMP/xauth: reply attribute XAUTH_USER_NAME_V2
1w6d: ISAKMP/xauth: reply attribute XAUTH_USER_PASSWORD_V2
1w6d: ISAKMP (0:2): deleting node 1641488057 error FALSE
reason "done with xauth request/reply exchange"
1w6d: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_CFG_REPLY
Old State = IKE_XAUTH_REQ_SENT
New State = IKE_XAUTH_AAA_CONT_LOGIN_AWAIT

1w6d: AAA/AUTHEN/CONT (2017610393): continue_login (user='(undef)')

1w6d: AAA/AUTHEN(2017610393): Status=GETUSER

1w6d: AAA/AUTHEN(2017610393): Method=tacacs+ (tacacs+)

1w6d: TAC+: send AUTHEN/CONT packet id=2017610393

1w6d: TAC+: 172.16.124.96 (2017610393) AUTHEN/CONT queued

1w6d: TAC+: (2017610393) AUTHEN/CONT processed

1w6d: TAC+: ver=192 id=2017610393 received AUTHEN status = GETPASS

1w6d: AAA/AUTHEN(2017610393): Status=GETPASS

1w6d: AAA/AUTHEN/CONT (2017610393): continue_login (user='cisco')

1w6d: AAA/AUTHEN(2017610393): Status=GETPASS

1w6d: AAA/AUTHEN(2017610393): Method=tacacs+ (tacacs+)

1w6d: TAC+: send AUTHEN/CONT packet id=2017610393

1w6d: TAC+: 172.16.124.96 (2017610393) AUTHEN/CONT queued

1w6d: TAC+: (2017610393) AUTHEN/CONT processed

1w6d: TAC+: ver=192 id=2017610393 received AUTHEN status = PASS

1w6d: AAA/AUTHEN(2017610393): Status=PASS

1w6d: ISAKMP: got callback 1

1w6d: TAC+: Closing TCP/IP 0x8183D638 connection to 172.16.124.96/49

1w6d: CryptoEngine0: generate hmac context for conn id 2

1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)

1w6d: ISAKMP (0:2): initiating peer config to 192.168.60.34. ID = 1736579999

1w6d: CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw) (ipsec)

1w6d: ISAKMP (0:2): sending packet to 192.168.60.34 (R) CONF_XAUTH

1w6d: ISAKMP (0:2): Input = IKE_MSG_FROM_AAA, IKE_AAA_CONT_LOGIN

Old State = IKE_XAUTH_AAA_CONT_LOGIN_AWAIT

New State = IKE_XAUTH_SET_SENT

1w6d: AAA/MEMORY: free_user (0x812F79FC) user='cisco' ruser='NULL'

port='ISAKMP' rem_addr='192.168.60.34' authen_type=ASCII

service=LOGIN priv=0

1w6d: ISAKMP (0:2): received packet from 192.168.60.34 (R) CONF_XAUTH

1w6d: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw) (ipsec)

1w6d: ISAKMP (0:2): processing transaction payload from 192.168.60.34.

message ID = 1736579999

1w6d: CryptoEngine0: generate hmac context for conn id 2

1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)

1w6d: ISAKMP: Config payload ACK

1w6d: ISAKMP (0:2): XAUTH ACK Processed

1w6d: ISAKMP (0:2): deleting node 1736579999 error FALSE

reason "done with transaction"

1w6d: ISAKMP (0:2): Input = IKE_MSG_FROM_PEER, IKE_CFG_ACK

Old State = IKE_XAUTH_SET_SENT New State = IKE_P1_COMPLETE

1w6d: ISAKMP (0:2): Input = IKE_MSG_INTERNAL, IKE_PHASE1_COMPLETE

Old State = IKE_P1_COMPLETE New State = IKE_P1_COMPLETE

1w6d: ISAKMP (0:2): received packet from 192.168.60.34 (R) QM_IDLE

1w6d: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw) (ipsec)

1w6d: ISAKMP (0:2): processing transaction payload from 192.168.60.34.

message ID = 398811763

1w6d: CryptoEngine0: generate hmac context for conn id 2

1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)

1w6d: ISAKMP: Config payload REQUEST

1w6d: ISAKMP (0:2): checking request:

1w6d: ISAKMP: IP4_ADDRESS

1w6d: ISAKMP: IP4_NETMASK

1w6d: ISAKMP: IP4_DNS

1w6d: ISAKMP: IP4_NBNS

1w6d: ISAKMP: ADDRESS_EXPIRY

1w6d: ISAKMP: APPLICATION_VERSION

1w6d: ISAKMP: UNKNOWN Unknown Attr: 0x7000

1w6d: ISAKMP: UNKNOWN Unknown Attr: 0x7001

1w6d: ISAKMP: DEFAULT_DOMAIN

```
1w6d: ISAKMP: SPLIT_INCLUDE
1w6d: ISAKMP: UNKNOWN Unknown Attr: 0x7007
1w6d: ISAKMP: UNKNOWN Unknown Attr: 0x7008
1w6d: ISAKMP: UNKNOWN Unknown Attr: 0x7005
1w6d: AAA: parse name=ISAKMP-GROUP-AUTH idb type=-1 tty=-1
1w6d: AAA/MEMORY: create_user (0x812F79FC) user='vpngroup' ruser='NULL' ds0=0 po
rt='ISAKMP-GROUP-AUTH' rem_addr='192.168.60.34' authen_type=NONE service=LOGIN pr
iv=0 initial_task_id='0'
1w6d: ISAKMP (0:2): Input = IKE_MESG_FROM_PEER, IKE_CFG_REQUEST
Old State = IKE_P1_COMPLETE New State = IKE_CONFIG_AUTHOR_AAA_AWAIT

1w6d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(1059453615):
  Port='ISAKMP-GROUP-AUTH' list='groupauthor' service=NET
1w6d: AAA/AUTHOR/CRYPTO AAA: ISAKMP-GROUP-AUTH(1059453615)
  user='vpngroup'
1w6d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(1059453615):
  send AV service=ike
1w6d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(1059453615):
  send AV protocol=ipsec
1w6d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(1059453615):
  found list "groupauthor"
1w6d: ISAKMP-GROUP-AUTH AAA/AUTHOR/CRYPTO AAA(1059453615):
  Method=LOCAL
1w6d: AAA/AUTHOR (1059453615): Post authorization status = PASS_ADD
1w6d: ISAKMP: got callback 1
AAA/AUTHOR/IKE: Processing AV service=ike
AAA/AUTHOR/IKE: Processing AV protocol=ipsec
AAA/AUTHOR/IKE: Processing AV tunnel-password=cisco123
AAA/AUTHOR/IKE: Processing AV default-domain*cisco.com
AAA/AUTHOR/IKE: Processing AV addr-pool*ippool
AAA/AUTHOR/IKE: Processing AV key-exchange=ike
AAA/AUTHOR/IKE: Processing AV timeout*0
AAA/AUTHOR/IKE: Processing AV idletime*0
AAA/AUTHOR/IKE: Processing AV inacl*102
AAA/AUTHOR/IKE: Processing AV dns-servers*10.1.1.10 0.0.0.0
AAA/AUTHOR/IKE: Processing AV wins-servers*10.1.1.20 0.0.0.0
1w6d: ISAKMP (0:2): attributes sent in message:
1w6d: Address: 0.2.0.0
1w6d: ISAKMP (0:2): allocating address 10.1.1.114
1w6d: ISAKMP: Sending private address: 10.1.1.114
1w6d: ISAKMP: Unknown Attr: IP4_NETMASK (0x2)
1w6d: ISAKMP: Sending IP4_DNS server address: 10.1.1.10
1w6d: ISAKMP: Sending IP4_NBNS server address: 10.1.1.20
1w6d: ISAKMP: Sending ADDRESS_EXPIRY seconds left to use the address: 86396
1w6d: ISAKMP: Sending APPLICATION_VERSION string:
  Cisco Internetwork Operating System Software IOS (tm) C1700 Software
  (C1710-K9O3SY-M), Version 12.2(8)T1, RELEASE SOFTWARE (fc2)
  TAC Support: http://www.cisco.com/tac
  Copyright (c) 1986-2002 by cisco Systems, Inc.
  Compiled Sat 30-Mar-02 13:30 by ccai
1w6d: ISAKMP: Unknown Attr: UNKNOWN (0x7000)
1w6d: ISAKMP: Unknown Attr: UNKNOWN (0x7001)
1w6d: ISAKMP: Sending DEFAULT_DOMAIN default domain name: cisco.com
1w6d: ISAKMP: Sending split include name 102 network 10.38.0.0
  mask 255.255.0.0 protocol 0, src port 0, dst port 0

1w6d: ISAKMP: Unknown Attr: UNKNOWN (0x7007)
1w6d: ISAKMP: Unknown Attr: UNKNOWN (0x7008)
1w6d: ISAKMP: Unknown Attr: UNKNOWN (0x7005)
1w6d: CryptoEngine0: generate hmac context for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)
1w6d: ISAKMP (0:2): responding to peer config from 192.168.60.34. ID = 398811763
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw) (ipsec)
1w6d: ISAKMP (0:2): sending packet to 192.168.60.34 (R) CONF_ADDR
```

1w6d: ISAKMP (0:2): deleting node 398811763 error FALSE reason ""
1w6d: ISAKMP (0:2): Input = IKE_MESG_FROM_AAA, IKE_AAA_GROUP_ATTR
Old State = IKE_CONFIG_AUTHOR_AAA_AWAIT New State = IKE_P1_COMPLETE

1w6d: AAA/MEMORY: free_user (0x812F79FC) user='vpngroup'
ruser='NULL' port='ISAKMP-GROUP-AUTH' rem_addr='192.168.60.34'
authen_type=NONE service=LOGIN priv=0

1w6d: ISAKMP (0:2): received packet from 192.168.60.34 (R) QM_IDLE
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw)(ipsec)
1w6d: CryptoEngine0: generate hmac context for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw)(ipsec)
1w6d: ISAKMP (0:2): processing HASH payload. message ID = 1369459046
1w6d: ISAKMP (0:2): processing SA payload. message ID = 1369459046
1w6d: ISAKMP (0:2): Checking IPsec proposal 1
1w6d: ISAKMP: transform 1, ESP_3DES
1w6d: ISAKMP: attributes in transform:
1w6d: ISAKMP: authenticator is HMAC-MD5
1w6d: ISAKMP: encaps is 1
1w6d: ISAKMP: SA life type in seconds
1w6d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w6d: validate proposal 0
1w6d: IPSEC(validate_proposal): transform proposal
(prot 3, trans 3, hmac_alg 1) not supported
1w6d: ISAKMP (0:2): atts not acceptable. Next payload is 0
1w6d: ISAKMP (0:2): skipping next ANDED proposal (1)
1w6d: ISAKMP (0:2): Checking IPsec proposal 2
1w6d: ISAKMP: transform 1, ESP_3DES
1w6d: ISAKMP: attributes in transform:
1w6d: ISAKMP: authenticator is HMAC-SHA
1w6d: ISAKMP: encaps is 1
1w6d: ISAKMP: SA life type in seconds
1w6d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w6d: validate proposal 0
1w6d: ISAKMP (0:2): atts are acceptable.
1w6d: ISAKMP (0:2): Checking IPsec proposal 2
1w6d: ISAKMP (0:2): transform 1, IPPCP LZS
1w6d: ISAKMP: attributes in transform:
1w6d: ISAKMP: encaps is 1
1w6d: ISAKMP: SA life type in seconds
1w6d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w6d: IPSEC(validate_proposal): transform proposal
(prot 4, trans 3, hmac_alg 0) not supported
1w6d: ISAKMP (0:2): atts not acceptable. Next payload is 0
1w6d: ISAKMP (0:2): Checking IPsec proposal 3
1w6d: ISAKMP: transform 1, ESP_3DES
1w6d: ISAKMP: attributes in transform:
1w6d: ISAKMP: authenticator is HMAC-MD5
1w6d: ISAKMP: encaps is 1
1w6d: ISAKMP: SA life type in seconds
1w6d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w6d: validate proposal 0
1w6d: IPSEC(validate_proposal): transform proposal
(prot 3, trans 3, hmac_alg 1) not supported
1w6d: ISAKMP (0:2): atts not acceptable. Next payload is 0
1w6d: ISAKMP (0:2): Checking IPsec proposal 4
1w6d: ISAKMP: transform 1, ESP_3DES
1w6d: ISAKMP: attributes in transform:
1w6d: ISAKMP: authenticator is HMAC-SHA
1w6d: ISAKMP: encaps is 1
1w6d: ISAKMP: SA life type in seconds
1w6d: ISAKMP: SA life duration (VPI) of 0x0 0x20 0xC4 0x9B
1w6d: validate proposal 0
1w6d: ISAKMP (0:2): atts are acceptable.
1w6d: IPSEC(validate_proposal_request): proposal part #1,

```
(key eng. msg.) INBOUND local= 172.18.124.158,
remote= 192.168.60.34, local_proxy= 172.18.124.158/255.255.255.255/0/0
(type=1), remote_proxy= 10.1.1.114/255.255.255.255/0/0 (type=1),
protocol= ESP, transform= esp-3des esp-sha-hmac , lifedur= 0s and 0kb,
spi= 0x0(0), conn_id= 0, keysize= 0, flags= 0x4
1w6d: validate proposal request 0
1w6d: ISAKMP (0:2): processing NONCE payload. message ID = 1369459046
1w6d: ISAKMP (0:2): processing ID payload. message ID = 1369459046
1w6d: ISAKMP (0:2): processing ID payload. message ID = 1369459046
1w6d: ISAKMP (0:2): asking for 1 spis from ipsec
1w6d: ISAKMP (0:2): Node 1369459046, Input = IKE_MSG_FROM_PEER, IKE_QM_EXCH
Old State = IKE_QM_READY New State = IKE_QM_SPI_STARVE

1w6d: IPSEC(key_engine): got a queue event...
1w6d: IPSEC(spi_response): getting spi 1640315492 for SA
    from 172.18.124.158 to 192.168.60.34 for prot 3
1w6d: ISAKMP: received ke message (2/1)
1w6d: CryptoEngine0: generate hmac context for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_ENCRYPT(hw) (ipsec)
1w6d: ISAKMP (0:2): sending packet to 192.168.60.34 (R) QM_IDLE
1w6d: ISAKMP (0:2): Node 1369459046,
    Input = IKE_MSG_FROM_IPSEC, IKE_SPI_REPLY
Old State = IKE_QM_SPI_STARVE New State = IKE_QM_R_QM2

1w6d: ISAKMP (0:2): received packet from 192.168.60.34 (R) QM_IDLE
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_DECRYPT(hw) (ipsec)
1w6d: CryptoEngine0: generate hmac context for conn id 2
1w6d: CryptoEngine0: CRYPTO_ISA_IKE_HMAC(hw) (ipsec)
1w6d: ipsec allocate flow 0
1w6d: ipsec allocate flow 0
1w6d: CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw) (ipsec)
1w6d: CryptoEngine0: CRYPTO_ISA_IPSEC_KEY_CREATE(hw) (ipsec)
1w6d: ISAKMP (0:2): Creating IPSec SAs
1w6d: inbound SA from 192.168.60.34 to 172.18.124.158
    (proxy 10.1.1.114 to 172.18.124.158)
1w6d: has spi 0x61C53A64 and conn_id 200 and flags 4
1w6d: lifetime of 2147483 seconds
1w6d: outbound SA from 172.18.124.158 to 192.168.60.34
    (proxy 172.18.124.158 to 10.1.1.114 )
1w6d: has spi -1885622177 and conn_id 201 and flags C
1w6d: lifetime of 2147483 seconds
1w6d: ISAKMP (0:2): deleting node 1369459046 error FALSE
    reason "quick mode done (await())"
1w6d: ISAKMP (0:2): Node 1369459046,
    Input = IKE_MSG_FROM_PEER, IKE_QM_EXCH
Old State = IKE_QM_R_QM2 New State = IKE_QM_PHASE2_COMPLETE

1w6d: IPSEC(key_engine): got a queue event...
1w6d: IPSEC(initialize_sas): ,
    (key eng. msg.) INBOUND local= 172.18.124.158,
    remote= 192.168.60.34, local_proxy= 172.18.124.158/0.0.0.0/0/0
    (type=1), remote_proxy= 10.1.1.114/0.0.0.0/0/0 (type=1),
    protocol= ESP, transform= esp-3des esp-sha-hmac ,
    lifedur= 2147483s and 0kb, spi= 0x61C53A64(1640315492),
    conn_id= 200, keysize= 0, flags= 0x4
1w6d: IPSEC(initialize_sas): , (key eng. msg.)
    OUTBOUND local= 172.18.124.158, remote= 192.168.60.34,
    local_proxy= 172.18.124.158/0.0.0.0/0/0 (type=1),
    remote_proxy= 10.1.1.114/0.0.0.0/0/0 (type=1),
    protocol= ESP, transform= esp-3des esp-sha-hmac ,
    lifedur= 2147483s and 0kb, spi= 0x8F9BB05F(2409345119),
    conn_id= 201, keysize= 0, flags= 0xC
1w6d: IPSEC(create_sa): sa created, (sa) sa_dest= 172.18.124.158,
```

```
sa_prot= 50, sa_spi= 0x61C53A64(1640315492),
sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 200
1w6d: IPSEC(create_sa): sa created, (sa) sa_dest= 192.168.60.34,
sa_prot= 50, sa_spi= 0x8F9BB05F(2409345119),
sa_trans= esp-3des esp-sha-hmac , sa_conn_id= 201
```

Registros de Cliente

Para visualizar os registros, inicie o Log Viewer no VPN Client e defina o filtro como *High* para todas as classes configuradas.

A saída do log de exemplo é mostrada aqui.

```
1 11:56:06.609 06/05/02 Sev=Info/6 DIALER/0x63300002
Initiating connection.

2 11:56:06.609 06/05/02 Sev=Info/4 CM/0x63100002
Begin connection process

3 11:56:06.609 06/05/02 Sev=Info/4 CM/0x63100004
Establish secure connection using Ethernet

4 11:56:06.609 06/05/02 Sev=Info/4 CM/0x63100026
Attempt connection with server "172.18.124.158"

5 11:56:06.609 06/05/02 Sev=Info/6 IKE/0x6300003B
Attempting to establish a connection with 172.18.124.158.

6 11:56:06.669 06/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK AG (SA, KE, NON, ID, VID, VID, VID) to 172.18.124.158

7 11:56:07.250 06/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.18.124.158

8 11:56:07.250 06/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK AG (SA, VID, VID, VID, VID, KE, ID, NON, HASH) from
172.18.124.158

9 11:56:07.250 06/05/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 12F5F28C457168A9702D9FE274CC0100

10 11:56:07.250 06/05/02 Sev=Info/5 IKE/0x63000001
Peer is a Cisco-Unity compliant peer

11 11:56:07.250 06/05/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = AFCAD71368A1F1C96B8696FC77570100

12 11:56:07.250 06/05/02 Sev=Info/5 IKE/0x63000001
Peer supports DPD

13 11:56:07.250 06/05/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 0A0E5F2A15C0B2F2A41B00897B816B3C

14 11:56:07.250 06/05/02 Sev=Info/5 IKE/0x63000059
Vendor ID payload = 09002689DFD6B712

15 11:56:07.280 06/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK AG *(HASH, NOTIFY:STATUS_INITIAL_CONTACT) to
172.18.124.158
```

16 11:56:07.320 06/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.18.124.158

17 11:56:07.320 06/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK INFO *(HASH, NOTIFY:STATUS_RESP_LIFETIME) from
172.18.124.158

18 11:56:07.320 06/05/02 Sev=Info/5 IKE/0x63000044
RESPONDER-LIFETIME notify has value of 86400 seconds

19 11:56:07.320 06/05/02 Sev=Info/5 IKE/0x63000046
This SA has already been alive for 1 seconds, setting expiry to 86399 seconds
from now

20 11:56:07.561 06/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.18.124.158

21 11:56:07.561 06/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 172.18.124.158

22 11:56:07.561 06/05/02 Sev=Info/4 CM/0x63100015
Launch xAuth application

23 11:56:07.571 06/05/02 Sev=Info/4 IPSEC/0x63700014
Deleted all keys

24 11:56:09.734 06/05/02 Sev=Info/4 CM/0x63100017
xAuth application returned

25 11:56:09.734 06/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 172.18.124.158

26 11:56:10.174 06/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.18.124.158

27 11:56:10.184 06/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 172.18.124.158

28 11:56:10.184 06/05/02 Sev=Info/4 CM/0x6310000E
Established Phase 1 SA. 1 Phase 1 SA in the system

29 11:56:10.184 06/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 172.18.124.158

30 11:56:10.204 06/05/02 Sev=Info/5 IKE/0x6300005D
Client sending a firewall request to concentrator

31 11:56:10.204 06/05/02 Sev=Info/5 IKE/0x6300005C
Firewall Policy: Product=Cisco Integrated Client, Capability= (Centralized
Policy Push).

32 11:56:10.204 06/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK TRANS *(HASH, ATTR) to 172.18.124.158

33 11:56:10.265 06/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.18.124.158

34 11:56:10.265 06/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK TRANS *(HASH, ATTR) from 172.18.124.158

35 11:56:10.265 06/05/02 Sev=Info/5 IKE/0x63000010
MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_ADDRESS: , value = 10.1.1.114

36 11:56:10.265 06/05/02 Sev=Info/5 IKE/0x63000010

MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_DNS(1): , value = 10.1.1.10

37 11:56:10.265 06/05/02 Sev=Info/5 IKE/0x63000010
MODE_CFG_REPLY: Attribute = INTERNAL_IPV4_NBNS(1) (a.k.a. WINS) : , value = 10.1.1.20

38 11:56:10.265 06/05/02 Sev=Info/5 IKE/0xA3000017
MODE_CFG_REPLY: The received (INTERNAL_ADDRESS_EXPIRY) attribute and value (86396) is not supported

39 11:56:10.265 06/05/02 Sev=Info/5 IKE/0x6300000E
MODE_CFG_REPLY: Attribute = APPLICATION_VERSION,
value = Cisco Internetwork Operating System Software
IOS (tm) C1700 Software (C1710-K9O3SY-M), Version 12.2(8)T1,
RELEASE SOFTWARE (fc2)
TAC Support: <http://www.cisco.com/tac>
Copyright (c) 1986-2002 by cisco Systems, Inc.
Compiled Sat 30-Mar-02 13:30 by ccai

40 11:56:10.265 06/05/02 Sev=Info/5 IKE/0x6300000E
MODE_CFG_REPLY: Attribute = MODECFG_UNITY_DEFDOMAIN: , value = cisco.com

41 11:56:10.265 06/05/02 Sev=Info/5 IKE/0x6300000D
MODE_CFG_REPLY: Attribute = MODECFG_UNITY_SPLIT_INCLUDE (# of split_nets),
value = 0x00000001

42 11:56:10.265 06/05/02 Sev=Info/5 IKE/0x6300000F
SPLIT_NET #1
subnet = 10.38.0.0
mask = 255.255.0.0
protocol = 0
src port = 0
dest port=0

43 11:56:10.265 06/05/02 Sev=Info/4 CM/0x63100019
Mode Config data received

44 11:56:10.275 06/05/02 Sev=Info/5 IKE/0x63000055
Received a key request from Driver for IP address 172.18.124.158, GW IP = 172.18.124.158

45 11:56:10.275 06/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH, SA, NON, ID, ID) to 172.18.124.158

46 11:56:10.575 06/05/02 Sev=Info/4 IPSEC/0x63700014
Deleted all keys

47 11:56:10.605 06/05/02 Sev=Info/5 IKE/0x6300002F
Received ISAKMP packet: peer = 172.18.124.158

48 11:56:10.605 06/05/02 Sev=Info/4 IKE/0x63000014
RECEIVING <<< ISAKMP OAK QM *(HASH, SA, NON, ID, ID,
NOTIFY:STATUS_RESP_LIFETIME) from 172.18.124.158

49 11:56:10.605 06/05/02 Sev=Info/5 IKE/0x63000044
RESPONDER-LIFETIME notify has value of 3600 seconds

50 11:56:10.605 06/05/02 Sev=Info/5 IKE/0x63000045
RESPONDER-LIFETIME notify has value of 4608000 kb

51 11:56:10.605 06/05/02 Sev=Info/4 IKE/0x63000013
SENDING >>> ISAKMP OAK QM *(HASH) to 172.18.124.158

52 11:56:10.605 06/05/02 Sev=Info/5 IKE/0x63000058

Loading IPsec SA (Message ID = 0x51A04966 OUTBOUND SPI = 0x61C53A64 INBOUND SPI = 0x8F9BB05F)

53 11:56:10.605 06/05/02 Sev=Info/5 IKE/0x63000025
Loaded OUTBOUND ESP SPI: 0x61C53A64

54 11:56:10.605 06/05/02 Sev=Info/5 IKE/0x63000026
Loaded INBOUND ESP SPI: 0x8F9BB05F

55 11:56:10.605 06/05/02 Sev=Info/4 CM/0x6310001A
One secure connection established

56 11:56:10.625 06/05/02 Sev=Info/6 DIALER/0x63300003
Connection established.

57 11:56:10.735 06/05/02 Sev=Info/6 DIALER/0x63300008
MAPI32 Information - Outlook not default mail client

58 11:56:11.677 06/05/02 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

59 11:56:11.677 06/05/02 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0x643ac561 into key list

60 11:56:11.677 06/05/02 Sev=Info/4 IPSEC/0x63700010
Created a new key structure

61 11:56:11.677 06/05/02 Sev=Info/4 IPSEC/0x6370000F
Added key with SPI=0x5fb09b8f into key list

[Informações Relacionadas](#)

- [Suporte ao sistema de controle de acesso do controlador de acesso de terminal \(TACACS+ - Terminal Access Controller Access Control System\)](#)
- [Cisco Secure Access Control Server para suporte Unix](#)
- [Suporte Cisco Secure ACS para Windows](#)
- [Suporte ao Cisco VPN Client](#)
- [Negociação de IPSec/Suporte a protocolos IKE](#)
- [Suporte Técnico e Documentação - Cisco Systems](#)