

Solucione problemas relacionados ao DHCP no Nexus 9000

Contents

[Introdução](#)

[Pré-requisitos](#)

[Requisitos](#)

[Componentes Utilizados](#)

[Informações de Apoio](#)

[Topologia](#)

[Verificar](#)

[Troubleshooting](#)

[Informações Relacionadas](#)

Introdução

Este documento descreve as etapas para verificar a configuração apropriada para um agente de retransmissão de DHCP em um Nexus 9000.

Pré-requisitos

Requisitos

O Cisco NXOS® recomenda que você tenha conhecimento destes tópicos:

- DHCP
- ELAM
- Ethalyzer

Componentes Utilizados

Este documento é restrito a hardware específico, como o Nexus 9000


As informações neste documento foram criadas a partir de dispositivos em um ambiente de laboratório específico. Todos os dispositivos utilizados neste documento foram iniciados com uma configuração (padrão) inicial. Se a rede estiver ativa, certifique-se de que você entenda o impacto potencial de qualquer comando.

Informações de Apoio

Você pode configurar o dispositivo para executar um agente de retransmissão DHCP, que encaminha pacotes DHCP entre clientes e servidores. Esse recurso é útil quando clientes e servidores não estão na mesma sub-rede física. Os agentes de retransmissão recebem mensagens DHCP e, em seguida, geram uma nova mensagem DHCP para enviar em outra interface.

Topologia

Os Nexus Switches funcionam como um relé DHCP para entregar um IP ao cliente a partir do servidor.

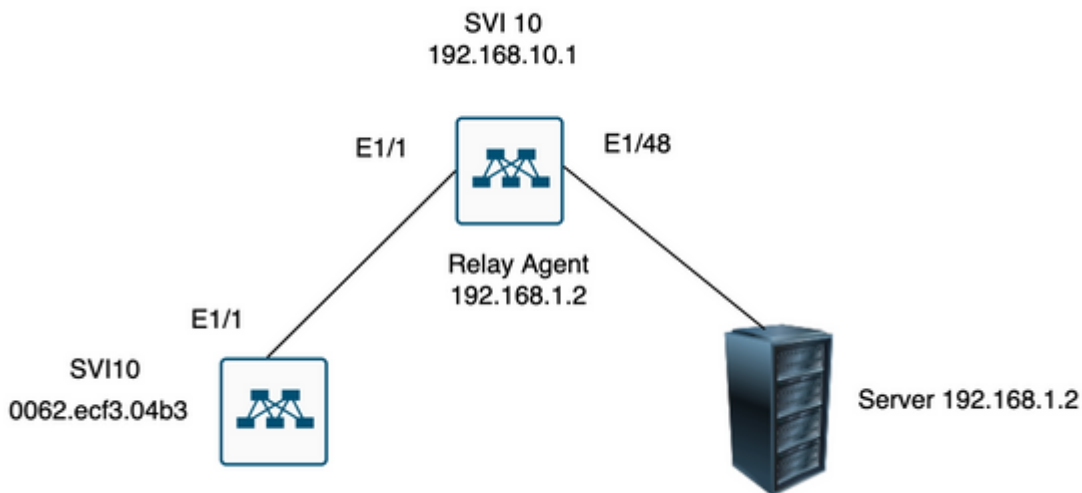

â€f

â€f

Verificar

1) Verificar a configuração do cliente (nenhum endereço IP atribuído)

```
Client# show interface vlan 10
Vlan10 is up, line protocol is up, autostate enabled
Hardware is EtherSVI, address is 0062.ecf3.04b3
MTU 1500 bytes, BW 1000000 Kbit, DLY 10 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set
Keepalive not supported
ARP type: ARPA
Last clearing of "show interface" counters never
L3 in Switched:
ucast: 0 pkts, 0 bytes
```

2) Verifique a configuração do DHCP

```
Switch1# show run dhcp
```

```
ip dhcp snooping
service dhcp
ip dhcp relay
ipv6 dhcp relay
```

```
interface Vlan10
 ip dhcp relay address 192.168.1.2
 ip dhcp snooping vlan 1,10
```

3) Verificar a conectividade com o servidor

```
Switch1# ping 192.168.1.2
PING 192.168.1.2 (192.168.1.2): 56 data bytes
64 bytes from 192.168.1.2: icmp_seq=0 ttl=253 time=1.678 ms
64 bytes from 192.168.1.2: icmp_seq=1 ttl=253 time=1.329 ms
64 bytes from 192.168.1.2: icmp_seq=2 ttl=253 time=1.742 ms
64 bytes from 192.168.1.2: icmp_seq=3 ttl=253 time=1.382 ms
64 bytes from 192.168.1.2: icmp_seq=4 ttl=253 time=1.241 ms
--- 192.168.1.2 ping statistics ---
5 packets transmitted, 5 packets received, 0.00% packet loss
round-trip min/avg/max = 1.241/1.474/1.742 ms
Switch1#
```

```
Switch1# show ip route 192.168.1.2
IP Route Table for VRF "default"
 '*' denotes best ucast next-hop
 '**' denotes best mcast next-hop
 '[x/y]' denotes [preference/metric]
 '%<string>' in via output denotes VRF <string>
192.168.1.2/32, ubest/mbest: 1/0, attached
*via 192.168.1.2, Eth1/48, [250/0], 02:13:58, am
Switch1#
```

4) Avance para ver as estatísticas do DHCP para verificar se as informações foram enviadas corretamente.

```
Switch1# show ip dhcp relay statistics interface vlan 10
```

```
-----
Message Type Rx Tx Drops
-----
```

```
Discover 1 1 0
Offer 1 1 0
Request(*) 1 1 0
Ack 1 1 0
Release(*) 0 0 0
Decline 0 0 0
Inform(*) 0 0 0
Nack 0 0 0
-----
```

```
Total 4 4 0
-----
```

```
DHCP server stats:
```

```
-----
Server Vrf Request Response
-----
```

```
192.168.1.2 2 2
-----
```

```
DHCP L3 FWD:
Total Packets Received : 0
Total Packets Forwarded : 0
Total Packets Dropped : 0
Non DHCP:
Total Packets Received : 0
Total Packets Forwarded : 0
Total Packets Dropped : 0
DROP:
DHCP Relay not enabled : 0
Invalid DHCP message type : 0
Interface error : 0
Tx failure towards server : 0
Tx failure towards client : 0
Unknown output interface : 0
Unknown vrf or interface for server : 0
Max hops exceeded : 0
Option 82 validation failed : 0
Packet Malformed : 0
DHCP Request dropped on MCT : 0
Relay Trusted port not configured : 0
* - These counters show correct value when switch
receives DHCP request packet with destination ip as broadcast
address. If request is unicast it is being HW switched
Switch1#
```

```
Switch1# show ip dhcp global statistics
Packets processed 130
Packets received through cfsoe 0
Packets forwarded 24
Packets forwarded on cfsoe 0
Total packets dropped 106
Packets dropped from untrusted ports 0
Packets dropped due to MAC address check failure 0
Packets dropped due to Option 82 insertion failure 0
Packets dropped due to o/p intf unknown 0
Packets dropped which were unknown 0
Packets dropped due to no trusted ports 106
Packets dropped due to dhcp relay not enabled 0
Packets dropped due to no binding entry 0
Packets dropped due to interface error/no interface 0
Packets dropped due to max hops exceeded 0
Packets dropped due to Queue full 0
Switch1#
```

Troubleshooting

1) Confirme se as estatísticas estão corretas executando um etanalyzer.

```
Switch1# ethanalyzer local interface inband display-filter bootp limit-captured-frames 0
Capturing on inband
```

```
2023-07-18 21:30:01.935789 0.0.0.0 -> 255.255.255.255 DHCP DHCP Discover - Transaction ID 0x64b6400b
2023-07-18 21:30:01.937789 192.168.10.1 -> 192.168.1.2 DHCP DHCP Discover - Transaction ID 0x64b6400b
```

```
2023-07-18 21:30:03.938596 192.168.1.2 -> 192.168.10.1 DHCP DHCP Offer - Transaction ID 0x64b6400b
2023-07-18 21:30:03.938659 192.168.1.2 -> 192.168.10.1 DHCP DHCP Offer - Transaction ID 0x64b6400b
2023-07-18 21:30:03.940103 192.168.10.1 -> 255.255.255.255 DHCP DHCP Offer - Transaction ID 0x64b6400b
2023-07-18 21:30:07.939208 0.0.0.0 -> 255.255.255.255 DHCP DHCP Request - Transaction ID 0x64b6400b
2023-07-18 21:30:07.941220 192.168.10.1 -> 192.168.1.2 DHCP DHCP Request - Transaction ID 0x64b6400b
2023-07-18 21:30:07.941848 192.168.1.2 -> 192.168.10.1 DHCP DHCP ACK - Transaction ID 0x64b6400b
2023-07-18 21:30:07.941897 192.168.1.2 -> 192.168.10.1 DHCP DHCP ACK - Transaction ID 0x64b6400b
2023-07-18 21:30:07.942693 192.168.10.1 -> 255.255.255.255 DHCP DHCP ACK - Transaction ID 0x64b6400b
```

2) O Ethalyzer tem uma opção detalhada que fornece informações adicionais, incluindo os cabeçalhos do tráfego capturado.

```
ethalyzer local interface inband display-filter "(eth.addr==<MAC_address> and bootp )" limit-capture
```

3) A adição do indicador de detalhes na captura do etalyzer fornece mais detalhes sobre a comunicação entre o cliente e o servidor.

[1] O agente de retransmissão recebe uma descoberta de DHCP do cliente como um broadcast:

O MAC origem é o MAC cliente: 00:62:ec:f3:04:b3

O MAC destino é broadcast: ff:ff:ff:ff:ff:ff

Como o cliente ainda não tem um endereço IP, o IP origem é 0.0.0.0

IP de origem: 0.0.0.0

IP de destino : 255.255.255.255

Porta de origem: bootpc (68)

Porta de destino: bootps (67)

Tipo de mensagem: Solicitação de inicialização (1)

Tipo de mensagem DHCP = Descoberta de DHCP

Frame 14 (358 bytes on wire, 358 bytes captured)

Arrival Time: Jul 19, 2023 21:53:29.339064000

[Time delta from previous captured frame: 0.096490000 seconds]

[Time delta from previous displayed frame: 2.618117000 seconds]

[Time since reference or first frame: 2.618117000 seconds]

Frame Number: 14

Frame Length: 358 bytes

Capture Length: 358 bytes

[Frame is marked: False]

[Protocols in frame: eth:vlan:ip:udp:bootp]

Ethernet II, Src: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3), Dst: ff:ff:ff:ff:ff:ff (ff:ff:ff:ff:ff:ff)

Destination: ff:ff:ff:ff:ff:ff (ff:ff:ff:ff:ff:ff)

Address: ff:ff:ff:ff:ff:ff (ff:ff:ff:ff:ff:ff)

.... 1 = IG bit: Group address (multicast/broadcast)

.... 1. = LG bit: Locally administered address (this is NOT the factory default)

Source: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)

Address: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)

.... 0 = IG bit: Individual address (unicast)

.... 0. = LG bit: Globally unique address (factory default)

Type: 802.1Q Virtual LAN (0x8100)

802.1Q Virtual LAN, PRI: 0, CFI: 0, ID: 10

000. = Priority: 0

... 0 = CFI: 0

.... 0000 0000 1010 = ID: 10
Type: IP (0x0800)
Internet Protocol, Src: 0.0.0.0 (0.0.0.0), Dst: 255.255.255.255 (255.255.255.255)
Version: 4
Header length: 20 bytes
Differentiated Services Field: 0x00 (DSCP 0x00: Default; ECN: 0x00)
0000 00.. = Differentiated Services Codepoint: Default (0x00)
.... ..0. = ECN-Capable Transport (ECT): 0
.... ...0 = ECN-CE: 0
Total Length: 340
Identification: 0x0000 (0)
Flags: 0x00
0.. = Reserved bit: Not Set
.0. = Do not fragment: Not Set
..0 = More fragments: Not Set
Fragment offset: 0
Time to live: 255
Protocol: UDP (0x11)
Header checksum: 0xba99 [correct]
[Good: True]
[Bad : False]
Source: 0.0.0.0 (0.0.0.0)
Destination: 255.255.255.255 (255.255.255.255)
User Datagram Protocol, Src Port: bootpc (68), Dst Port: bootps (67)
Source port: bootpc (68)
Destination port: bootps (67)
Length: 320
Checksum: 0x2bbb [validation disabled]
[Good Checksum: False]
[Bad Checksum: False]
Bootstrap Protocol
Message type: Boot Request (1)
Hardware type: Ethernet
Hardware address length: 6
Hops: 0
Transaction ID: 0x64b14fa7
Seconds elapsed: 0
Bootp flags: 0x8000 (Broadcast)
1... = Broadcast flag: Broadcast
.000 0000 0000 0000 = Reserved flags: 0x0000
Client IP address: 0.0.0.0 (0.0.0.0)
Your (client) IP address: 0.0.0.0 (0.0.0.0)
Next server IP address: 0.0.0.0 (0.0.0.0)
Relay agent IP address: 0.0.0.0 (0.0.0.0)
Client MAC address: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)
Client hardware address padding: 00000000000000000000
Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) DHCP Message Type = DHCP Discover
Option: (53) DHCP Message Type
Length: 1
Value: 01
Option: (t=61,l=18) Client identifier
Option: (61) Client identifier
Length: 18
Value: 0046444F3230323431435548566C616E3130
Option: (t=51,l=4) IP Address Lease Time = 2 hours
Option: (51) IP Address Lease Time
Length: 4
Value: 00001C20
Option: (t=60,l=19) Vendor class identifier = "Cisco NXOS® N9K-C9372PX-E"

```
Option: (60) Vendor class identifier
Length: 19
Value: 436973636F204E394B2D433933373250582D45
Option: (t=43,l=8) Vendor-Specific Information
Option: (43) Vendor-Specific Information
Length: 8
Value: F1060062ECF304AC
Option: (t=55,l=8) Parameter Request List
Option: (55) Parameter Request List
Length: 8
Value: 010306070C424396
1 = Subnet Mask
3 = Router
6 = Domain Name Server
7 = Log Server
12 = Host Name
66 = TFTP Server Name
67 = Bootfile name
150 = TFTP server address
End Option
Padding
Frame 15 (354 bytes on wire, 354 bytes captured)
Arrival Time: Jul 19, 2023 21:53:29.340263000
[Time delta from previous captured frame: 0.001199000 seconds]
[Time delta from previous displayed frame: 0.001199000 seconds]
[Time since reference or first frame: 2.619316000 seconds]
Frame Number: 15
Frame Length: 354 bytes
Capture Length: 354 bytes
[Frame is marked: False]
[Protocols in frame: eth:ip:udp:bootp]
Ethernet II, Src: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57), Dst: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
Destination: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
Address: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
.... 0 .... = IG bit: Individual address (unicast)
.... 0. .... = LG bit: Globally unique address (factory default)
Source: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
Address: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
.... 0 .... = IG bit: Individual address (unicast)
.... 0. .... = LG bit: Globally unique address (factory default)
Type: IP (0x0800)
```

[2] O Agente de Retransmissão envia uma Descoberta usando unicast ao Servidor.

O MAC de origem é o MAC do nexus: 6c:31:0e:a3:0c:57

O MAC destino é o MAC do servidor DHCP: c4:c6:03:09:cf:47

O IP de origem é o IP do Nexus no SVI10 :192.168.10.1

O IP de destino é o IP do servidor DHCP: 192.168.1.2

Porta de origem: bootps (67)

Porta de destino: bootps (67)

Endereço MAC do cliente: 00:62:ec:f3:04:b3 <<<<< O MAC do cliente está incluído no cabeçalho UDP/DHCP

Tipo de mensagem: Solicitação de inicialização (1)

Tipo de mensagem DHCP = Descoberta de DHCP

```
Frame 15 (354 bytes on wire, 354 bytes captured)
Arrival Time: Jul 19, 2023 21:53:29.340263000
[Time delta from previous captured frame: 0.001199000 seconds]
[Time delta from previous displayed frame: 0.001199000 seconds]
```

[Time since reference or first frame: 2.619316000 seconds]
Frame Number: 15
Frame Length: 354 bytes
Capture Length: 354 bytes
[Frame is marked: False]
[Protocols in frame: eth:ip:udp:bootp]
Ethernet II, Src: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57), Dst: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
Destination: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
Address: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
.... 0 = IG bit: Individual address (unicast)
.... 0. = LG bit: Globally unique address (factory default)
Source: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
Address: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
.... 0 = IG bit: Individual address (unicast)
.... 0. = LG bit: Globally unique address (factory default)
Type: IP (0x0800)

Internet Protocol, Src: 192.168.10.1 (192.168.10.1), Dst: 192.168.1.2 (192.168.1.2)
Version: 4
Header length: 20 bytes
Differentiated Services Field: 0x00 (DSCP 0x00: Default; ECN: 0x00)
0000 00.. = Differentiated Services Codepoint: Default (0x00)
.... 0. = ECN-Capable Transport (ECT): 0
.... 0 = ECN-CE: 0
Total Length: 340
Identification: 0xefab (61355)
Flags: 0x00
0.. = Reserved bit: Not Set
.0. = Do not fragment: Not Set
..0 = More fragments: Not Set
Fragment offset: 0
Time to live: 255
Protocol: UDP (0x11)
Header checksum: 0x3e99 [correct]
[Good: True]
[Bad : False]
Source: 192.168.10.1 (192.168.10.1)
Destination: 192.168.1.2 (192.168.1.2)
User Datagram Protocol, Src Port: bootps (67), Dst Port: bootps (67)
Source port: bootps (67)
Destination port: bootps (67)
Length: 320
Checksum: 0xd4bc [validation disabled]
[Good Checksum: False]
[Bad Checksum: False]
Bootstrap Protocol
Message type: Boot Request (1)
Hardware type: Ethernet
Hardware address length: 6
Hops: 1
Transaction ID: 0x64b14fa7
Seconds elapsed: 0
Bootp flags: 0x8000 (Broadcast)
1... .. = Broadcast flag: Broadcast
.000 0000 0000 0000 = Reserved flags: 0x0000
Client IP address: 0.0.0.0 (0.0.0.0)
Your (client) IP address: 0.0.0.0 (0.0.0.0)
Next server IP address: 0.0.0.0 (0.0.0.0)
Relay agent IP address: 192.168.10.1 (192.168.10.1)
Client MAC address: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)
Client hardware address padding: 00000000000000000000

Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) DHCP Message Type = DHCP Discover
Option: (53) DHCP Message Type
Length: 1
Value: 01
Option: (t=61,l=18) Client identifier
Option: (61) Client identifier
Length: 18
Value: 0046444F3230323431435548566C616E3130
Option: (t=51,l=4) IP Address Lease Time = 2 hours
Option: (51) IP Address Lease Time
Length: 4
Value: 00001C20
Option: (t=60,l=19) Vendor class identifier = "Cisco NXOS® N9K-C9372PX-E"
Option: (60) Vendor class identifier
Length: 19
Value: 436973636F204E394B2D433933373250582D45
Option: (t=43,l=8) Vendor-Specific Information
Option: (43) Vendor-Specific Information
Length: 8
Value: F1060062ECF304AC
Option: (t=55,l=8) Parameter Request List
Option: (55) Parameter Request List
Length: 8
Value: 010306070C424396
1 = Subnet Mask
3 = Router
6 = Domain Name Server
7 = Log Server
12 = Host Name
66 = TFTP Server Name
67 = Bootfile name
150 = TFTP server address
End Option
Padding

[3] O servidor responde oferta unicast ao agente de retransmissão.
O MAC de origem é o MAC do servidor DHCP: c4:c6:03:09:cf:47
O MAC destino é o Nexus MAC: 6c:31:0e:a3:0c:57
O Ip De Origem É O Servidor DHCP: 192.168.1.2
IP Nexus IP de destino no SVI10: 192.168.10.1
Porta de origem: bootps (67)
Porta de destino: bootps (67)
Tipo de mensagem: Boot Reply (2)
Seu endereço IP (cliente): 192.168.10.19 (192.168.10.19) <<<< Este pacote de oferta inclui o endereço IP a ser atribuído ao cliente
Endereço MAC do cliente: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3) <<< Endereço MAC do cliente
Tipo de Mensagem DHCP = Oferta DHCP

Frame 27 (348 bytes on wire, 348 bytes captured)
Arrival Time: Jul 19, 2023 21:53:31.340920000
[Time delta from previous captured frame: 0.097549000 seconds]
[Time delta from previous displayed frame: 2.000657000 seconds]
[Time since reference or first frame: 4.619973000 seconds]
Frame Number: 27
Frame Length: 348 bytes
Capture Length: 348 bytes

```
[Frame is marked: False]
[Protocols in frame: eth:ip:udp:bootp]
Ethernet II, Src: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47), Dst: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
Destination: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
Address: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
.... 00000000 = IG bit: Individual address (unicast)
.... 00000000 = LG bit: Globally unique address (factory default)
Source: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
Address: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
.... 00000000 = IG bit: Individual address (unicast)
.... 00000000 = LG bit: Globally unique address (factory default)
Type: IP (0x0800)
Internet Protocol, Src: 192.168.1.2 (192.168.1.2), Dst: 192.168.10.1 (192.168.10.1)
Version: 4
Header length: 20 bytes
Differentiated Services Field: 0x00 (DSCP 0x00: Default; ECN: 0x00)
0000 00.. = Differentiated Services Codepoint: Default (0x00)
.... 0000 = ECN-Capable Transport (ECT): 0
.... 0000 = ECN-CE: 0
Total Length: 334
Identification: 0x0014 (20)
Flags: 0x00
0.. = Reserved bit: Not Set
.0. = Do not fragment: Not Set
..0 = More fragments: Not Set
Fragment offset: 0
Time to live: 254
Protocol: UDP (0x11)
Header checksum: 0x2f37 [correct]
[Good: True]
[Bad : False]
Source: 192.168.1.2 (192.168.1.2)
Destination: 192.168.10.1 (192.168.10.1)
User Datagram Protocol, Src Port: bootps (67), Dst Port: bootps (67)
Source port: bootps (67)
Destination port: bootps (67)
Length: 314
Checksum: 0x0500 [validation disabled]
[Good Checksum: False]
[Bad Checksum: False]
Bootstrap Protocol
Message type: Boot Reply (2)
Hardware type: Ethernet
Hardware address length: 6
Hops: 0
Transaction ID: 0x64b14fa7
Seconds elapsed: 0
Bootp flags: 0x8000 (Broadcast)
1... .. = Broadcast flag: Broadcast
.000 0000 0000 0000 = Reserved flags: 0x0000
Client IP address: 0.0.0.0 (0.0.0.0)
Your (client) IP address: 192.168.10.19 (192.168.10.19)
Next server IP address: 0.0.0.0 (0.0.0.0)
Relay agent IP address: 192.168.10.1 (192.168.10.1)
Client MAC address: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)
Client hardware address padding: 00000000000000000000
Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) DHCP Message Type = DHCP Offer
Option: (53) DHCP Message Type
Length: 1
```

Value: 02
Option: (t=61,l=18) Client identifier
Option: (61) Client identifier
Length: 18
Value: 0046444F3230323431435548566C616E3130
Option: (t=54,l=4) DHCP Server Identifier = 192.168.1.2
Option: (54) DHCP Server Identifier
Length: 4
Value: C0A80102
Option: (t=51,l=4) IP Address Lease Time = 1 day
Option: (51) IP Address Lease Time
Length: 4
Value: 00015180
Option: (t=58,l=4) Renewal Time Value = 12 hours
Option: (58) Renewal Time Value
Length: 4
Value: 0000A8C0
Option: (t=59,l=4) Rebinding Time Value = 21 hours
Option: (59) Rebinding Time Value
Length: 4
Value: 00012750
Option: (t=1,l=4) Subnet Mask = 255.255.255.0
Option: (1) Subnet Mask
Length: 4
Value: FFFFFFF0
Option: (t=3,l=4) Router = 192.168.1.2
Option: (3) Router
Length: 4
Value: C0A80102
Option: (t=6,l=4) Domain Name Server = 8.8.8.8
Option: (6) Domain Name Server
Length: 4
Value: 08080808
End Option

[4] O agente de retransmissão encaminha a oferta DHCP do servidor DHCP usando broadcast. Esse pacote de broadcast é recebido pela sub-rede, mas inclui o MAC cliente, portanto, somente o proprietário do MAC processa esse pacote.

O MAC de origem é o MAC do nexus: 6c:31:0e:a3:0c:57

O MAC destino é broadcast: ff:ff:ff:ff:ff:ff

O IP de origem é o IP do Nexus no SVI10 :192.168.10.1

O IP destino é o endereço de broadcast: 255.255.255.255

Porta de origem: bootps (67)

Porta de destino: bootpc (68)

Tipo de mensagem: Boot Reply (2)

Seu endereço IP (cliente): 192.168.10.19

Endereço MAC do cliente: 00:62:ec:f3:04:b3

Tipo de Mensagem DHCP = Oferta DHCP

Frame 28 (348 bytes on wire, 348 bytes captured)

Arrival Time: Jul 19, 2023 21:53:31.341325000

[Time delta from previous captured frame: 0.000405000 seconds]

[Time delta from previous displayed frame: 0.000405000 seconds]

[Time since reference or first frame: 4.620378000 seconds]

Frame Number: 28

Frame Length: 348 bytes

Capture Length: 348 bytes

```
[Frame is marked: False]
[Protocols in frame: eth:ip:udp:bootp]
Ethernet II, Src: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57), Dst: ff:ff:ff:ff:ff:ff (ff:ff:ff:ff:ff:ff)
Destination: ff:ff:ff:ff:ff:ff (ff:ff:ff:ff:ff:ff)
Address: ff:ff:ff:ff:ff:ff (ff:ff:ff:ff:ff:ff)
.... 1. .... = IG bit: Group address (multicast/broadcast)
.... 1. .... = LG bit: Locally administered address (this is NOT the factory default)
Source: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
Address: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
.... 0. .... = IG bit: Individual address (unicast)
.... 0. .... = LG bit: Globally unique address (factory default)
Type: IP (0x0800)
Internet Protocol, Src: 192.168.10.1 (192.168.10.1), Dst: 255.255.255.255 (255.255.255.255)
Version: 4
Header length: 20 bytes
Differentiated Services Field: 0x00 (DSCP 0x00: Default; ECN: 0x00)
0000 00.. = Differentiated Services Codepoint: Default (0x00)
.... 0. = ECN-Capable Transport (ECT): 0
.... 0. = ECN-CE: 0
Total Length: 334
Identification: 0x1400 (5120)
Flags: 0x00
0.. = Reserved bit: Not Set
.0. = Do not fragment: Not Set
..0 = More fragments: Not Set
Fragment offset: 0
Time to live: 255
Protocol: UDP (0x11)
Header checksum: 0xdbf5 [correct]
[Good: True]
[Bad : False]
Source: 192.168.10.1 (192.168.10.1)
Destination: 255.255.255.255 (255.255.255.255)
User Datagram Protocol, Src Port: bootps (67), Dst Port: bootpc (68)
Source port: bootps (67)
Destination port: bootpc (68)
Length: 314
Checksum: 0xc6a8 [validation disabled]
[Good Checksum: False]
[Bad Checksum: False]
Bootstrap Protocol
Message type: Boot Reply (2)
Hardware type: Ethernet
Hardware address length: 6
Hops: 1
Transaction ID: 0x64b14fa7
Seconds elapsed: 0
Bootp flags: 0x8000 (Broadcast)
1... .... = Broadcast flag: Broadcast
.000 0000 0000 0000 = Reserved flags: 0x0000
Client IP address: 0.0.0.0 (0.0.0.0)
Your (client) IP address: 192.168.10.19 (192.168.10.19)
Next server IP address: 0.0.0.0 (0.0.0.0)
Relay agent IP address: 192.168.10.1 (192.168.10.1)
Client MAC address: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)
Client hardware address padding: 000000000000000000000000
Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) DHCP Message Type = DHCP Offer
Option: (53) DHCP Message Type
Length: 1
```

Value: 02
Option: (t=61,l=18) Client identifier
Option: (61) Client identifier
Length: 18
Value: 0046444F3230323431435548566C616E3130
Option: (t=54,l=4) DHCP Server Identifier = 192.168.1.2
Option: (54) DHCP Server Identifier
Length: 4
Value: C0A80102
Option: (t=51,l=4) IP Address Lease Time = 1 day
Option: (51) IP Address Lease Time
Length: 4
Value: 00015180
Option: (t=58,l=4) Renewal Time Value = 12 hours
Option: (58) Renewal Time Value
Length: 4
Value: 0000A8C0
Option: (t=59,l=4) Rebinding Time Value = 21 hours
Option: (59) Rebinding Time Value
Length: 4
Value: 00012750
Option: (t=1,l=4) Subnet Mask = 255.255.255.0
Option: (1) Subnet Mask
Length: 4
Value: FFFFFFF0
Option: (t=3,l=4) Router = 192.168.1.2
Option: (3) Router
Length: 4
Value: C0A80102
Option: (t=6,l=4) Domain Name Server = 8.8.8.8
Option: (6) Domain Name Server
Length: 4
Value: 08080808
End Option

[5] O agente de retransmissão recebe uma solicitação do cliente e vem como broadcast.

O MAC origem é o MAC cliente: 00:62:ec:f3:04:b3

O MAC destino é broadcast: ff:ff:ff:ff:ff:ff

Neste ponto, o cliente ainda não tem um endereço IP, o IP origem ainda é 0.0.0.0

IP de origem: 0.0.0.0

IP de destino : 255.255.255.255

Porta de origem: bootpc (68)

Porta de destino: bootps (67)

Tipo de mensagem: Solicitação de inicialização (1) <<<< esta mensagem é a solicitação do cliente para o IP 192.168.10.19

Endereço IP solicitado = 192.168.10.19 <<<<<<< cliente que solicita o IP atribuído pelo servidor DHCP

Tipo de mensagem DHCP = Solicitação DHCP

Frame 47 (370 bytes on wire, 370 bytes captured)

Arrival Time: Jul 19, 2023 21:53:35.342380000

[Time delta from previous captured frame: 0.097649000 seconds]

[Time delta from previous displayed frame: 4.001055000 seconds]

[Time since reference or first frame: 8.621433000 seconds]

Frame Number: 47

Frame Length: 370 bytes

Capture Length: 370 bytes

[Frame is marked: False]

[Protocols in frame: eth:vlan:ip:udp:bootp]

Ethernet II, Src: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3), Dst: ff:ff:ff:ff:ff:ff (ff:ff:ff:ff:ff:ff)
Destination: ff:ff:ff:ff:ff:ff (ff:ff:ff:ff:ff:ff)
Address: ff:ff:ff:ff:ff:ff (ff:ff:ff:ff:ff:ff)
.... ..1 = IG bit: Group address (multicast/broadcast)
.... ..1. = LG bit: Locally administered address (this is NOT the factory default)
Source: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)
Address: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)
.... ..0 = IG bit: Individual address (unicast)
.... ..0. = LG bit: Globally unique address (factory default)
Type: 802.1Q Virtual LAN (0x8100)
802.1Q Virtual LAN, PRI: 0, CFI: 0, ID: 10
000. = Priority: 0
...0 = CFI: 0
.... 0000 0000 1010 = ID: 10
Type: IP (0x0800)
Internet Protocol, Src: 0.0.0.0 (0.0.0.0), Dst: 255.255.255.255 (255.255.255.255)
Version: 4
Header length: 20 bytes
Differentiated Services Field: 0x00 (DSCP 0x00: Default; ECN: 0x00)
0000 00.. = Differentiated Services Codepoint: Default (0x00)
.... ..0. = ECN-Capable Transport (ECT): 0
.... ...0 = ECN-CE: 0
Total Length: 352
Identification: 0x0000 (0)
Flags: 0x00
0.. = Reserved bit: Not Set
.0. = Do not fragment: Not Set
..0 = More fragments: Not Set
Fragment offset: 0
Time to live: 255
Protocol: UDP (0x11)
Header checksum: 0xba8d [correct]
[Good: True]
[Bad : False]
Source: 0.0.0.0 (0.0.0.0)
Destination: 255.255.255.255 (255.255.255.255)
User Datagram Protocol, Src Port: bootpc (68), Dst Port: bootps (67)
Source port: bootpc (68)
Destination port: bootps (67)
Length: 332
Checksum: 0xbaae [validation disabled]
[Good Checksum: False]
[Bad Checksum: False]
Bootstrap Protocol
Message type: Boot Request (1)
Hardware type: Ethernet
Hardware address length: 6
Hops: 0
Transaction ID: 0x64b14fa7
Seconds elapsed: 0
Bootp flags: 0x8000 (Broadcast)
1... = Broadcast flag: Broadcast
.000 0000 0000 0000 = Reserved flags: 0x0000
Client IP address: 0.0.0.0 (0.0.0.0)
Your (client) IP address: 0.0.0.0 (0.0.0.0)
Next server IP address: 0.0.0.0 (0.0.0.0)
Relay agent IP address: 0.0.0.0 (0.0.0.0)
Client MAC address: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)
Client hardware address padding: 00000000000000000000
Server host name not given
Boot file name not given
Magic cookie: (OK)

Option: (t=53,l=1) DHCP Message Type = DHCP Request
Option: (53) DHCP Message Type
Length: 1
Value: 03
Option: (t=61,l=18) Client identifier
Option: (61) Client identifier
Length: 18
Value: 0046444F3230323431435548566C616E3130
Option: (t=50,l=4) Requested IP Address = 192.168.10.19
Option: (50) Requested IP Address
Length: 4
Value: C0A80A13
Option: (t=51,l=4) IP Address Lease Time = 2 hours
Option: (51) IP Address Lease Time
Length: 4
Value: 00001C20
Option: (t=54,l=4) DHCP Server Identifier = 192.168.1.2
Option: (54) DHCP Server Identifier
Length: 4
Value: C0A80102
Option: (t=60,l=19) Vendor class identifier = "Cisco NXOS® N9K-C9372PX-E"
Option: (60) Vendor class identifier
Length: 19
Value: 436973636F204E394B2D433933373250582D45
Option: (t=43,l=8) Vendor-Specific Information
Option: (43) Vendor-Specific Information
Length: 8
Value: F1060062ECF304AC
Option: (t=55,l=8) Parameter Request List
Option: (55) Parameter Request List
Length: 8
Value: 010306070C424396
1 = Subnet Mask
3 = Router
6 = Domain Name Server
7 = Log Server
12 = Host Name
66 = TFTP Server Name
67 = Bootfile name
150 = TFTP server address
End Option
Padding

[6] O agente de retransmissão encaminha a solicitação DHCP do cliente para o servidor DHCP.
O MAC de origem é o MAC do nexus: 6c:31:0e:a3:0c:57
O MAC destino é o MAC do servidor DHCP: c4:c6:03:09:cf:47
O IP de origem é o IP do Nexus no SVI10 :192.168.10.1
O IP de destino é o IP do servidor DHCP: 192.168.1.2
Porta de origem: bootps (67)
Porta de destino: bootps (67)
Tipo de mensagem: Solicitação de inicialização (1)
Endereço IP solicitado = 192.168.10.19
Endereço MAC do cliente: 00:62:ec:f3:04:b3 <<<<<< O MAC do cliente está incluído no cabeçalho
UDP/DHCP
Tipo de mensagem DHCP = Solicitação DHCP

Frame 48 (366 bytes on wire, 366 bytes captured)
Arrival Time: Jul 19, 2023 21:53:35.343718000

[Time delta from previous captured frame: 0.001338000 seconds]
[Time delta from previous displayed frame: 0.001338000 seconds]
[Time since reference or first frame: 8.622771000 seconds]
Frame Number: 48
Frame Length: 366 bytes
Capture Length: 366 bytes
[Frame is marked: False]
[Protocols in frame: eth:ip:udp:bootp]
Ethernet II, Src: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57), Dst: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
Destination: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
Address: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
.... 0 = IG bit: Individual address (unicast)
.... 0. = LG bit: Globally unique address (factory default)
Source: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
Address: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
.... 0 = IG bit: Individual address (unicast)
.... 0. = LG bit: Globally unique address (factory default)
Type: IP (0x0800)
Internet Protocol, Src: 192.168.10.1 (192.168.10.1), Dst: 192.168.1.2 (192.168.1.2)
Version: 4
Header length: 20 bytes
Differentiated Services Field: 0x00 (DSCP 0x00: Default; ECN: 0x00)
0000 00.. = Differentiated Services Codepoint: Default (0x00)
.... 0. = ECN-Capable Transport (ECT): 0
.... 0 = ECN-CE: 0
Total Length: 352
Identification: 0xefac (61356)
Flags: 0x00
0.. = Reserved bit: Not Set
.0. = Do not fragment: Not Set
..0 = More fragments: Not Set
Fragment offset: 0
Time to live: 255
Protocol: UDP (0x11)
Header checksum: 0x3e8c [correct]
[Good: True]
[Bad : False]
Source: 192.168.10.1 (192.168.10.1)
Destination: 192.168.1.2 (192.168.1.2)
User Datagram Protocol, Src Port: bootps (67), Dst Port: bootps (67)
Source port: bootps (67)
Destination port: bootps (67)
Length: 332
Checksum: 0x63b0 [validation disabled]
[Good Checksum: False]
[Bad Checksum: False]
Bootstrap Protocol
Message type: Boot Request (1)
Hardware type: Ethernet
Hardware address length: 6
Hops: 1
Transaction ID: 0x64b14fa7
Seconds elapsed: 0
Bootp flags: 0x8000 (Broadcast)
1... = Broadcast flag: Broadcast
.000 0000 0000 0000 = Reserved flags: 0x0000
Client IP address: 0.0.0.0 (0.0.0.0)
Your (client) IP address: 0.0.0.0 (0.0.0.0)
Next server IP address: 0.0.0.0 (0.0.0.0)
Relay agent IP address: 192.168.10.1 (192.168.10.1)
Client MAC address: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)
Client hardware address padding: 00000000000000000000

Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) DHCP Message Type = DHCP Request
Option: (53) DHCP Message Type
Length: 1
Value: 03
Option: (t=61,l=18) Client identifier
Option: (61) Client identifier
Length: 18
Value: 0046444F3230323431435548566C616E3130
Option: (t=50,l=4) Requested IP Address = 192.168.10.19
Option: (50) Requested IP Address
Length: 4
Value: C0A80A13
Option: (t=51,l=4) IP Address Lease Time = 2 hours
Option: (51) IP Address Lease Time
Length: 4
Value: 00001C20
Option: (t=54,l=4) DHCP Server Identifier = 192.168.1.2
Option: (54) DHCP Server Identifier
Length: 4
Value: C0A80102
Option: (t=60,l=19) Vendor class identifier = "Cisco N9K-C9372PX-E"
Option: (60) Vendor class identifier
Length: 19
Value: 436973636F204E394B2D433933373250582D45
Option: (t=43,l=8) Vendor-Specific Information
Option: (43) Vendor-Specific Information
Length: 8
Value: F1060062ECF304AC
Option: (t=55,l=8) Parameter Request List
Option: (55) Parameter Request List
Length: 8
Value: 010306070C424396
1 = Subnet Mask
3 = Router
6 = Domain Name Server
7 = Log Server
12 = Host Name
66 = TFTP Server Name
67 = Bootfile name
150 = TFTP server address
End Option
Padding

[7] O servidor responde unicast (ACK) ao agente de retransmissão.
O MAC de origem é o MAC do servidor DHCP: c4:c6:03:09:cf:47
O MAC destino é o Nexus MAC: 6c:31:0e:a3:0c:57
O Ip De Origem É O Servidor DHCP: 192.168.1.2
IP Nexus IP de destino no SVI10: 192.168.10.1
Porta de origem: bootps (67)
Porta de destino: bootps (67)
Tipo de mensagem: Boot Reply (2)
Seu endereço IP (cliente): 192.168.10.19
Endereço MAC do cliente: 00:62:ec:f3:04:b3
Tipo de mensagem DHCP = DHCP ACK <<<< Este é o ACK do servidor


Frame 49 (348 bytes on wire, 348 bytes captured)
Arrival Time: Jul 19, 2023 21:53:35.344310000
[Time delta from previous captured frame: 0.000592000 seconds]
[Time delta from previous displayed frame: 0.000592000 seconds]
[Time since reference or first frame: 8.623363000 seconds]
Frame Number: 49
Frame Length: 348 bytes
Capture Length: 348 bytes
[Frame is marked: False]
[Protocols in frame: eth:ip:udp:bootp]
Ethernet II, Src: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47), Dst: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
Destination: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
Address: 6c:31:0e:a3:0c:57 (6c:31:0e:a3:0c:57)
.... 0. = IG bit: Individual address (unicast)
.... 0. = LG bit: Globally unique address (factory default)
Source: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
Address: c4:c6:03:09:cf:47 (c4:c6:03:09:cf:47)
.... 0. = IG bit: Individual address (unicast)
.... 0. = LG bit: Globally unique address (factory default)
Type: IP (0x0800)
Internet Protocol, Src: 192.168.1.2 (192.168.1.2), Dst: 192.168.10.1 (192.168.10.1)
Version: 4
Header length: 20 bytes
Differentiated Services Field: 0x00 (DSCP 0x00: Default; ECN: 0x00)
0000 00.. = Differentiated Services Codepoint: Default (0x00)
.... 0. = ECN-Capable Transport (ECT): 0
.... 0. = ECN-CE: 0
Total Length: 334
Identification: 0x0015 (21)
Flags: 0x00
0.. = Reserved bit: Not Set
.0. = Do not fragment: Not Set
..0 = More fragments: Not Set
Fragment offset: 0
Time to live: 254
Protocol: UDP (0x11)
Header checksum: 0x2f36 [correct]
[Good: True]
[Bad : False]
Source: 192.168.1.2 (192.168.1.2)
Destination: 192.168.10.1 (192.168.10.1)
User Datagram Protocol, Src Port: bootps (67), Dst Port: bootps (67)
Source port: bootps (67)
Destination port: bootps (67)
Length: 314
Checksum: 0x0200 [validation disabled]
[Good Checksum: False]
[Bad Checksum: False]
Bootstrap Protocol
Message type: Boot Reply (2)
Hardware type: Ethernet
Hardware address length: 6
Hops: 0
Transaction ID: 0x64b14fa7
Seconds elapsed: 0
Bootp flags: 0x8000 (Broadcast)
1... = Broadcast flag: Broadcast
.000 0000 0000 0000 = Reserved flags: 0x0000
Client IP address: 0.0.0.0 (0.0.0.0)
Your (client) IP address: 192.168.10.19 (192.168.10.19)
Next server IP address: 0.0.0.0 (0.0.0.0)
Relay agent IP address: 192.168.10.1 (192.168.10.1)

```
Client MAC address: 00:62:ec:f3:04:b3 (00:62:ec:f3:04:b3)
Client hardware address padding: 00000000000000000000
Server host name not given
Boot file name not given
Magic cookie: (OK)
Option: (t=53,l=1) DHCP Message Type = DHCP ACK
Option: (53) DHCP Message Type
Length: 1
Value: 05
Option: (t=61,l=18) Client identifier
Option: (61) Client identifier
Length: 18
Value: 0046444F3230323431435548566C616E3130
Option: (t=54,l=4) DHCP Server Identifier = 192.168.1.2
Option: (54) DHCP Server Identifier
Length: 4
Value: C0A80102
Option: (t=51,l=4) IP Address Lease Time = 1 day
Option: (51) IP Address Lease Time
Length: 4
Value: 00015180
Option: (t=58,l=4) Renewal Time Value = 12 hours
Option: (58) Renewal Time Value
Length: 4
Value: 0000A8C0
Option: (t=59,l=4) Rebinding Time Value = 21 hours
Option: (59) Rebinding Time Value
Length: 4
Value: 00012750
Option: (t=1,l=4) Subnet Mask = 255.255.255.0
Option: (1) Subnet Mask
Length: 4
Value: FFFFFFF0
Option: (t=3,l=4) Router = 192.168.1.2
Option: (3) Router
Length: 4
Value: C0A80102
Option: (t=6,l=4) Domain Name Server = 8.8.8.8
Option: (6) Domain Name Server
Length: 4
Value: 08080808
End Option
```

Nesse ponto, o cliente começa a usar o endereço IP e confirma que foi atribuído ao cliente.

```
Client# show interface vlan 10
Vlan10 is up, line protocol is up, autostate enabled
Hardware is EtherSVI, address is 0062.ecf3.04b3
Internet Address is 192.168.10.19/24 <<<<<< It is using the IP address
MTU 1500 bytes, BW 1000000 Kbit, DLY 10 usec,
reliability 255/255, txload 1/255, rxload 1/255
Encapsulation ARPA, loopback not set
Keepalive not supported
ARP type: ARPA
Last clearing of "show interface" counters never
L3 in Switched:
```

ucast: 0 pkts, 0 bytes
Client#

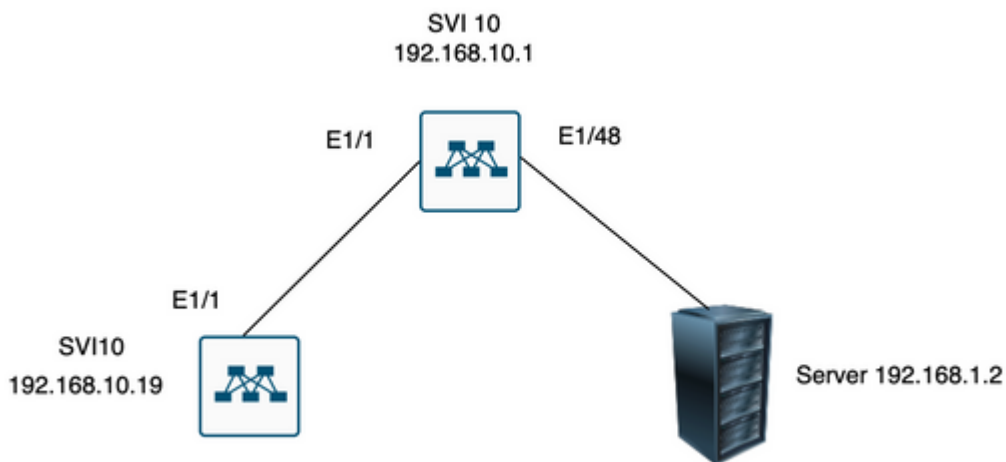

â€f

Informações Relacionadas

[Configurando o DHCP](#)

[Ethanalyzer](#)

Sobre esta tradução

A Cisco traduziu este documento com a ajuda de tecnologias de tradução automática e humana para oferecer conteúdo de suporte aos seus usuários no seu próprio idioma, independentemente da localização.

Observe que mesmo a melhor tradução automática não será tão precisa quanto as realizadas por um tradutor profissional.

A Cisco Systems, Inc. não se responsabiliza pela precisão destas traduções e recomenda que o documento original em inglês ([link fornecido](#)) seja sempre consultado.