

在EIGRP中配置默认路由

目录

[简介](#)
[先决条件](#)

[要求](#)
[使用的组件](#)

[配置](#)
[网络图](#)

[配置](#)
[R1](#)
[R2](#)
[R3](#)

[方法1.使用默认路由和重分发](#)

[验证](#)
[方法2.使用汇总地址](#)
[验证](#)
[故障排除](#)

简介

本文档介绍如何在增强型内部网关路由协议(EIGRP)中配置默认路由。

先决条件

要求

Cisco建议您了解EIGRP。

使用的组件

本文档不限于特定的软件和硬件版本。


本文档中的信息都是基于特定实验室环境中的设备编写的。本文档中使用的所有设备最初均采用原始(默认)配置。如果您的网络处于活动状态,请确保您了解所有命令的潜在影响。

配置

以下方法可用于通告EIGRP中的默认路由,本文对此进行了说明:

1. 使用默认路由和重分发
2. 使用汇总地址

网络图

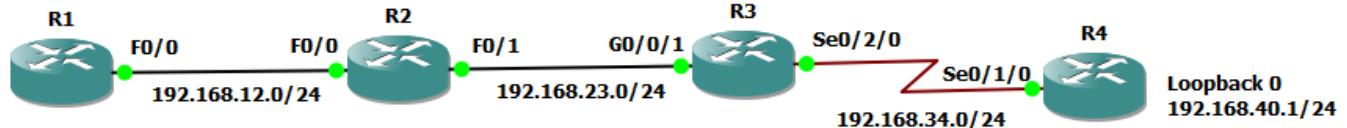

配置

此处，路由器R1、R2和R3配置了EIGRP，并且R3和R4之间不运行EIGRP。

R1

```
!
router eigrp 1
network 192.168.12.0
!

R1#show ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route

Gateway of last resort is not set

C 192.168.12.0/24 is directly connected, FastEthernet0/0
D 192.168.23.0/24 [90/30720] via 192.168.12.2, 00:10:27, FastEthernet0/0
```

R2

```
!
router eigrp 1
network 192.168.12.0
network 192.168.23.0
!

R2#show ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route

Gateway of last resort is not set

C 192.168.12.0/24 is directly connected, FastEthernet0/0
C 192.168.23.0/24 is directly connected, FastEthernet0/1
```

R3

```

!
router eigrp 1
 network 192.168.23.0
!

R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override

Gateway of last resort is not set

D 192.168.12.0/24
[90/28416] via 192.168.23.2, 00:05:16, GigabitEthernet0/0/1
192.168.23.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.23.0/24 is directly connected, GigabitEthernet0/0/1
L 192.168.23.3/32 is directly connected, GigabitEthernet0/0/1
192.168.34.0/24 is variably subnetted, 2 subnets, 2 masks
C 192.168.34.0/24 is directly connected, Serial0/2/0
L 192.168.34.3/32 is directly connected, Serial0/2/0

```

方法1.使用默认路由和重分发

此方法描述如何使用静态默认路由在EIGRP中通告默认路由：

```

R3(config)#ip route 0.0.0.0 0.0.0.0 192.168.34.4

R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
E1 - OSPF external type 1, E2 - OSPF external type 2
i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
ia - IS-IS inter area, * - candidate default, U - per-user static route
o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
a - application route
+ - replicated route, % - next hop override

```

Gateway of last resort is 192.168.34.4 to network 0.0.0.0

```

S*      0.0.0.0/0 [1/0] via 192.168.34.4
D      192.168.12.0/24
        [90/28416] via 192.168.23.2, 00:59:18, GigabitEthernet0/0/1
        192.168.23.0/24 is variably subnetted, 2 subnets, 2 masks
C      192.168.23.0/24 is directly connected, GigabitEthernet0/0/1
L      192.168.23.3/32 is directly connected, GigabitEthernet0/0/1
        192.168.34.0/24 is variably subnetted, 2 subnets, 2 masks
C      192.168.34.0/24 is directly connected, Serial0/2/0
L      192.168.34.3/32 is directly connected, Serial0/2/0

```

注意：在这种情况下，EIGRP内不能使用network语句来通告0.0.0.0，因为它不是直连的。

静态路由的重分发在EIGRP下完成，如下所示：

```
R3(config)#router eigrp 1  
R3(config-router)#redistribute static metric 100000 1000 255 1 1500
```

验证

使用本部分可确认配置能否正常运行。

R1#show ip route

```
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP  
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
       E1 - OSPF external type 1, E2 - OSPF external type 2  
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
       ia - IS-IS inter area, * - candidate default, U - per-user static route  
       o - ODR, P - periodic downloaded static route
```

Gateway of last resort is 192.168.12.2 to network 0.0.0.0

```
C    192.168.12.0/24 is directly connected, FastEthernet0/0  
D    192.168.23.0/24 [90/30720] via 192.168.12.2, 00:14:01, FastEthernet0/0  
D*EX 0.0.0.0/0 [170/286720] via 192.168.12.2, 00:00:39, FastEthernet0/0
```

R2#show ip route


```
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP  
       D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area  
       N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2  
       E1 - OSPF external type 1, E2 - OSPF external type 2  
       i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2  
       ia - IS-IS inter area, * - candidate default, U - per-user static route  
       o - ODR, P - periodic downloaded static route
```

Gateway of last resort is 192.168.23.3 to network 0.0.0.0

```
C    192.168.12.0/24 is directly connected, FastEthernet0/0  
C    192.168.23.0/24 is directly connected, FastEthernet0/1  
D*EX 0.0.0.0/0 [170/284160] via 192.168.23.3, 00:04:44, FastEthernet0/1
```

方法2. 使用汇总地址

此方法使用EIGRP的汇总规则，如图所示。

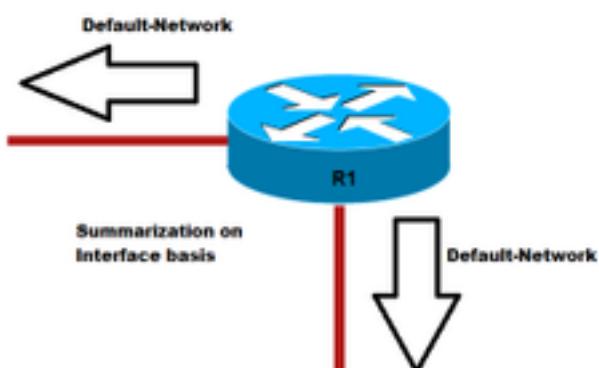

```
!
R3(config)#interface gigabitEthernet 0/0/1 R3(config-if)#ip summary-address eigrp 1 0.0.0.0
0.0.0.0
!
```

验证

使用本部分可确认配置能否正常运行。

```
R3#show ip route
Codes: L - local, C - connected, S - static, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2
      i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
      ia - IS-IS inter area, * - candidate default, U - per-user static route
      o - ODR, P - periodic downloaded static route, H - NHRP, l - LISP
      a - application route
      + - replicated route, % - next hop override

Gateway of last resort is 0.0.0.0 to network 0.0.0.0

D* 0.0.0.0/0 is a summary, 00:00:06, Null0
D  192.168.12.0/24
    [90/28416] via 192.168.23.2, 00:15:54, GigabitEthernet0/0/1
    192.168.23.0/24 is variably subnetted, 2 subnets, 2 masks
C    192.168.23.0/24 is directly connected, GigabitEthernet0/0/1
L    192.168.23.3/32 is directly connected, GigabitEthernet0/0/1
    192.168.34.0/24 is variably subnetted, 2 subnets, 2 masks
C    192.168.34.0/24 is directly connected, Serial0/2/0
L    192.168.34.3/32 is directly connected, Serial0/2/0
```

R1和R2的路由表现在显示从EIGRP获知的默认路由：

```
R1#show ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2
      i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
      ia - IS-IS inter area, * - candidate default, U - per-user static route
      o - ODR, P - periodic downloaded static route

Gateway of last resort is 192.168.12.2 to network 0.0.0.0

C  192.168.12.0/24 is directly connected, FastEthernet0/0
D  192.168.23.0/24 [90/30720] via 192.168.12.2, 00:17:50, FastEthernet0/0
D* 0.0.0.0/0 [90/30976] via 192.168.12.2, 00:01:30, FastEthernet0/0
```

```
R2#show ip route
Codes: C - connected, S - static, R - RIP, M - mobile, B - BGP
      D - EIGRP, EX - EIGRP external, O - OSPF, IA - OSPF inter area
      N1 - OSPF NSSA external type 1, N2 - OSPF NSSA external type 2
      E1 - OSPF external type 1, E2 - OSPF external type 2
      i - IS-IS, su - IS-IS summary, L1 - IS-IS level-1, L2 - IS-IS level-2
      ia - IS-IS inter area, * - candidate default, U - per-user static route
      o - ODR, P - periodic downloaded static route
```

```
Gateway of last resort is 192.168.23.3 to network 0.0.0.0  
  
C      192.168.12.0/24 is directly connected, FastEthernet0/0  
C      192.168.23.0/24 is directly connected, FastEthernet0/1  
D*    0.0.0.0/0 [90/28416] via 192.168.23.3, 00:03:50, FastEthernet0/1
```

故障排除

目前没有针对此配置的故障排除信息。