

فتاه ىلع فتاهلل ةي لحملا تاداعإل تي بثت IP Phone 7841

تايوتحملا

[ةمدقملا](#)

[ةيساسأل تابلطتملا](#)

[تابلطتملا](#)

[ةمدختسملا تانوكملا](#)

[ةيساسأ تامولعم](#)

[نيوكتلا](#)

[تانويكتلا](#)

[ةحصللا نم ققحتلا](#)

[اهحالص او عاطخأل فاشكتسا](#)

ةمدقملا

ةلسلسلا نم IP فتاه ىلع ةي لحملا فتاهلل تاداعإل تي بثت ةيفيك دنتسملا اذه حضوي Cisco 7841 Series.

ةيساسأل تابلطتملا

تابلطتملا

دنتسملا اذهل ةصاخ تابلطتم دجوت ال

ةمدختسملا تانوكملا

ةيلاتلا ةي داملا تانوكملا وجماربل تارادصإل دنتسملا اذه يف ةدراول تامولعملا دنتست

- Cisco Unified Communications Manager، رادصإل 12.x
- Cisco IP 7841 فتاه

ةصاخ ةي لمعم ةئيبي يف ةدوجوملا ةزهجال نم دنتسملا اذه يف ةدراول تامولعملا عاشنإ مت تناك اذإ. (يضا رتفا) حوسمم نيوكتب دنتسملا اذه يف ةمدختسملا ةزهجال عيمج تادب رمأ يال لم تحملا ريثاتلل كم هف نم دكاتف، ليغشتلا ديق كتكتبش

ةيساسأ تامولعم

امب ةغل 12 ل ماظنلا ةطساوب ةدحملا ةمجرتل معد Cisco نم ةدحوملا تالاصتال ري دم رفوي ةي لحملا تاداعإل ددحت. ةدحتملا تايالاولا اهي ف امب ةلود 16 و ةيزيلجنإل ةغلل كذيف يتللا ةغلل مدختسملا عوضاوم ددحت؛ ةلود لكل ةدحملا تافاسملاو ةي نولل تاجردلا ةكبشلل صنلا ضرعل اهمدختست

نيوكتلا

تاني وكالتا

عنصم لاي ف فتاهلل طبض ةداعإ ارجاب صاخلا ارجالا وه اذه

بيولا لى Cisco عقوم نم ةيحمل ادادعإ ليزنتب مق 1. ةوطخل



Downloads Home / Collaboration Endpoints / IP Phones / IP Phone 7800 Series / IP Phone 7841 / Unified Communications Manager Endpoints Locale Installer- 12.1(1.1000)

Search...

Expand All Collapse All

Latest Release

- 12.1(1.1000)
- 12.0(1.1000)
- 11.7(1.1000)
- 11.5(1.3000-1)

All Release

- TNP Firmware v.11.5
- TNP Firmware v.11
- TNP Firmware v.10

IP Phone 7841


Release 12.1(1.1000)

Notifications

Related Links and Documentation
- No related links or documentation -

File Information	Release Date	Size	
Cisco Unified Communications Locale Installer 12.1.1.1000 Arabic (United Arab Emirates) for Cisco Unified IP Phones FW 12.1(1) po-locale-ar_AE-k3-12.1.1.1000-1.cop.sgn	27-MAR-2018	2.89 MB	Download
Cisco Unified Communications Locale Installer 12.1.1.1000 Arabic (Bahrain) for Cisco Unified IP Phones FW 12.1(1) po-locale-ar_BH-k3-12.1.1.1000-1.cop.sgn	27-MAR-2018	2.88 MB	Download
Cisco Unified Communications Locale Installer 12.1.1.1000 Arabic (Algeria) for Cisco Unified IP Phones	27-MAR-2018	2.88 MB	Download

ةيقرت/تيبثت > جماربل تايقرت > ليغشتلا ماظن ةرادإ لى لقنتا 2. ةوطخل

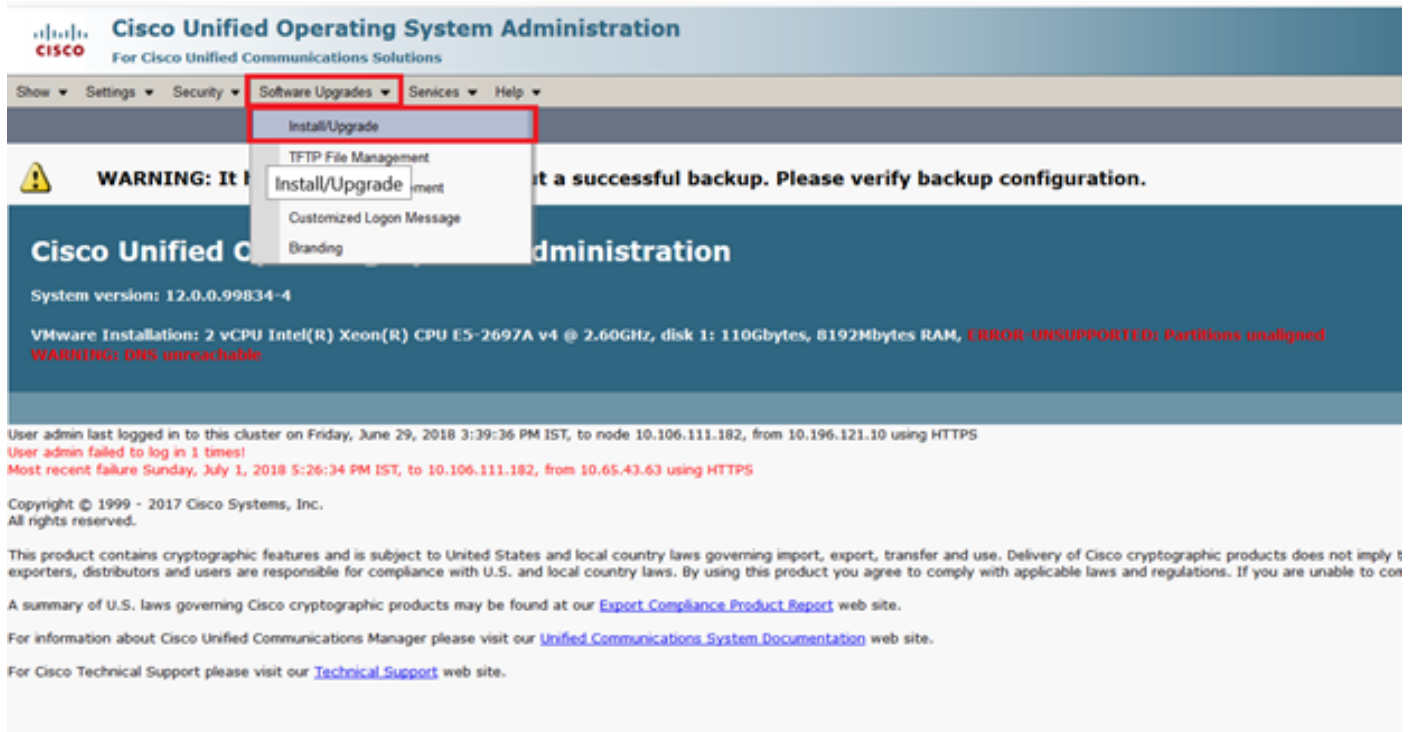

Cisco Unified Operating System Administration
For Cisco Unified Communications Solutions

Show Settings Security Software Upgrades Services Help

Install/Upgrade

TFTP File Management

Install/Upgrade

Customized Logon Message

Branding

WARNING: It is recommended to take a successful backup. Please verify backup configuration.

Cisco Unified Communications Administration

System version: 12.0.0.99834-4

VMware Installation: 2 vCPU Intel(R) Xeon(R) CPU ES-2697A v4 @ 2.60GHz, disk 1: 110Gbytes, 8192Mbytes RAM, ERROR: UNSUPPORTED: Partitions unaligned

WARNING: DNS unreachable

User admin last logged in to this cluster on Friday, June 29, 2018 3:39:36 PM IST, to node 10.106.111.182, from 10.196.121.10 using HTTPS

User admin failed to log in 1 times!

Most recent failure Sunday, July 1, 2018 5:26:34 PM IST, to 10.106.111.182, from 10.65.43.63 using HTTPS

Copyright © 1999 - 2017 Cisco Systems, Inc.
All rights reserved.

This product contains cryptographic features and is subject to United States and local country laws governing import, export, transfer and use. Delivery of Cisco cryptographic products does not imply that exporters, distributors and users are responsible for compliance with U.S. and local country laws. By using this product you agree to comply with applicable laws and regulations. If you are unable to comply with applicable laws and regulations, you may not use this product.

A summary of U.S. laws governing Cisco cryptographic products may be found at our [Export Compliance Product Report](#) web site.

For information about Cisco Unified Communications Manager please visit our [Unified Communications System Documentation](#) web site.

For Cisco Technical Support please visit our [Technical Support](#) web site.

SFTP مداخل دامتعالا تانايب لخدا، ةروصل لاي ف حضوم وه امك 3. ةوطخل



Cisco Unified Operating System Administration


For Cisco Unified Communications Solutions

Show ▾ Settings ▾ Security ▾ Software Upgrades ▾ Services ▾ Help ▾

Software Installation/Upgrade


 Cancel  Next

- Status -

 Status: Ready

- Software Location -

Source*	<input type="text" value="Remote Filesystem"/>
Directory*	<input type="text" value="/"/>
Server*	<input type="text" value="192.168.0.5"/>
User Name*	<input type="text" value="cisco"/>
User Password*	<input type="password" value="*****"/>
Transfer Protocol*	<input type="text" value="SFTP"/>
SMTP Server	<input type="text"/>
Email Destination	<input type="text"/>

 *- indicates required item.

امك، يلات اللى عل رقناو تايقرت/تاراخي ةلدسنم ال ةمئاق ال نم ةي لحميل تاداع ال دح. 4 ةوطخ ال ةي لحميل تاداع ال تيبثت ادبي. ةروصل ال ف حضوم وه.

Cisco Unified Operating System Administration
For Cisco Unified Communications Solutions

Show Settings Security Software Upgrades Services Help

Software Installation/Upgrade

Install Another

Installation Status

File po-locale-ca_ES-k3-12.1.1.1000-1.cop.sgn
Start Time Mon Jul 02 13:19:26 IST 2018
Status Complete

Installation Log

```

[18/07/02_13:19:57] locale_install.sh: Publisher: Starting installdb...
/bin/su -l informix -s /bin/sh -c
"source /usr/local/cm/db/dblenv.bash /usr/local/cm ;
source /usr/local/cm/db/informix/local/ids.env ;
nice /usr/local/cm/bin/installdb -x /usr/local/cm/db/xml/xml"

```

Install Another

i *- indicates required item.

ءانثأ اهلهفغش تب موقت يتلل دقعلل عي مج يلع Cisco TFTP ةمدخ ططبض ةداعإب مق 7. ةوطخلل ءانثأ اهلهفغش تب موقت يتلل دقعلل عي مج يلع Cisco TFTP ةمدخ دح. مكحتلل زكرم ةزيم تامدخ > تاودأ > ةمدخلل ةيلباق ةحفص يلل كلالقتنا ةروصلل ي ف حضوم وه امك ، لهفغشتلل ةداعإ يلع رقنواو كانه.

Cisco Unified Serviceability
For Cisco Unified Communications Solutions

Alarm Trace Tools Snmp CallHome Help

Control Center - Feature Services

Start Stop Restart Refresh Page

Status:
i Ready

Select Server
Server* 10.106.111.182--CUCM Voice/Video Go

Performance and Monitoring Services

Service Name	Status:
Cisco Serviceability Reporter	Started
Cisco CallManager SNMP Service	Started

Directory Services

Service Name	Status:
Cisco DirSync	Started

CM Services

Service Name	Status:
Cisco CallManager	Started
Cisco Unified Mobile Voice Access Service	Started
Cisco IP Voice Media Streaming App	Started
Cisco CTIManager	Started
Cisco Extension Mobility	Started
Cisco DHCP Monitor Service	Started
Cisco Intercluster Lookup Service	Started
Cisco Location Bandwidth Manager	Started
Cisco Directory Number Alias Sync	Started
Cisco Directory Number Alias Lookup	Started
Cisco Dialed Number Analyzer Server	Started
Cisco Dialed Number Analyzer	Started
Cisco Tftp	Started

فاتاهال إلى لقتنا 8. ةوطخال

System ▾ Call Routing ▾ Media Resources ▾ Advanced Features ▾ Device ▾ Application ▾ User Management ▾ Bulk Administration ▾ Help ▾

Find and List Phones Related Links: [Actively Logged In Device Report](#)

+ Add New Select All Clear All Delete Selected Reset Selected Apply Config to Selected

Status
1 records found

Query Information
Searching on a directory number may show the same device name multiple times depending on the number of lines configured per device.

Phone (1 - 1 of 1) Rows per Page 50 ▾

Find Phone where: Directory Number ▾ begins with ▾ 1006 Find Clear Filter

Select item or enter search text ▾

<input type="checkbox"/>	Device Name(1 line)	Description	Device Pool	Extension	Partition	Device Protocol	Status	IPv4 Address	Copy	Super Copy
<input type="checkbox"/>	SEP5C5015458F33(1)	Auto 1006	Default	1006		SIP	Registered with 10.106.113.72	10.106.113.89	<input type="button" value="⌵"/>	<input type="button" value="⌵"/>

اهل يزن بت موقت يتي الة ل حمل اتاداعإل ددح مدخت سملل ةي ل حمل اتاداعإل تحت 9. ةوطخال طاق.

MAC Address* 5C5015458F33

Description Auto 1006

Device Pool* Default [View Details](#)

Common Device Configuration < None > [View Details](#)

Phone Button Template* SEP5C5015458F33-SIP-Individual Template

Softkey Template < None >

Common Phone Profile* Standard Common Phone Profile [View Details](#)

Calling Search Space < None >

AAR Calling Search Space < None >

Media Resource Group List < None >

User Hold MOH Audio Source < None >

Network Hold MOH Audio Source < None >

Location* Hub_None

AAR Group < None >

User Locale < None >

Network Locale < None >

Built In Bridge* English, United States


Privacy* Català, Reino de España

English(British), United Kingdom

هني عت ةداعإو هقي ب طتو فاتاهال ظفح 10. ةوطخال

ةحصلال نم ققحتال

وه امك ةي لصال ةغلل ال في بيلال سأل ةي وركنكمي، حاجنب ةي ل حمل اتاداعإل تي ب ت مت اذا ةروصلال في حضورم:

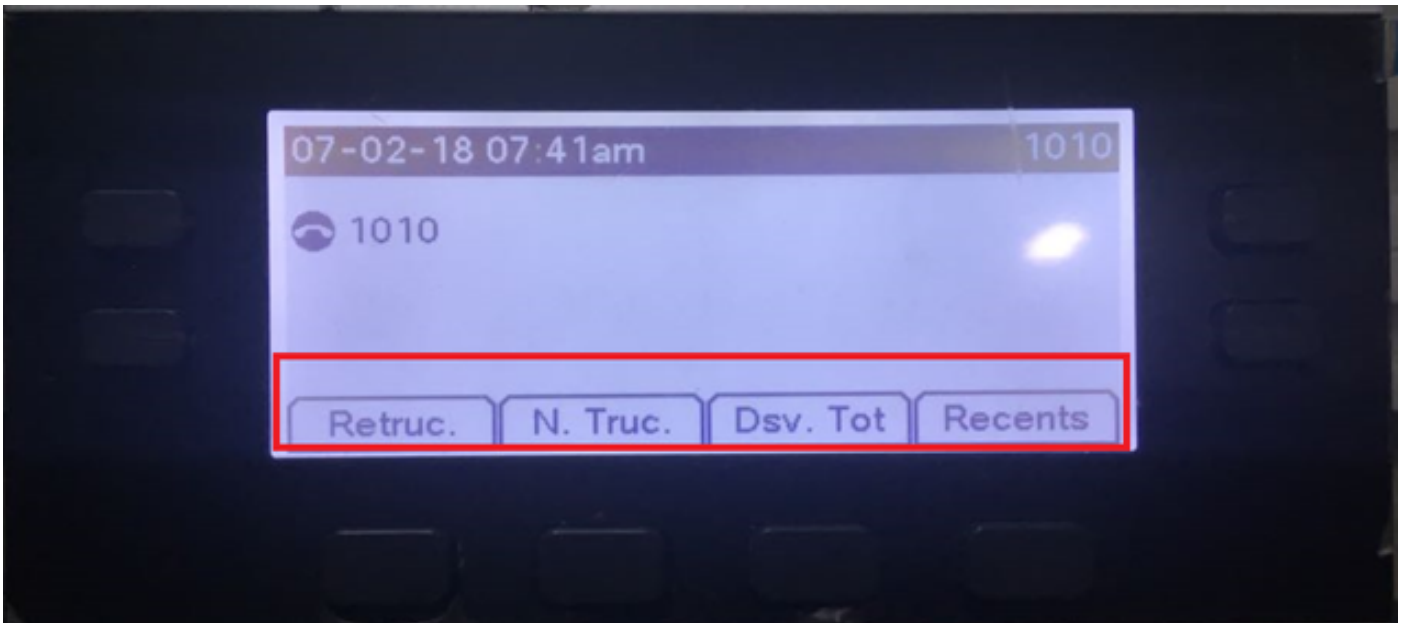

اهحال صإو ءاطخألأ فاشك تسإ

نېوكتلأ اذهل اھحال صإو ءاطخألأ فاشك تسإل ءددم تامولعم آيلاح رفوتت ال

ةمچرتل هذه ل و ح

ةلأل تاي نقتل ن م ة و مچ م ادخت ساب دن تسم ل ا ذه Cisco ت مچرت
م ل ا ل اء ان ا ع مچ ي ف ن م دخت س م ل ل م عد و ت ح م م ي دقت ل ة ي ر ش ب ل و
امك ة ق ي ق د ن و ك ت ن ل ة ل ا ة مچرت ل ض ف ا ن ا ة ظ ح ال م ي ج ر ي . ة ص ا خ ل ا م ه ت غ ل ب
Cisco ي ل خ ت . ف ر ت ح م مچرت م ا ه م د ق ي ي ت ل ا ة ي ف ا ر ت ح ال ا ة مچرت ل ا ع م ل ا ح ل ا و ه
ل ا ا م اء ا د ع و ج ر ل ا ب ي ص و ت و ت ا مچرت ل ا هذه ة ق د ن ع ا ه ت ي ل و ئ س م Cisco
Systems (ر ف و ت م ط ب ا ر ل ا) ي ل ص ا ل ا ي ز ي ل ج ن ا ل ا دن ت س م ل ا