

# Een lijn op de SPA100 Series telefoonadapter inschakelen

## Doel

Wanneer de lijn wordt toegelaten, kunnen de spraakdiensten door de lijnen voor de respectieve telefoonpoorten worden gevestigd. Dit artikel legt uit hoe u verschillende lijnen op de SPA100 Series analoge telefoonadapter kunt inschakelen, zodat twee gebruikers direct kunnen communiceren (bijvoorbeeld General Manager to Account Manager).

## Toepassbaar apparaat


- SPA112
- SPA122

## Softwareversie

- 1.1.0

## Lijn inschakelen

Stap 1. Meld u aan bij het hulpprogramma telefoonadapter en kies **spraak > Line1** of **Line2**. De *lijn 1* pagina wordt geopend:

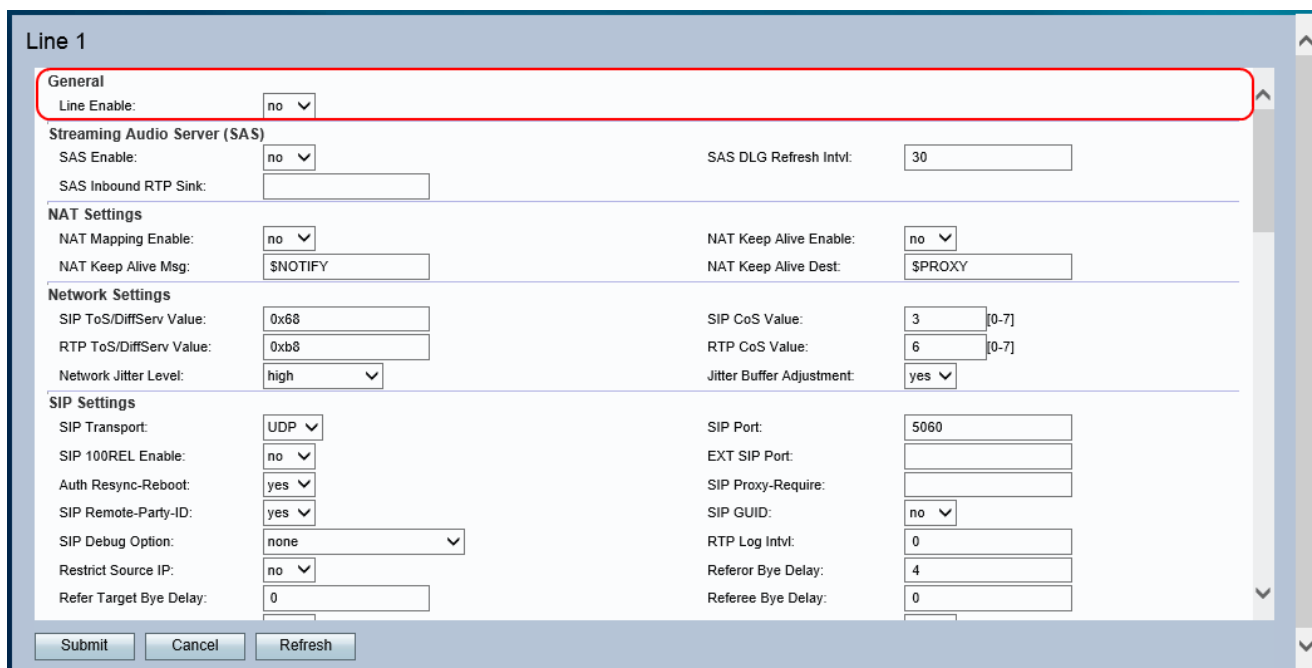

The screenshot shows the configuration page for Line 1. The 'General' section is highlighted with a red box and contains the following settings:

Section	Parameter	Value
General	Line Enable:	no
	SAS Enable:	no
Streaming Audio Server (SAS)	SAS Inbound RTP Sink:	
	SAS DLG Refresh Intvl:	30
NAT Settings	NAT Mapping Enable:	no
	NAT Keep Alive Msg:	\$NOTIFY
NAT Settings	NAT Keep Alive Enable:	no
	NAT Keep Alive Dest:	\$PROXY
Network Settings	SIP ToS/DiffServ Value:	0x68
	RTP ToS/DiffServ Value:	0xb8
Network Settings	Network Jitter Level:	high
	SIP CoS Value:	3 [0-7]
Network Settings	RTP CoS Value:	6 [0-7]
	Jitter Buffer Adjustment:	yes
SIP Settings	SIP Transport:	UDP
	SIP Port:	5060
SIP Settings	SIP 100REL Enable:	no
	EXT SIP Port:	
SIP Settings	Auth Resync-Reboot:	yes
	SIP Proxy-Require:	
SIP Settings	SIP Remote-Party-ID:	yes
	SIP GUID:	no
SIP Settings	SIP Debug Option:	none
	RTP Log Intvl:	0
SIP Settings	Restrict Source IP:	no
	Referor Bye Delay:	4
SIP Settings	Refer Target Bye Delay:	0
	Referee Bye Delay:	0

At the bottom of the page, there are three buttons: Submit, Cancel, and Refresh.

Opmerking: De configuraties voor Line 1 zijn van toepassing op Line 2.

Line 1

General

Line Enable: yes ▾

Submit Cancel Refresh

Stap 2. Kies **ja** in de vervolgkeuzelijst Line Enable. Dit maakt de lijn mogelijk en alle andere configuraties kunnen op deze lijn worden gemaakt.

Stap 3. Klik op **Indienen** om de instellingen op te slaan.