

使用PPTP和MPPE配置Cisco路由器和VPN客戶端

目錄

[簡介](#)

[必要條件](#)

[需求](#)

[採用元件](#)

[網路圖表](#)

[慣例](#)

[PPTP路由器配置](#)

[使用MPPE和MS-CHAP的路由器配置](#)

[Windows 2000 VPN\(PPTP\)設定和配置](#)

[驗證](#)

[疑難排解](#)

[疑難排解指令](#)

[相關資訊](#)

簡介

本檔案介紹如何設定終止Windows 2000點對點通道通訊協定(PPTP)使用者端和Microsoft點對點加密通訊協定(MPPE)的Cisco IOS[®]路由器。

有關使用思科安全訪問控制伺服器(ACS)進行PPTP身份驗證的詳細資訊，請參閱[為Windows路由器PPTP身份驗證配置Cisco Secure ACS](#)。

必要條件

需求

本文件沒有特定需求。

採用元件


本檔案中的資訊是根據軟體和硬體版本：

- 運行Cisco IOS軟體版本12.2的Cisco 2621路由器
- Microsoft Windows 2000

本文中的資訊是根據特定實驗室環境內的裝置所建立。文中使用到的所有裝置皆從已清除（預設）的組態來啟動。如果您的網路正在作用，請確保您已瞭解任何指令可能造成的影響。

網路圖表

本檔案會使用以下網路設定：

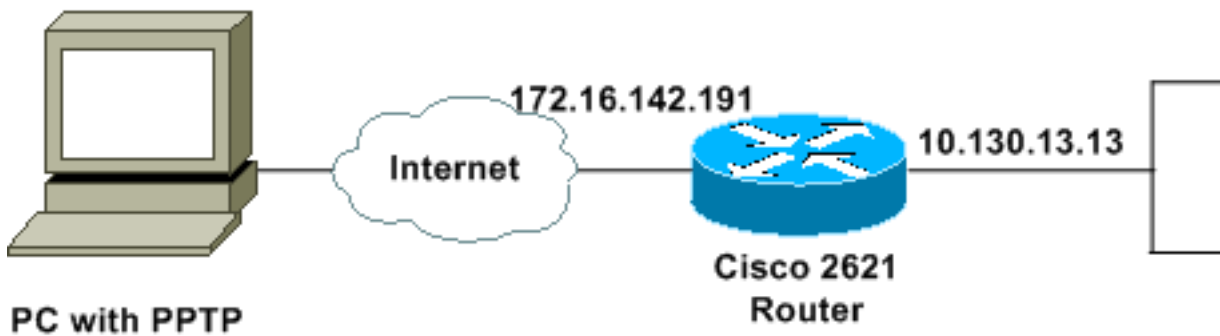

慣例

如需文件慣例的詳細資訊，請參閱[思科技術提示慣例](#)。

PPTP路由器配置

這些IOS命令適用於支援PPTP的所有平台。

```
2621#configure terminal
Enter configuration commands, one per line. End with CNTL/Z.
!--- Enable virtual private dial-up networking. 2621(config)#vpdn enable
!--- Enters VPDN group configuration mode for the specified VPDN group. 2621(config)#vpdn-group
1
!--- Enters VPDN accept-dialin configuration mode !--- and enables the router to accept dial-in
requests. 2621(config-vpdn)#accept-dialin
!--- Specifies which PPTP protocol is used. 2621(config-vpdn-acc-in)#protocol pptp
!--- Specifies the virtual template that is used !--- in order to clone the virtual access
interface. 2621(config-vpdn-acc-in)#virtual-template 1
2621(config-vpdn-acc-in)#exit

2621(config)#ip local pool test 192.168.1.1 192.168.1.250
!--- Create virtual-template interface used for cloning !--- virtual-access interfaces with the
use of address pool test !--- with Challenge Authentication Protocol (CHAP) authentication, PAP,
and MS-CHAP. 2621(config)#interface virtual-template 1

2621(config-if)#encapsulation ppp
2621(config-if)#peer default ip address pool test
2621(config-if)#ip unnumbered FastEthernet0/0
2621(config-if)#no keepalive
2621(config-if)#ppp encrypt mppe auto
2621(config-if)#ppp authentication pap chap ms-chap
```

思科2621路由器

```
2621#show run
Building configuration...

Current configuration : 1566 bytes
!
version 12.2
service timestamps debug datetime msec localtime
```



```

no ip route-cache
no ip mroute-cache
duplex auto
speed auto
!
interface FastEthernet0/1
ip address 10.130.13.13 255.255.0.0
duplex auto
speed auto
!
!--- Create virtual-template interface used for cloning
!--- virtual-access interfaces with the use of address
pool test !--- with CHAP authentication, PAP, and MS-
CHAP. interface Virtual-Template1
ip unnumbered FastEthernet0/0
peer default ip address pool test
no keepalive
ppp encrypt mppe auto
ppp authentication pap chap ms-chap
!
!--- Create IP pool named test and specify IP range. ip
local pool test 192.168.1.1 192.168.1.250
no ip http server
no ip http secure-server
ip classless
ip route 0.0.0.0 0.0.0.0 172.16.142.1
!
ip pim bidir-enable
!
!
!
call rsvp-sync
!
!
mgcp profile default
!
dial-peer cor custom
!
!
!
!
!
line con 0
exec-timeout 0 0
line aux 0
line vty 0 4
password cisco
login
!
!
end
2621#

```

使用MPPE和MS-CHAP的路由器配置

```

!--- Enter configuration commands, one per line. !--- End with CNTL/Z. 2621(config)#interface
Virtual-Template1
2621(config-if)#ppp authentication ms-chap
2621(config-if)#ppp encrypt mppe ?

```


128 128 Bit Encryption only
40 40 Bit Encryption only
auto Will offer 40 and 128 bit if available

```
2621(config-if)#ppp encrypt mppe auto  
2621(config-if)#ppp encrypt mppe auto required
```


Windows 2000 VPN(PPTP)設定和配置

請完成以下步驟：


1. 選擇**Start > Settings > Network and Dial-up Connections > Make New Connection**。

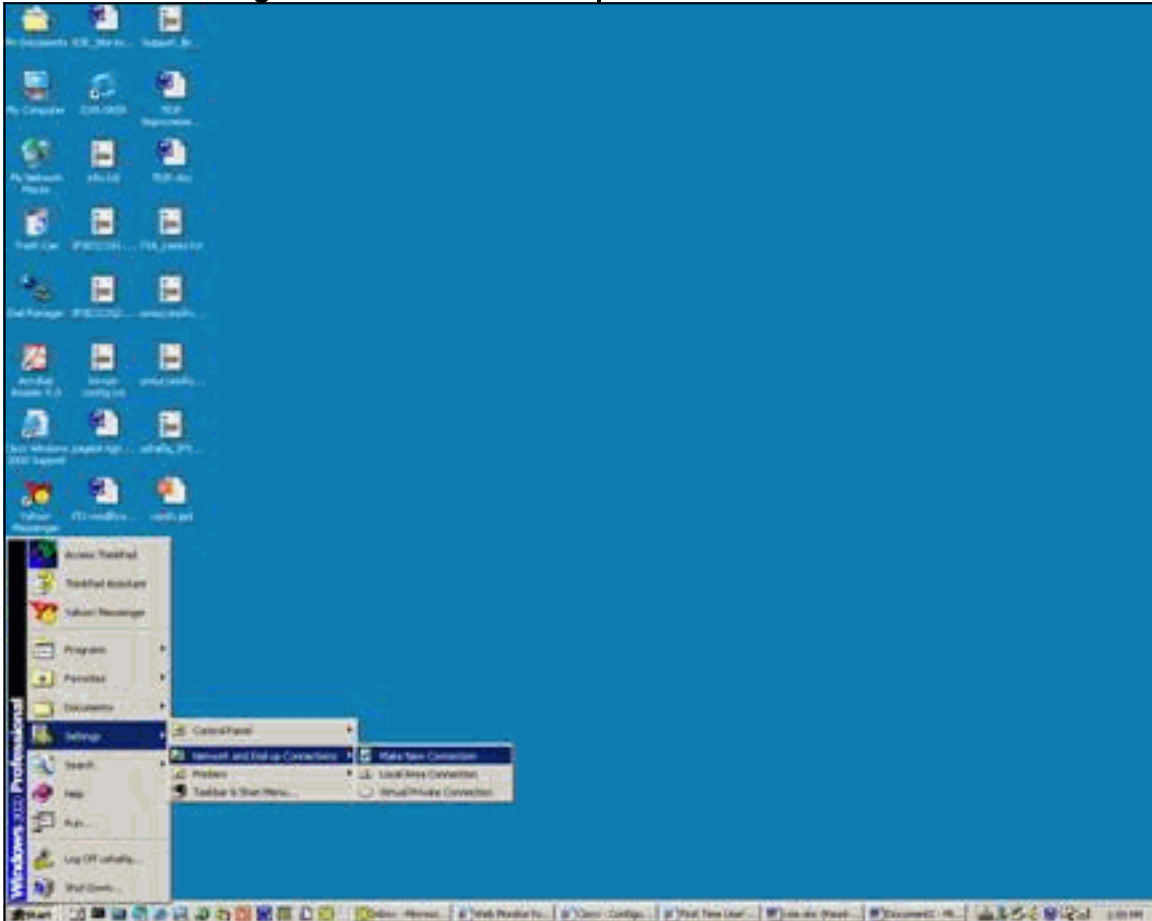


2. 出現「Network Connection Wizard (網路連線嚮導)」視窗後，選擇**Network Connection Type**和**Connect to a private network through the Internet**。

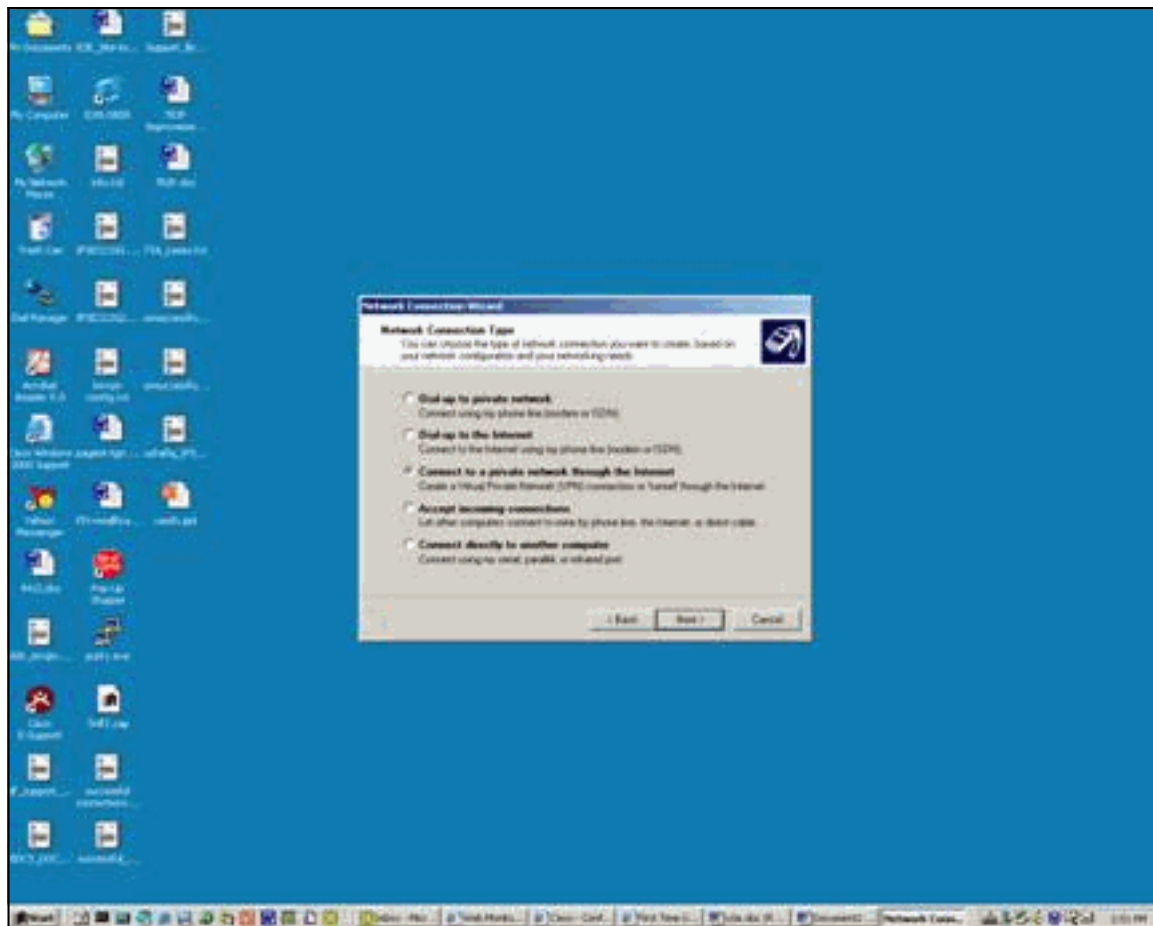


3. 選擇Automatically dial this initial connection。

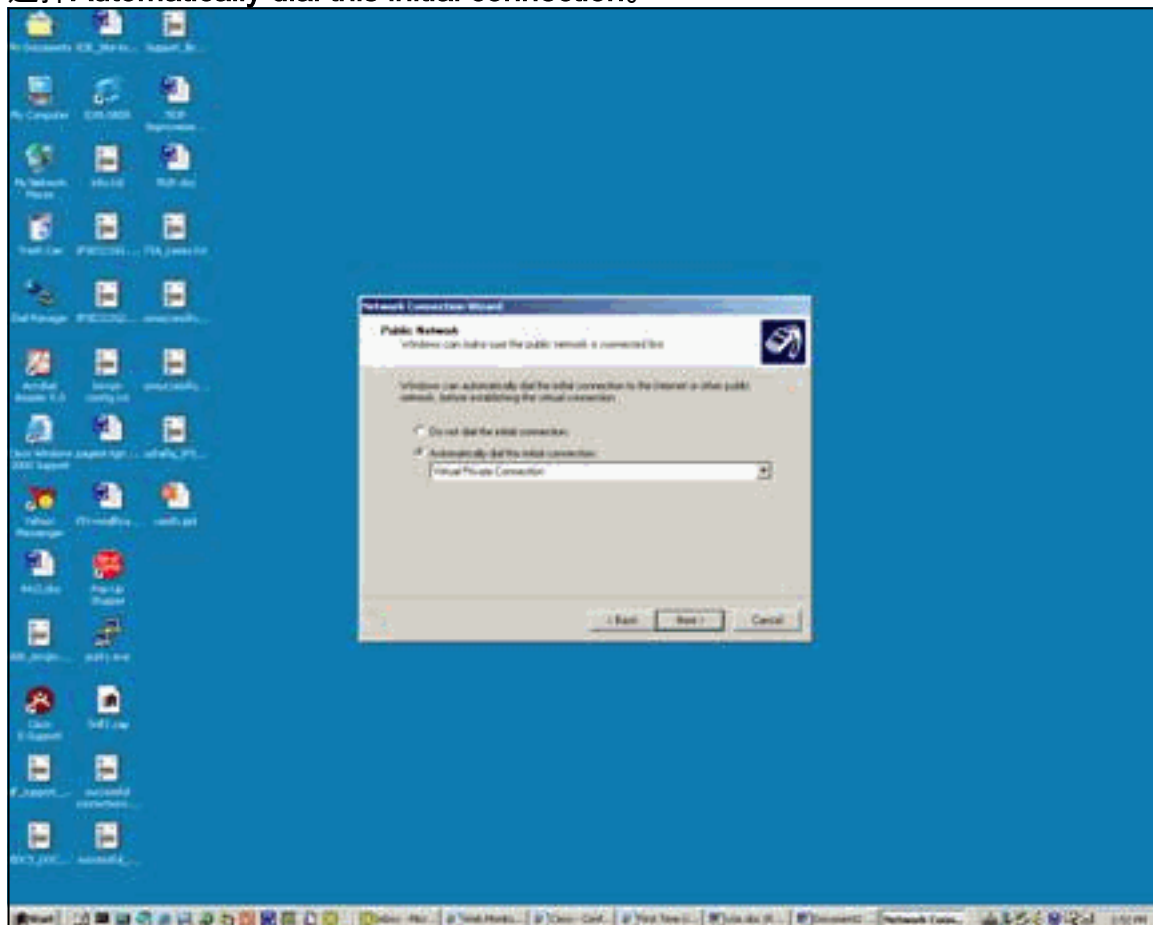


4. 在主機或IP地址欄位中指定目標地址，然後按一下下一步。

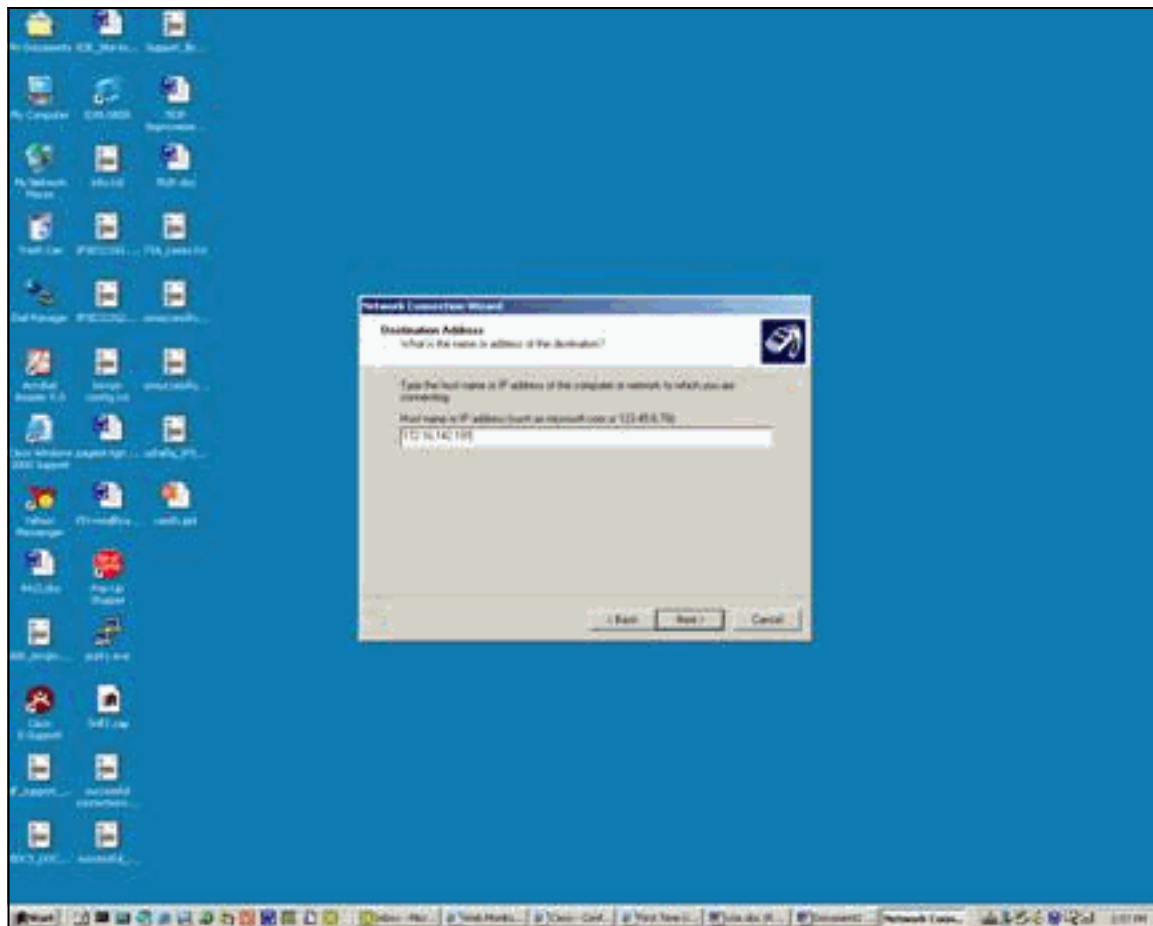


5. 選擇Start > Settings > Network and Dial up connections，然後選擇最近配置的連線。

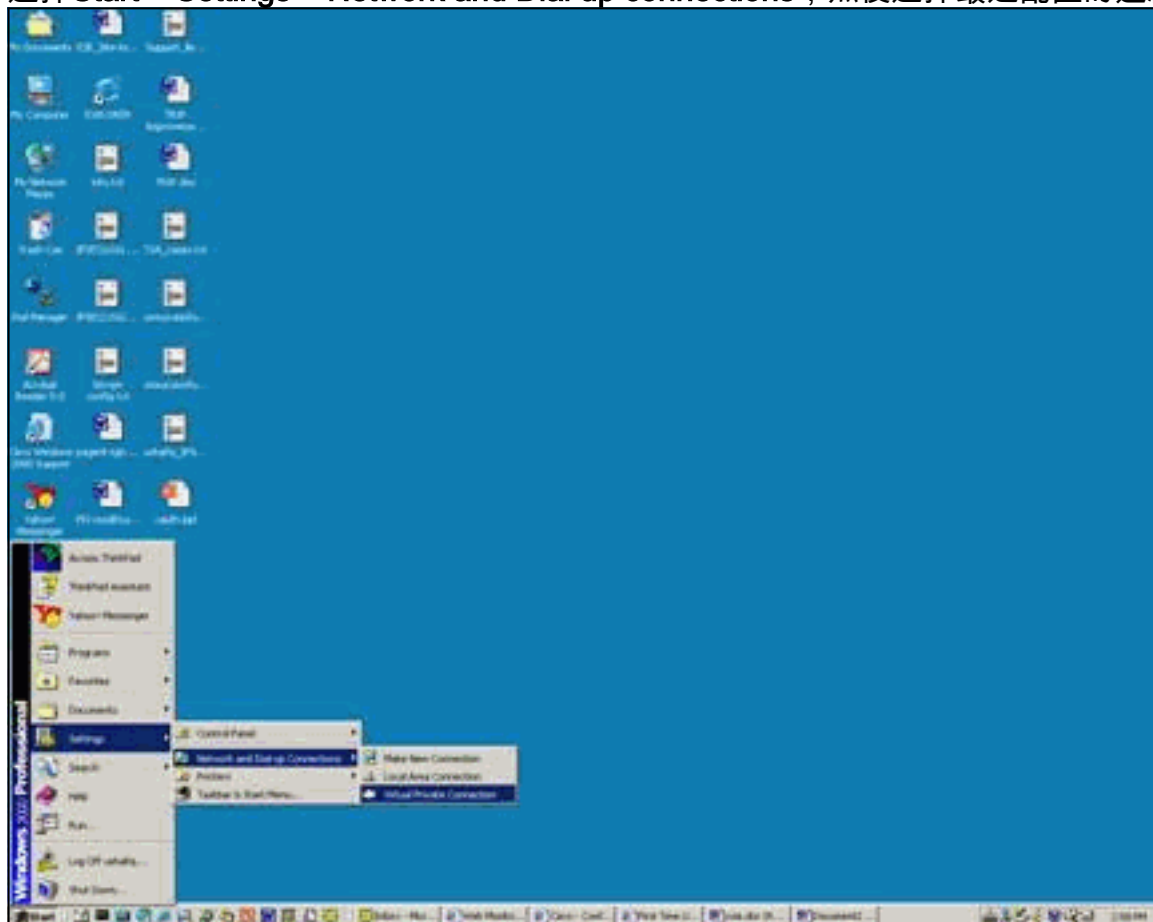


6. 出現此視窗後，選擇Properties > Security以正確設定選項。

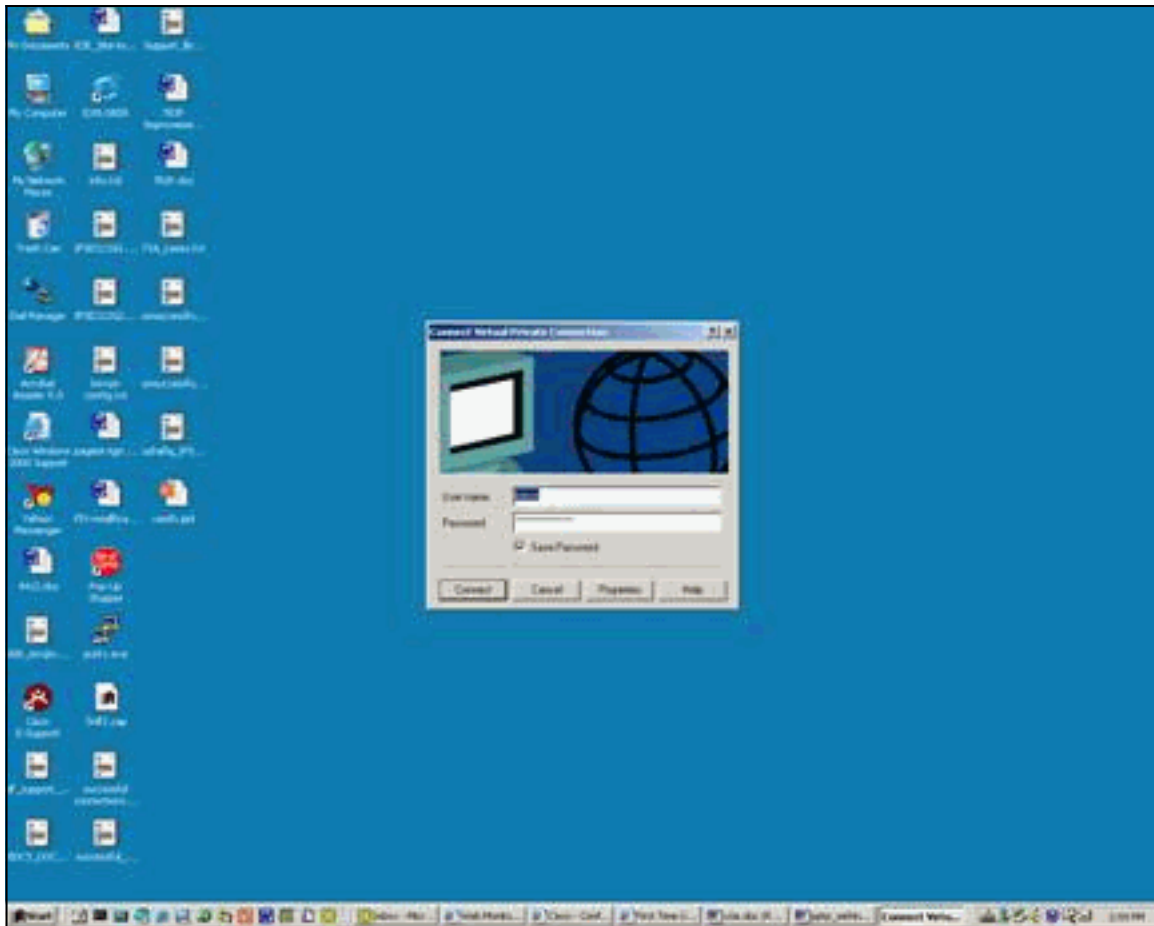


7. 選擇Advanced (客戶設定) ，選擇Settings，然後選擇適當的加密 (資料加密) 級別和身份驗證 (允許這些協定) 。

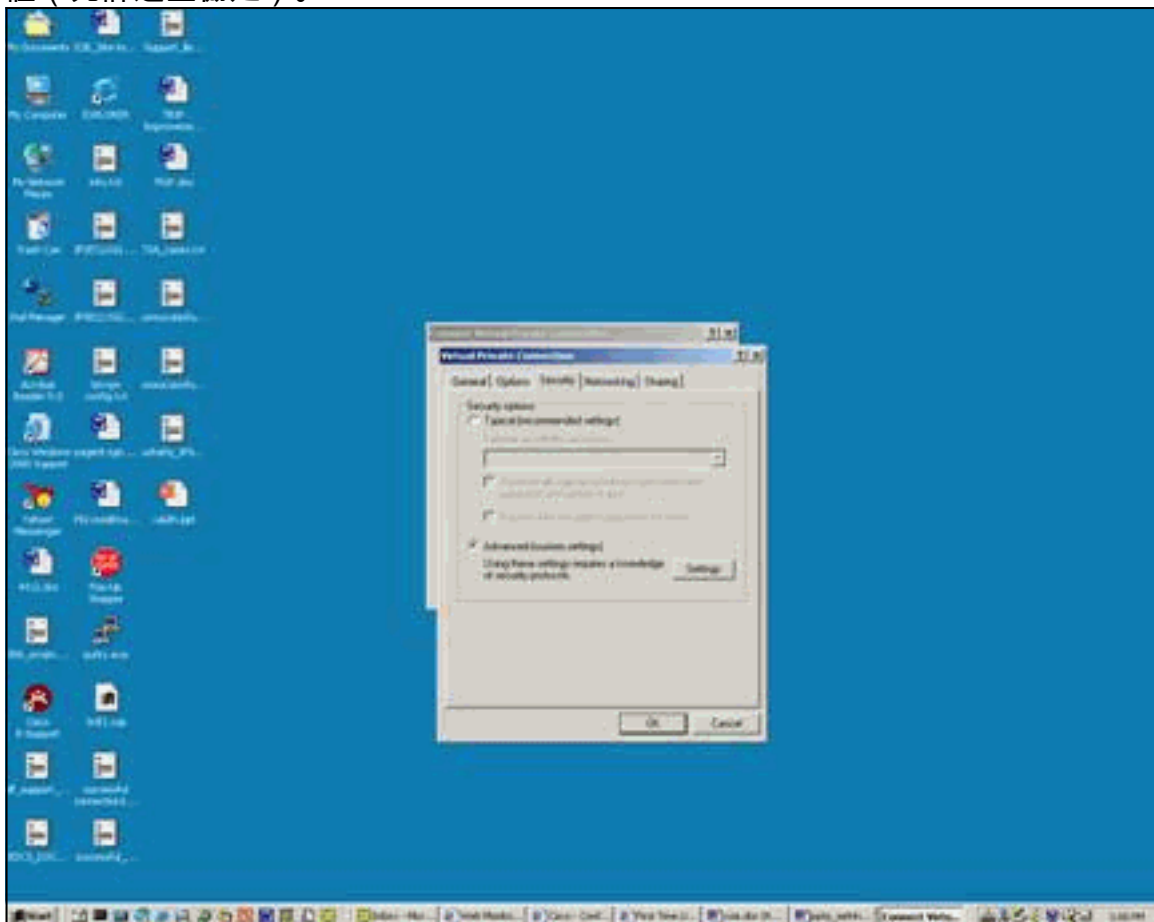


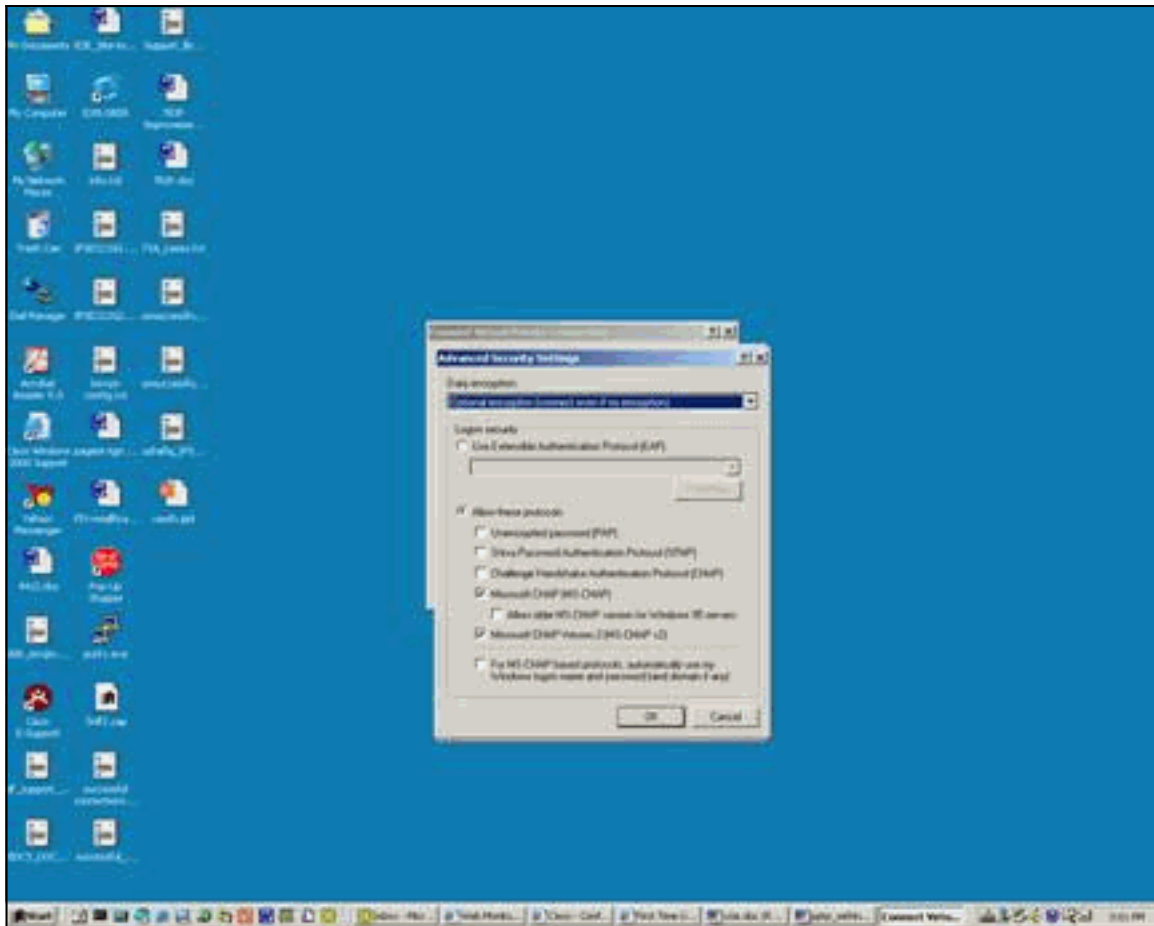


8. 在Networking (所呼叫的VPN伺服器的型別) 下，選擇PPTP，然後按一下OK。

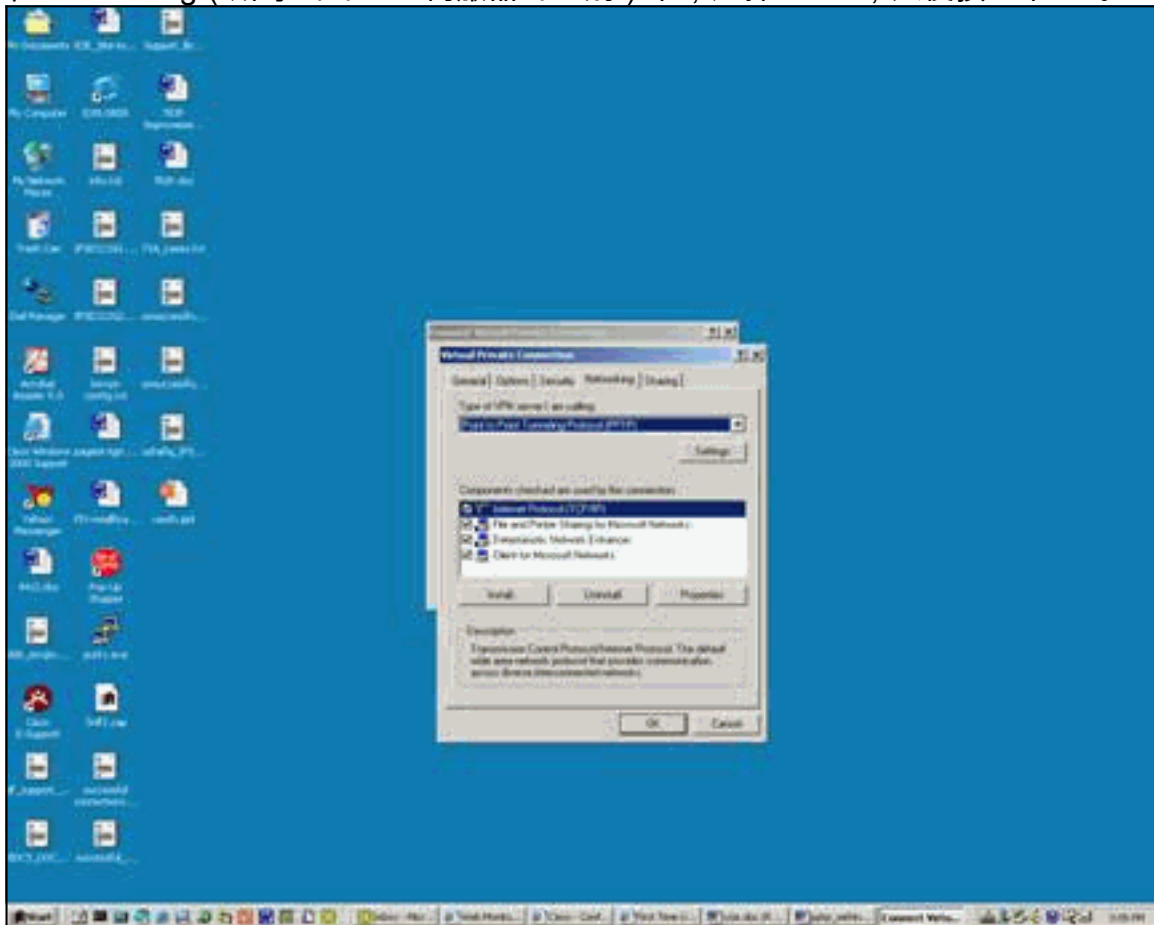


9. 出現「Verifying username and password (驗證使用者名稱和密碼)」視窗。

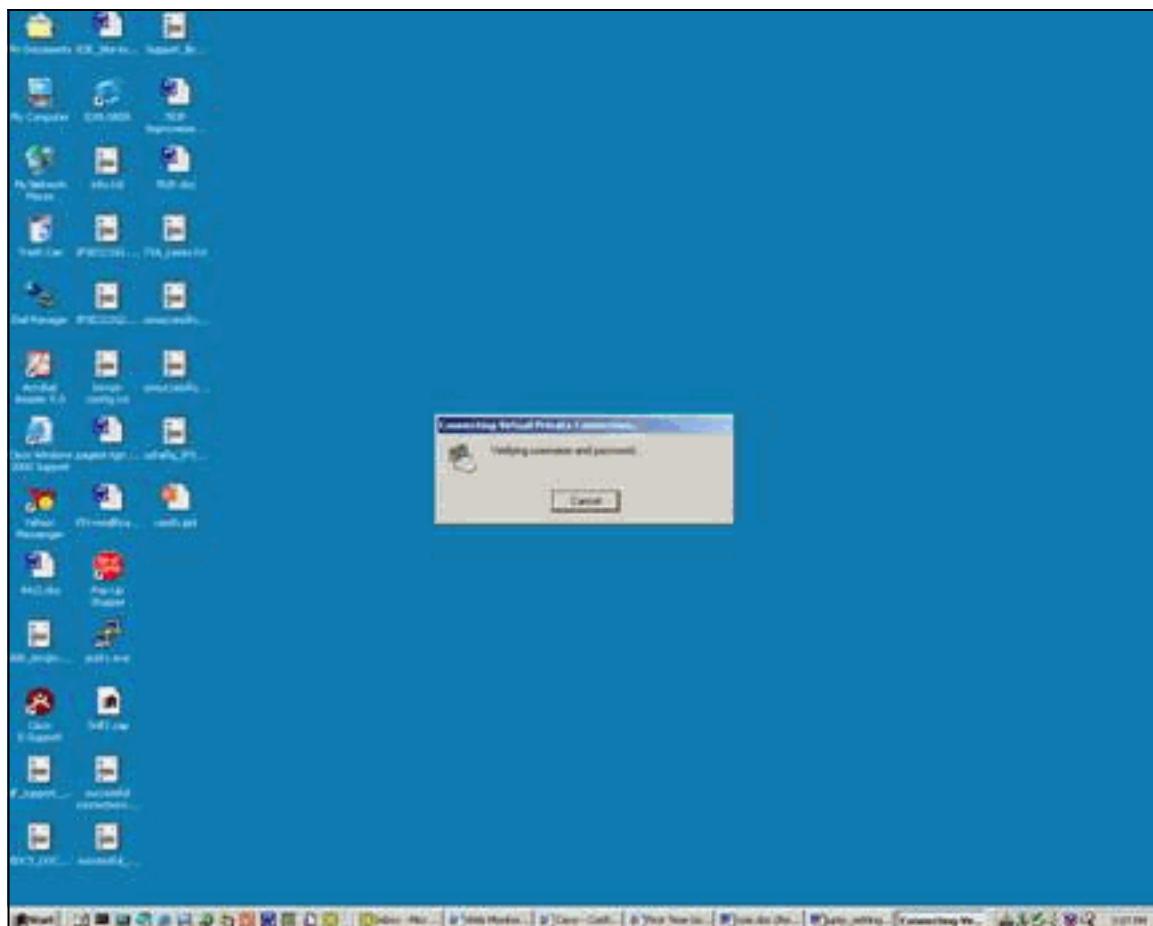


10. 出現「Registering your computer on the network (在網路上註冊電腦)」視窗。

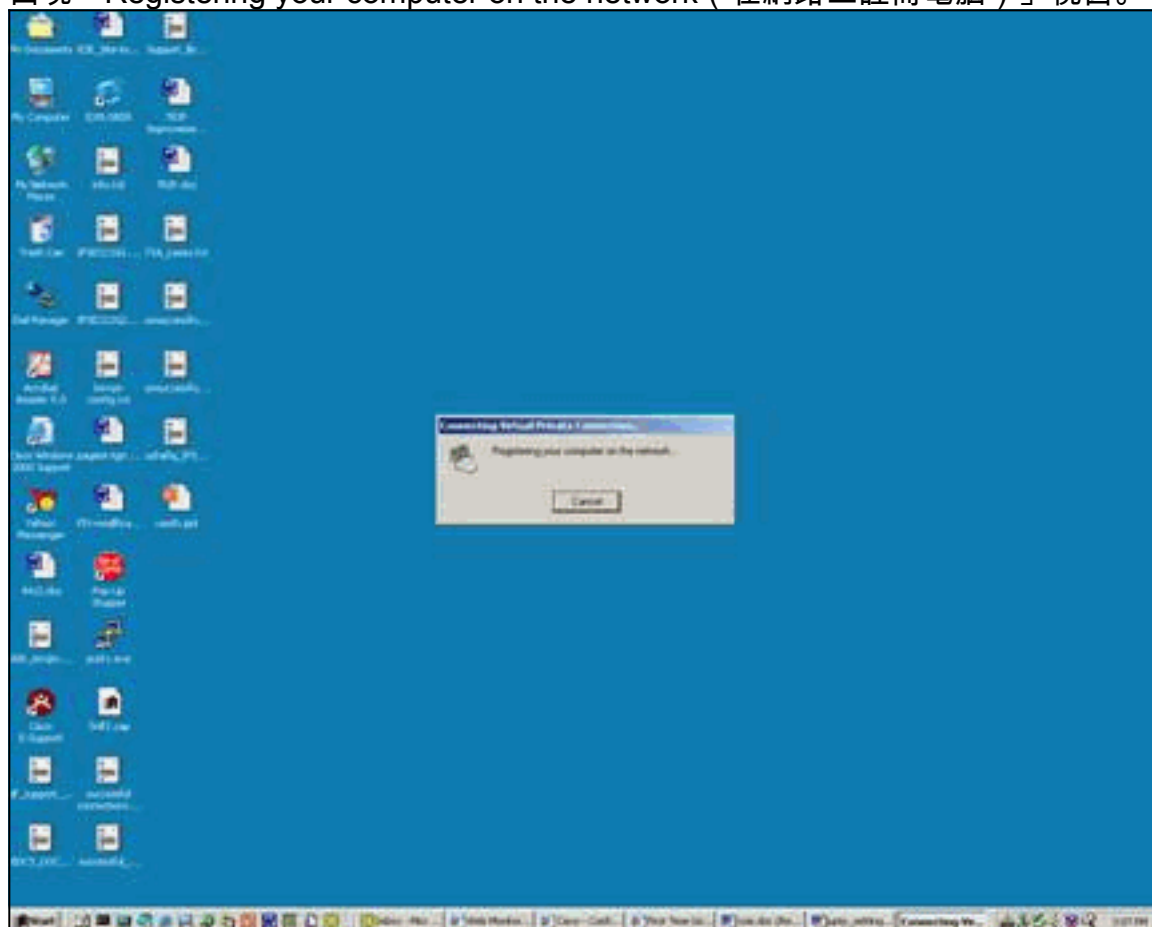


11. 出現「Connections Properties (連線屬性)」視窗。

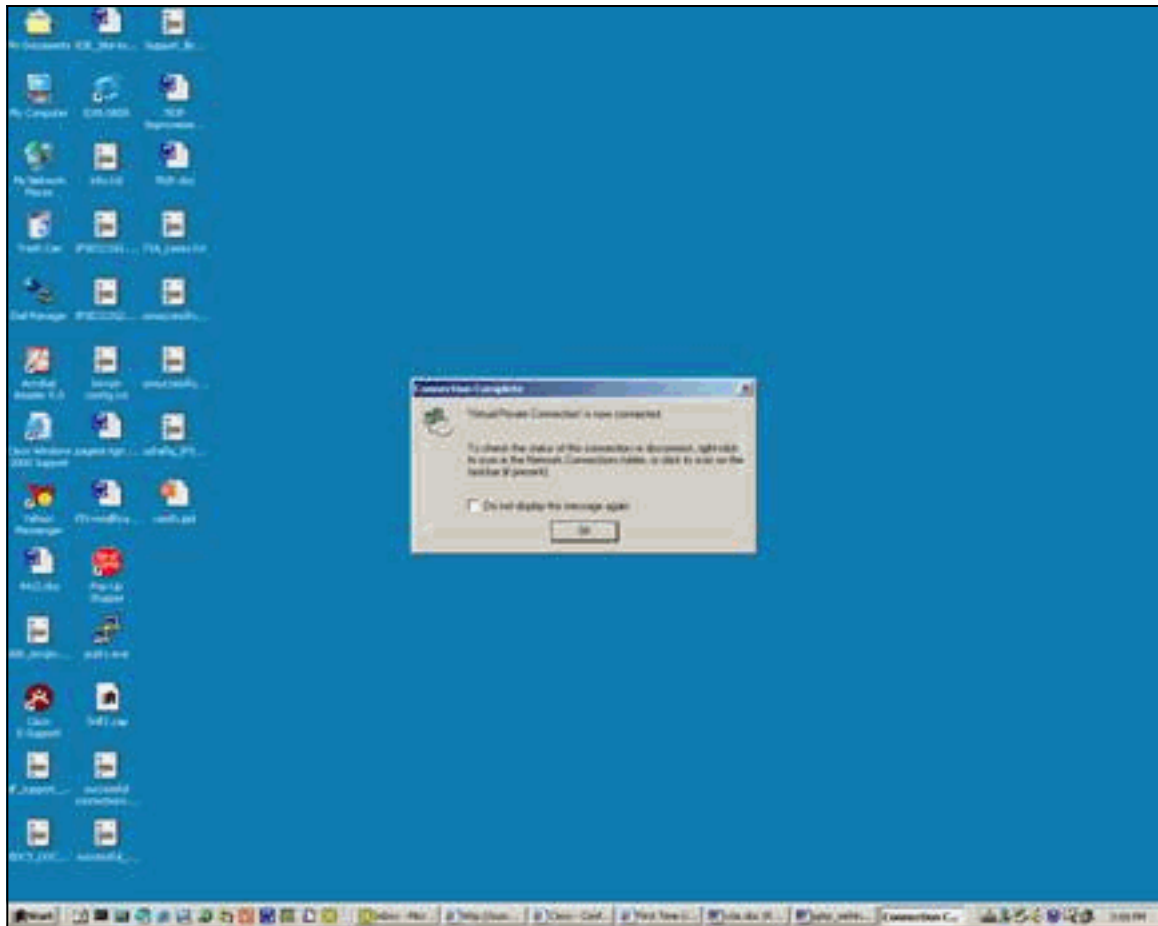

12. 這些視窗顯示連線狀態。

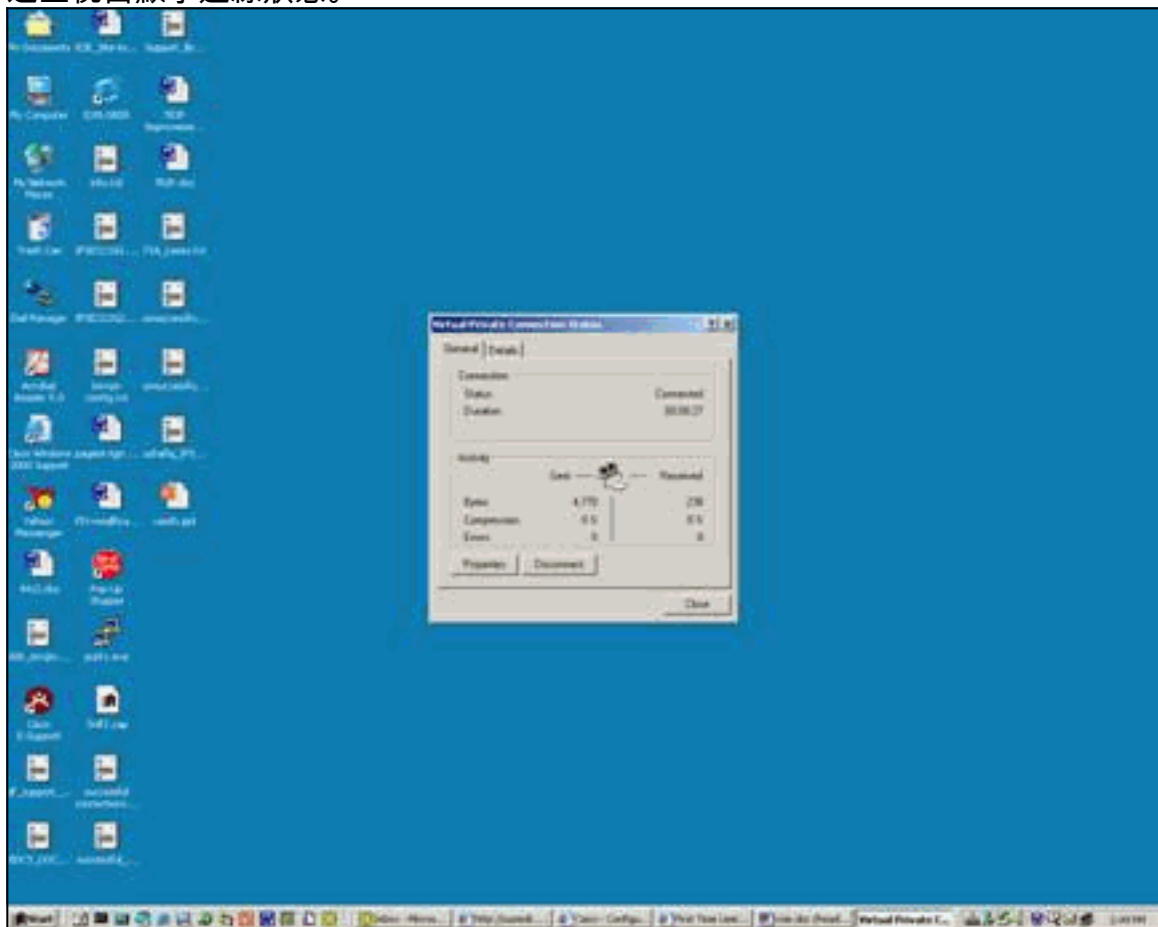

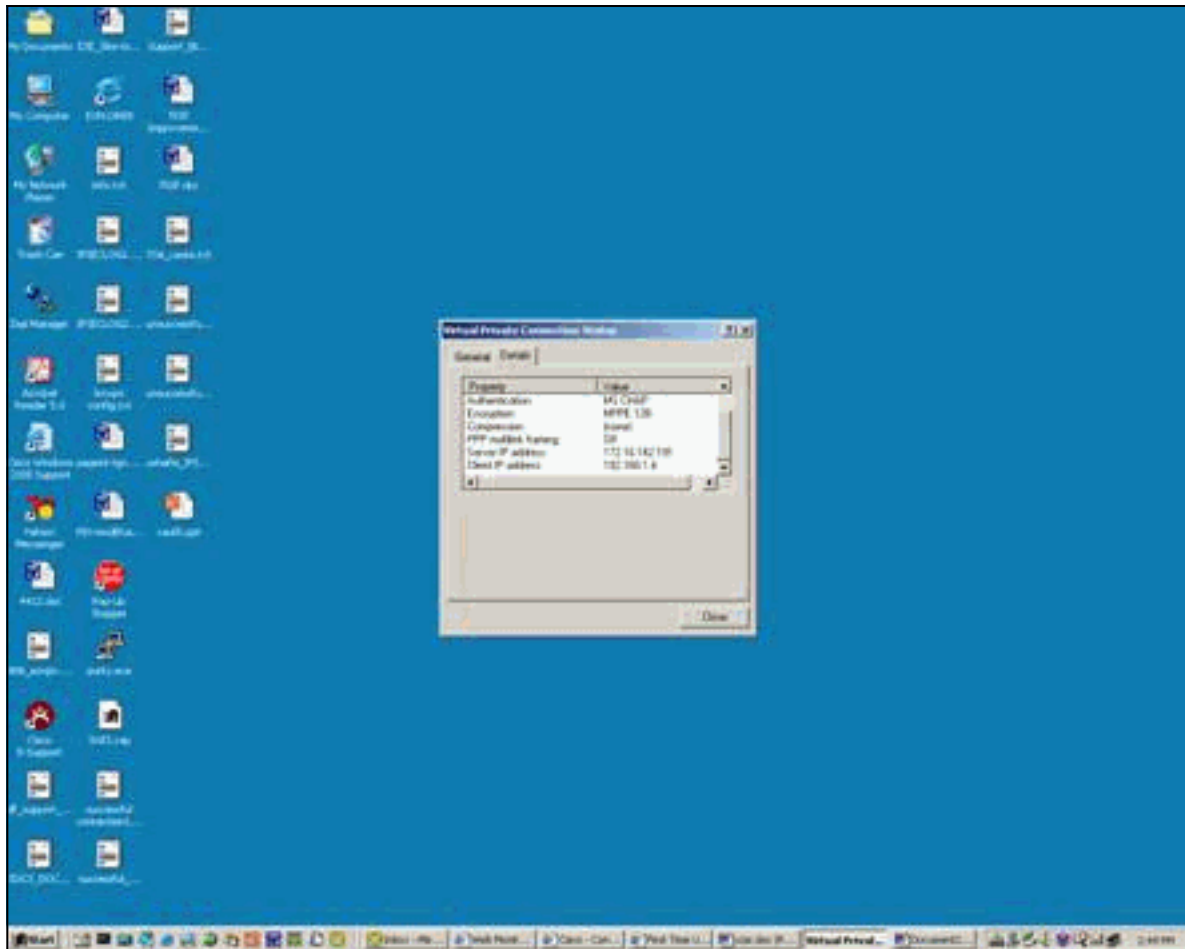

驗證

本節提供的資訊可用於確認您的組態是否正常運作。

[輸出直譯器工具](#)(僅供已註冊客戶使用)(OIT)支援某些show命令。使用OIT檢視show命令輸出的分析

。

- **show debug** — 顯示目前已啟用的debug命令以進行故障排除
- **show user** — 顯示當前登入的使用者及其狀態
- **show ip route connected** — 顯示路由表的當前狀態
- **show vpdn** — 顯示有關虛擬專用撥接網路(VPDN)中作用中第2層通道通訊協定(L2TP)或第2層轉送(L2F)通訊協定通道和訊息識別符號的資訊

以下是show debug指令輸出的範例。

```
2621#show debug
PPP:
  PPP authentication debugging is on
  PPP protocol negotiation debugging is on
```

```
VPN:
  VPDN events debugging is on
```

這是配置了初始PPTP的調試輸出。

```
2621#
```

*Mar 5 02:16:25.675: ppp2 PPP: Using vpn set call direction
*Mar 5 02:16:25.675: ppp2 PPP: Treating connection as a callin
*Mar 5 02:16:25.675: ppp2 PPP: Phase is ESTABLISHING, Passive Open
*Mar 5 02:16:25.675: ppp2 LCP: State is Listen
*Mar 5 02:16:27.663: ppp2 LCP: TIMEout: State Listen
*Mar 5 02:16:27.663: ppp2 PPP: Authorization required
*Mar 5 02:16:27.663: ppp2 LCP: O CONFREQ [Listen] id 1 len 14
*Mar 5 02:16:27.663: ppp2 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:16:27.663: ppp2 LCP: MagicNumber 0x1658CF62 (0x05061658CF62)
*Mar 5 02:16:27.667: ppp2 LCP: I CONFACK [REQsent] id 1 len 14
*Mar 5 02:16:27.667: ppp2 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:16:27.667: ppp2 LCP: MagicNumber 0x1658CF62 (0x05061658CF62)
*Mar 5 02:16:27.695: ppp2 LCP: I CONFREQ [ACKrcvd] id 1 len 44
*Mar 5 02:16:27.695: ppp2 LCP: MagicNumber 0x131A2427 (0x0506131A2427)
*Mar 5 02:16:27.695: ppp2 LCP: PFC (0x0702)
*Mar 5 02:16:27.695: ppp2 LCP: ACFC (0x0802)
*Mar 5 02:16:27.695: ppp2 LCP: Callback 6 (0x0D0306)
*Mar 5 02:16:27.695: ppp2 LCP: MRRU 1614 (0x1104064E)
*Mar 5 02:16:27.695: ppp2 LCP: EndpointDisc 1 Local
*Mar 5 02:16:27.699: ppp2 LCP: (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:16:27.699: ppp2 LCP: (0x897EAE00000002)
*Mar 5 02:16:27.699: ppp2 LCP: O CONFREQ [ACKrcvd] id 1 len 11
*Mar 5 02:16:27.699: ppp2 LCP: Callback 6 (0x0D0306)
*Mar 5 02:16:27.699: ppp2 LCP: MRRU 1614 (0x1104064E)
*Mar 5 02:16:27.703: ppp2 LCP: I CONFREQ [ACKrcvd] id 2 len 37
*Mar 5 02:16:27.703: ppp2 LCP: MagicNumber 0x131A2427 (0x0506131A2427)
*Mar 5 02:16:27.703: ppp2 LCP: PFC (0x0702)
*Mar 5 02:16:27.707: ppp2 LCP: ACFC (0x0802)
*Mar 5 02:16:27.707: ppp2 LCP: EndpointDisc 1 Local
*Mar 5 02:16:27.707: ppp2 LCP: (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:16:27.707: ppp2 LCP: (0x897EAE00000002)
*Mar 5 02:16:27.707: ppp2 LCP: O CONFACK [ACKrcvd] id 2 len 37
*Mar 5 02:16:27.707: ppp2 LCP: MagicNumber 0x131A2427 (0x0506131A2427)
*Mar 5 02:16:27.707: ppp2 LCP: PFC (0x0702)
*Mar 5 02:16:27.707: ppp2 LCP: ACFC (0x0802)
*Mar 5 02:16:27.711: ppp2 LCP: EndpointDisc 1 Local
*Mar 5 02:16:27.711: ppp2 LCP: (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:16:27.711: ppp2 LCP: (0x897EAE00000002)
*Mar 5 02:16:27.711: ppp2 LCP: State is Open
***Mar 5 02:16:27.711: ppp2 PPP: Phase is AUTHENTICATING, by this end**
*Mar 5 02:16:27.715: ppp2 LCP: I IDENTIFY [Open] id 3 len 18 magic
0x131A2427 MSRSASV5.00
*Mar 5 02:16:27.719: ppp2 LCP: I IDENTIFY [Open] id 4 len 28 magic
0x131A2427 MSRSAS-1-USHAFIQ-W2K1
*Mar 5 02:16:27.719: ppp2 PAP: I AUTH-REQ id 1 len 19 from "cisco"
*Mar 5 02:16:27.719: ppp2 PAP: Authenticating peer cisco
*Mar 5 02:16:27.719: ppp2 PPP: Phase is FORWARDING, Attempting Forward
*Mar 5 02:16:27.719: ppp2 PPP: Phase is AUTHENTICATING, Unauthenticated User
*Mar 5 02:16:27.719: ppp2 PPP: Sent PAP LOGIN Request
*Mar 5 02:16:27.723: ppp2 PPP: Received LOGIN Response PASS
*Mar 5 02:16:27.723: ppp2 PPP: Phase is FORWARDING, Attempting Forward
*Mar 5 02:16:27.727: Vi4 PPP: Phase is DOWN, Setup
***Mar 5 02:16:27.727: Tnl/Sn3/3 PPTP: Virtual interface created for
bandwidth 100000 Kbps**
***Mar 5 02:16:27.731: Vi4 Tnl/Sn3/3 PPTP: VPDN session up**
*Mar 5 02:16:27.735: %LINK-3-UPDOWN: Interface Virtual-Access4, changed state to up
*Mar 5 02:16:27.735: Vi4 PPP: Phase is AUTHENTICATING, Authenticated User
*Mar 5 02:16:27.735: Vi4 PAP: O AUTH-ACK id 1 len 5
*Mar 5 02:16:27.739: Vi4 PPP: Phase is UP
*Mar 5 02:16:27.739: Vi4 IPCP: O CONFREQ [Closed] id 1 len 10
*Mar 5 02:16:27.739: Vi4 IPCP: Address 172.16.142.191 (0x0306AC108EBF)
*Mar 5 02:16:27.739: Vi4 CCP: O CONFREQ [Closed] id 1 len 4
*Mar 5 02:16:27.739: Vi4 PPP: Process pending packets
*Mar 5 02:16:27.747: Vi4 CCP: I CONFREQ [REQsent] id 5 len 10

```

*Mar 5 02:16:27.747: Vi4 CCP: MS-PPC supported bits 0x01000001 (0x120601000001)
*Mar 5 02:16:27.747: Vi4 CCP: O CONFNAK [REQsent] id 5 len 10
*Mar 5 02:16:27.751: Vi4 CCP: MS-PPC supported bits 0x01000060 (0x120601000060)
*Mar 5 02:16:27.751: Vi4 CCP: I CONFACK [REQsent] id 1 len 4
*Mar 5 02:16:27.751: Vi4 IPCP: I CONFREQ [REQsent] id 6 len 34
*Mar 5 02:16:27.751: Vi4 IPCP: Address 0.0.0.0 (0x030600000000)
*Mar 5 02:16:27.751: Vi4 IPCP: PrimaryDNS 0.0.0.0 (0x810600000000)
*Mar 5 02:16:27.751: Vi4 IPCP: PrimaryWINS 0.0.0.0 (0x820600000000)
*Mar 5 02:16:27.755: Vi4 IPCP: SecondaryDNS 0.0.0.0 (0x830600000000)
*Mar 5 02:16:27.755: Vi4 IPCP: SecondaryWINS 0.0.0.0 (0x840600000000)
*Mar 5 02:16:27.755: Vi4 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 0.0.0.0
*Mar 5 02:16:27.755: Vi4 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0, we want 0.0.0.0
*Mar 5 02:16:27.755: Vi4 IPCP: Pool returned 192.168.1.4
*Mar 5 02:16:27.755: Vi4 IPCP: O CONFREQ [REQsent] id 6 len 28
*Mar 5 02:16:27.759: Vi4 IPCP: PrimaryDNS 0.0.0.0 (0x810600000000)
*Mar 5 02:16:27.759: Vi4 IPCP: PrimaryWINS 0.0.0.0 (0x820600000000)
*Mar 5 02:16:27.759: Vi4 IPCP: SecondaryDNS 0.0.0.0 (0x830600000000)
*Mar 5 02:16:27.759: Vi4 IPCP: SecondaryWINS 0.0.0.0 (0x840600000000)
*Mar 5 02:16:27.759: Vi4 IPCP: I CONFACK [REQsent] id 1 len 10
*Mar 5 02:16:27.759: Vi4 IPCP: Address 172.16.142.191 (0x0306AC108EBF)
*Mar 5 02:16:27.763: Vi4 CCP: I CONFREQ [ACKrcvd] id 7 len 4
*Mar 5 02:16:27.767: Vi4 CCP: O CONFACK [ACKrcvd] id 7 len 4
*Mar 5 02:16:27.767: Vi4 CCP: State is Open
*Mar 5 02:16:27.767: Vi4 CCP: Compression not negotiated
*Mar 5 02:16:27.767: Vi4 CCP: Decompression not negotiated
*Mar 5 02:16:27.767: Vi4 CCP: Negotiation mismatch, closing CCP
*Mar 5 02:16:27.767: Vi4 CCP: O TERMREQ [Open] id 2 len 4
*Mar 5 02:16:27.767: Vi4 IPCP: I CONFREQ [ACKrcvd] id 8 len 10
*Mar 5 02:16:27.767: Vi4 IPCP: Address 0.0.0.0 (0x030600000000)
*Mar 5 02:16:27.771: Vi4 IPCP: O CONFNAK [ACKrcvd] id 8 len 10
*Mar 5 02:16:27.771: Vi4 IPCP: Address 192.168.1.4 (0x0306C0A80104)
*Mar 5 02:16:27.775: Vi4 CCP: I TERMACK [TERMsent] id 2 len 4
*Mar 5 02:16:27.775: Vi4 CCP: State is Closed
*Mar 5 02:16:27.775: Vi4 IPCP: I CONFREQ [ACKrcvd] id 9 len 10
*Mar 5 02:16:27.775: Vi4 IPCP: Address 192.168.1.4 (0x0306C0A80104)
*Mar 5 02:16:27.775: Vi4 IPCP: O CONFACK [ACKrcvd] id 9 len 10
*Mar 5 02:16:27.779: Vi4 IPCP: Address 192.168.1.4 (0x0306C0A80104)
*Mar 5 02:16:27.779: Vi4 IPCP: State is Open
*Mar 5 02:16:27.783: Vi4 IPCP: Install route to 192.168.1.4
*Mar 5 02:16:27.783: Vi4 IPCP: Add link info for cef entry 192.168.1.4
*Mar 5 02:16:28.735: %LINEPROTO-5-UPDOWN: Line protocol on Interface
Virtual-Access4, changed state to up
*Mar 5 02:16:37.743: Vi4 CCP: O CONFREQ [Closed] id 3 len 4
2621#
2621#

```

這是使用所需的MPPE和MS-CHAP配置的調試輸出。

```

2621#
*Mar 5 02:25:01.815: ppp4 PPP: Using vpn set call direction
*Mar 5 02:25:01.815: ppp4 PPP: Treating connection as a callin
*Mar 5 02:25:01.815: ppp4 PPP: Phase is ESTABLISHING, Passive Open
*Mar 5 02:25:01.815: ppp4 LCP: State is Listen
*Mar 5 02:25:03.823: ppp4 LCP: TIMEout: State Listen
*Mar 5 02:25:03.823: ppp4 PPP: Authorization required
*Mar 5 02:25:03.823: ppp4 LCP: O CONFREQ [Listen] id 1 len 15
*Mar 5 02:25:03.823: ppp4 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:25:03.823: ppp4 LCP: MagicNumber 0x1660AFA4 (0x05061660AFA4)
*Mar 5 02:25:03.843: ppp4 LCP: I CONFACK [REQsent] id 1 len 15
*Mar 5 02:25:03.843: ppp4 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:25:03.843: ppp4 LCP: MagicNumber 0x1660AFA4 (0x05061660AFA4)
*Mar 5 02:25:03.843: ppp4 LCP: I CONFREQ [ACKrcvd] id 1 len 44
*Mar 5 02:25:03.843: ppp4 LCP: MagicNumber 0x4B5A2A81 (0x05064B5A2A81)

```

*Mar 5 02:25:03.843: ppp4 LCP: PFC (0x0702)
*Mar 5 02:25:03.847: ppp4 LCP: ACFC (0x0802)
*Mar 5 02:25:03.847: ppp4 LCP: Callback 6 (0x0D0306)
*Mar 5 02:25:03.847: ppp4 LCP: MRRU 1614 (0x1104064E)
*Mar 5 02:25:03.847: ppp4 LCP: EndpointDisc 1 Local
*Mar 5 02:25:03.847: ppp4 LCP: (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:25:03.847: ppp4 LCP: (0x897EAE00000004)
*Mar 5 02:25:03.847: ppp4 LCP: O CONFREJ [ACKrcvd] id 1 len 11
*Mar 5 02:25:03.847: ppp4 LCP: Callback 6 (0x0D0306)
*Mar 5 02:25:03.851: ppp4 LCP: MRRU 1614 (0x1104064E)
*Mar 5 02:25:03.851: ppp4 LCP: I CONFREQ [ACKrcvd] id 2 len 37
*Mar 5 02:25:03.855: ppp4 LCP: MagicNumber 0x4B5A2A81 (0x05064B5A2A81)
*Mar 5 02:25:03.855: ppp4 LCP: PFC (0x0702)
*Mar 5 02:25:03.855: ppp4 LCP: ACFC (0x0802)
*Mar 5 02:25:03.855: ppp4 LCP: EndpointDisc 1 Local
*Mar 5 02:25:03.855: ppp4 LCP: (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:25:03.855: ppp4 LCP: (0x897EAE00000004)
*Mar 5 02:25:03.855: ppp4 LCP: O CONFACK [ACKrcvd] id 2 len 37
*Mar 5 02:25:03.859: ppp4 LCP: MagicNumber 0x4B5A2A81 (0x05064B5A2A81)
*Mar 5 02:25:03.859: ppp4 LCP: PFC (0x0702)
*Mar 5 02:25:03.859: ppp4 LCP: ACFC (0x0802)
*Mar 5 02:25:03.859: ppp4 LCP: EndpointDisc 1 Local
*Mar 5 02:25:03.859: ppp4 LCP: (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:25:03.859: ppp4 LCP: (0x897EAE00000004)
*Mar 5 02:25:03.859: ppp4 LCP: State is Open
*Mar 5 02:25:03.859: ppp4 PPP: Phase is AUTHENTICATING, by this end
*Mar 5 02:25:03.863: ppp4 MS-CHAP: O CHALLENGE id 1 len 21 from "2621 "
*Mar 5 02:25:03.867: ppp4 LCP: I IDENTIFY [Open] id 3 len 18 magic 0x4B5A2A81
MSRASV5.00
*Mar 5 02:25:03.867: ppp4 LCP: I IDENTIFY [Open] id 4 len 28 magic 0x4B5A2A81
MSRAS-1-USHAFIQ-W2K1
*Mar 5 02:25:03.867: ppp4 MS-CHAP: I RESPONSE id 1 len 59 from "cisco"
*Mar 5 02:25:03.867: ppp4 PPP: Phase is FORWARDING, Attempting Forward
*Mar 5 02:25:03.871: ppp4 PPP: Phase is AUTHENTICATING, Unauthenticated User
*Mar 5 02:25:03.871: ppp4 PPP: Sent MSCHAP LOGIN Request
*Mar 5 02:25:03.963: ppp4 PPP: Received LOGIN Response PASS
*Mar 5 02:25:03.963: ppp4 PPP: Phase is FORWARDING, Attempting Forward
*Mar 5 02:25:03.975: Vi4 PPP: Phase is DOWN, Setup
*Mar 5 02:25:03.975: Tn1/Sn5/5 PPTP: Virtual interface created for
bandwidth 100000 Kbps
*Mar 5 02:25:03.979: Vi4 Tn1/Sn5/5 PPTP: VPDN session up
*Mar 5 02:25:03.983: %LINK-3-UPDOWN: Interface Virtual-Access4, changed state to up
*Mar 5 02:25:03.983: Vi4 PPP: Phase is AUTHENTICATING, Authenticated User
*Mar 5 02:25:03.983: Vi4 MS-CHAP: O SUCCESS id 1 len 4
*Mar 5 02:25:03.987: Vi4 PPP: Phase is UP
*Mar 5 02:25:03.987: Vi4 IPCP: O CONFREQ [Closed] id 1 len 10
*Mar 5 02:25:03.987: Vi4 IPCP: Address 172.16.142.191 (0x0306AC108EBF)
*Mar 5 02:25:03.987: Vi4 CCP: O CONFREQ [Closed] id 1 len 10
*Mar 5 02:25:03.987: Vi4 CCP: MS-PPC supported bits 0x01000060 (0x120601000060)
*Mar 5 02:25:03.987: Vi4 PPP: Process pending packets
*Mar 5 02:25:03.995: Vi4 CCP: I CONFREQ [REQsent] id 5 len 10
*Mar 5 02:25:03.995: Vi4 CCP: MS-PPC supported bits 0x01000001 (0x120601000001)
*Mar 5 02:25:03.999: Vi4 CCP: O CONFNAK [REQsent] id 5 len 10
*Mar 5 02:25:03.999: Vi4 CCP: MS-PPC supported bits 0x01000060 (0x120601000060)
*Mar 5 02:25:03.999: Vi4 CCP: I CONFNAK [REQsent] id 1 len 10
*Mar 5 02:25:03.999: Vi4 CCP: MS-PPC supported bits 0x01000040 (0x120601000040)
*Mar 5 02:25:03.999: Vi4 CCP: O CONFREQ [REQsent] id 2 len 10
*Mar 5 02:25:03.999: Vi4 CCP: MS-PPC supported bits 0x01000040 (0x120601000040)
*Mar 5 02:25:04.003: Vi4 IPCP: I CONFREQ [REQsent] id 6 len 34
*Mar 5 02:25:04.003: Vi4 IPCP: Address 0.0.0.0 (0x030600000000)
*Mar 5 02:25:04.003: Vi4 IPCP: PrimaryDNS 0.0.0.0 (0x810600000000)
*Mar 5 02:25:04.003: Vi4 IPCP: PrimaryWINS 0.0.0.0 (0x820600000000)
*Mar 5 02:25:04.003: Vi4 IPCP: SecondaryDNS 0.0.0.0 (0x830600000000)
*Mar 5 02:25:04.003: Vi4 IPCP: SecondaryWINS 0.0.0.0 (0x840600000000)

```

*Mar 5 02:25:04.003: Vi4 AAA/AUTHOR/IPCP: Start. Her address 0.0.0.0, we want 0.0.0.0
*Mar 5 02:25:04.007: Vi4 AAA/AUTHOR/IPCP: Done. Her address 0.0.0.0, we want 0.0.0.0
*Mar 5 02:25:04.007: Vi4 IPCP: Pool returned 192.168.1.4
*Mar 5 02:25:04.007: Vi4 IPCP: O CONFREQ [REQsent] id 6 len 28
*Mar 5 02:25:04.007: Vi4 IPCP: PrimaryDNS 0.0.0.0 (0x810600000000)
*Mar 5 02:25:04.007: Vi4 IPCP: PrimaryWINS 0.0.0.0 (0x820600000000)
*Mar 5 02:25:04.007: Vi4 IPCP: SecondaryDNS 0.0.0.0 (0x830600000000)
*Mar 5 02:25:04.011: Vi4 IPCP: SecondaryWINS 0.0.0.0 (0x840600000000)
*Mar 5 02:25:04.011: Vi4 IPCP: I CONFACK [REQsent] id 1 len 10
*Mar 5 02:25:04.011: Vi4 IPCP: Address 172.16.142.191 (0x0306AC108EBF)
*Mar 5 02:25:04.015: Vi4 CCP: I CONFREQ [REQsent] id 7 len 10
*Mar 5 02:25:04.015: Vi4 CCP: MS-PPC supported bits 0x01000040 (0x120601000040)
*Mar 5 02:25:04.015: Vi4 CCP: O CONFACK [REQsent] id 7 len 10
*Mar 5 02:25:04.015: Vi4 CCP: MS-PPC supported bits 0x01000040 (0x120601000040)
*Mar 5 02:25:04.019: Vi4 CCP: I CONFACK [ACKsent] id 2 len 10
*Mar 5 02:25:04.019: Vi4 CCP: MS-PPC supported bits 0x01000040 (0x120601000040)
*Mar 5 02:25:04.019: Vi4 CCP: State is Open
*Mar 5 02:25:04.023: Vi4 IPCP: I CONFREQ [ACKrcvd] id 8 len 10
*Mar 5 02:25:04.027: Vi4 IPCP: Address 0.0.0.0 (0x030600000000)
*Mar 5 02:25:04.027: Vi4 IPCP: O CONFNAK [ACKrcvd] id 8 len 10
*Mar 5 02:25:04.027: Vi4 IPCP: Address 192.168.1.4 (0x0306C0A80104)
*Mar 5 02:25:04.031: Vi4 IPCP: I CONFREQ [ACKrcvd] id 9 len 10
*Mar 5 02:25:04.031: Vi4 IPCP: Address 192.168.1.4 (0x0306C0A80104)
*Mar 5 02:25:04.031: Vi4 IPCP: O CONFACK [ACKrcvd] id 9 len 10
*Mar 5 02:25:04.031: Vi4 IPCP: Address 192.168.1.4 (0x0306C0A80104)
*Mar 5 02:25:04.031: Vi4 IPCP: State is Open
*Mar 5 02:25:04.035: Vi4 IPCP: Install route to 192.168.1.4
*Mar 5 02:25:04.035: Vi4 IPCP: Add link info for cef entry 192.168.1.4
*Mar 5 02:25:04.983: %LINEPROTO-5-UPDOWN: Line protocol on Interface
Virtual-Access4, changed state to up

```

此show user輸出在啟用MS-CHAP和MPPE之前。

```
2621#show user
```

Line	User	Host(s)	Idle	Location
* 0 con 0		idle	00:00:00	

Interface	User	Mode	Idle	Peer Address
Vi4	cisco	PPPoVPDN	00:00:01	192.168.1.4

此show user輸出是在啟用MS-CHAP和MPPE之後。

```
2621#show user
```

Line	User	Host(s)	Idle	Location
* 0 con 0		idle	00:00:00	

Interface	User	Mode	Idle	Peer Address
Vi4	cisco	PPPoVPDN	00:00:00	192.168.1.4

此show ip route connected輸出在啟用MS-CHAP和MPPE之前。

```
2621#show ip route connected
```

```

172.16.0.0/24 is subnetted, 1 subnets
C    172.16.142.0 is directly connected, FastEthernet0/0
10.0.0.0/24 is subnetted, 1 subnets
C    10.100.100.0 is directly connected, Loopback0
192.168.1.0/32 is subnetted, 1 subnets
C    192.168.1.4 is directly connected, Virtual-Access4

```

此show vpdn輸出是在啟用MS-CHAP和MPPE之前。


```
2621#show vpdn
```

```
%No active L2TP tunnels
```

```
%No active L2F tunnels
```

```
PPTP Tunnel and Session Information Total tunnels 1 sessions 1
```

LocID	Remote Name	State	Remote Address	Port	Sessions	VPDN Group
3		estabd	171.69.89.81	4737	1	1

LocID	RemID	TunID	Intf	Username	State	Last Chg	Uniq ID
3	32768	3	Vi4	cisco	estabd	00:01:44	2

```
%No active PPPoE tunnels
```

此show vpdn輸出是在啟用MS-CHAP和MPPE之後。

```
2621#show vpdn
```

```
%No active L2TP tunnels
```

```
%No active L2F tunnels
```

```
PPTP Tunnel and Session Information Total tunnels 1 sessions 1
```

LocID	Remote Name	State	Remote Address	Port	Sessions	VPDN Group
5		estabd	171.69.89.81	4893	1	1

LocID	RemID	TunID	Intf	Username	State	Last Chg	Uniq ID
5	0	5	Vi4	cisco	estabd	00:00:37	4

```
%No active PPPoE tunnels
```

[疑難排解](#)

本節提供的資訊可用於對組態進行疑難排解。

[疑難排解指令](#)

[輸出直譯器工具](#)(僅供註冊客戶使用)支援某些show命令，此工具可讓您檢視show命令輸出的分析。

附註：使用 debug 指令之前，請先參閱[有關 Debug 指令的重要資訊](#)。

- **clear vpdn tunnel pptp** — 用於關閉指定的隧道和隧道內的所有會話並清除指定的PPTP隧道

```
2621#clear vpdn tunnel pptp ip remote 171.69.89.81
```

```
Starting to clear the tunnel
```

```
2621#
```

```
*Mar 5 02:27:35.611: Vi4 PPP: Sending Acct Event[Down] id[5]
```

```
*Mar 5 02:27:35.611: Vi4 VPDN: Reseting interface
```

```
*Mar 5 02:27:35.611: Vi4 PPP: Block vaccess from being freed [0x1D]
```

```
*Mar 5 02:27:35.619: %LINK-3-UPDOWN: Interface Virtual-Access4, changed state to down
```

```
*Mar 5 02:27:35.619: Vi4 CCP: State is Closed
```

```
*Mar 5 02:27:35.623: Vi4 MPPE: Required encryption not negotiated
```

```
*Mar 5 02:27:35.623: Vi4 IPCP: Remove link info for cef entry 192.168.1.4
```

```
*Mar 5 02:27:35.623: Vi4 PPP: Unlocked by [0x4] Still Locked by [0x1B]
```

```

*Mar 5 02:27:35.623: Vi4 PPP: Unlocked by [0x10] Still Locked by [0xB]
*Mar 5 02:27:35.623: Vi4 PPP: Phase is TERMINATING
*Mar 5 02:27:35.627: Vi4 LCP: O TERMREQ [Open] id 2 len 4
*Mar 5 02:27:35.627: Vi4 IPCP: State is Closed
*Mar 5 02:27:35.627: Vi4 PPP: Unlocked by [0x8] Still Locked by [0x3]
*Mar 5 02:27:35.627: Vi4 LCP: State is Closed
*Mar 5 02:27:35.627: Vi4 PPP: Phase is DOWN
*Mar 5 02:27:35.627: Vi4 PPP: Unlocked by [0x2] Still Locked by [0x1]
*Mar 5 02:27:35.639: Vi4 IPCP: Remove route to 192.168.1.4
*Mar 5 02:27:35.639: Vi4 PPP: Unlocked by [0x1] Still Locked by [0x0]
*Mar 5 02:27:35.639: Vi4 PPP: Free previously blocked vaccess
*Mar 5 02:27:36.619: %LINEPROTO-5-UPDOWN: Line protocol on Interface
Virtual-Access4, changed state to down

```

加密不匹配 — 當VPN客戶端配置為40位加密時，為128強加密配置的路由器的調試輸出。

2621#

2621#

```

*Mar 5 02:29:36.339: ppp5 PPP: Using vpn set call direction
*Mar 5 02:29:36.339: ppp5 PPP: Treating connection as a callin
*Mar 5 02:29:36.339: ppp5 PPP: Phase is ESTABLISHING, Passive Open
*Mar 5 02:29:36.343: ppp5 LCP: State is Listen
*Mar 5 02:29:38.351: ppp5 LCP: TIMEout: State Listen
*Mar 5 02:29:38.351: ppp5 PPP: Authorization required
*Mar 5 02:29:38.351: ppp5 LCP: O CONFREQ [Listen] id 1 len 15
*Mar 5 02:29:38.351: ppp5 LCP:   AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:29:38.351: ppp5 LCP:   MagicNumber 0x1664E006 (0x05061664E006)
*Mar 5 02:29:38.359: ppp5 LCP: I CONFACK [REQsent] id 1 len 15
*Mar 5 02:29:38.359: ppp5 LCP:   AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:29:38.359: ppp5 LCP:   MagicNumber 0x1664E006 (0x05061664E006)
*Mar 5 02:29:38.359: ppp5 LCP: I CONFREQ [ACKrcvd] id 1 len 44
*Mar 5 02:29:38.359: ppp5 LCP:   MagicNumber 0x793D5ED8 (0x0506793D5ED8)
*Mar 5 02:29:38.363: ppp5 LCP:   PFC (0x0702)
*Mar 5 02:29:38.363: ppp5 LCP:   ACFC (0x0802)
*Mar 5 02:29:38.363: ppp5 LCP:   Callback 6 (0x0D0306)
*Mar 5 02:29:38.363: ppp5 LCP:   MRRU 1614 (0x1104064E)
*Mar 5 02:29:38.363: ppp5 LCP:   EndpointDisc 1 Local
*Mar 5 02:29:38.363: ppp5 LCP:   (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:29:38.363: ppp5 LCP:   (0x897EAE00000005)
*Mar 5 02:29:38.363: ppp5 LCP: O CONFREQ [ACKrcvd] id 1 len 11
*Mar 5 02:29:38.367: ppp5 LCP:   Callback 6 (0x0D0306)
*Mar 5 02:29:38.367: ppp5 LCP:   MRRU 1614 (0x1104064E)
*Mar 5 02:29:38.367: ppp5 LCP: I CONFREQ [ACKrcvd] id 2 len 37
*Mar 5 02:29:38.371: ppp5 LCP:   MagicNumber 0x793D5ED8 (0x0506793D5ED8)
*Mar 5 02:29:38.371: ppp5 LCP:   PFC (0x0702)
*Mar 5 02:29:38.371: ppp5 LCP:   ACFC (0x0802)
*Mar 5 02:29:38.371: ppp5 LCP:   EndpointDisc 1 Local
*Mar 5 02:29:38.371: ppp5 LCP:   (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:29:38.371: ppp5 LCP:   (0x897EAE00000005)
*Mar 5 02:29:38.371: ppp5 LCP: O CONFACK [ACKrcvd] id 2 len 37
*Mar 5 02:29:38.375: ppp5 LCP:   MagicNumber 0x793D5ED8 (0x0506793D5ED8)
*Mar 5 02:29:38.375: ppp5 LCP:   PFC (0x0702)
*Mar 5 02:29:38.375: ppp5 LCP:   ACFC (0x0802)
*Mar 5 02:29:38.375: ppp5 LCP:   EndpointDisc 1 Local
*Mar 5 02:29:38.375: ppp5 LCP:   (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:29:38.375: ppp5 LCP:   (0x897EAE00000005)
*Mar 5 02:29:38.375: ppp5 LCP: State is Open
*Mar 5 02:29:38.375: ppp5 PPP: Phase is AUTHENTICATING, by this end
*Mar 5 02:29:38.379: ppp5 MS-CHAP: O CHALLENGE id 1 len 21 from "2621"
*Mar 5 02:29:38.383: ppp5 LCP: I IDENTIFY [Open] id 3 len 18 magic
0x793D5ED8 MSRASV5.00
*Mar 5 02:29:38.383: ppp5 LCP: I IDENTIFY [Open] id 4 len 28 magic
0x793D5ED8 MSRAS-1-USHAFIQ-W2K1

```

```

*Mar 5 02:29:38.383: ppp5 MS-CHAP: I RESPONSE id 1 len 59 from "cisco"
*Mar 5 02:29:38.383: ppp5 PPP: Phase is FORWARDING, Attempting Forward
*Mar 5 02:29:38.387: ppp5 PPP: Phase is AUTHENTICATING, Unauthenticated User
*Mar 5 02:29:38.387: ppp5 PPP: Sent MSCHAP LOGIN Request
*Mar 5 02:29:38.475: ppp5 PPP: Received LOGIN Response PASS
*Mar 5 02:29:38.479: ppp5 PPP: Phase is FORWARDING, Attempting Forward
*Mar 5 02:29:38.483: Vi4 PPP: Phase is DOWN, Setup
*Mar 5 02:29:38.483: Tn1/Sn6/6 PPTP: Virtual interface created for
        bandwidth 100000 Kbps
*Mar 5 02:29:38.483: Vi4 Tn1/Sn6/6 PPTP: VPDN session up
*Mar 5 02:29:38.487: %LINK-3-UPDOWN: Interface Virtual-Access4, changed state to up
*Mar 5 02:29:38.487: Vi4 PPP: Phase is AUTHENTICATING, Authenticated User
*Mar 5 02:29:38.487: Vi4 MS-CHAP: O SUCCESS id 1 len 4
*Mar 5 02:29:38.491: Vi4 PPP: Phase is UP
*Mar 5 02:29:38.491: Vi4 IPCP: O CONFREQ [Closed] id 1 len 10
*Mar 5 02:29:38.491: Vi4 IPCP: Address 172.16.142.191 (0x0306AC108EBF)
*Mar 5 02:29:38.491: Vi4 CCP: O CONFREQ [Closed] id 1 len 10
*Mar 5 02:29:38.491: Vi4 CCP: MS-PPC supported bits 0x01000060 (0x120601000060)
*Mar 5 02:29:38.491: Vi4 PPP: Process pending packets
*Mar 5 02:29:38.499: Vi4 CCP: I CONFREQ [REQsent] id 5 len 10
*Mar 5 02:29:38.503: Vi4 CCP: MS-PPC supported bits 0x01000001 (0x120601000001)
*Mar 5 02:29:38.503: Vi4 CCP: O CONFNAK [REQsent] id 5 len 10
*Mar 5 02:29:38.503: Vi4 CCP: MS-PPC supported bits 0x01000060 (0x120601000060)
*Mar 5 02:29:38.503: Vi4 CCP: I CONFREQ [REQsent] id 1 len 10
*Mar 5 02:29:38.503: Vi4 CCP: MS-PPC supported bits 0x01000060 (0x120601000060)
*Mar 5 02:29:38.503: Vi4 MPPE: Required encryption not negotiated
*Mar 5 02:29:38.503: Vi4 PPP: Sending Acct Event[Down] id[6]
*Mar 5 02:29:38.507: Vi4 CCP: State is Closed
*Mar 5 02:29:38.507: Vi4 MPPE: Required encryption not negotiated
*Mar 5 02:29:38.507: Vi4 PPP: Phase is TERMINATING
*Mar 5 02:29:38.507: Vi4 LCP: O TERMREQ [Open] id 2 len 4
*Mar 5 02:29:38.507: Vi4 IPCP: State is Closed
*Mar 5 02:29:38.507: Vi4 LCP: State is Closed
*Mar 5 02:29:38.511: Vi4 PPP: Phase is DOWN
*Mar 5 02:29:38.511: Vi4 VPDN: Reseting interface
*Mar 5 02:29:38.515: Vi4 PPP: Phase is ESTABLISHING, Passive Open
*Mar 5 02:29:38.515: Vi4 LCP: State is Listen
*Mar 5 02:29:38.515: Vi4 CCP: O CONFREQ [Closed] id 2 len 4
*Mar 5 02:29:38.519: %LINK-3-UPDOWN: Interface Virtual-Access4, changed state to down
*Mar 5 02:29:38.519: Vi4 LCP: State is Closed
*Mar 5 02:29:38.519: Vi4 PPP: Phase is DOWN

```

Authentication Mismatch — 為MS-CHAP配置的路由器以及為PAP配置的VPN客戶端的調試輸出。

```

*Mar 5 02:30:46.555: ppp6 PPP: Using vpn set call direction
*Mar 5 02:30:46.559: ppp6 PPP: Treating connection as a callin
*Mar 5 02:30:46.559: ppp6 PPP: Phase is ESTABLISHING, Passive Open
*Mar 5 02:30:46.559: ppp6 LCP: State is Listen
*Mar 5 02:30:48.559: ppp6 LCP: TIMEout: State Listen
*Mar 5 02:30:48.559: ppp6 PPP: Authorization required
*Mar 5 02:30:48.559: ppp6 LCP: O CONFREQ [Listen] id 1 len 15
*Mar 5 02:30:48.559: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.559: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.575: ppp6 LCP: I CONFNAK [REQsent] id 1 len 8
*Mar 5 02:30:48.575: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.575: ppp6 LCP: O CONFREQ [REQsent] id 2 len 15
*Mar 5 02:30:48.575: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.575: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.579: ppp6 LCP: I CONFREQ [REQsent] id 1 len 44
*Mar 5 02:30:48.579: ppp6 LCP: MagicNumber 0x78FD271D (0x050678FD271D)
*Mar 5 02:30:48.579: ppp6 LCP: PFC (0x0702)
*Mar 5 02:30:48.579: ppp6 LCP: ACFC (0x0802)
*Mar 5 02:30:48.579: ppp6 LCP: Callback 6 (0x0D0306)

```

*Mar 5 02:30:48.579: ppp6 LCP: MRRU 1614 (0x1104064E)
*Mar 5 02:30:48.579: ppp6 LCP: EndpointDisc 1 Local
*Mar 5 02:30:48.583: ppp6 LCP: (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:30:48.583: ppp6 LCP: (0x897EAE00000006)
*Mar 5 02:30:48.583: ppp6 LCP: O CONFREQ [REQsent] id 1 len 11
*Mar 5 02:30:48.583: ppp6 LCP: Callback 6 (0x0D0306)
*Mar 5 02:30:48.583: ppp6 LCP: MRRU 1614 (0x1104064E)
*Mar 5 02:30:48.587: ppp6 LCP: I CONFNAK [REQsent] id 2 len 8
*Mar 5 02:30:48.587: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.587: ppp6 LCP: O CONFREQ [REQsent] id 3 len 15
*Mar 5 02:30:48.587: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.587: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.591: ppp6 LCP: I CONFREQ [REQsent] id 2 len 37
*Mar 5 02:30:48.591: ppp6 LCP: MagicNumber 0x78FD271D (0x050678FD271D)
*Mar 5 02:30:48.591: ppp6 LCP: PFC (0x0702)
*Mar 5 02:30:48.591: ppp6 LCP: ACFC (0x0802)
*Mar 5 02:30:48.591: ppp6 LCP: EndpointDisc 1 Local
*Mar 5 02:30:48.591: ppp6 LCP: (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:30:48.595: ppp6 LCP: (0x897EAE00000006)
*Mar 5 02:30:48.595: ppp6 LCP: O CONFACK [REQsent] id 2 len 37
*Mar 5 02:30:48.595: ppp6 LCP: MagicNumber 0x78FD271D (0x050678FD271D)
*Mar 5 02:30:48.595: ppp6 LCP: PFC (0x0702)
*Mar 5 02:30:48.595: ppp6 LCP: ACFC (0x0802)
*Mar 5 02:30:48.595: ppp6 LCP: EndpointDisc 1 Local
*Mar 5 02:30:48.595: ppp6 LCP: (0x131701E18F20C4D84A435B98EBA4BEA6)
*Mar 5 02:30:48.595: ppp6 LCP: (0x897EAE00000006)
*Mar 5 02:30:48.599: ppp6 LCP: I CONFNAK [ACKsent] id 3 len 8
*Mar 5 02:30:48.599: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.599: ppp6 LCP: O CONFREQ [ACKsent] id 4 len 15
*Mar 5 02:30:48.599: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.599: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.603: ppp6 LCP: I CONFNAK [ACKsent] id 4 len 8
*Mar 5 02:30:48.603: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.607: ppp6 LCP: O CONFREQ [ACKsent] id 5 len 15
*Mar 5 02:30:48.607: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.607: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.611: ppp6 LCP: I CONFNAK [ACKsent] id 5 len 8
*Mar 5 02:30:48.611: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.611: ppp6 LCP: O CONFREQ [ACKsent] id 6 len 15
*Mar 5 02:30:48.611: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.611: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.615: ppp6 LCP: I CONFNAK [ACKsent] id 6 len 8
*Mar 5 02:30:48.615: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.615: ppp6 LCP: O CONFREQ [ACKsent] id 7 len 15
*Mar 5 02:30:48.615: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.619: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.619: ppp6 LCP: I CONFNAK [ACKsent] id 7 len 8
*Mar 5 02:30:48.619: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.623: ppp6 LCP: O CONFREQ [ACKsent] id 8 len 15
*Mar 5 02:30:48.623: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.623: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.627: ppp6 LCP: I CONFNAK [ACKsent] id 8 len 8
*Mar 5 02:30:48.627: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.627: ppp6 LCP: O CONFREQ [ACKsent] id 9 len 15
*Mar 5 02:30:48.627: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.627: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.631: ppp6 LCP: I CONFNAK [ACKsent] id 9 len 8
*Mar 5 02:30:48.631: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.631: ppp6 LCP: O CONFREQ [ACKsent] id 10 len 15
*Mar 5 02:30:48.635: ppp6 LCP: AuthProto MS-CHAP (0x0305C22380)
*Mar 5 02:30:48.635: ppp6 LCP: MagicNumber 0x1665F247 (0x05061665F247)
*Mar 5 02:30:48.635: ppp6 LCP: I CONFNAK [ACKsent] id 10 len 8
*Mar 5 02:30:48.639: ppp6 LCP: AuthProto PAP (0x0304C023)
*Mar 5 02:30:48.639: ppp6 LCP: Failed to negotiate with peer

```
*Mar 5 02:30:48.639: ppp6 PPP: Sending Acct Event[Down] id[7]
*Mar 5 02:30:48.639: ppp6 LCP: O TERMREQ [ACKsent] id 11 len 4
*Mar 5 02:30:48.639: ppp6 PPP: Phase is TERMINATING
*Mar 5 02:30:48.647: ppp6 LCP: I TERMACK [TERMsent] id 11 len 4
*Mar 5 02:30:48.647: ppp6 LCP: State is Closed
*Mar 5 02:30:48.647: ppp6 PPP: Phase is DOWN
```

相關資訊

- [配置Cisco Secure PIX防火牆以使用PPTP](#)
- [PPTP支援頁面](#)
- [技術支援與文件 - Cisco Systems](#)